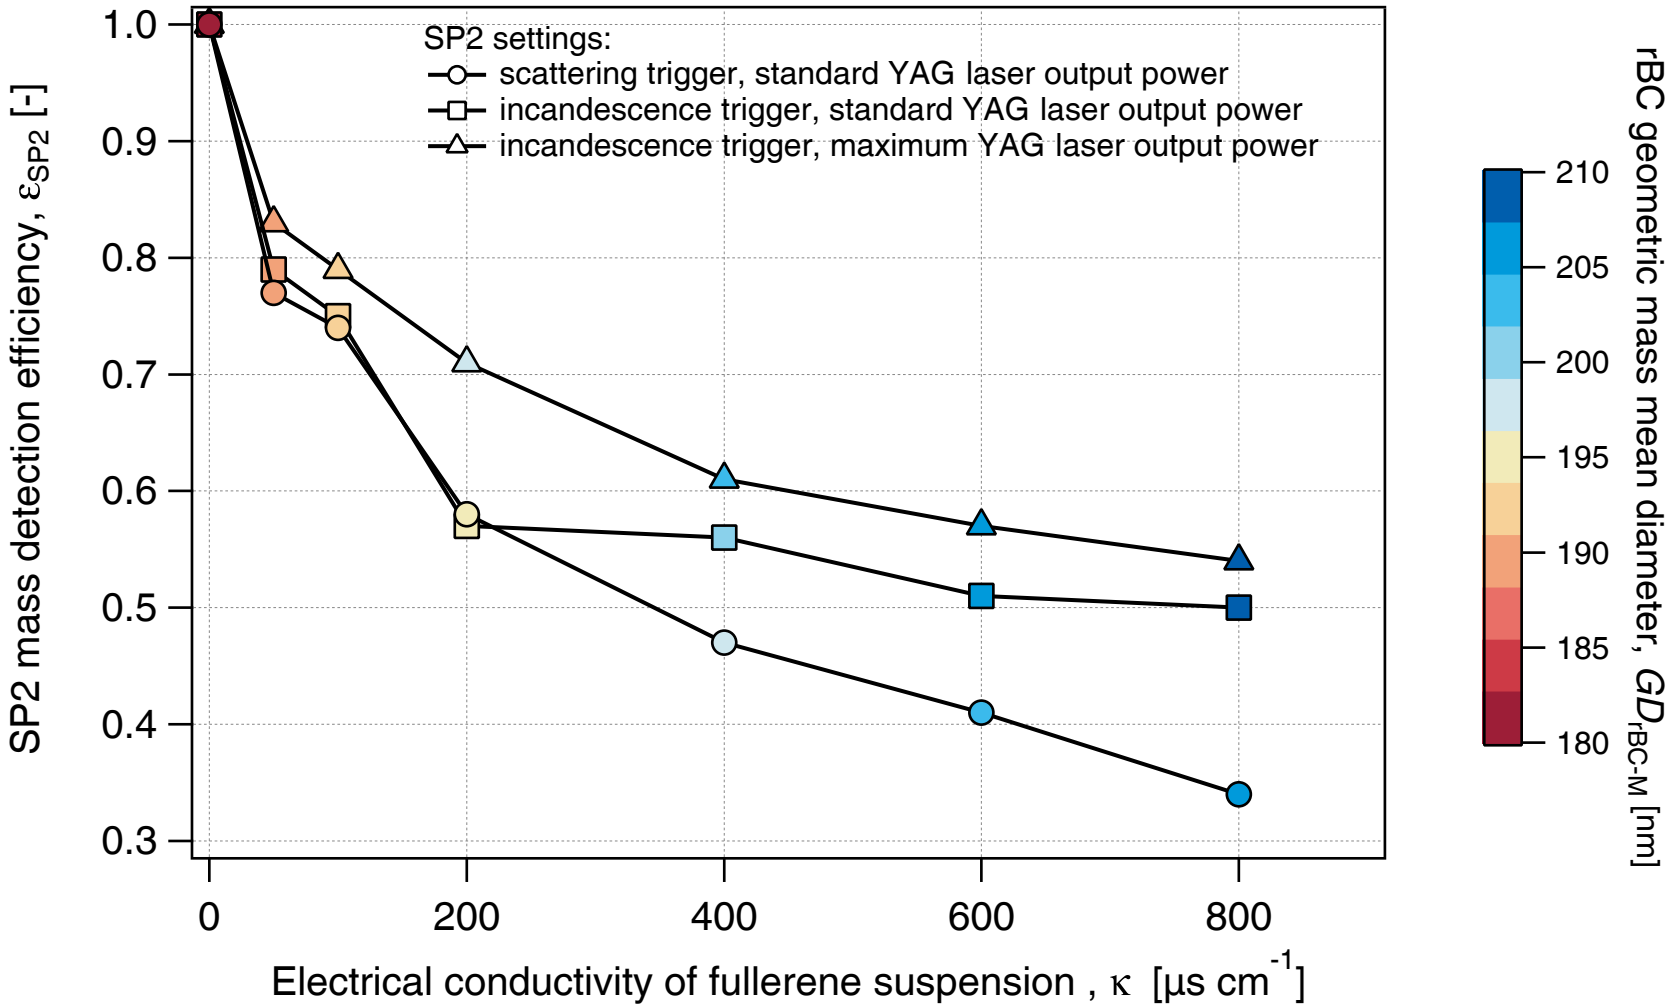
SP2 settings:
scattering trigger, standard YAG laser output power
incandescence trigger, standard YAG laser output power
incandescence trigger, maximum YAG laser output power
SP2 mass detection efficiency, ε_{SP2} [-]
1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0
200
400
600
800
Electrical conductivity of fullerene suspension , κ [µs cm^{-1}]
rBC geometric mass mean diameter, $GD_{rBC\text{-}M}$ [nm]
210
205
200
195
190
185
180