Atmos. Chem. Phys., 24, 4675–4691, 2024 https://doi.org/10.5194/acp-24-4675-2024 © Author(s) 2024. This work is distributed under the Creative Commons Attribution 4.0 License.





A bottom-up emission estimate for the 2022 Nord Stream gas leak: derivation, simulations, and evaluation

Rostislav Kouznetsov¹, Risto Hänninen¹, Andreas Uppstu¹, Evgeny Kadantsev¹, Yalda Fatahi¹, Marje Prank¹, Dmitrii Kouznetsov², Steffen Manfred Noe³, Heikki Junninen⁴, and Mikhail Sofiev¹

¹Finnish Meteorological Institute, Helsinki, Finland
²Institute for Laser Science, University of Electrocommunications, Tokyo, Japan
³Institute of Forestry and Engineering, Estonian University of Life Sciences, Tartu, Estonia
⁴Institute of Physics, University of Tartu, Tartu, Estonia

Correspondence: Rostislav Kouznetsov (rostislav.kouznetsov@fmi.fi)

Received: 13 April 2023 – Discussion started: 15 September 2023 Revised: 21 December 2023 – Accepted: 12 February 2024 – Published: 19 April 2024

Abstract. A major release of methane from the Nord Stream pipelines occurred in the Baltic Sea on 26 September 2022. Elevated levels of methane were recorded at many observational sites in northern Europe. While it is relatively straightforward to estimate the total emitted amount from the incidents (around 330 kt of methane), the detailed vertical and temporal distributions of the releases are needed for numerical simulations of the incident. Based on information from public media and basic physical concepts, we reconstructed vertical profiles and temporal evolution of the methane releases from the broken pipes and simulated subsequent transport of the released methane in the atmosphere. The parameterization for the initial rise of the buoyant methane plume has been validated with a set of large-eddy simulations by means of the UCLALES model. The estimated emission source was used to simulate the dispersion of the gas plume with the SILAM chemistry transport model. The simulated fields of the excess methane led to a noticeable increase in concentrations at several carbon-monitoring stations in the Baltic Sea region. Comparison of the simulated and observed time series indicated an agreement within a couple of hours between the timing of the plume arrival/departure at the stations with observed methane peaks. Comparison of absolute levels was quite uncertain. At most of the stations the magnitude of the observed and modeled peaks was comparable with the natural variability of methane concentrations. The magnitude of peaks at a few stations close to the release was well above natural variability; however, the magnitude of the peaks was very sensitive to minor uncertainties in the emission vertical profile and in the meteorology used to drive SILAM. The obtained emission inventory and the simulation results can be used for further analysis of the incident and its climate impact. They can also be used as a test case for atmospheric dispersion models.

1 Introduction

A major release of methane from the Nord Stream pipelines 1 and 2 occurred at the bottom of the Baltic Sea on 26 September 2022 as a result of explosions at both lines. At the moments of the blasts, the pipes were filled with pressurized methane but no gas pumping was happening. Over the following days, methane escaped from the damaged pipes to the atmosphere.

Natural gas mining and transport through pipelines are considered among the safest means of energy transport. Over the period 1800–2018, less than 300 serious accidents have been documented worldwide, which is, for instance, 4 times less than in oil transport, 8 times less than in the coal industry, and 10% lower than the accidents counted in wind energy (Kim et al., 2021). In standard practice, accidents in the energy sector are categorized in terms of fatalities and property damage, which are documented by the authorities (e.g. Pipeline and Hazardous Materials Safety Administra-

tion in the US). Other parameters, such as the amount of natural gas released into the atmosphere, are rarely considered. However, in the Nord Stream case, the atmospheric release was one of important characteristics of the incident. To put it into a large-scale context, one can note the annual release of methane from the US gas production and distribution system was 13 Tg (+2.1/-1.6 Tg, 95 % confidence interval) in 2015, i.e. 2.3 % of the total production in that year (Alvarez et al., 2018). This number includes both releases from normal and abnormal operations and significantly exceeds the official US EPA methane emission of 8.1 Tg for 2015 (EPA, 2017). Alvarez et al. suggested that the disagreement is partly due to accidental releases, which are not accounted for in the official EPA inventory. They estimated the gas-transportation-only contribution to the CH₄ total emission as 1.8 Tg yr⁻¹ (both normal and abnormal operations), whereas the US EPA regular-operation estimate is 1.4 Tg yr⁻¹ (normal operations). Comparison of these numbers suggests that the accidental losses in the US gas transport system are $\sim 400 \,\mathrm{Gg} \,\mathrm{yr}^{-1}$ (EPA, 2017). The release from one of three breached Nord Stream pipes was estimated to be 115 Gg (Sanderson, 2022), i.e. over 30 % of the above annual leaks due to accidents at the US pipelines (over 5×10^6 km of the total length), but accounts for around 0.14 % of the global annual methane emissions from the oil and gas industry (Sanderson, 2022). Therefore, albeit extremely large for a single case, the Nord Stream leaks alone could hardly have a measurable impact on the global scale (Chen and Zhou, 2022).

The long atmospheric lifetime of methane and its significant radiative effect make methane a major greenhouse gas (Tollefson, 2022). Since it also has a very low deposition velocity and solubility (100 times less soluble in water than CO₂), its release at virtually any height leads to large-scale dispersion. Besides that, methane is flammable at mixing ratios of 5 vol % to 15 vol % (Zabetakis, 1964), and in large concentrations it can be very hazardous due to oxygen deprivation (e.g. Duncan, 2015). Therefore, emergency management of large releases, similar to the one considered in this study, requires detailed knowledge of the release temporal and vertical distribution, as well as evolution of the resulting in-air concentrations.

Methane density is about half of the air density; therefore, a concentrated release of methane creates a powerful buoyant plume, which rises in the atmosphere similarly to an overheated plume from a major fire. Numerous (semi)empirical models and parameterizations have been developed for estimating the equilibrium height and vertical profile of atmospheric injection of buoyant plumes. However, these models were developed for industrial stacks and provide unrealistic results with very powerful buoyant releases or releases that take place over extended area (Sofiev et al., 2012; Li et al., 2023). More suitable models for such conditions have been developed for vegetation fires (Freitas et al., 2007; Sofiev et al., 2009, 2012; Rémy et al., 2017).

The accidents at the Nord Stream pipelines have been extensively reported in mass media and by various internet resources. Many mutually contradicting facts about the pipeline, leak locations, and their intensity have been published. Even the locations and number of leaks have been specified differently by different sources (Fig. 1).

There have been several publications analyzing the gas releases from the pipes. The total amount of about 110 kt of methane per pipe (around 330 kt in total) can be calculated on the back of an envelope if one assumes an initial pressure of 105 bar inside the pipes, one assumes a final pressure of 7 bar, and one knows the pipe dimensions.

The calculated amount varies depending on assumptions of the natural gas composition and the initial gas pressure. Such calculations have been performed in several studies. Jia et al. (2022) assumed that two pipes were destroyed and thus reported 230 kt of total methane released. Sanderson (2022) reported 115 kt from the destruction of a single NS2 pipe. The worst-case scenario considered by the Danish Environmental Agency amounts to 500 kt (https://ens.dk/en/press/possible-climate-effect-gas-leaks-nord-stream-1-and-nord-stream-2-pipelines, last access: 15 August 2023), which is probably based on the design pressure of the pipeline rather than on the actual pressure at the start of the release.

The total released amount has been analyzed also by inverse techniques. The Norwegian Institute for Air Research reported total emissions in the range between 56 and 155 kt of methane (https://www.nilu.com/2022/10/improved-estimates-of-nord-stream-leaks/, last access: 15 August 2023). Jia et al. (2022) reported $220\pm30\,\mathrm{kt}$, which nicely coincides with their bottom-up estimate. None of these studies considered the effect of methane buoyancy on the plume injection or initial release height.

The goals of the current paper are (i) to construct a self-consistent and physically feasible picture of the event; (ii) to calculate the bottom-up time-resolving emission of methane from the broken Nord Stream pipes; (iii) to estimate the vertical extent of the plume injection and its evolution; (iv) to calculate the plume dispersion in the atmosphere during several days since the release, by using the Finnish emergency and atmospheric composition model SILAM; and (v) to evaluate the resulting simulations against observational data.

The paper is structured as follows. The next section describes the models and the observational datasets used to evaluate the inventory. Section 3 formulates a mathematical model for the temporal evolution of the leak intensity. Section 4 formulates an approach to evaluate the injection height for the buoyant methane plume. Section 5 summarizes the parameters of the pipelines and the gas leaks that are available in the media and literature and formulates the emission source for the Nord Stream 2022 gas leaks. It also compares the injection profile obtained from the parameterization to the vertical distribution simulated with a large-eddy simulation model. Section 6 describes the simulations of the methane

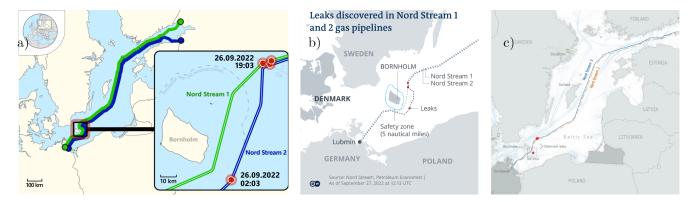


Figure 1. Maps of the Nord Stream gas leaks from various sources. **(a)** Wikimedia (https://upload.wikimedia.org/wikipedia/commons/e/e1/Nord_Stream_gas_leaks_2022.svg, last access: 28 March 2024; CC BY-SA 4.0), **(b)** Deutsche Welle (https://www.dw.com/en/denmark-sweden-view-nord-stream-pipeline-leaks-as-deliberate-actions/a-63251217, last access: 28 March 2024), and **(c)** European Space Agency (ESA, https://www.esa.int/ESA_Multimedia/Images/2022/10/Nordstream_pipeline_map_with_shipping_traffic, last access: 28 March 2024).

dispersion from the leaks and the results of a comparison against in situ observations of methane concentrations.

2 Modeling tools and measurement data

2.1 SILAM chemistry transport model

To simulate the plume dispersion we have used the atmospheric chemistry transport model (CTM) SILAM (https: //silam.fmi.fi, last access: 28 March 2024). The model features a mass-conservative and non-diffusive Eulerian advection scheme (Sofiev et al., 2015) and has been used for many applications in the fields of research, operational forecasting, and emergency response. The model can operate at various scales, starting from sub-kilometer resolutions in a limited-area mode to several-degree resolutions in a global mode. Feasible vertical resolutions normally start from around 10 m near the surface to several-kilometer-thick layers in the free troposphere and stratosphere.

Being an offline CTM, SILAM requires a pre-computed set of meteorological fields to drive the transport and transformation processes. SILAM can consume meteorological fields from several different numerical-weatherprediction models (NWP) and climate models. For the present study, we use high-resolution operational global forecasts (HRES product) by the European Centre for Medium-Range Weather Forecasts (ECMWF), obtained with the Integrated Forecasting System (IFS), and forecasts from the unperturbed member of the Mesoscale Ensemble Prediction System (MEPS) for the Nordic countries. MEPS is based on the Harmonie meteorological model. From both models, a series of hourly forecasts with the shortest available lead time was used. The ECMWF forecast was taken with a resolution of $0.1^{\circ} \times 0.1^{\circ}$ in a rotated longitude-latitude grid, and the MEPS forecasts were used at the original Lambert conformal conic grid of 2.5 km resolution. To evaluate the sensitivity of the simulations to the spatial resolution, we made three sets of the simulations: VHiRes at a $0.02^{\circ} \times 0.02^{\circ}$ grid, HiRes at a $0.1^{\circ} \times 0.1^{\circ}$ grid, and LoRes at a $0.4^{\circ} \times 0.4^{\circ}$ grid. The first of these was driven with data from the MEPS model, whereas the latter two were driven with the same set of data from the IFS model. All grids were aligned with the input meteorological grids. All simulations used the same vertical structure consisting of 13 stacked layers of increasing thicknesses, from 25 m at the surface to 2000 m close to the domain top, located at 6000 m above the surface.

SILAM allows for several types of meteorology-dependent emission sources, including a source for wildland fires with a dynamic injection height (Sofiev et al., 2012). For the current study, the fire plume rise module has been interfaced to the point-source module, enabling injection of large buoyant plumes. For such sources, the buoyancy flux is provided along with the emission rate, and the former is used to evaluate the injection height range.

2.2 UCLALES large-eddy simulator

The applicability of the fire plume rise module of SILAM for the current task was evaluated by comparing it to fine-scale simulations of the buoyant plume made using the large-eddy simulator UCLALES (Stevens et al., 1999, 2005; Stevens and Seifert, 2008). The methane emission was applied in UCLALES as a volumetric flux originating from the underlying surface. The horizontal distribution of the emission flux was assumed to be normal, with 99 % of the emission located in a circular area with a 500 m diameter. The formula for virtual temperature used for computing the vertical acceleration due to buoyancy was amended to account for methane mixing ratio in the grid cell.

UCLALES simulations were initialized with temperature, humidity, wind profiles, and surface variables taken from the same ECMWF forecasts used for SILAM simulations. Simulations were made in a 5 km high domain spanning 18 km in the downwind direction and 6 km in the crosswind direction. The domain was selected to be sufficiently large to extend beyond the vertical and crosswind spread of the plume and to be long enough in the downwind direction for the plume to rise to its final altitude. The simulations were made at a 50 m horizontal and a 10 m vertical resolution and a time step with a maximal length of 1 s, automatically reduced if required by the flow conditions for stability of the UCLALES numerical schemes.

2.3 Observational data

To validate our simulation results, we use observational time series of atmospheric methane concentrations obtained by the Integrated Carbon Observation System (ICOS) network (https://icos-cp.eu, last access: 12 December 2023). We use hourly time series of in-air volume mixing ratios of methane from several dozen stations in Europe. Many stations are located in tall towers and are able to make observations at several different heights up to a few hundred meters above the surface.

In the paper, we use data from five ICOS stations: the Finnish Utö station (UTO), located in the Baltic Sea (Hatakka and Laurila, 2022); the Swedish Norunda (NOR) and Hyltemossa (HTM) stations (Lehner and Mölder, 2022; Heliasz and Biermann, 2022); and the Norwegian Birkenes (BIR) and Zeppelin (ZEP) stations (Lund Myhre et al., 2022a, b). Data from more ICOS stations are presented in the Supplement.

In addition to the ICOS stations, we have also used data from the Finnish measurement station at Sodankylä, FI-SDK (Kilkki et al., 2015), and two Estonian sites: the Järvselja SMEAR (Station for Measuring Ecosystem-Atmosphere Relations) EE-SMR (Noe et al., 2015) and the Tahkuse station THK (Luts et al., 2023; Hõrrak et al., 2000). Despite these stations using very similar protocols to the ICOS network, they are currently not a part of it.

In the figures below, the time series from the ICOS stations have been marked with their three-letter codes and the measurement heights above the ground in meters. The other stations have been marked with two-letter country codes and three-letter abbreviations of their names. The complete list of the stations, their locations, and references for the ICOS time series used can be found in the Supplement.

3 Equations for a methane leak from a half-open pipe

To estimate the leak discharge as a function of time, let us consider an idealized system: a long smooth round pipe of inner diameter D and length L ($L \gg D$), which is closed at both ends and filled with a pressurized gas of initial density ρ_0 . At the moment t_0 one end of the pipe is opened and the gas starts leaking.

The evolution of the gas velocity v(x,t) and density $\rho(x,t)$ along the pipe can be described by the equation of motion,

$$\rho \frac{\partial v}{\partial t} = -\frac{\partial p}{\partial x} - \frac{\rho v^3}{2D|v|} f,\tag{1}$$

and the continuity equation,

$$\frac{\partial \rho}{\partial t} = -\frac{\partial (\rho v)}{\partial x}.\tag{2}$$

The first term at the right-hand side of Eq. (1) describes the acceleration of the gas due to the pressure gradient along the pipe and the second term describes the turbulent drag. The dimensionless drag coefficient f depends on the flow regime. The relevant velocity for the flow ranges from about 10 m per second, to the speed of sound (450 ms⁻¹), and the kinematic viscosity of methane for the pressure range of 10–100 bar can be approximated as $v = 15 \times 10^{-6} \, \mathrm{m^2 s^{-1}} \cdot \frac{\rho_a}{\rho}$, where ρ_a is the methane density at standard conditions. The Reynolds number Re = vD/v of the flow exceeds 10^6 but is less than 4×10^7 . At such Reynolds numbers the Blasius formula for the drag coefficient is applicable:

$$f = (100Re)^{-1/4}. (3)$$

To get a complete system of equations for $\rho(x,t)$ and v(x,t), one needs also an equation of state that connects the pressure and density of the gas. Since the pipe is submerged in water, the process of gas expansion can be considered isothermal at temperature $T = 278 \,\mathrm{K}$ (Kniebusch et al., 2019). The ideal-gas equation of state,

$$p(x,t) = \frac{R}{\mu}\rho(x,t)T,\tag{4}$$

where R is the universal gas constant ($R \simeq 8.3 \, \mathrm{J \, K^{-1} \, mol^{-1}}$) and μ is the molar mass of the gas ($\mu = 0.016 \, \mathrm{kg \, mol^{-1}}$), does not describe methane in the relevant pressure range. In particular, it predicts the density of methane at 100 bar to be some 20% lower than experimental values reported by Mollerup (1985). Therefore, we use the more rigorous van der Waals equation:

$$p(x,t) = \frac{R}{\mu} \left(\frac{1}{\rho(x,t)} - \frac{b}{\mu} \right)^{-1} T - \frac{a}{\mu^2} \rho^2(x,t), \tag{5}$$

where a and b are gas-specific van der Waals constants, describing the effects of the finite volume of a gas molecule and the effects of inter-molecular attraction. For the study we use the values of $a = 0.21 \,\mathrm{J\,m^3\,mol^{-1}}$ and $b = 4.31 \times 10^{-5} \,\mathrm{m^3\,mol^{-1}}$. Note that our value of a differs from the one suggested by Poling et al. (2001) ($a = 0.2303 \,\mathrm{J\,m^3\,mol^{-1}}$), since it fits better experimental data on methane density, e.g. by Mollerup (1985), for pressures up to 150 bar.

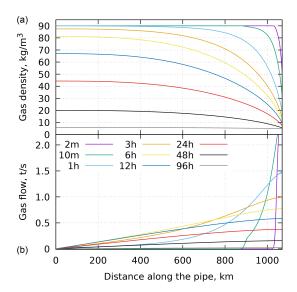


Figure 2. The along-pipe profiles of the density (a) and the flow rate (b) for different times (in min/h, as indicated in the legend) after opening the pipe end for the pipe length of 1080 km.

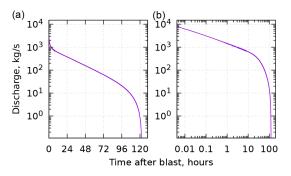


Figure 3. The gas discharge rate as a function of time after opening the pipe end for the same case as in Fig. 2 with a linear (a) and logarithmic (b) time axis.

The initial and boundary conditions corresponding to the pipe are

$$\rho(x,0) = \rho_0,\tag{6}$$

$$v(x,0) = 0, (7)$$

$$v(0,t) = 0, (8)$$

$$\rho(L,t) = \rho_{\text{out}},\tag{9}$$

where ρ_0 is the density of the gas at the initial pressure p_0 (inside the pipe) and ρ_{out} is the density at the pressure at the open end of the pipe, i.e. p_{out} .

Breaching a pressurized pipe at an intermediate point is equivalent to the simultaneous opening of the ends of two shorter pipes located at both sides of the breach.

To illustrate the temporal evolution of the gas distribution within a pipe containing pressurized methane after one end has been opened, we consider a 1080 km long pipe of a an inner diameter of 1.153 m at the initial pressure of 105 bar

and an outside pressure of 7 bar. Figure 2 shows the simulated profiles of the gas density and the gas flow along the pipe at various times. The evolution of the flow in the pipe has two stages. During the first stage the distortion propagates towards the closed end of the pipe, and during the second stage the flow profile is almost linear along the pipe, as the speed is limited by the turbulent drag inside the pipe. These regimes are clearly seen also in the evolution of the discharge rate at the open end of the pipe (Fig. 3). Initially, the flow can be described by a power function of time, and then it starts to decay exponentially. Once the flow becomes so slow that the drag is insignificant, it ceases quickly.

4 Injection height

Methane is almost half as light as air. A massive injection of methane from the surface of the Earth produces a buoyant plume that rises upwards and is mixed with surrounding air, eventually losing its buoyancy. A number of various models and parameterizations have been developed for describing the buoyant plume rise from industrial sources (e.g. Briggs, 1984). However, these empirical formulas turned out to be inaccurate for highly buoyant wide-area sources, for which alternative solutions were proposed. In particular, a dedicated semi-empirical parameterization was suggested and evaluated for plumes from vegetation fires by Sofiev et al. (2012). Input variables for that approach are derived in this section.

The primary characteristic of buoyant plumes in plume rise parameterizations is the buoyancy flux (Venkatram and Wyngaard, 1988, Eq. 3.11 there):

$$F_{\rm b} = F_{\rm v} g \frac{\Delta \rho}{\rho_{\rm a}},\tag{10}$$

where $F_{\rm v}$ is the volumetric flux of a source (in m³ s⁻¹), g is the acceleration of gravity, and $\Delta \rho$ is the difference between ambient air density $\rho_{\rm a} \simeq 1.2\,{\rm kg\,m^{-3}}$ and the released gas density $\rho_{\rm g} \simeq 0.69\,{\rm kg\,m^{-3}}$. It is straightforward to convert a methane discharge at the surface $F_{\rm m}$ (in kg s⁻¹) to the buoyancy flux:

$$F_{\rm b} = F_{\rm m}g \frac{\Delta \rho}{\rho_{\rm a}\rho_{\rm g}}.$$
 (11)

For methane in standard conditions, the conversion coefficient $g\frac{\Delta\rho}{\rho_a\rho_g}\simeq 6\,\mathrm{m}^4\,\mathrm{kg}^{-1}\,\mathrm{s}^{-2}$

The parameterization for plume injection heights for wild-land fires Sofiev et al. (2012) uses the Fire Radiative Power (FRP) of a fire as a measure of its intensity. According to Wooster et al. (2005), FRP constitutes about 20 % of the total combustion energy, competing with the convective energy loss, latent heat release, and heat conduction into the soil. In the same work, the conduction of heat into the soil was suggested to consume barely 5 % of the total energy, thus leaving 75 % of the total combustion energy distributed between sensible and latent heat releases, with the former being the

dominant fraction. These estimates corroborate with some works (e.g. Kremens et al., 2012) but are rather conservative in comparison with others (e.g. Ferguson et al., 2000). Admitting significant uncertainties in the relation between FRP and convective power, all studies agree that they differ by a factor of a few times at most. Since the formula of Sofiev et al. (2012) involves the cubic root of the FRP, one can assume that for a fire the fractions of the power spent for radiation and for creating buoyancy are approximately equal. Thus, the equivalent of FRP to a gas leak can be expressed in terms of the buoyancy flux.

The buoyancy of a given volume of methane at temperature T_0 is equivalent to the buoyancy of the same volume of air at a temperature of T_{eff} :

$$T_{\text{eff}} = T_0 \frac{\rho_a}{\rho_g}.$$
 (12)

 $T_{\rm eff}$ is analogous to the virtual temperature used for buoyancy calculations of water vapor. The power needed to produce the overheated air plume of the same buoyancy as the release of the gas is

$$FRP = F_{\rm m}c_{\rm p}T_0\left(\frac{\rho_{\rm a}}{\rho_{\rm g}} - 1\right),\tag{13}$$

where c_p is the specific heat capacity of air at constant pressure. At standard conditions, the conversion factor to get the equivalent of FRP for a methane release is $\sim 1.9 \times 10^5 \, \mathrm{J \, kg^{-1}}$, which is more than 2 orders of magnitude smaller than the specific energy of the released gas if it was combusted $(5.6 \times 10^7 \, \mathrm{J \, kg^{-1}})$.

Therefore, the injection of methane at the surface of the Earth at a rate of $10^4 \, \mathrm{kg \, s^{-1}}$, as in the beginning of the release shown in Fig. 3, is equivalent to a fire emitting 2 GW of radiation. It is of the same order of magnitude as the most powerful fire considered by (Freitas et al., 2007) and much higher than any realistic industrial sources. A smoke plume from such a fire, depending on the weather conditions, can rise up to a few kilometers due to its own buoyancy (Sofiev et al., 2012).

5 Quantifying the emission source

5.1 Reported locations and timelines of the leaks

The Nord Stream 1 and 2 pipelines consist of two pipes each. The locations of the leaks, reported by the Danish Maritime Authority, are shown in Fig. 4a, b. The locations of the Nord Stream 1 pipeline and a part of the Nord Stream 2 pipeline as reported by the EMODnet human activities database (https://www.emodnet-humanactivities.eu, last access: 9 December 2022) are shown with solid lines. A part of the Nord Stream 2 pipeline, missing from the database, is sketched with a dashed line that connects the westmost point of the NS2 pipeline given by the database, the leak site NS2A, and the destination point of the pipeline.

A blast at the Nord Stream 2 pipeline was detected by a seismograph of the Danish Geological Survey at Bornholm island at 02:03 CEST (00:03 Z) on 26 September 2022, and similar data were reported by several seismic stations in the region (https://www.geus.dk/om-geus/nyheder/nyhedsarkiv/ 2022/sep/seismologi, last access: 9 December 2022). Soon after that the Nord Stream 2 pipeline's operators saw a sudden pressure drop from 105 to 7 bar in one of the pipes, (Sanderson, 2022), and a Danish F-16 interceptor discovered a gas leak at the location of the seismic wave origin (NS2A in Fig. 4a). On the same day, the area around the location was closed by the Danish Maritime Authority for all types of vessels with the navigational warning NW-230-22. The bubbling of the water surface at the location was observed to go on for several days after the blast by satellites and aircraft. On 1 October 2022 the Danish Energy Agency reported that according to the Nord Stream 2 operator, the pressure in the damaged Nord Stream 2 pipe stabilized and the gas leakage from the pipe ceased (https://apnews.com/article/russiaukraine-putin-united-states-germany-business-

afebd99d298ac72192acfeabfe384609, last access: 28 March 2024).

A series of blasts at the Nord Stream 1 pipeline was detected by the same seismographs around 19:03 CEST (17:03 Z) on 26 September 2022. According to the navigational warning NW-235-22 issued by the Danish Maritime Authority, three leaks were discovered: NS1A, NS1B, and NS2X in Fig. 4a, b. NS1A and NS1B correspond to leaks in both of the pipes of the Nord Stream 1 pipeline, whereas the location NS2X corresponds to the Nord Stream 2 pipeline. The leaks NS1A and NS1B were recorded by several satellites and aircraft during several days following the blasts. The leaks ceased on 2 October 2022 (https://sverigesradio.se/ artikel/nord-stream-1-har-slutat-att-lacka-gas, last access: 28 March 2024). We could not find any information on further detections of leaks at the NS2X site after the initial one. As the second of the two Nord Stream 2 pipes stayed intact (https://www.reuters.com/business/energy/gazprom-lowerspressure-undamaged-part-nord-stream-2-pipe-denmarksays-2022-10-05/, last access: 28 March 2024), while the leak from the NS2A site continued long after 26 September 2022, we conclude that the leak at NS2X was probably a mistake in the issued warning.

The key input needed to evaluate the amount released from the pipelines is the initial pressure inside the pipes at the moment of the rupture. Besides the aforementioned pressure of 105 bar, we could find an image of a pressure gauge seen at the landfall facility of the Baltic Sea gas pipeline Nord Stream 2 in Lubmin, Germany, on 19 September 2022 (https://www.reuters.com/business/energy/gazprom-lowers-pressure-undamaged-part-nord-stream-2-pipe-denmark-says-2022-10-05, last access: 28 March 2024) that indicates a pressure of 95 bar. Therefore, we suggest that the accuracy of the release estimates based on the available pressure

figures should be around 10 %–15 %.

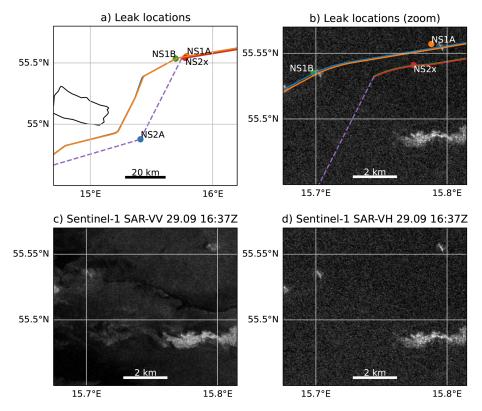


Figure 4. The locations of the gas leaks near the island of Bornholm reported by the Danish Maritime Authority and the Nord Stream pipeline (a), zoom plotted over the Sentinel-1 synthetic-aperture-radar backscatter acquired on 29 September 2022 at 16:36:54 Z in VH polarization (b), and the same radar image in VV (c) and VH (d) polarizations. The lighter areas on the radar images indicate a disturbed water surface. The Sentinel-1 data were acquired from ESA via https://scihub.copernicus.eu (last access: 28 March 2024).

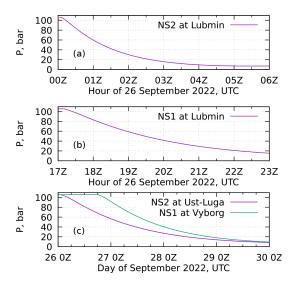


Figure 5. Pressure evolution at the landfall facilities of the Nord Stream pipelines during the leak events, according to our calculations. Note different time axes on the panels.

5.2 The emission source

The gas discharge from each leak can be considered as a sum of two flows originating from half-opened pipes on both sides of the leak. For the NS2A leak, we take the lengths of the pipe segments equal to 150 and 1080 km, and for both NS1 leaks we take the lengths of the pipe segments equal to 230 and 1000 km. The system of equations derived in Sect. 3 is evaluated for these four segments with the parameters summarized in Table 1.

There is an uncertainty about the pressure in the Nord Stream 1 pipelines. The Danish Energy Agency reported pressures of 165 and 103 bar for NS1 and NS2 lines, respectively (https://twitter.com/Energistyr/status/1576888899288256514, last access: 28 March 2024). The figure for NS2 agrees well with the data of Sanderson (2022). The figure for NS1 is close to the design pressure of the pipeline (170 bar, http://www.nord-stream.com/en/the-pipeline/facts-figures.html, last access: 4 November 2011), which is hardly consistent with the statement from the same tweet that the pressure had been lowered in the pipelines by the moment of incident. Since NS1 and NS2 have very similar characteristics, we consider 105 bar as a

Table 1. Nord Stream gas pipe and blast parameters assumed for the simulations.

Parameter	Value, notes
Pipe inner diameter D	1.153 m ^a
Pipe length L	1224 km ^a
Initial pressure P_0	105 bar ^b
Water pressure at the blast point	7 bar ^b
NS2A leak	started on 26 September 2022, 00:00 Z, 54.877° N, 15.410° E ^c
NS1A leak	started on 26 September 2022, 17:00 Z, 55.535° N, 15.698° E ^d
NS1B leak	started on 26 September 2022, 17:00 Z, 55.557° N, 15.788° E ^d
NS2X leak	started on 26 September 2022, 17:00 Z, 55.53° N, 15.6983° E ^d , assumed false detection

^a Nord Stream AG (2013). ^b Sanderson (2022). ^c Navigational warning NW-230-22 by the Danish Maritime Authority (https://nautiskinformation.soefartsstyrelsen.dk, last access: 28 March 2024). ^d Navigational warning NW-235-22 by the Danish Maritime Authority (https://nautiskinformation.soefartsstyrelsen.dk, last access: 28 March 2024).

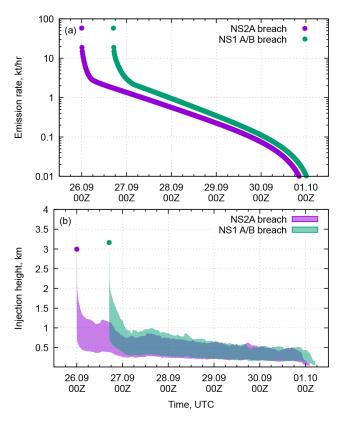


Figure 6. The simulated emission rates (a) and injection heights (b) from the breached pipelines.

reliable estimate of the pressure of both pipelines at the moment of the incident.

The temporal evolution of the pressure at the landfall facilities of the pipelines, calculated for the parameters in Table 1, is given in Fig. 5. The figure can be directly compared to the readings of the pressure gauges at the landfall facilities. The plot was sent to the Nord Stream AG on 16 November 2022 with a request for comments. However, no reply has been received by the moment of the paper submission.

The gas discharge rates, resulting from the solution of the above equations for both pipelines, can be seen in Fig. 6a. Both pipelines exhibit the same starting discharge rate, as it is fully determined by the pipe size and its initial pressure. The NS2A shows a more rapid decrease in the rate and then stabilizes after the shorter part of pipe A (200 km) has been drained. Then the longer end (1000 km) gradually drained. The breaches of the NS1 pipes occurred closer to the middle of the pipes, causing the initial decrease in the discharge to be slower and the total duration of the discharge to be shorter.

The injection heights for the releases, evaluated with the one-step procedure suggested by Sofiev et al. (2009), are given in Fig. 6b. The initial phase of the release produces a plume that is up to 3.5 km tall, with the height then quickly decreasing down to approximately 1 km.

5.3 Validating the injection heights

To ensure the applicability of the parameterization for fire plumes (Sect. 4) to the methane releases, we simulated the rise of the buoyant plume with the large-eddy simulator UCLALES. We selected four periods of the NS2A breach to simulate for comparison: the beginning of the release with the maximum release rate and the moments when the release rate had reduced to 1000, 100, and $10 \,\mathrm{kg}\,\mathrm{s}^{-1}$ (26 September, 00:00 Z; 26 September, 04:00 Z; 28 September, 12:00 Z; and 30 September, 10:00 Z). The LES simulations were initialized with meteorological profiles from ECMWF forecasts and were allowed to run until the methane tracer crossed the domain downwind boundary. The plume rise was assumed to be complete at the spot downwind where the vertical wind component no longer correlated with the methane mixing ratio. The height of the plume between that spot and a location 15 km downwind from the release was analyzed.

Figure 7 shows the comparison of the LES-simulated plume heights (box plots) with the fire plume parameterization (purple). The plume heights computed by the two methods agree reasonably well. In both cases only the initial release peak is strong enough to inject most of the methane

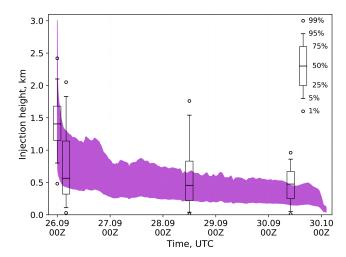


Figure 7. Comparison of the plume height parameterization with UCLALES simulations for the NS2A breach. Purple, parameterization; boxes, LES simulations.

into the free troposphere above the boundary layer (which was 664 m thick according to ECMWF forecast). For the later and weaker releases, the LES predicts a part of the methane reaching much higher altitudes than given by the parameterization. However, the models agree that the majority of methane stays within the boundary layer (902, 490, and 680 m for the second, third, and fourth case), and there is a significant overlap in the region where most of the plume is located. The disagreement in the lower part comes from the LES freely mixing the methane through the boundary layer, while the parameterization assumes a fixed plume bottom located at one-third of the top height. The observed differences do not validate major changes of the large-scale model, as boundary layer mixing will occur at the lower end of the plume in a limited amount of time. Thus, the skill of the fire plume parameterization seems sufficient for predicting the rise of buoyant gas plumes.

The width of the emission area of the gas is an uncertainty of the LES simulations. In the main simulations, the release is assumed to be distributed normally within a circle with a diameter of 500 m. We conducted sensitivity studies varying the diameter from 100 to 1000 m for the highest release case. We found a very limited sensitivity to this parameter – while the narrow emission produces a somewhat narrower plume, the mean height of the plume stays practically the same (see Supplement).

6 Simulating the methane dispersion from the NS leaks

Using the emission source defined in the above sections, we simulated the methane dispersion for 10 d following the release start with the three setups described in Sect. 2.1. For each setup, besides the emission sources with plume rise, we

have used several fixed vertical profiles to evaluate the sensitivity of the simulations to the injection height.

For each resolution, a set of vertical injection profiles were simulated: 0–50, 0–500, 0–1500, and 0–5000 m and a dynamic vertical profile, labeled as "FRP" and described in Sect. 4. The latter injects uniformly into an elevated layer with bounds controlled by the buoyancy flux and meteorological conditions. In all simulations the same temporal profiles of net emission were used.

According to the simulations, during the period from 26 September to 5 October 2022, the methane plume hit several of the ICOS stations that were actively reporting data. For most stations, the observed variations of methane were well within the range of usual variability of the methane mixing ratios, so one cannot unequivocally detect the signal originating from the Nord Stream gas leak solely from the observed time series. However, if plotted in the same scale as the modeled time series, the peaks originating from the Nord Stream leaks can be relatively well identified.

To illustrate the results of the simulations, we have selected six stations with clearly visible signals. Figure 8 shows four panels of time series for each station illustrating the observed methane content and the modeled methane excess from the three simulations. The simulations did not have any background methane. Wherever possible, we kept the same vertical scale among the three panels (all stations in Fig. 8 except for EE-SMR). The time series for the remaining ICOS and two non-ICOS methane-monitoring sites in Finland and Estonia can be found in the Supplement.

Six moments of time were selected to illustrate the spatial distribution of the simulated methane plume and its relative position to the stations. The selected moments are marked with vertical lines and letters at the top of the panels with observations in Fig. 8. The maps of near-surface methane mixing ratios for the selected moments are shown in the corresponding panels in Figs. 9, 10, and 11.

Direct quantitative model evaluation of the performed simulations against the observational data poses a certain difficulty, since one has to compare observed methane levels to the simulated excess methane. In the case of a large excess the background variations can be neglected. On the other hand, the highest concentrations are also the most uncertain ones, since the plumes are relatively narrow, and the time series of both observations and simulations are determined way more by fine details of plume location than by emission rates. Due to the small spatial extent of the source, minor inaccuracies of the dispersion model and/or driving meteorology can lead to significant discrepancies between the model and the observations even for perfectly accurate emission profiles.

For the sake of completeness, we have performed a quantitative evaluation of the simulation results. To allow for a spatially inhomogeneous background as well as for temporal variability, we used metrics that do not depend on the model bias, i.e. correlation, ratio of standard deviations (SD ratio) and normalized de-biased root-mean-square error (RMSE).

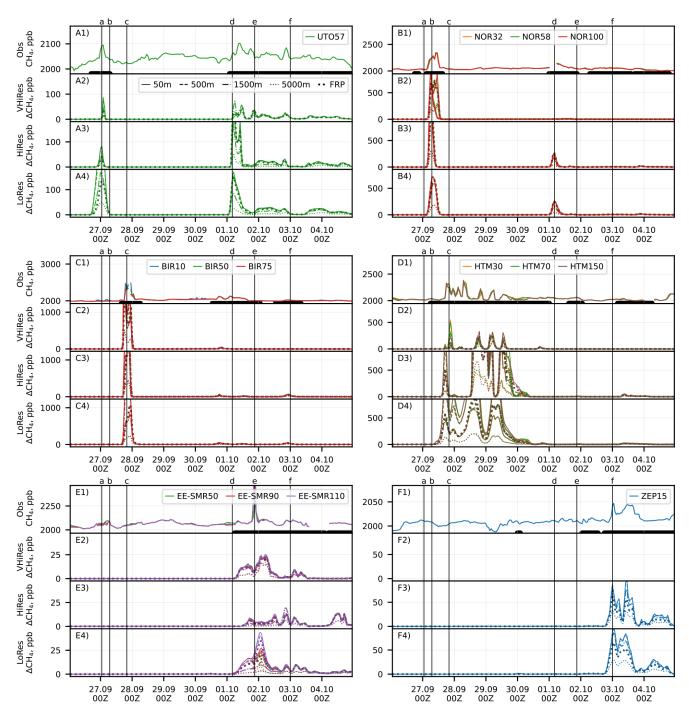


Figure 8. Time series of the methane mixing ratio observed at six selected stations after the pipeline rupture and corresponding time series simulated with three different resolutions for several vertical profiles of the release. Each group of panels corresponds to a station. The panels in each group are (top to bottom) for observations and model with 0.02, 0.1, and 0.4° resolution. Measurement heights are coded with colors and emission heights with line styles. Vertical lines mark the moments shown in Figs. 9–11. Periods used to evaluate the model scores for each station are given at the bottom of the observation (Obs.) panels.

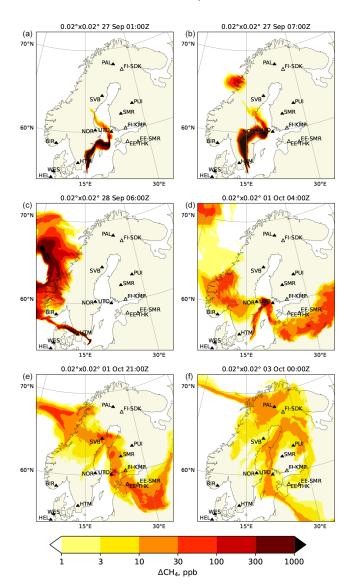


Figure 9. Snapshots of near-surface methane excess simulated at 0.02° resolution with SILAM driven with Harmonie meteorological fields for the FRP injection profile (VHiRes setup). The ICOS stations are shown with filled symbols and three-letter codes, and other stations have two-letter country prefixes. A full list of the station data and references to them can be found in the Supplement. The panels correspond to the moments marked with vertical lines in Fig. 8.

These quantities can be naturally represented by Taylor diagrams (Taylor, 2001), where the de-biased root-mean-square error normalized with the SD of observations appears as a distance from the "perfect" model. For evaluation, we selected periods when any of the simulations predicted an observable methane excess, assumed to be at least 1 ppb. The selected periods for each station are marked in the corresponding time series panels (Fig. 8). The Taylor diagrams for the selected stations are shown in Fig. 12, whereas the diagrams for the rest of the stations can be found in the Sup-

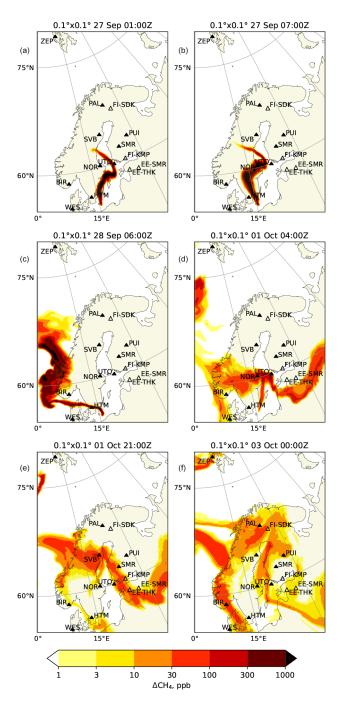


Figure 10. Same as in Fig. 9 but for 0.1° simulation driven with IFS meteorology (HiRes setup).

plement. Since the magnitude of the variability of both the excess methane content and the background methane varies a lot among the stations, we could not find a way to aggregate the scores among the stations in a reasonable manner to make a solid conclusion on the relative performance of the simulations.

In the diagrams of Fig. 12, the Pearson correlation coefficient is represented by the angle with the y axis and the

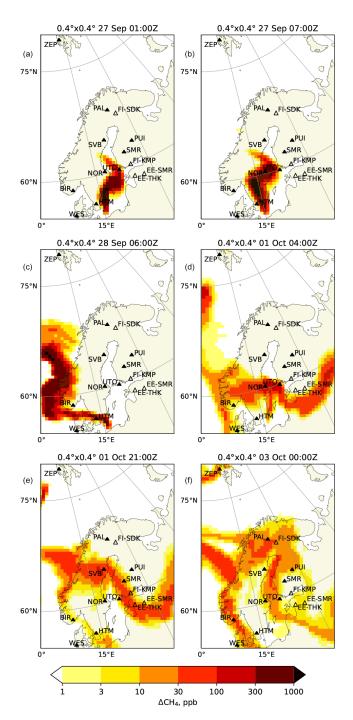


Figure 11. Same as in Fig. 9 but for 0.4° simulation driven with IFS meteorology (LoRes setup)

ratio of standard deviations by the distance from the origin. The de-biased root-mean-square error, normalized with the standard deviation of the observations, equals then the distance from the perfect model. The shapes of the markers refer to the different model setups, while the emission injection heights are coded by color. Different observation heights are thus shown with markers of the same shape and color. The

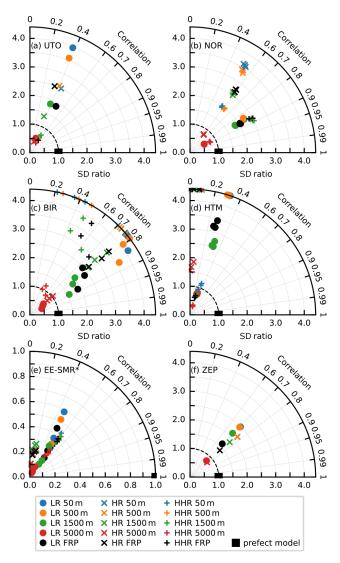


Figure 12. Taylor diagrams of model performance on the time series shown in Fig. 8. An ideal model is given by a black rectangle. Note the excluded observed peak for the EE-SMR scores in panel (e). The scores beyond the plot range are shown at the corresponding edge of a panel.

markers plotted along the correlation axes of the figures represent values that do not fit inside the plotted areas of figures.

The earliest detection of the plume occurred at the Utö station (UTO), located in the Baltic Sea (Fig. 8Ax), around midnight on 27 September 2022 (Figs. 9a, 10a, and 11a). The timing of the peak is in good agreement between the observation and all simulations. In all simulations, the plume touched the station without crossing it; therefore, the magnitude of the peak both in observations and simulations was strongly influenced by fine details of the plume location. The VHiRes and HiRes simulations produce narrower peaks than the LoRes ones. The magnitude of the peak for HiRes simulations was well reproduced for the fixed injection heights in

the range of 500–1500 m and with the dynamic injection profile. LoRes simulations clearly overestimate the peak, especially for lower injection height (reached 350 ppb). The peak originates from early-stage high-altitude injection.

There is also a good correspondence between the measurement and the modeled evolution of the time series during 1 and 2 October 2022, except for a large peak during the first half of 1 October 2022 in lower-resolution simulations. During that time the station was at the edge of the plume (see Figs. 9d, 10d, and 11d), where slight uncertainties of the plume location lead to large differences in simulated concentrations. The resulting correlation is in the range of 0.3–0.6, with the highest correlation for the VHiRes case, which is also the least sensitive to the injection height (Fig. 12a). At the same time the standard deviation ratio is around 0.5–0.7 for these cases. For other cases the effect of the injection height is stronger.

The Norunda station (NOR) in Sweden (Fig. 8Bx) measures methane at three different heights, all of which reported very similar mixing ratios during the simulated period. In the morning of 27 September 2022, the arrival of the plume at the station resulted in a clear increase in methane, i.e. by about 300 ppb (see Figs. 9b, 10b, and 11b). The simulations show a notably higher peak, of up to 3500 ppb, for the nearsurface emission scenario in the HiRes case, while the peak magnitude for the 5 km injection height has about the correct magnitude. In the VHiRes simulation both the shape and the magnitude of the observed peak were best reproduced with the fixed 0-5000 m injection profile. This indicates that the FRP injection height could be too low at the beginning of the releases. There is a gap in the measurement data corresponding to the arrival of the second peak (1 October 2022, 04:00 Z), probably caused by the overly conservative automated quality control of the observational data. The second peak is not visible in the VHiRes simulation, since the simulated plume was at a higher elevation (see Figs. 9d, 10d, and 11d). The timings of both peaks were nicely captured by the model. The highest correlation is shown by the VHiRes model, except for the scenarios of near-surface injection, and by the LoRes model (Fig. 12b). The HiRes case resulted in a too narrow peak. The probable reason is that in the LoRes case, a too fast passage of the plume over the station was compensated for by excessive smearing of the plume by the low-resolving model. The magnitude of the simulated peaks affects the standard deviation ratio, as it is underestimated for the emission profile of 0-5000 m and overestimated in the other cases.

The Birkenes station (BIR) in Norway (Fig. 8Cx) detected a major peak just before midnight on 28 September 2022. Similar to NOR, there is a gap in the observations during the peak. The peak simulated with the FRP plume rise model (1300 ppb for VHiRes and HiRes and 800 ppb for LoRes) is stronger than the measured one, showing that the injection height was slightly underestimated, again pointing to a too conservative injection height of the FRP plume rise model.

The resolution of the simulation did not have a major effect on the peak timing, since the plume was already wide enough when it passed over the station (see Figs. 9c, 10c, and 11c). The correct timing of the peaks resulted in a high correlation, i.e. up to 0.9 (Fig. 12c), whereas the overestimation of the main peak and the likely lack of measurements of the highest values resulted in a very high SD ratio for all simulations, except for those with the emission extending to 5000 m. Remarkably, there is a large scatter between observations made at different heights, originating from differences in the sampling of the main peak. The secondary peaks occurring after 30 September 2022 have also been reproduced by the model, although they do not affect the performance metrics.

During 2 d starting from \sim 12:00 Z on 27 September 2022, the plume was meandering near the Hyltemossa ICOS station (HTM) in Sweden (Fig. 8Dx), which resulted in an oscillating pattern in the observations. The plume was narrow (see Figs. 9c, 10c, and 11c), so a slight change of the wind direction was able to result in a large change of the methane concentrations at the station. The magnitude and timing of some of the observed peaks were nicely captured by the VHiRes simulation, since it was able to simulate sufficiently narrow plumes, and its driving Harmonie meteorology reproduced the land-sea circulation well. For coarser resolutions the simulated concentrations reached up to 5000 ppb for the nearsurface emission scenario. Similarly to the metrics for the NOR station, the HiRes simulation exhibits a lower correlation than the others (Fig. 12d), since while it is capable of creating finer features of the plume, it fails to reproduce the timings and magnitudes of the peaks. The lower-resolution simulation (LoRes) improves the evaluation metrics by smearing out the plume. The VHiRes simulation, besides exhibiting a higher correlation, also resulted in a SD ratio within 50 % of unity for all injection heights except for 5000 m.

The strongest peak of the whole measurement dataset was observed at the Estonian SMEAR station (EE-SMR) around 21:00 Z on 1 October 2022 (Fig. 8E1). The peak showed a strong vertical gradient of methane, ranging from about 200 ppb of excess methane at 50 m above the ground to 1500 ppb at 110 m. The simulations indicate the arrival of a plume around the same time (Fig. 8) but of much wider extent and of about 30–100 times lower intensity. The peak in the LoRes simulation showed a similar vertical profile of the excess methane content, i.e. the 110 m level exhibited some 50 % higher values than the 90 m one.

The corresponding maps (Figs. 9e, 10e, and 11e) show a plume in the vicinity of the station, although with concentrations not exceeding 100 ppb. If we used only the aforementioned threshold of 1 ppb for this station the model points would have collapsed to the origin of the Taylor diagram, due to the failure of the models reproduce the observed peak. To explore the situation further, we excluded the peak (> 2150 ppb) from the selection for calculating the evaluation metrics (Fig. 12e). With such a selection, the model time series indicates a correlation above 0.6, though with several

times smaller mixing ratios than indicated by the observations. This is not necessarily an indication of a corresponding underestimation of the modeled emission, since the background methane at the EE-SMR station exhibits a variation whose magnitude is similar to the modeled variations. Substantial variability of the background at the station leads to the reduction of the SD ratio. Similar to the other stations, the best evaluation metrics are shown by the VHiRes simulations, while the LoRes simulations correspond to slightly lower correlations with a larger scatter between SD ratios. The lack of a peak in the simulations indicates that it is likely not originating from the Nord Stream leaks.

The arrival of the plume at the Zeppelin station (ZEP) at Spitsbergen archipelago was well reproduced by the model (Fig. 8F), except for the VHiRes simulation, which did not extend to the station. The resolution of the simulation had a moderate impact on the magnitude of the methane excess around the station (Figs. 10f and 11f), and the dual-peak structure of the time series was well reproduced at both resolutions. In both cases the magnitude of the plume was slightly overestimated with the FRP model and underestimated with the emissions extending to 5 km. The correlations between the model and the observations (Fig. 12f) reached 0.75, and all standard deviation ratios were within a factor of 2.5 from unity. Contrary to the other stations, the HiRes simulation shows somewhat better correlations and lower SD ratios than the LoRes one.

7 Conclusions

By relying solely on publicly available media reports, we successfully inferred the temporal evolution and the injection height of the Nord Stream gas leaks in September 2022. The resulting inventory specifies locations, vertical distributions, and temporal profiles of the methane sources and can be used to simulate the event with atmospheric transport models. The inventory is supplemented with a set of observational data tailored to evaluate the results of the simulations.

Unlike in many cases of industrial accidents, the total released amount of tracer was relatively well known, amounting to 110 kt of methane in each of the three breached pipes, or 330 kt in total. The main uncertainties stem from the assumption of gas composition in the pipes and the assumption of a 105 bar initial pressure in all damaged pipes. However, we believe that these figures are accurate within a few percent. Since the uncertainties of atmospheric dispersion models are much larger than small uncertainties in the emitted amount, the assumption of the emission consisting of pure methane does not impact the quality of the simulation.

The nature of a pollutant-transport problem with point sources and point receptors causes accurate prediction of the observation results to be unlikely to succeed. A transport model, even if it was perfect on its own, acts as an integrator of errors of the driving meteorological model. Our evalua-

tion of the performed simulations with different setups indicates that a slight change of the plume location and/or shape, caused by uncertainties of the dispersion model or in the driving meteorological data, can lead to huge changes in the simulated time series at the measurement station. The time series are also substantially affected by the spatial resolution of the transport model. This sensitivity also has to be accounted for in inverse problems, where a slight variation of the model setup can substantially change the inversion results.

Even with an accurate temporal profile, the effective injection height of the buoyant admixture has to be parameterized. In this study, we used an existing parameterization for wild-fire plume injection height. However, there is a substantial difference in the mechanisms of buoyancy loss between an overheated moist plume from a fire and a methane plume. The fire plume loses buoyancy due to dilution, stable temperature stratification of the surrounding air, and radiative cooling, and it gains buoyancy from the latent heat of water vapor condensation, whereas only dilution is relevant for the methane plume. Therefore, a specially tailored plume rise model would be more appropriate for the case. Nevertheless, the fire plume model was able to provide an evolution of the effective injection height for the methane plume that agrees with process-based LES simulations.

In order to reliably compare a simulated plume with regular methane observations, the plume should induce a significant change of the observed times series, i.e. the increment caused by the plume should be larger than the normal variability of the methane concentration at the station. Moreover, in order to rank model setups by simulation quality, the difference between the simulations should be larger than the background variability. As seen from the time series shown in Fig. 8 and in the Supplement, this was rarely the case in this study. However, by selecting only the times when the model results indicated that the stations were under the influence of the plume originating from the broken pipes, we found that correlation coefficients between observations and model simulations, while rarely above 0.8, exceeded 0.4 for the majority of the stations, even though the model simulations represented only a part of methane variation at a station.

As seen from the plotted time series, the vertical profile of the release influences mostly the height of the peak values of methane through the initial dilution of the plume, while the timing and shape of the modeled peaks are not very sensitive to the release height. Thus, the correlation coefficients are often relatively similar for simulations differing only by the release height. As seen from the Taylor diagrams, the lower the correlation, the more the model needs to underestimate the amplitude of the observed variations (standard deviation ratio < 1) to reach the lowest de-biased root-mean-square error. For example, for near-zero or negative correlations, the lowest RMSE is reached by the model setup with the lowest plume concentration. This feature makes it useless to rank the studied model setups by RMSE in order to find the optimal release height. This should also be recognized when

making top-down emission assessments that rely on minimizing RMSE, and we cannot point out the release height that would lead to the best fit with observations due to the large amplitude of the background variations. The concentrations at the stations simulated with different vertical emission profiles differ by factors of several times, which would lead to very different emission inversions depending on the estimated emission profile. The temporal variations of the vertical injection profile should be accounted for when using the case for evaluating source inversion techniques.

The evaluation of the simulation results against the station data and large-eddy simulations suggests that the fire plume injection profile was likely too low for the methane plume, having a low emission rate. However, a relatively small difference in the evaluation metrics between the 50 and 500 m injection heights suggests that this uncertainty had little effect on the long-range transport.

The performed evaluation of the dispersion simulations with several model setups indicated the applicability of the developed inventory to the forward simulations. The inventory together with the ICOS observation data can be used to test and validate various source inversion techniques. The inventory can also be used as a starting point for inversions of the effective vertical and temporal profiles of the plume injection based on column-integrated observations from methane-observing satellites, such as IASI.

Code and data availability. The code of SILAM model that can be used to reproduce the results of the current study is available from Zenodo https://doi.org/10.5281/ZENODO.7598284 (Kouznetsov, 2023). Appendix also contains code to simulate a methane leak from a pressurized pipe. The source estimates for the leak at 10 min resolution together with the evaluated injection heights both in CSV format and in SILAM point-source format are available in the Supplement. The summary of the observed and simulated station time series can be found in the Supplement.

Video supplement. The animation of the methane plumes simulated with 0.02° resolution can be found in (https://doi.org/10.5446/1770, Kouznetsov and Kadantsev, 2023).

Supplement. The supplement related to this article is available online at: https://doi.org/10.5194/acp-24-4675-2024-supplement.

Author contributions. RK conceptualized the paper, performed the numerical simulations and evaluations, wrote the initial text, and prepared the figures. MS contributed to the case conceptualization and participated in writing and editing of the manuscript. EK prepared the animation of the simulation results. MP adapted UCLALES for this study; performed the LES simulations and participated in analyzing their results; and contributed to SILAM devel-

opment, conceptualization of the study, and editing the manuscript. RH and AU participated in SILAM development, conceptualization of the study, and editing the manuscript. YF assisted with literature overview, data mining, and editing the manuscript. DK contributed to the design of the conceptual model and to calculations for the gas leak. SMN performed the measurements, provided the data for EE-SMR station, and contributed to editing the manuscript. HJ performed the measurements and provided the data for the EE-THK station.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. The paper represents the authors' personal opinions and views, which might or might not agree with the positions of their organizations.

Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Financial support. This research has been supported by the European Union's Horizon 2020 research and innovation program projects (EXHAUSTION, grant no. 820655; FirEUrisk, grant no. 101003890; and ACTRIS IMP, grant no. 871115), Nordic Nuclear Safety Research (SOCHAOTIC project, contract no. AFT/B(22)1), the Research Council of Finland (VFSP-WASE, grant no. 359421, and MOAC, grant no. 322532), the Archimedes Foundation (Roadmap project Estonian Environmental Observatory, grant no. 3.2.0304.11-0395), the Environmental Investment Centre (KIK, grant no. 3-2.8/6574), and the Estonian Research Council (grant nos. PRG1674 and PRG714).

Review statement. This paper was edited by Aijun Ding and reviewed by two anonymous referees.

References

Alvarez, R. A., Zavala-Araiza, D., Lyon, D. R., Allen, D. T., Barkley, Z. R., Brandt, A. R., Davis, K. J., Herndon, S. C., Jacob, D. J., Karion, A., Kort, E. A., Lamb, B. K., Lauvaux, T., Maasakkers, J. D., Marchese, A. J., Omara, M., Pacala, S. W., Peischl, J., Robinson, A. L., Shepson, P. B., Sweeney, C., Townsend-Small, A., Wofsy, S. C., and Hamburg, S. P.: Assessment of Methane Emissions from the U.S. Oil and Gas Supply Chain, Science, 361, 186–188, https://doi.org/10.1126/science.aar7204, 2018.

Briggs, G. A.: Plume rise and buoyancy effects, in: Atmospheric sciences and power production, edited by: Randerson, D., DOE/TIC-27601 (DE84005177), TN, Technical Information Center, U.S. Dept. of Energy, Oak Ridge, USA, 327–366,

- https://ntrl.ntis.gov/NTRL/dashboard/searchResults/titleDetail/DE84005177.xhtml (last access: 28 March 2024), 1984.
- Chen, X. and Zhou, T.: Negligible Warming Caused by Nord Stream Methane Leaks, Adv. Atmos. Sci., 40, 549–552, https://doi.org/10.1007/s00376-022-2305-x, 2022.
- Duncan, I. J.: Does Methane Pose Significant Health and Public Safety Hazards? A Review, Environ. Geosci., 22, 85–96, https://doi.org/10.1306/eg.06191515005, 2015.
- EPA: Inventory of U.S. Greenhouse Gas Emisand Sinks: 1990-2015, Technical sions Report 430-P-17-001, United Environmental States Protection Agency, https://www.epa.gov/ghgemissions/ inventory-us-greenhouse-gas-emissions-and-sinks-1990-2015 (last access: 28 March 2024), 2017.
- Ferguson, S. A., Sandberg, D. V., and Ottmar, R.: Modelling the Effect of Landuse Changes on Global Biomass Emissions, in: Biomass Burning and Its Inter-Relationships with the Climate System, edited by: Beniston, M., Innes, J. L., Beniston, M., and Verstraete, M. M., Vol. 3, Springer Netherlands, Dordrecht, 33–50, https://doi.org/10.1007/0-306-47959-1_3, 2000.
- Freitas, S. R., Longo, K. M., Chatfield, R., Latham, D., Silva Dias, M. A. F., Andreae, M. O., Prins, E., Santos, J. C., Gielow, R., and Carvalho Jr., J. A.: Including the sub-grid scale plume rise of vegetation fires in low resolution atmospheric transport models, Atmos. Chem. Phys., 7, 3385–3398, https://doi.org/10.5194/acp-7-3385-2007, 2007.
- Hatakka, J. and Laurila, T.: ICOS ATC NRT CH₄ growing time series, Utö Baltic sea (57.0 m), 2022-03-01–2022-10-16, ICOS Data Portal [data set], https://hdl.handle.net/11676/yFO_L2onDwckHg_2194ej4Mx (last access: 28 March 2024), 2022.
- Heliasz, M. and Biermann, T.: ICOS ATC NRT CH₄ growing time series, Hyltemossa (150.0 m), 2022-03-01-2022-10-16, ICOS Data Portal [data set], https://hdl.handle.net/11676/-uYDRenkp8mfYPJLhekmx9Ko (last access: 28 March 2024), 2022.
- Hörrak, U., Salm, J., and Tammet, H.: Statistical Characterization of Air Ion Mobility Spectra at Tahkuse Observatory: Classification of Air Ions, J. Geophys. Res., 105, 9291–9302, https://doi.org/10.1029/1999JD901197, 2000.
- Jia, M., Li, F., Zhang, Y., Wu, M., Li, Y., Feng, S., Wang, H., Chen, H., Ju, W., Lin, J., Cai, J., Zhang, Y., and Jiang, F.: The Nord Stream Pipeline Gas Leaks Released Approximately 220,000 Tonnes of Methane into the Atmosphere, Environmental Science and Ecotechnology, 12, 100210, https://doi.org/10.1016/j.ese.2022.100210, 2022.
- Kilkki, J., Aalto, T., Hatakka, J., Portin, H., and Laurila, T.: Atmospheric CO₂ Observations at Finnish Urban and Rural Sites, Boreal Environ. Res., 20, 227–242, 2015.
- Kim, J., Ryu, D., and Sovacool, B. K.: Critically Assessing and Projecting the Frequency, Severity, and Cost of Major Energy Accidents, The Extractive Industries and Society, 8, 100885, https://doi.org/10.1016/j.exis.2021.02.005, 2021.
- Kniebusch, M., Meier, H. M., Neumann, T., and Börgel, F.: Temperature Variability of the Baltic Sea Since 1850 and Attribution to Atmospheric Forcing Variables, J. Geophys. Res.-Oceans, 124, 4168–4187, https://doi.org/10.1029/2018JC013948, 2019.
- Kouznetsov, R.: Fmidev/Silam-Model: Release to Get DOI with Zenodo, Zenodo [code], https://doi.org/10.5281/ZENODO.7598284, 2023.

- Kouznetsov, R. and Kadantsev, E.: Methane dispersion form the Nord Stream gas leaks: Simulation with SILAM, driven with Harmonie meteorology, TIB [video], https://doi.org/10.5446/1770, 2023.
- Kremens, R. L., Dickinson, M. B., and Bova, A. S.: Radiant Flux Density, Energy Density and Fuel Consumption in Mixed-Oak Forest Surface Fires, Int. J. Wildland Fire, 21, 722, https://doi.org/10.1071/WF10143, 2012.
- Lehner, I. and Mölder, M.: ICOS ATC NRT CH₄ growing time series, Norunda (100.0m), 2022-03-01-2022-10-16, ICOS Data Portal [data set], https://hdl.handle.net/11676/DHD1wLPlqqb2Fo-NlWVBHed5 (last access: 28 March 2024), 2022.
- Li, Y., Tong, D., Ma, S., Freitas, S. R., Ahmadov, R., Sofiev, M., Zhang, X., Kondragunta, S., Kahn, R., Tang, Y., Baker, B., Campbell, P., Saylor, R., Grell, G., and Li, F.: Impacts of estimated plume rise on PM_{2.5} exceedance prediction during extreme wildfire events: a comparison of three schemes (Briggs, Freitas, and Sofiev), Atmos. Chem. Phys., 23, 3083–3101, https://doi.org/10.5194/acp-23-3083-2023, 2023.
- Lund Myhre, C., Platt, S. M., Hermansen, O., and Lunder, C.: ICOS ATC NRT CH₄ growing time series, Zeppelin (15.0m), 2022-03-01–2022-10-16, ICOS Data Portal [data set], https://hdl.handle.net/11676/jRuxDepDwdYIgT6bnMyS1Kb4 (last access: 28 March 2024), 2022a.
- Lund Myhre, C., Platt, S. M., Lunder, C., and Hermansen, O.: ICOS ATC NRT CH₄ growing time series, Birkenes (75.0m), 2022-03-01–2022-10-16, ICOS Data Portal [data set], https://hdl.handle.net/11676/M1WVYeDMy6UtPnSvF6KKmq_L (last access: 28 March 2024), 2022b.
- Luts, A., Kaasik, M., Hörrak, U., Maasikmets, M., and Junninen, H.: Links between the Concentrations of Gaseous Pollutants Measured in Different Regions of Estonia, Air Qual. Atmos. Hlth., 16, 25–36, https://doi.org/10.1007/s11869-022-01261-5, 2023.
- Mollerup, J.: Measurement of the Volumetric Properties of Methane and Ethene at 310 K at Pressures to 70 MPa and of Propene from 270 to 345 K at Pressures to 3 MPa by the Burnett Method, J. Chem. Thermodyn., 17, 489–499, https://doi.org/10.1016/0021-9614(85)90148-X, 1985.
- Noe, S. M., Niinemets, Ü., Krasnova, A., Krasnov, D., Motallebi, A., Kängsepp, V., Jõgiste, K., Hõrrak, U., Komsaare, K., Mirme, S., Vana, M., Tammet, H., Bäck, J., Vesala, T., Kulmala, M., Petäjä, T., and Kangur, A.: SMEAR Estonia: Perspectives of a Large-Scale Forest Ecosystem Atmosphere Research Infrastructure, Forestry Studies, 63, 56–84, https://doi.org/10.1515/fsmu-2015-0009, 2015.
- Nord Stream AG: Inline Inspection for the Nord Stream Pipeline, Background Information, Tech. rep., Nord Stream AG, https://www.nord-stream.com/download/document/231/?language=en (last access: 28 March 2024), 2013.
- Poling, B. E., Prausnitz, J. M., and O'Connell, J. P.: The Properties of Gases and Liquids, McGraw-Hill, New York, 5th edn., ISBN 9780070116825, 2001.
- Rémy, S., Veira, A., Paugam, R., Sofiev, M., Kaiser, J. W., Marenco, F., Burton, S. P., Benedetti, A., Engelen, R. J., Ferrare, R., and Hair, J. W.: Two global data sets of daily fire emission injection heights since 2003, Atmos. Chem. Phys., 17, 2921–2942, https://doi.org/10.5194/acp-17-2921-2017, 2017.

- Sanderson, K.: What Do Nord Stream Methane Leaks Mean for Climate Change?, Nature, https://doi.org/10.1038/d41586-022-03111-x, 2022.
- Sofiev, M., Vankevich, R., Lotjonen, M., Prank, M., Petukhov, V., Ermakova, T., Koskinen, J., and Kukkonen, J.: An operational system for the assimilation of the satellite information on wildland fires for the needs of air quality modelling and forecasting, Atmos. Chem. Phys., 9, 6833–6847, https://doi.org/10.5194/acp-9-6833-2009, 2009.
- Sofiev, M., Ermakova, T., and Vankevich, R.: Evaluation of the smoke-injection height from wild-land fires using remote-sensing data, Atmos. Chem. Phys., 12, 1995–2006, https://doi.org/10.5194/acp-12-1995-2012, 2012.
- Sofiev, M., Vira, J., Kouznetsov, R., Prank, M., Soares, J., and Genikhovich, E.: Construction of the SILAM Eulerian atmospheric dispersion model based on the advection algorithm of Michael Galperin, Geosci. Model Dev., 8, 3497–3522, https://doi.org/10.5194/gmd-8-3497-2015, 2015.
- Stevens, B. and Seifert, A.: Understanding Macrophysical Outcomes of Microphysical Choices in Simulations of Shallow Cumulus Convection, J. Meteorol. Soc. Jpn., 86A, 143–162, https://doi.org/10.2151/jmsj.86A.143, 2008.
- Stevens, B., Moeng, C.-H., and Sullivan, P. P.: Large-Eddy Simulations of Radiatively Driven Convection: Sensitivities to the Representation of Small Scales, J. Atmos. Sci., 56, 3963–3984, https://doi.org/10.1175/1520-0469(1999)056<3963:LESORD>2.0.CO;2, 1999.

- Stevens, B., Moeng, C.-H., Ackerman, A. S., Bretherton, C. S., Chlond, A., de Roode, S., Edwards, J., Golaz, J.-C., Jiang, H., Khairoutdinov, M., Kirkpatrick, M. P., Lewellen, D. C., Lock, A., Müller, F., Stevens, D. E., Whelan, E., and Zhu, P.: Evaluation of Large-Eddy Simulations via Observations of Nocturnal Marine Stratocumulus, Mon. Weather Rev., 133, 1443–1462, https://doi.org/10.1175/MWR2930.1, 2005.
- Taylor, K. E.: Summarizing Multiple Aspects of Model Performance in a Single Diagram, J. Geophys. Res., 106, 7183–7192, https://doi.org/10.1029/2000JD900719, 2001.
- Tollefson, J.: Scientists Raise Alarm over "Dangerously Fast" Growth in Atmospheric Methane, Nature, https://doi.org/10.1038/d41586-022-00312-2, 2022.
- Venkatram, A. and Wyngaard, J. C.: Lectures on Air Pollution Modeling, American meteorological society, Boston, ISBN 9780933876675, 1988.
- Wooster, M. J., Roberts, G., Perry, G. L. W., and Kaufman, Y. J.: Retrieval of Biomass Combustion Rates and Totals from Fire Radiative Power Observations: FRP Derivation and Calibration Relationships between Biomass Consumption and Fire Radiative Energy Release, J. Geophys. Res., 110, D24311, https://doi.org/10.1029/2005JD006318, 2005.
- Zabetakis, M. G.: Flammability Characteristics of Combustible Gases and Vapors, Tech. Rep. BM–BULL-627, 7328370, https://doi.org/10.2172/7328370, 1964.