

Abstract

Nitrogen oxides (NO_x) are key pollutants for the improvement of ambient air quality. Within this study we estimated the historical NO_x emissions in China for the period 1995–2010, and calculated future NO_x emissions every five years until 2030 under six emission scenarios. Driven by the fast growth of energy consumption, we estimate the NO_x emissions in China increased rapidly from 11.0 Mt in 1995 to 26.1 Mt in 2010. Power plants, industry and transportation were major sources of NO_x emissions, accounting for 28.4, 34.0, and 25.4 % of the total NO_x emissions in 2010, respectively. Two energy scenarios, a business as usual scenario (BAU) and an alternative policy scenario (PC), were developed to project future energy consumption. In 2030, total energy consumption is projected to increase by 64 and 27 % from 2010 level respectively. Three sets of end-of-pipe pollution control measures, including baseline, progressive, and stringent control case, were developed for each energy scenario, thereby constituting six emission scenarios. By 2030, the total NO_x emissions are projected to increase (compared to 2010) by 36 % in the baseline while policy cases result in reduction up to 61 % in the most ambitious case with stringent control measures. More than a third of the reduction achieved by 2030 between least and most ambitious scenario comes from power sector and more than half is distributed equally between industry and transportation sectors. Selective Catalytic Reduction dominates the NO_x emission reductions in power plants, while life style changes, control measures for industrial boilers and cement production are major contributors to reductions in industry. Timely enforcement of legislation on heavy duty vehicles would contribute significantly to NO_x emission reductions. About 30 % of the NO_x emission reduction in 2020, and 40 % of the NO_x emission reduction in 2030 could be treated as the ancillary benefit of energy conservation. Sensitivity analysis was conducted to explore the impact of key factors on future emissions.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1 Introduction

Nitrogen oxides (NO_x) play a crucial role in tropospheric chemistry. Production of ozone in the troposphere is controlled by the abundance of NO_x (e.g., Zhang et al., 2007). NO_x also contributes to the formation of secondary inorganic aerosols, resulting in adverse impacts on human health (Wang et al., 2011b; Mueller et al., 2004). Increasing nitrate/sulfate ratios in precipitation have been observed in monitored cities in China, attributable to increasing NO_x emissions (Zhao et al., 2009). In addition, NO_x may lead to climate forcing effects via ozone formation or via secondary aerosols (Solomon et al., 2007). Therefore, NO_x is a key pollutant for the overall improvement of ambient air quality under multi-objective environmental management policies.

With the rapid economic development and urbanization in China, air pollutant emissions have been increasing at an unprecedented rate over the last decade (Xing et al., 2011). NO_x emissions in China (or as part of regional/global inventories) have been estimated by a number of researchers (Kato and Akimoto, 1992; Akimoto and Narita, 1994; Olivier et al., 1998; van Aardenne et al., 1999; Xue et al., 1999; Shah et al., 2000; Streets and Waldhoff, 2000; Klimont et al., 2001, 2009; Streets et al., 2001, 2003a; Val-lack et al., 2001; Hao et al., 2002; Zhang et al., 2007, 2009; Ohara et al., 2007; Wang et al., 2011a; Xing et al., 2011; Zhao et al., 2013). The annual growth rate of NO_x emissions was as high as 6.3% during 1995–2004 according to Zhang et al. (2007). Satellite based observations of NO_2 columns have shown even faster growth in the same period (Richter et al., 2005). It is important to provide a reliable estimate of the historical trends in the past two decades. In addition, nearly all the previous studies neglected the emissions from several “small industries”, including the production of bricks, glass, lime, ceramics, and nitric acid, the emissions of which were quite uncertain but fairly important.

To mitigate the adverse effect of air pollution, the Chinese government aims to reduce NO_x emissions by 10% (compared to 2010) during the 12th Five Year Plan (2011–2015) (The State Council of the People’s Republic of China, 2011a). It is of strategic

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



importance to indicate the dimensions of the effort to achieve such an ambitious target, and to evaluate the impact of further control policies on the emission pathway beyond 2015. Some previous studies have presented NO_x emission projections (van Aardenne et al., 1999; Shah et al., 2000; Streets and Waldhoff, 2000; Klimont et al., 2001, 2009; Ohara et al., 2007; Amann et al., 2008; Xing et al., 2011). However, these projections were based on the emissions for the year 2005 or earlier, and underestimated China's economic growth experienced in the last decade, especially during the period from 2006 to 2010. What's more, none of the projections anticipated the aggressive NO_x emission control policies envisaged in the 12th Five Year Plan, which may fundamentally change the future NO_x emission pathway. End-of-pipe control technologies were historically relied on for pollutant reductions while recent research has illustrated the importance of energy-saving policies for emission control in China (Yuan et al., 2011). The substantial reduction of NO_x emissions in the future calls for integrated control policies, which contribute to energy conservation and pollutant reductions simultaneously. Previous projections often adopted energy consumption projections directly from other sources, therefore it was difficult to quantify the impact of various energy saving policies on emission reductions.

To reflect recent changes of NO_x emissions and quantify the effects of various control policies, we estimated China's NO_x emissions during 1995–2010 and developed future NO_x emission scenarios in five years steps up to 2030 using a consistent model structure. These scenarios include not only end-of-pipe control measures, but also integrated energy-saving measures, such as life style changes, energy structure adjustment, and energy efficiency improvement. The impact of various control measures on NO_x emissions was evaluated, and the ancillary benefit of energy conservation on NO_x emission reductions was analyzed. Sensitivity analysis was then conducted to explore the impact of some key factors on future emissions.

2 Methodology and data sources

A consistent model structure was developed for the estimation of historical NO_x emissions, and the calculation of future energy consumption and NO_x emissions. This model structure is characterized by detailed representation and dynamic renewal of energy technologies and air pollutants control technologies, and the coupling between them. For the past years (1995–2010), energy consumption data were collected from statistics, and the technology distribution was collected from a variety of local sources. To provide a robust baseline for the calculation of future data, the historical energy consumption were also calculated from energy service demand, technology distribution, and energy efficiencies, and the model was calibrated by adapting the technology-based energy calculation to energy statistics. For the future years (2010–2030), the driving forces (e.g. GDP, population) are assumed first, then energy service demand is estimated based on driving forces. The future technology distribution and energy efficiencies are assumed and the energy consumption is calculated. Both historical and future emissions are derived from energy consumption, emission factors and assumptions on the penetration of control technologies. The governing equations of the model are as follows:

$$\hat{E}_{k,i,j,l} = E_{k,i,j,l} D_{i,j} X_{i,j,l} \quad (1)$$

$$\hat{E}_{k,i} = \sum_j \sum_{l \in W_j} E_{k,i,j,l} D_{i,j} X_{i,j,l} \quad (2)$$

$$Q_i^m = \sum_j \sum_{l \in W_j} \sum_{p \in V_l} \left(\left(F_{i,j,l}^m D_{i,j} X_{i,j,l} + \sum_k f_{k,i,j,l}^m \hat{E}_{k,i,j,l} \right) Y_{i,j,l,p} \left(1 - d_{i,j,l,p}^m \right) \right) \quad (3)$$

where, i represents the economic sector in a specific province, e.g. power plants in Beijing; j represents energy service type; k represents fuel type; l represents energy technology type; p represents air pollutant control technology type; m represents air pollutant/greenhouse gas; W_j is all the energy technologies which supply energy ser-

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



vice type j ; V_l is all the control technologies coupled with energy technology l ; D represents the energy service demand; X is proportion of energy service supplied by a specific energy technology; E is the energy efficiency, i.e. the energy consumption to supply per unit energy service with a specific energy technology; \hat{E} is the total energy consumption; f is the energy-based uncontrolled emission factor, i.e. the uncontrolled air pollutant/greenhouse gas emission per unit energy consumption of a specific energy technology; F is the service-based uncontrolled emission factor, i.e. the uncontrolled air pollutant/greenhouse gas emission per unit energy service supplied with a specific energy technology; Y is the proportion of an energy technology equipped with a specific control technology; d is the removal rate of a specific air pollutants control technology when coupled with a specific energy technology; Q is the total final air pollutant/greenhouse gas emissions. The sources and values of energy service demand, proportion of energy technologies, and energy efficiencies are documented in Sect. 2.1, while those of uncontrolled emission factors and proportion of control technologies are given in Sects. 2.2 and 2.3, respectively.

This study covers 31 provinces in mainland China. All data are at the provincial level. Unit-based methodology is applied to estimate the emissions from large point sources including coal-fired power plants, iron and steel plants, and cement plants (Zhao et al., 2008; Lei et al., 2011).

2.1 Data sources of energy consumption

2.1.1 Historical energy consumption

The historical energy consumption data were collected from a variety of sources, with a critical examination of the data reliability. Energy consumption of the stationary combustion sectors (power plants, heat supply, industry, and domestic) were derived from China Energy Statistical Yearbooks (CESY) (National Bureau of Statistics, 1998, 2001, 2004a, b, 2005, 2006, 2007, 2008a, b, 2009, 2011a, b). While CESY provides both a national and provincial energy balances, they are inconsistent with each other. Fol-

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



lowing the method of Zhang et al. (2009), we adopted the energy consumption values from the provincial energy balances, except for diesel, which was taken from the national balance. The shares of technologies were collected from a wide range of statistics, peer-reviewed papers, a number of technical reports, and unpublished materials from industrial associations and research institutes.

The industry sector is classified into industrial boilers and industry process because of different combustion technologies. The amount of fuel consumed for the production of various industrial products was estimated from the yields and energy efficiencies, and the amount of fuel consumed in the boilers was obtained by extracting the fuels consumed for industrial products from the total fuel consumption of the industry sector. The provincial data on industrial production were collected from various governmental statistics, such as China Statistical Yearbook and China Statistical Yearbook for Regional Economy (National Bureau of Statistics, 1996–2011, 2000–2011). The brick production was estimated from the unpublished data of China Bricks and Tiles Industrial Association, as the governmental statistics includes only enterprises above specific size, which accounts for only 10–20 % of the total production (Xu, 2008, 2010).

Fuel consumption of on-road vehicles was calculated from vehicle population, annual average vehicle mileage traveled, and fuel economy for each vehicle type, as documented in He et al. (2005) and Wang et al. (2006). Fuel consumption of off-road vehicles was also derived with a bottom-up method (Zhang, 2005, 2008). The fuel consumption of transportation was subtracted from other sectors in the energy balance table to avoid double counting. The open burning of agricultural residue was calculated based on the residue production, the ratio of open burning, and the burning efficiency; the method and key parameters are described in Streets et al. (2003b) and Wang et al. (2008). Although biomass open burning is not the key source of emissions for NO_x, it should be noted that the estimate of burned agricultural residue has large uncertainty. Some remote sensing products have showed much lower activity than bottom-up estimate based on crop residue remaining on field and the ratio of burning (van der Werf et al., 2010; Yevich et al., 2003).

2.1.2 Assumptions on future driving forces

GDP

The government aims to develop China into a medium developed country by 2050, which implies the GDP per capita should be over 20 000 USD (at 2005 exchange rate). We assume the annual average GDP growth rate is 8.0 % from 2011 to 2015, 7.5 % from 2016 to 2020, 6.5 % from 2021 to 2025, and 5.5 % from 2026 to 2030, respectively. Based on these assumptions and population development as discussed below, GDP per capita is estimated at about 9700 USD (at 2005 exchange rate) or about 11 400 USD (2007 exchange rate) in 2030. The provincial GDP was calculated with historical data from 1995 to 2010 using the logistic regression method. Minor adjustment was necessary to make the total of provincial GDP consistent with the national GDP. The share of primary, secondary, and tertiary industries in GDP, and the share of various industries in the secondary industry, were adopted from the Energy Research Institute (2009).

Population

Different projections of China's population agree fairly well with each other. In this study, we adopted the Research Report on National Population Development Strategy (National Population Development Strategy Research Group, 2007), and made minor revisions based on recent population growth rates. The national population is projected to increase from 1.34 billion in 2010 to 1.44 billion in 2020 and 1.47 billion in 2030. The provincial populations were calculated with historical data from 1995 to 2010 using the logistic regression method.

Urbanization and household size

Urbanization rate is assumed to increase from 49.95 % in 2010 to 58 and 63 % in 2020 and 2030, respectively, representing a medium range in urbanization projections.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Household sizes in urban and rural area are assumed to decrease from 2.88 and 3.95 in 2010 to 2.75 and 3.40 in 2030, respectively (Energy Research Institute, 2009).

2.1.3 Assumptions on future energy consumption

We developed two energy scenarios, a business as usual scenario (BAU) and an alternative policy scenario (PC). The BAU scenario is based on current legislations and implementation status (until the end of 2010), in particular on the assumption that CO₂ intensity would be 40–45 % lower in 2020 than that of 2005 (The State Council of the People's Republic of China, 2009). In the PC scenario, we assume the introduction and strict enforcement of new energy-saving policies, including life style changes, structural adjustment, and energy efficiency improvement. Life style changes imply slower growth of energy service demand, including energy-intensive industrial products, building area and domestic service demand, vehicle population, electricity production, and heat supply, due to more conservative life styles. Structural adjustment includes promotion of clean and renewable fuels and energy-efficient technologies, such as renewable energy power and combined heat and power generation (CHP) for power plants and heat supply sector respectively, arc furnace and large precalcined kilns for industrial sector, biogas stoves and heat pumps for domestic sector, electric vehicles and bio-fuel vehicles for transportation sector, and so on. Assumed energy efficiency improvement includes the improvement of the energy efficiencies of single technologies in each sector. The definition and key parameters of the energy scenarios are summarized in Table 1 and Table 2 respectively. The energy consumption was calculated with a 5 yr resolution, though the parameters for selected years only are presented in the tables. Detailed assumptions of the energy scenarios are documented below.

Power plants

Future electricity production is calculated based on the demand of final consumption sectors. The method to estimate the demand of final consumption sectors is described

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



in the next few sections. The total electricity production is projected to be 6690/5998 TWh and 8506/7457 TWh in BAU/PC scenario in 2020 and 2030, respectively.

The penetration of clean energy power is expected to increase rapidly in the future. The BAU scenario is designed based on the plan of the National Development and Reform Commission (2005, 2007b), with revisions according to recent development. The PC scenario considers an aggressive development plan proposed by China Electricity Council (2011) and a series of other analyses and projections. The installed capacities of hydro power, nuclear power, wind power, solar power, and biomass power are expected to be 300/320 GW, 40/70 GW, 40/60 GW, 1.8/8 GW, and 20/30 GW respectively in BAU/PC scenario in 2020. The corresponding capacities are projected to be 350/380 GW, 70/130 GW, 60/120 GW, 9/30 GW, 30/55 GW in 2030. Natural gas power is not expected to develop in large scale due to its high cost, whereas it may be constructed in some metropolitan areas for the relief of air pollution (Zhao et al., 2011), or constructed in small scale for peak shaving in the power grid. The proportion of electricity production from coal-fired power plants is expected to decrease to 73 and 57 % in 2030 under BAU and PC scenarios, respectively. Newly built coal-fired power plants are dominated by large units (300 MW or larger); smaller units (below 100–200 MW) will be phased out in the near future. Before 2005, sub-critical units were the dominant technology. Super-critical units have been widely applied since 2005. Ultra-supercritical units are expected to be widely promoted in the next five years. Integrated gasification combined cycle (IGCC) units are promising to be applied in large scale in 5–10 yr. The structure adjustment of power plants is shown in Fig. 1.

Heat supply

Future heat supply is also estimated based on the demand of final consumption sectors. The total heat supply is projected at 258/243 Mtce and 345/325 Mtce in BAU/PC scenario in 2020 and 2030, respectively.

Technologies for heat supply include CHP, coal-fired boilers, oil-fired boilers, and gas-fired boilers. The share of CHP is assumed to increase from 61 % in 2010 to 65/72 %

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



in 2030 under BAU/PC scenario, attributable to the promotion of the government, and the increasing need of district heating from CHP in domestic sector. The penetration of gas-fired boiler is assumed to increase to 10 and 15% in BAU and PC scenarios respectively in 2030.

5 Industry sector

We applied an elasticity coefficient method for the estimation of future production of industrial products, the governing equation of which is as follows:

$$Y_{t_1} = Y_{t_0} \left(\frac{dv_{t_1}}{dv_{t_0}} \right)^\delta \quad (4)$$

where, t_0, t_1 are time periods, e.g., $t_0 = 2010$, and $t_1 = 2030$; Y is the yield of a specific industrial product; dv is the driving force, namely sectoral value added or population; δ is the product specific elasticity coefficient. The values of δ are determined through (1) the historical trend during 1995–2010; (2) the experience of developed countries; (3) the projections of some industry associations. Most energy-intensive products for infrastructure construction are expected to increase until 2020, and stabilize or even decline after 2020, whereas the products closely related to everyday life are expected to increase until 2030, though at a declining rate. Future yields in PC scenario are less than those in BAU scenario because of a more conservative life style.

The National Development and Reform Commission released the Special Plan for Medium and Long Term Energy Conservation in 2004 (National Development and Reform Commission, 2004), which set the aim that the comprehensive energy efficiencies of most energy-intensive products would reach or approach the average level of developed countries by 2020. In BAU scenario, we assume the plan will be realized by 2020, whereas the energy efficiencies will not increase markedly beyond 2020. Under PC scenario, the best available technologies (BATs) are assumed to be adopted in some

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



industries by 2020, and are expected to be widely used in 2030, which implies China's energy efficiencies would be among the highest in the world.

The improvement of comprehensive energy efficiency is achieved through structural adjustment and energy efficiency improvement of specific technology. The shares of less energy-intensive technologies are assumed to be higher in PC scenario than BAU scenario, as summarized in Table 3. For example, the share of precalcined kilns in cement production is projected to approach 100 % in 2030 in PC scenario, and 85 % of them have a capacity larger than or equal to 4000 td^{-1} . However, energy-intensive shaft kilns are still expected to account for 15 % of cement production in 2030 under BAU scenario. The energy efficiencies of single technologies are also expected to improve in the future. For example, the energy consumption per unit product of blast furnaces, brick production, precalcined kilns for clinker production, machine coke ovens, and petroleum refineries is assumed to be 4, 18, 9, 33, and 21 % lower respectively in 2030 under BAU scenario compared with 2010. The corresponding reduction rates in the PC scenario are assumed to be 13, 27, 15, 44, and 31 % respectively.

Domestic sector

The domestic energy consumption is divided into urban residential consumption, rural residential consumption, and commercial consumption. Building area is a key factor of domestic energy consumption. In this study, future building area is estimated by referring to the governmental plan and comparing with the experience of developed countries. Average urban residential building area per capita is projected at 33 m^2 in 2030 under BAU scenario, comparable to that of Japan and the target set by the Ministry of Construction of China. Rural residential building area per capita is projected at 42 m^2 since it is less populous, also comparable to the target of the Ministry of Construction. In PC scenario, the building area per capita is $3\text{--}4 \text{ m}^2$ lower than that of BAU scenario in both urban and rural area.

Energy service demand in the domestic sector is derived from building area/population and energy service intensity, which is defined as the energy service

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



demand per building area/capita. Heating intensity is influenced by climate, the proportion of heating area, heating service quality, thermal insulation of the building envelope, and heating duration. As an integral effect, the heating intensity of urban area in north China is expected to decrease, while that of rural area and transition region (between north and south China) is expected to increase. The heating intensity is somewhat lower in our PC scenario than the BAU scenario. The cooking and hot water intensity is projected to increase by a factor of 1.25–1.45 from 2010 to 2030, depending on rural or urban area, BAU or PC scenario. As for electric appliance, urban ownership in 2030 is projected to account for 70–100 % that of Japan in 2005, while the rural ownership is lower.

People tend to use cleaner fuels for heating and cooking as incomes rise. Natural gas utilization as a domestic fuel enjoys the highest priority according to the “National Natural Gas Utilization Policy” (National Development and Reform Commission, 2007a). The development of biogas and solar water heaters has also been considered in the governmental plan (National Development and Reform Commission, 2007b). The heating structure adjustment is presented in Fig. 2, and that of cooking and hot water is presented in Fig. 3. In urban areas, coal is expected to be replaced by natural gas, electricity, heat pumps, and solar water heaters, except that district heating from CHP is expected to be promoted. In rural areas, coal and traditional biomass are expected to be replaced by electricity, biogas, heat pumps, and solar water heaters, with faster progress in the PC scenario.

Transportation sector

Future on-road vehicle population is estimated using the Gompertz Curve:

$$VPper_i = VPper_S \times e^{\alpha e^{\beta \cdot GDPper_i}} \quad (5)$$

where, $VPper_i$ is on-road vehicle population per 1000 persons in year i ; $VPper_S$ is on-road vehicle population per 1000 persons, saturation level; $GDPper_i$ represents GDP

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



per capita in year i ; α , β , parameters. The saturation levels are assumed to be 500 and 400 units per 1000 persons in BAU and PC scenarios, similar to those of Japan and Korea, respectively. The population of tractors, agricultural conveyers, the power of agriculture and construction machines, as well as the passenger and freight traffic volume of trains and inland waterway ships, are also related to total or sectoral GDP growth.

Passenger car ownership is assumed to maintain its exploding growth. The market share of passenger cars is projected to increase from 52 % in 2010 to 82 % in 2030. China has set up several initiatives to promote electric vehicles. In the BAU scenario, it is assumed that the market share of HEV (Hybrid Electric Vehicle) in passenger cars will to increase slowly in the first few years, speed up gradually and eventually reach 20 % in 2030. The PC scenario is designed by referring to several scenarios designed for American market, and making adjustment according to China's conditions. The market share of HEV, PHEV (Plug-in Hybrid Electric Vehicle) and EV (Electric Vehicle) in passenger cars are estimated to be 25, 28 and 2 % in 2030, respectively. Electric buses and light duty electric trucks are also expected to be promoted. The annual consumption of bio-gasoline and bio-diesel is expected to reach 10 Mt and 2 Mt respectively in 2020 under BAU scenario, consistent with the governmental plan (National Development and Reform Commission, 2007b). In PC scenario, the annual consumption of bio-gasoline is projected to increase to 20 Mt and 50 Mt in 2020 and 2030 respectively.

Several fuel efficiency standards have been released in China, including "Limits of Fuel Consumption for Passenger Cars" in 2004, "Limits of Fuel Consumption for Light Duty Commercial Vehicles" in 2007, "Low-speed Goods Vehicles – Limits and Measurement Methods for Fuel Consumption" and "Tri-wheel Vehicles – Limits and Measurement Methods For Fuel Consumption" in 2008. In 2010, the fuel efficiencies of new gasoline passenger cars and new heavy duty diesel vehicles are about 13.5 kmL⁻¹ and 3.6 kmL⁻¹ respectively. In BAU scenario, only the policies released in the year 2010 or before are considered. In PC scenario, for light duty vehicle, a new standard entitled "Fuel Consumption Evaluation Methods and Targets for Passenger Cars" issued

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



in 2011 is assumed to be implemented during 2012–2015. Potential improvements of fuel economy corresponding to Path Three of NAS (US National Academy of Sciences) are assumed to be implemented during 2015–2025. Path Three, the most aggressive pathway designed by NAS, necessitates the introduction of emerging technologies that have the potential for substantial market penetration within 10–15 yr (US National Research Council, 2002). For heavy duty vehicles, the Japanese fuel consumption limits of new heavy-duty vehicles are assumed to be implemented between 2015 and 2025, and the fuel economy requirements are assumed to be 20 % more stringent than the Japanese limit after 2025. Considering the policies discussed above, the resulting fuel economy of new passenger cars and light duty buses is 33 % better in 2030 in PC scenario than 2010, while the corresponding improvement for new heavy duty vehicles is 57 %. The historical and future fuel economy of electric vehicles are determined based on Lin (2010) and Huo et al. (2010). Fuel economy of motorcycle, agricultural tractors and conveyers, agriculture and construction machines, trains, and inland waterway ships is projected to increase by 23/29 %, 13/19 %, 14/23 %, 10/12 %, and 18/24 % respectively in BAU/PC scenario in 2030, compared to 2010.

Open burning of agricultural residue

In 1997, the government began enacting a series of regulations and laws to prohibit field burning. Farmers are encouraged to return crop residue to agricultural soils as fertilizer. Although it is not usually adopted by all farmers, especially younger ones (Yan et al., 2006), we assume the crop residue burned in the field will decline by 10 % every five years in both BAU and PC scenarios.

2.2 Data sources of uncontrolled emission factors

The uncontrolled emission factors were obtained through a thorough survey of literatures reporting field measurements from Chinese sources. The uncontrolled NO_x emission factors for stationary sources are summarized in Table 4. Here, we include a brief

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



discussion of the “small industries”, including the production of glass, bricks, lime, ce-
ramics, and nitric acid, which were often neglected in previous studies. Information on
emission factors for these industries is limited but has been increasing in the past few
years. The Chinese Research Academy of Environmental Sciences and Bengbu Glass
Industry Design & Research Institute (2010) investigated the NO_x concentration in the
flue gas of 14 glass plants, and estimated that the NO_x emission factor was within
a range of 1.7–7.4 kg/t-glass, and 5.2 kg/t-glass on average. The NO_x concentrations
in the flue gas of brick kilns were within a range of 31.5–232.7 mg m⁻³ (78.6 mg m⁻³
on average, with annular kilns larger than tunnel kilns) for 8 brick plants investigated
by Chinese Research Academy of Environmental Sciences (2009). However, the brick
plants under investigation were mostly advanced tunnel kilns, and the production ca-
pacities were larger than 10 million units per year. In contrast, the traditional annular
kilns account for more than 90 % of total brick production, and the plants with pro-
duction capacity less than 10 million units per year account for over 60 %. Zhang
et al. (2007) used 0.21 kg/t-brick (about 106 mg m⁻³) based on the measurements of
Tang et al. (1995). The Manual of Emission Factors for the Pollution Source Census
recommended 0.27 kg/t-brick (about 140 mg m⁻³) to represent the average emission
rate of brick plants in China (Data Codification Committee of the First National Pollu-
tion Source Census, 2011), which was also adopted by Chinese Research Academy
of Environmental Sciences (2009) for the estimation of total emissions. In this study,
we used an emission factor of 0.27 kg/t-brick. The emission factor for ceramics pro-
duction, 4.35 kg/t-ceramics, was based on the measurements of 22 plants by Hunan
Research Academy of Environmental Sciences (2008). Qingdao University of Science
& Technology (2008) collected the NO_x emission rates of 60 nitric acid plants. The
NO_x concentrations in the flue gas of dual-pressure processes are usually less than
600 mg m⁻³, while those of other processes are significantly higher. We estimated the
uncontrolled NO_x emission factors to be 1.8 and 13.6 kg/t-nitric acid, for dual-pressure
process and other processes, respectively.

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The emission factors of on-road vehicles, including uncontrolled factors, and controlled factors under Euro-I, Euro-II and Euro-III, were compiled from a number of peer-reviewed studies (Huo et al., 2012a, b; Xie et al., 2006; Li et al., 2003; Hu et al., 2002; Tian, 2003; Fu et al., 2000) and summarized in Table 5. There is only limited number of studies where emission performance of non-road vehicles has been analyzed; we rely on Tian (2003) for trains and agricultural tractors and conveyers, Wang et al. (2007) and Tian (2003) for agricultural and construction machinery, and Ding et al. (2000) and Song (2007) for inland waterway ships; these are summarized in Table 5.

2.3 Data sources for NO_x emission control measures**2.3.1 Historical NO_x emission control measures**

Low NO_x combustion technology (mainly Low NO_x Burner, LNB) was the only NO_x control technology widely used in China's power plants before 2005. Flue gas denitrification, including selective catalytic reduction (SCR) and selective non-catalytic reduction (SNCR) began to be installed from 2005 onwards. The installed capacity of power plants equipped with SCR/SNCR increased from 4.2 GW in 2005 to 80.7 GW in 2010 (Ministry of Environmental Protection of China, 2011a). Fifty-seven percent of the total SCR/SNCR capacities in 2010 were located in the three "key regions", including the Greater Beijing region (including Beijing, Tianjin, Hebei), the Yangtze River Delta (YRD, including Shanghai, Jiangsu, Zhejiang), and the Pearl River Delta (PRD, mainly Guangdong province). The LNB penetration was estimated based on the following assumptions due to the lack of official statistics: (1) no boilers were equipped with LNB before 31 December 1996; (2) large units (≥ 300 MW) built after 1 January 1997 were equipped with LNB, according to the emission standard released in 1996 (State Environmental Protection Administration, 1996b); (3) smaller units (≥ 300 MW) were not equipped with LNB until 31 December 2003, but LNBs were installed with new boilers after 1 January 2004, based on the emission standard released in 2003 (State Environmental Protection Administration, 2003). The penetration of LNB (in-

cluding LNB + SCR and LNB + SNCR) in coal-fired power plants was estimated to be 22.3 % in 2000, 50.5 % in 2005, and 87.9 % in 2010 based on the assumptions above. The data for 2005 are between the estimates of Zhang (2008) (46 % in 2005), and Zhao et al. (2008) (60 % in 2005).

NO_x control technologies were rarely adopted in the industry sector. Low NO_x combustion technologies were installed in some new precalcined cement kilns, while end-of-pipe control technologies like SCR/SNCR were seldom installed in the cement industry by 2010. The flue gas of dual-pressure nitric acid processes can be exhausted untreated according to the current emission standard (State Environmental Protection Administration, 1996a), though some plants are equipped with end-of-pipe control technologies. In contrast, other nitric acid processes were usually equipped with SCR or absorption methods in order to achieve the standard (Tang, 2006; Wang and Zeng, 2008).

Since 2000, China has released a series of emission standards for new vehicles, which are basically consistent with the corresponding European standards, though released several years later. The implementation timeline of these standards is summarized in Fig. 4 (Wang and Hao, 2012).

2.3.2 Assumptions on future NO_x emission control measures

We developed three sets of end-of-pipe pollution control measures for each energy scenario, including baseline (abbr. [0]), progressive (abbr. [1]), and stringent control measures (abbr. [2]), thereby constituting six emission scenarios (BAU[0], BAU[1], BAU[2], PC[0], PC[1], and PC[2]). The baseline control measures (BAU[0]/PC[0] scenario) assumes that all current pollution control legislation (until the end of 2010) and the current implementation status would be followed during 2011–2030. The progressive control measures (BAU[1]/PC[1] scenario) assumes that new pollution control policies would be released and implemented, representing progressive approach towards future environmental policies. The stringent control measures (BAU[2]/PC[2] scenario) assumes that even more ambitious policies would be released and implemented; such scenario

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



could be realized only if the government takes quick and substantially aggressive action. The definitions of the emission scenarios are summarized in Table 1, and the penetration of major control technologies under each emission scenario is summarized in Table 6. The future emissions are calculated with a 5 yr resolution, though the parameters are presented for selected years only.

Power plants

The “Twelfth Five Year Plan for Environmental Protection” (the “Plan”) requires that all new-built thermal power plants be equipped with low NO_x combustion technologies and flue gas denitrification (SCR/SNCR) during 2011–2015. Existing thermal power plants should be upgraded with low NO_x combustion technologies, and flue gas denitrification is required for large units (≥ 300 MW). More ambitious application of measures is required in the “key regions” (see Sect. 2.3.1). A new emission standard for thermal power plants (the “New standard”) was issued in July 2011, which is more stringent than the “Plan”. The “New standard” requires that nearly all thermal power plants should be equipped with SCR, except for some CFB boilers and some boilers burning coal with very high volatile matter content.

Only existing emission standards are considered in BAU[0]/PC[0] scenario. In contrast, BAU[1]/PC[1] scenario is designed based on the “Plan” during 2011–2015, and the assumption that SCR/SNCR will continue to spread gradually after 2015. In BAU[2]/PC[2] scenario, the “New standard” is assumed to be implemented stringently during the 12th Five Year Plan. Table 6 gives the national average penetration of NO_x control technologies. Note that the penetrations in the “key regions” are usually larger than those of other regions. To illustrate the required effort, Table 7 shows the additional capacities of each control technology that need to be installed during every five-year period in BAU[0], BAU[1], and BAU[2] scenarios. With the implementation of the governmental plan for environmental protection, about 578 GW SCR devices are expected to be installed during 2011–2015 under BAU[1] scenario.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Industrial sector

There was no national NO_x emission limit for coal-fired industrial boilers in China. However, several provinces including Beijing and Guangdong have issued local standards recently. No control measures are assumed for BAU[0]/PC[0] scenario. The BAU[1]/PC[1] scenario is based on the “Plan”, where newly built industrial boilers are required to be equipped with LNB, and existing boilers in the “key regions” are beginning to be retrofitted with LNB during 2011–2015. The vast majority of existing boilers are expected to be equipped with LNB by 2020. In BAU[2]/PC[2] scenario, newly built industrial boilers are assumed to be equipped with LNB + SNCR, and existing boilers in the “key region” are beginning to be reconstructed with LNB + SNCR during 2011–2015. The penetrations of LNB + SNCR are expected to increase to 73 %, 90 %, and 100 % in 2020, 2025, and 2030 respectively.

As for “industry process”, only the emission threshold for cement production and nitric acid production were formally regulated before 2010. However, new emission standards for ceramics industry, nitric acid industry, glass industry, steel industry (sintering), and brick industry have been released or drafted recently.

The standard for cement released in 2004 can be met by all shaft kilns and most precalcined kilns without additional control measures. Other rotary kilns, which may exceed the standard, are assumed to be phased out in the near future. Thus, we assume the control technology mix of 2010 would be kept in BAU[0]/PC[0] scenario. The BAU[1]/PC[1] scenario is designed based on the “Plan”. Newly built precalcined kilns (mostly $\geq 4000 \text{td}^{-1}$) are required to be equipped with flue gas denitrification (SCR/SNCR), and existing precalcined kilns should be reconstructed with LNB during 2011–2015. SCR/SNCR is assumed to continue to spread gradually after 2015. In BAU[2]/PC[2] scenario, the penetration of flue gas denitrification is assumed to grow much faster. The shares of major control technologies are given in Table 6.

Glass production was almost completely uncontrolled before 2010. However, to attain the new flue gas concentration standard of 700mgm^{-3} as specified in “Glass in-

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



dustry air pollutants emission standards (GB26453–2011)”, add-on control technologies should be used, typically oxy-fuel combustion technology or SCR. No control measures are assumed for BAU[0]/PC[0] scenario. In BAU[1]/PC[1] scenario, the new standard is assumed to be released but nevertheless enforced leniently, because of the difficulty in implementation. In BAU[2]/PC[2] scenario, the new standard is assumed to be enforced stringently. The draft new standards for brick industry and ceramic industry (GB25464-2010) can be reached without additional end-of-pipe control technologies, though these standards are comparable with the most stringent standards in the world. Thus, no control measures are assumed for brick and ceramic production. The draft new standard of sintering in 2007 can also be attained without additional control technologies. However, the “Plan” requests newly built sintering plants to be equipped with flue gas denitrification (SCR/SNCR). The BAU[0]/PC[0] scenario assumes no control measures, while BAU[1]/PC[1] scenario is developed on the basis of the “Plan”. Even more aggressive promotion of SCR/SNCR is assumed for BAU[2]/PC[2] scenario. To attain the new emission standard for the nitric acid industry (GB26131-2010), the dual-pressure process should be equipped with absorption method (ABSP) or SCR, while other processes need to adopt both ABSP and SCR. The BAU[0]/PC[0], BAU[1]/PC[1] and BAU[2]/PC[2] scenarios assume the technology mix of 2010, lenient enforcement of the new standard, and stringent enforcement of the new standard, respectively.

20 Transportation sector

In BAU[0]/PC[0] scenario, only existing standards (released before the end of 2010) are considered. In BAU[1]/PC[1] scenario, all the current standards in Europe are assumed to be implemented in China gradually, and the time intervals between the releases of two stage standards would be a little shorter than those of Europe. The BAU[2]/PC[2] scenario shares the same assumptions as BAU[1]/PC[1] scenario. The removal efficiencies of the future emission standards are from the GAINS-Asia model of IIASA (Amann et al., 2008, 2011). The emission factors are listed in Table 5, and the implementation timeline of the emission standards is given in Fig. 4.

Heat supply, domestic sector, and open burning of agricultural residue

The control technology mix of CHP is assumed to be the same as ordinary thermal power plants, while that of other heating boilers is consistent with the corresponding industrial boilers. No end-of-pipe control technology is assumed for domestic sector and for open burning of agricultural residue we assume decline in activity as discussed in the “Open burning of agricultural residue” section.

Plausibility of the emission scenarios

Emission scenarios developed here represent different futures which vary with respect to stringency and enforcement of NO_x emission policies. While their feasibility assessment is beyond the scope of this study, we discuss below implications of assumptions behind these scenarios, including enforcement mechanisms, necessary pace of implementation and associated costs.

In recent years, Chinese authorities implemented continuous emission monitoring systems (CEMSs), which have been widely used to monitor SO₂ emissions from power plants. The 12th Five Year Plan calls for installation of CEMS for high emitting plants (e.g. power plants, iron and steel plants, and large cement plants) for the online monitoring of NO_x emissions before 2015 (The State Council of the People’s Republic of China, 2011b). The CEMSs data are transmitted in real time to administrative departments. Similarly, a stringent “environmental label” system is implemented for road vehicles. Environmental labels are necessary for new vehicles to come into markets. High emitting vehicles with “yellow labels” registered before 2005 will be forbidden by 2015 (The State Council of the People’s Republic of China, 2012). Finally, field inspections will be strengthened to ensure the operation of control technologies. The SO₂ scrubbers and CEMSs have been inspected once or twice a month in the past few years and harsh penalties were imposed in case of non-compliance (Xu et al., 2011). Similar inspections will be performed for NO_x control technologies. The continuity of compliance with emissions standards for new vehicles will be assured via frequent inspections of

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



manufacturers (The State Council of the People's Republic of China, 2012). The number of inspectors has increased from 50 040 in 2005 to 62 468 in 2010 (Ministry of Environmental Protection of China, 2006, 2012).

Scenario BAU[1] and BAU[2] set ambitious goals with respect to reductions and consequently require large capacities to be equipped with control measures within a relatively short period of time. For example, as described above, 578 GW of SCR capacity are expected to be installed for power plants during 2011–2015 under BAU[1] scenario. Such policy will be associated with significant costs. Based on Liu (2013), the investment cost for the implementation of control technologies in power sector is estimated at about 65 billion CHY during this period. For comparison, the government has committed 816 billion CHY for the installation of control technologies for air and water pollutants in the same period (The State Council of the People's Republic of China, 2012), accounting for about 0.4 % of China's GDP (40.1 trillion CHY in 2010, i.e. about 200 trillion CHY for five years). In addition, economic policies including denitrification compensation price and pollutant discharge fee have been released. The electricity generation unit equipped with flue gas denitrification is supported by a price subsidy of $0.008 \text{ CHY kWh}^{-1}$. Although it is not enough to compensate the denitrification cost, the price subsidy and the pollutant discharge fee ($0.63 \text{ CHY kg}^{-1} \text{ NO}_x$, approximately $0.002 \text{ CHY kWh}^{-1}$) together will be a little higher than the denitrification cost of $0.0083 \text{ CHY kWh}^{-1}$ (Liu, 2013). Therefore, it is a rational decision for the power plant managers to run the flue gas denitrification properly considering the economic benefits.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3 Results and discussion

3.1 Historical and future energy consumption

3.1.1 Trends and sectoral distribution of energy consumption

Figure 5 shows the evolution of energy consumption by sector and fuel in the period from 1995 to 2030. Total energy consumption in China increased from 1651.6 Mtce in 1995 to 4159.1 Mtce in 2010, with an annual average growth rate of 6.4%. Energy consumption grew slowly from 1995 to 2000 (1.3% annual average growth rate), largely due to the Asian economic crisis, and subsequently increased rapidly from 2000 to 2010 (8.9% annual average growth rate) because of rapid economic growth. Industry was the largest energy consumer during 1995–2010; its share varied between 40.5% and 47.8%. The energy consumption of domestic and transportation sectors increased by 1.4 and 3.5 times, respectively, while their shares changes from 30.3 and 6.6% in 1995 to 17.1% and 9.0% in 2010, respectively. As for power plants, only the energy conversion loss (energy input minus electricity output) was included in the total energy consumption to avoid double-counting. The share of power plants varied between 17.8 and 22.4% during the studied period. Coal was the dominant fuel type. Its share decreased from 67.8% in 1996 to 63.3% in 2001, and increased to 69.6% in 2007, and decreased again to 68.1% in 2010. The share of biomass decreased from 15.8 to 5.9%, while that of other renewable energy and nuclear energy increased from 5.3 to 7.5% during 1995–2010.

In 2030, the total energy consumption is projected to increase to 6816.5 Mtce under the BAU scenario and to 5295.1 Mtce under the PC scenario, 64 and 27% larger than that of 2010, respectively. As with the sectoral distribution, the share of industry is expected to decrease notably in both scenarios resulting from the economic structure adjustment, while the share of transportation is expected to experience a dramatic increase, especially under the BAU scenario. The relative contributions of other sectors change very slightly. Coal continues to dominate China's energy mix, but the proportion

decreases from 68.1% in 2010 to 59.5 and 51.8% in 2030 under the BAU and PC scenarios, respectively. In contrast, the shares of natural gas and “other renewable energy and nuclear energy” are estimated to increase from 3.4 and 7.5% in 2010 to 5.5 and 8.9% in 2030 under the BAU scenario, and 9.3 and 15.8% under the PC scenario, respectively.

3.1.2 Impact of various energy-saving measures

Energy conservation measures might play an important role in achieving ambitious NO_x reduction targets; therefore we present here a brief discussion of importance of particular measures included in our analysis. We use the BAU scenario as our “benchmark”, the differences of energy consumption between BAU and PC scenarios represent the effects of various energy saving measures. As documented in Sect. 2.1.3, energy-saving measures can be classified into three major categories, including life style changes, structural adjustment, and energy efficiency improvement. Figure 6 depicts the contribution of each control measure category to the reductions of energy consumption. Both life style changes and structural adjustment are critical for the energy conservation of power plants. Structural adjustment, namely the replacement of traditional coal power with advanced coal power and clean energy power, contributes 69% of the total energy conservation in 2030. As for the industry sector, life style changes play the most important role, followed by energy efficiency improvement and structural adjustment. A more conservative life style implies relatively smaller living area, fewer passenger cars, and consequently reduced steel and cement production, thereby contributing to over half (52%) of the energy saving in 2030. Life style changes also dominate the energy saving (54% in 2030) in the domestic sector. For the transportation sector, life style changes, structural adjustment and energy efficiency improvement account for 38, 39, and 23% of the energy conservation in 2030, respectively, and their contribution to energy saving increases quickly with time. In terms of sectors, power plants and industry are expected to play the leading roles, accounting for 29 and 30% of the total energy saving in 2030, respectively.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.2 Historical and future NO_x emissions

3.2.1 Trends and sectoral distribution of NO_x emissions

The trends in NO_x emissions and their sectoral distributions during 1995–2030 are presented in Fig. 7, and the provincial NO_x emissions are given in Table 8. As the high-efficient end-of-pipe control technologies were not widely used until 2010, the historical trends of NO_x emissions closely matched energy consumption, which experienced slow increases from 11.0 Mt in 1995 to 12.2 Mt in 2000 (2.0 % annual average growth rate), and faster growth from 12.2 Mt in 2000 to 26.1 Mt in 2010 (7.9 % annual average growth rate). The NO_x emissions during 2007–2010, which have not been documented in previous studies, increased rapidly with an annual growth rate of 5.4 % despite existing control measures (see Sect. 2.3.1). Power plants, industry and transportation accounted for 81.4–87.9 % of the total NO_x emissions during 1995–2010, of which the share of power plants varied between 28.4 and 34.5 %. It is worth noting that the share of power plants in total NO_x emissions decreased remarkably after 2004, though the share in energy consumption remained stable. This could be attributed mainly to the nation-wide utilization of low NO_x combustion technologies, and the promotion of flue gas denitrification in designated areas (the “key regions”; see Sect. 2.3.1). Although the share of energy used in transportation increased in the 1995–2010 period, the share in NO_x emissions from transportation showed a decreasing trend after 2001 (from 28.4 % in 2001 to 25.4 % in 2010) owing to introduction of emission standards for new vehicles. The share of industry decreased slightly during 1995–2002, but rose quickly from 23.9 % in 2002 to 34.0 % in 2010, which could be attributed both to the rapid development of industry, and to the control measures taken in power plants and transportation sectors. The industry sector exceeded power plants, and became the largest source for NO_x emissions in 2009. Emissions from several “small industries”, including the production of bricks, glass, lime, ceramics, and nitric acid, which were often neglected or approximated in previous published studies, were estimated to be 1143 kt, 1303 kt, and 1977 kt in 1995, 2005 and 2010, respectively. The corresponding

contributions to total NO_x emissions are 10.4, 6.7, and 7.6 % respectively. Shangdong, Henan, Jiangsu, Guangdong, and Hebei provinces were top five emitters of NO_x emissions, each of which had over 1500 kt NO_x emissions and contributed together over 35 % of total emissions.

5 A Monte Carlo uncertainty analysis was performed on the NO_x emission inventory, as described in Wei et al. (2011) and Bo et al. (2008). Results showed that the 90 % confidence interval of NO_x emissions was (−32, 49 %) on average in the period of 1995–2010. The coefficients of variation (CV) were ±27–34 % during 1995–2010, and 30 % on average. The CVs of emissions from the power plants, heat supply, industry, 10 domestic, transportation, and others were ±34 %, ±49 %, ±50 %, ±54 %, ± 92 %, and ±231 % on average during 1995–2010, respectively.

In 2030, the total anthropogenic NO_x emissions are projected to be 35.4 Mt, 15.8 Mt, 13.8 Mt, 25.2 Mt, 11.5 Mt, and 10.1 Mt under BAU[0], BAU[1], BAU[2], PC[0], PC[1], PC[2] scenarios respectively. The corresponding change rates compared with 2010 15 are 36, −39, −47, −3, −56, −61 % respectively. The NO_x emissions are projected to be 22.9 Mt in 2015 under the BAU[1] scenario, 12.2 % lower than that of 2010. This implies that if the control policies in the related work plan of the Chinese government (i.e. “Twelfth Five Year Plan for Environmental Protection”) could be implemented successfully (as assumed in the BAU[1] scenario), the national target to reduce the NO_x 20 emissions by 10 % during 2011–2015 would be achieved. However, many uncertainties exist, and some major ones are analyzed in Sect. 3.3.

It is important to stress that early implementation of measures is important to the success of the BAU[1]/PC[1]/BAU[2]/PC[2] policies. This implies rapid installation of control measures, e.g., according to our calculation, during the 12th Five Year Plan nearly 25 600 GW flue gas denitrification capacity needs to be installed, accounting for about 65 % of the total thermal power generation capacity. Such investment is consistent with the current requirements laid down in the 12th Five Year Plan specifying SCR/SNCR installation requirements in the power sector (see Sect. 2.3.2). In addition, the government announced the Euro IV emission standard for heavy-duty diesel vehicles that

NO_x emissions in China

B. Zhao et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

would be implemented in July 2013 (Ministry of Environmental Protection of China, 2011b). This is expected to reduce the NO_x emissions of heavy duty diesel trucks by about 40 % from the Euro III levels. Besides, as described in Sect. 2.3.2 further policies assuring enforcement of the control programmes have been released in China.

The sectoral distribution is not expected to change significantly in the future under the BAU[0] and PC[0] scenarios. However, under BAU[1], BAU[2], PC[1], and PC[2] scenarios, the share of power plants in total NO_x emissions is expected to decrease strongly during 2011–2015, due to extensive SNCR/SCR installation. However, it is expected to reverse and increase after 2015, because the reduction potential of power plants will be exhausted. The share of transportation decreases all along during 2011–2030 as a result of the implementation of stringent vehicle emission standards. The proportion of industry increases despite the control measures, reflecting the lower ambition of explored policies with respect to control of industrial NO_x emissions. The provincial distribution pattern is not expected to change much, and Shangdong, Henan, Guangdong, Hebei, and Jiangsu continue to have the largest emissions under nearly all scenarios. However, the emissions of the “key regions” (see Sect. 2.3.1) decrease more rapidly than other regions under the BAU[1], BAU[2], PC[1], and PC[2] scenarios.

3.2.2 Impact of various energy-saving measures and end-of-pipe control measures

Both energy saving measures and end-of-pipe control measures contribute to the reductions of NO_x emissions. As documented in Sects. 2.1 and 3.1.2, the energy saving measures were categorized into life style changes, structural adjustment, and energy efficiency improvement. In contrast, the end-of-pipe control measures were categorized considering the characteristics of each specific sector. For example, all end-of-pipe control technologies of industry sector were classified into seven kinds, including low NO_x burners for industrial boilers, SNCR for industrial boilers, low NO_x burners for cement production, SNCR/SCR for cement production, control measures for sintering, control measures for glass production, and control measures for nitric acid production.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The contributions of each control measure category to the reduction of NO_x emissions between BAU[0] and PC[2] scenarios are given in Fig. 8. SCR accounts for 74 % of the total NO_x emission reduction in power plants in 2015, however, it's contribution decreases gradually to 52 % in 2030 as the installation potential of SCR is exhausted.

Therefore, energy saving measures such as life style changes and structural adjustment are expected to play a leading role for the further reductions of NO_x emissions in power plants after 2015. For industry sector, life style changes, control measures for industrial boilers, and control measures for cement production contribute 26, 27, and 31 % of the total NO_x emission reduction in 2030, respectively. For the transportation sector, the energy saving measures, end-of-pipe control measures for on-road transportation, and end-of-pipe control measures for off-road transportation account for 36, 43, and 21 % of the total NO_x emission reduction in 2030, respectively. Within the end-of-pipe measures for on-road transportation, the control measures for heavy duty vehicles account for as much as 69 % of the reduction. Adding up all the control measures, power plants, industry, and transportation contribute 60, 26, and 4 % of the total NO_x emission reduction in 2015. However, the relative importance of power plants is expected to decrease while that of transportation increases after 2015. The contributions of power plants, industry, and transportation to the total NO_x emission reduction in 2030 are estimated to be 36, 27, and 27 %, respectively.

3.2.3 Ancillary benefit of energy conservation on NO_x emission reduction

The contribution of energy saving measures to total NO_x emission reductions (between BAU[0] and PC[2]) is 21, 30, 35, and 40 % in 2015, 2020, 2025, and 2030, respectively. We further analyzed the increment of the NO_x emission reduction (between BAU[0] and PC[2]) for every five years. The integrated energy-saving measures account for only 21 % of the NO_x reduction increment during 2010–2015. However, during 2025–2030, 89 % of the NO_x reduction increment could be attributed to energy-saving measures. Therefore, the traditional end-of-pipe measures might dominate the NO_x emission reductions in the short term, but their reduction potential might nevertheless be

exhausted in the near future. To achieve further reductions, it is strategically important to take advantage of the ancillary benefit of energy conservation on NO_x emission reductions.

Actually, the “latent” ancillary benefit of energy saving on NO_x emission reductions might be much larger than documented above. Figure 9 shows the temporal evolution of energy intensity (energy consumption per unit GDP) and NO_x intensity (NO_x emission per unit GDP) during 1995–2030 (normalized to 1995). The line of “BAU_NOC” in Fig. 9 defines what the NO_x intensity in BAU[0]/BAU[1]/BAU[2] scenario would be if no end-of-pipe NO_x control measures were applied, and similarly, the line of “PC_NOC” defines that of PC[0]/PC[1]/PC[2] scenario. With no energy-saving measures, the NO_x intensity under BAU_NOC/PC_NOC would have remained roughly unchanged. In fact, the NO_x intensity decreases by 25 % under BAU_NOC/PC_NOC, during 1995–2010, attributable to the integrated energy-saving measures in these years. In other words, energy savings avoided 25 % of the NO_x emissions by 2010. From 2010 to 2030, the NO_x intensity decreases by 46 and 63 % under BAU_NOC and PC_NOC, respectively. This implies that the integrated energy-saving measures assumed in BAU and PC scenarios could avoid 46 and 63 % of the NO_x emissions by 2030, respectively. Thus, making full use of the ancillary benefit of energy saving on NO_x emission reductions would be of strategic importance in the pollution control policies.

3.3 Sensitivity analysis

The intrinsic uncertainties in the key drivers (including economic growth, energy saving policies, pollution control policies, etc.) constitute the major sources of the uncertainties of future emissions, which, however, cannot be considered thoroughly in the scenarios. It is instructive to quantify the impacts of some key factors on the future emissions, which were not considered in the “standard” scenarios.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.3.1 Uncertainty in the GDP growth rate

The GDP growth rate in such a rapidly developing country as China is quite uncertain. The actual GDP growth rate was significantly higher than the governmental target in the past few decades. Thus, we designed a higher GDP growth case (HGDP) for each of the standard cases, where the GDP growth rate was one percent higher, i.e. 9.0% from 2011 to 2015, 8.5% from 2016 to 2020, 7.5% from 2021 to 2025, and 6.5% from 2026 to 2030, respectively. In 2030, the total NO_x emissions under the six sensitivity (HGDP) cases are projected to be 4.8–9.0% higher than the corresponding standard cases. The NO_x emissions are estimated to be 23.8 Mt in 2015 under the HGDP-BAU[1] scenario, 8.6% lower than that of 2010, implying that the national target to reduce the NO_x emissions by 10% during 2011–2015 might not be achieved with 1 percent higher GDP growth.

3.3.2 Failure in the control of heavy diesel vehicles

The Euro I–Euro III standards for heavy diesels vehicles have already been implemented nationwide, and the Euro IV is expected to be implemented during the 12th Five Year Plan. However, the effectiveness of the standards has been questioned in recent research. Wang et al. (2012) suggested that current emission standard implemented in Beijing (Euro I~ Euro IV) and nationwide might have limited impacts on reducing NO_x emissions. Wu et al. (2012) found the NO_x emission factors for heavy-duty diesel buses did not improve in most cases as emission standards became more stringent, and that the average NO_x emission factors of Euro II, Euro III and Euro IV buses in Beijing under the same typical driving cycle were all around 12 g km⁻¹. These findings are consistent with earlier work of Velders et al. (2011) for Europe as well as Huo et al. (2012b) for China, where similar non-compliance was identified. Therefore, we designed a heavy-duty diesel vehicle control failure case (HDF) for each of the standard cases, where the NO_x removal rates of Euro IV, Euro V, and Euro VI were assumed to be 50, 50, and 75% respectively (or relative to Euro III, reductions of 22,

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



22, and 60 %, respectively). In 2030, the NO_x emissions of the transportation sector under the HDF cases are projected to be 1.5–2.8 times the corresponding standard cases. Consequently, the total NO_x emissions under the six HDF cases are projected to be 13–29 % higher than the corresponding standard cases. The NO_x emissions are estimated to be 23.3 Mt in 2015 under the HDF-BAU[1] scenario, 10.5 % lower than that of 2010, still meeting the national target to reduce the NO_x emissions by 10 % during 2011–2015.

3.3.3 Failure in the operation of flue gas denitrification for power plants

As described in Sect. 3.2.2, SCR accounts for 74 and 52 % of the total NO_x emission reductions in power plants in 2015 and 2030, respectively. However, we must take into account that some of the installed SCRs might actually not be operating. In fact, the actual operation of the SO₂ scrubbers has been questioned before by the government and researcher community (Xu et al., 2009). A power plants control failure case (PPF) for each of the standard cases was developed, where we assumed 25 % of the installed flue gas denitrification technologies were not actually running. In 2030, the NO_x emissions of power plants under the PPF cases are projected to be 1.0–2.3 times the corresponding standard cases. Consequently, the total NO_x emissions under the six PPF cases are projected be 1.2–29 % higher than the corresponding standard cases. The NO_x emissions are estimated at 25.2 Mt in 2015 under the PPF-BAU[1] scenario, 3.2 % lower than that of 2010, implying failure to meet the national target to reduce the NO_x emissions by 10 % during 2011–2015.

3.4 Gridded emissions

Figure 10 shows the spatial distribution of NO_x emissions in 2005, 2010, and 2030 for four scenarios. Most coal-fired power plants, iron and steel plants, and cement plants were identified as large point sources, and allocated based on their geographical coordinates. The other sources were treated as area sources, the emissions of which

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



were distributed into 36 km × 36 km grid cells using various spatial proxies at a grid resolution of 1 km × 1 km using the methodology described in Streets et al. (2003a) and Woo et al. (2003). Figure 10 illustrates that the NO_x emission intensities were much higher in eastern China than in western China. Moreover, the vast North China Plain, the eastern coastal region, the southern coastal region, Liaoning Province and the Sichuan Basin were typical high emission regions. The YRD, the PRD, and the areas around Beijing stood out with highest emissions. This characteristic of spatial distribution is closely related with the unbalanced economic development in China. In considered scenarios, the spatial distribution in 2030 is similar to that of 2010. However, under the BAU[0] scenario, the emission intensity of high emission regions is increasing and the area of such regions is increasing over the years. Under the PC[2] scenario, in which stringent energy-saving measures and end-of-pipe control measures are taken, the emission intensity decreases distinctly and the high emission areas are significantly reduced. However, high emission intensity still occurs in some metropolitan area, such as the Pearl River Delta and the Yangtze River Delta.

3.5 Comparison with other studies

Figure 11 compares the emission estimates in this study with other studies.

Comparison of historical emissions shows that this study represents a medium estimation of NO_x emissions. Our estimate was quite close to those of Zhang et al. (2007) for 1995–2004, with relative errors within 6%. The estimation of Ohara et al. (2007) was 7–15% lower than this study during 1995–2003. The result of Klimont et al. (2001) was 12% lower than ours in 1995, and Streets et al. (2003a) was 14% lower in 2000. Estimates by Olivier et al. (2005) were 12% higher in 1995 and 13% higher in 2000, while that by Streets et al. (2001) was 9% higher than this study in 1997. NO_x emission estimates for year 2005 by Amann et al. (2008), Wang et al. (2011a), and Xing et al. (2011) were 13, 5 and 7% lower than this study, respectively. The estimates of Zhao et al. (2013), MEIC inventory, and Kurokawa et al. (2013) are 1–10, 9–10, and 4–7% higher than this study during 2005–2010, respectively.

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Previous projections (reported before 2005) about NO_x emissions of China (van Aardenne et al., 1999; Streets and Waldhoff, 2000; Klimont et al., 2001) were based on the emissions in 1995 or before, which substantially underestimated the rapid economic growth during 2000–2010. Therefore, they usually significantly underestimated the emissions in 2010.

Several recent projections were reported since 2005. Ohara et al. (2007) projected NO_x emissions in China for 2020 by using the emissions for 2000 and three scenarios, a policy failure scenario, a “best guess” scenario, and an optimistic scenario. The projections of all the three scenarios for 2010 were much lower than our estimates, while the emissions of the policy failure scenario, best guess scenario, and optimistic scenario in 2020 were comparable to our PC[0], PC[1], and PC[2] scenarios, respectively. Amann et al. (2008) developed three scenarios until 2030 based on the emissions in 2005. The current legislation scenario assumed current legislation and current enforcement, while the advanced control technology scenario assumed across-the-board application of advanced control technologies; principally consistent with existing German legislation. The optimized scenario was a least cost optimization scenario that would achieve the same health benefit as the advanced control technology scenario. The projections of these three scenarios for 2010 were also significantly lower than our estimation. The estimation of current legislation scenario, optimized scenario, and advanced control technology scenario for 2030 were similar to our PC[0], BAU[1], and PC[1], respectively. Xing et al. (2011) projected NO_x emissions for 2020 with four scenarios based on the emissions of 2005, including a scenario assuming current legislation and implementation status, a scenario assuming improvement of energy efficiencies and current environmental legislation, a scenario assuming improvement of energy efficiencies and better implementation of environmental legislation, and a scenario assuming improvement of energy efficiencies and strict environmental legislation. The results of the four scenarios were actually quite similar. The emissions of the most conservative scenario would be comparable to our PC[0] scenario in 2020, while those of the most optimistic scenario would be similar to our BAU[1] scenario. These pro-

jections underestimated the rapid economic growth experienced during 2006–2010, thereby underestimating the emissions for 2010. None of them foresaw the ambitious NO_x emission reduction policies scheduled for implementation in the 12th Five Year Plan, which might significantly change the future NO_x emission pathway.

4 Conclusions

In this study we estimated the historical NO_x emissions of China from 1995 to 2010, calculated future NO_x emissions every five years until 2030 under six emission scenarios, and quantified the effects of various control policies on emissions.

With the rapid growth of energy consumption, NO_x emissions were estimated to more than double from 11.0 Mt in 1995 to 26.1 Mt in 2010, with an annual growth rate of 5.9%. Power plants, industry and transportation were major sources of NO_x emissions, accounting for 28.4, 34.0, and 25.4% of the total NO_x emissions in 2010, respectively. Although several control measures have been introduced for power plants and transportation, they were insufficient to constrain the strong increase of NO_x emissions.

Based on current legislation and current implementation status (BAU[0] scenario), NO_x emissions are estimated to increase by 36% in 2030 from 2010 level. The implementation of new energy-saving policies and end-of-pipe control policies is expected to change the NO_x emission pathway significantly in the future. With the enforcement of new energy-saving policies, including life style changes, structural adjustments, and energy efficiency improvements, NO_x emissions are expected to decrease by nearly 30% in 2030 compared with the baseline case (BAU[0] scenario). The implementation of the “progressive” and “more stringent” end-of-pipe control measures is expected to lead to about 55 and 61% reductions of the baseline NO_x emissions in 2030, respectively. If the energy-saving measures and stringent end-of-pipe measures are taken simultaneously, the NO_x emissions in 2030 could be reduced further, resulting in more than 70% lower emissions than the baseline case, i.e. over 60% less than the 2010 level.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Power plants, industry, and transportation contribute 36, 27, and 27 % of the total NO_x emission reduction respectively between the baseline and the most aggressive scenario in 2030. Industry is expected to account for 47.5 % of the total remaining NO_x emissions in 2030 under the most aggressive scenario. Research should be conducted on the reduction potential of the industry sector in order to achieve further NO_x emission reductions beyond the scenarios in this study.

About 30 % of the NO_x emission reduction in 2020, and 40 % of the NO_x emission reduction in 2030 could be treated as ancillary benefits of energy conservation, while the “latent” ancillary benefit of energy conservation could be much larger. The contribution of energy-saving measures is expected to become larger and larger in the long run, with the reduction potential of end-of-pipe measures being exhausted. Therefore, it is strategically important to adopt energy-saving measures besides the historically dominant end-of-pipe measures.

Some policy factors which were not considered in the energy and pollution control scenarios may also have significant impacts on NO_x emissions. Although the governmental target to reduce the NO_x emission by 10 % during the 12th Five Year Plan (2011–2015) is estimated to be exceeded under the “progressive” control strategy, the target would not be met if the GDP growth rate was one percent higher, or if 25 % of the installed flue gas denitrification technologies for power plants were not actually in operation. Failure in the operation of flue gas denitrification for power plants is expected to increase the NO_x emissions dramatically in the next 5–10 yr, while failure to control heavy diesel vehicles is expected to pose more adverse effects in the long term.

Acknowledgements. This study is financially supported by the National Natural Science Foundation of China (21221004, 20921140409), special fund of State Key Joint Laboratory of Environment Simulation and Pollution Control (12L05ESPC), ECLIPSE European Union’s Seventh Framework Programme (FP7/2007-2013) under Grant Agreement no. 282688, and the Program for New Century Excellent Talents in University (NCET-10-0532). We acknowledge the assistance of Scott Voorhees and Maria Pia Ancora in revising this paper.

References

Akimoto, H. and Narita, H.: Distribution of SO₂, NO_x and CO₂ emissions from fuel combustion and Industrial activities in Asia with 1-degrees-X1-degrees resolution, Atmos. Environ., 28, 213–225, 1994.

5 Amann, M., Jiang, K. J., Hao, J. M., and Wang, S. X.: Scenarios for cost-effective control of air pollution and greenhouse gases in China, International Institute for Applied Systems Analysis, Laxenburg, Austria, 51 pp., 2008.

Amann, M., Bertok, I., Borken-Kleefeld, J., Cofala, J., Heyes, C., Hoglund-Isaksson, L., Klimont, Z., Nguyen, B., Posch, M., Rafaj, P., Sandler, R., Schopp, W., Wagner, F.,
10 and Winiwarter, W.: Cost-effective control of air quality and greenhouse gases in Europe: Modeling and policy applications, Environ. Modell. Softw., 26, 1489–1501, doi:10.1016/j.envsoft.2011.07.012, 2011.

Anshan Steel Group: Description on developing the emission standard for air pollutants from iron and steel industry – sintering/pelletizing (draft), available at: <http://www.es.org.cn/download/1392-2.pdf> (last access: 1 May 2012), 2007 (in Chinese).

15 Bo, Y., Cai, H., and Xie, S. D.: Spatial and temporal variation of historical anthropogenic NMVOCs emission inventories in China, Atmos. Chem. Phys., 8, 7297–7316, doi:10.5194/acp-8-7297-2008, 2008.

China Electricity Council: Viewpoint for the power generation development plan in the 12th five year plan, available at: <http://www.cec.org.cn/zhuanti/2011nianzhuantihuigu/dianlixingyeshierwuguihua/> (last access: 1 May 2012), 2011 (in Chinese).

Chinese Research Academy of Environmental Sciences: Description on developing the emission standard of air pollutants for cement industry, available at: <http://www.es.org.cn/download/381-2.pdf> (last access: 5 May 2012), 2004 (in Chinese).

25 Chinese Research Academy of Environmental Sciences: Description on developing the emission standard of pollutants for brick and tile industry (draft), available at: http://www.zhb.gov.cn/gkml/hbb/bgth/200912/t20091202_182559.htm (last access: 5 May 2012), 2009 (in Chinese).

Chinese Research Academy of Environmental Sciences, and Bangbu Glass Industry Design & Research Institute: Description on developing the emission standard of air pollutants for flat glass industry (draft), available at: http://www.mep.gov.cn/gkml/hbb/bgth/201002/t20100201_185227.htm (last access: 5 May 2012), 2010 (in Chinese).

ACPD

13, 16047–16112, 2013

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Data Codification Committee of the First National Pollution Source Census: Manual of Emission Factors for the Pollution Source Census, China Environmental Science Press, Beijing, 485 pp., 2011 (in Chinese).

Ding, H. Q., Lv, L., and Wu, J. X.: NO_x emission legislation and control for diesel engine on ships, *Journal of Wuhan University of Technology*, 24, 355–359, 2000 (in Chinese).

Energy Research Institute: China's Low Carbon Development Pathways by 2050: Scenario Analysis of Energy Demand and Carbon Emissions, Science Press, Beijing, 168 pp., 2009.

Fu, L. X., Hao, J. M., He, D. Q., and He, K. B.: The emission characteristics of pollutants from motor vehicles in Beijing, *Environ. Sci.*, 21, 68–70, 2000 (in Chinese).

Hao, J. M., Tian, H. Z., and Lu, Y. Q.: Emission inventories of NO_x from commercial energy consumption in China, 1995–1998, *Environ. Sci. Technol.*, 36, 552–560, doi:10.1021/Es015601k, 2002.

He, K. B., Huo, H., Zhang, Q., He, D. Q., An, F., Wang, M., and Walsh, M. P.: Oil consumption and CO₂ emissions in China's road transport: current status, future trends, and policy implications, *Energ. Policy*, 33, 1499–1507, doi:10.1016/j.enpol.2004.01.007, 2005.

Hu, B. X., Zhu, H., and Qin, W. X.: The emission inventory of China's technology development pattern, *Journal of Wuhan University of Technology*, 24, 99–102, 2002 (in Chinese).

Hunan Research Academy of Environmental Sciences: Description on developing the emission standard for pollutants from ceramics industry (draft), available at: http://www.zhb.gov.cn/info/gw/bgth/200801/t20080129_117766.htm (last access: 5 May 2012), 2008 (in Chinese).

Huo, H., Zhang, Q. A., Wang, M. Q., Streets, D. G., and He, K. B.: Environmental implication of electric vehicles in China, *Environ. Sci. Technol.*, 44, 4856–4861, doi:10.1021/Es100520c, 2010.

Huo, H., Yao, Z. L., Zhang, Y. Z., Shen, X. B., Zhang, Q., Ding, Y., and He, K. B.: On-board measurements of emissions from light-duty gasoline vehicles in three mega-cities of China, *Atmos. Environ.*, 49, 371–377, doi:10.1016/j.atmosenv.2011.11.005, 2012a.

Huo, H., Yao, Z. L., Zhang, Y. Z., Shen, X. B., Zhang, Q., and He, K. B.: On-board measurements of emissions from diesel trucks in five cities in China, *Atmos. Environ.*, 54, 159–167, 2012b.

Kato, N. and Akimoto, H.: Anthropogenic emissions of SO₂ and NO_x in Asia – emission inventories, *Atmos. Environ. A*, 26, 2997–3017, 1992.

Klimont, Z., Cofala, J., Schopp, W., Amann, M., Streets, D. G., Ichikawa, Y., and Fujita, S.: Projections of SO₂, NO_x, NH₃ and VOC emissions in East Asia up to 2030, *Water. Air. Soil. Poll.*, 130, 193–198, 2001.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Klimont, Z., Cofala, J., Xing, J., Wei, W., Zhang, C., Wang, S., Kejun, J., Bhandari, P., Mathur, R., Purohit, P., Rafaj, P., Chambers, A., and Amann, M.: Projections of SO₂, NO_x and carbonaceous aerosols emissions in Asia, *Tellus. B.*, 61, 602–617, doi:10.1111/j.1600-0889.2009.00428.x, 2009.
- 5 Kurokawa, J., Ohara, T., Morikawa, T., Hanayama, S., Greet, J.-M., Fukui, T., Kawashima, K., and Akimoto, H.: Emissions of air pollutants and greenhouse gases over Asian regions during 2000–2008: Regional Emission inventory in ASia (REAS) version 2, *Atmos. Chem. Phys. Discuss.*, 13, 10049–10123, doi:10.5194/acpd-13-10049-2013, 2013.
- 10 Lei, Y.: Research on Anthropogenic Emissions and Control of Primary Particles and Its Key Chemical Components, Ph.D. thesis, Department of Environmental Science and Engineering, Tsinghua University, Beijing, 154 pp., 2008 (in Chinese).
- Lei, Y., Zhang, Q. A., Nielsen, C., and He, K. B.: An inventory of primary air pollutants and CO₂ emissions from cement production in China, 1990–2020, *Atmos. Environ.*, 45, 147–154, doi:10.1016/j.atmosenv.2010.09.034, 2011.
- 15 Li, W., Fu, L. X., and Hao, J. M.: The emissions of 10 air pollutants from on-road vehicles in China, *Urban Environ. Urb. Ecol.*, 16, 36–38, 2003 (in Chinese).
- Li, X. H., Wang, S. X., Duan, L., and Hao, J. M.: Particulate and trace gas emissions from open burning of wheat straw and corn stover in China, *Environ. Sci. Technol.*, 41, 6052–6058, 2007.
- 20 Lin, B. H.: Oil Consumption and CO₂ Emissions from Automobile Sector in Major Regions of China: Present and Future, M.S. thesis, Department of Environmental Science and Engineering, Tsinghua University, Beijing, 88 pp., 2010 (in Chinese).
- Liu, T.: Cost-Benefit Analysis of the NO_x Emission Control of Power Industry in China, M.S. thesis, School of Environment, Tsinghua University, Beijing, 96 pp., 2013 (in Chinese).
- 25 Ministry of Environmental Protection of China: Chinese Environmental Statistical Bulletin 2005, available at: http://zls.mep.gov.cn/hjtj/qghjtjgb/200606/t20060612_77318.htm (last access: 5 May 2012), 2006 (in Chinese).
- Ministry of Environmental Protection of China: Bulletin of urban sewage treatment facilities, and flue gas desulfurization/denitrification facilities of coal-fired power plants, available at: http://www.mep.gov.cn/gkml/hbb/bgg/201104/t20110420_209449.htm (last access: 5 May 2012), 2011a (in Chinese).
- 30

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Ministry of Environmental Protection of China: Notice to implement the Stage IV emission standard for compression ignition engines and vehicles, available at: http://www.zhb.gov.cn/gkml/hbb/bgg/201201/t20120110_222376.htm (last access: 5 May 2012), 2011b (in Chinese).

Ministry of Environmental Protection of China: Chinese Environmental Statistical Bulletin 2010, available at: http://zls.mep.gov.cn/hjtj/qghjtjgb/201201/t20120118_222703.htm (last access: 5 May 2012), 2012 (in Chinese).

Mueller, S. F., Bailey, E. M., and Kelsoe, J. J.: Geographic sensitivity of fine particle mass to emissions of SO₂ and NO_x, *Environ. Sci. Technol.*, 38, 570–580, doi:10.1021/Es021016n, 2004.

National Bureau of Statistics: China Statistical Yearbook 1996–2011, China Statistics Press, Beijing, 1996–2011.

National Bureau of Statistics: China Energy Statistical Yearbook 1991–1996, China Statistics Press, Beijing, 1998.

National Bureau of Statistics: China Statistical Yearbook for Regional Economy 2000–2011, China Statistics Press, Beijing, 2000–2011.

National Bureau of Statistics: China Energy Statistical Yearbook 1997–1999, China Statistics Press, Beijing, 2001.

National Bureau of Statistics: China Energy Statistical Yearbook 2000–2002, China Statistics Press, Beijing, 2004a.

National Bureau of Statistics: China Energy Statistical Yearbook 2003, China Statistics Press, Beijing, 2004b.

National Bureau of Statistics: China Energy Statistical Yearbook 2004, China Statistics Press, Beijing, 2005.

National Bureau of Statistics: China Energy Statistical Yearbook 2005, China Statistics Press, Beijing, 2006.

National Bureau of Statistics: China Energy Statistical Yearbook 2006, China Statistics Press, Beijing, 2007.

National Bureau of Statistics: China Energy Statistical Yearbook 2007, China Statistics Press, Beijing, 2008a.

National Bureau of Statistics: China Energy Statistical Yearbook 2008, China Statistics Press, Beijing, 2008b.

National Bureau of Statistics: China Energy Statistical Yearbook 2009, China Statistics Press, Beijing, 2009.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- National Bureau of Statistics: China Energy Statistical Yearbook 2010, China Statistics Press, Beijing, 2011a.
- National Bureau of Statistics: China Energy Statistical Yearbook 2011, China Statistics Press, Beijing, 2011b.
- 5 National Development and Reform Commission: Special Plan for Medium and Long Term Energy Conservation, available at: http://www.ndrc.gov.cn/xwfb/t20050628_27571.htm (last access: 1 May 2012), 2004 (in Chinese).
- National Development and Reform Commission: Medium and Long Term Development Plan for Nuclear Power, available at: http://www.sdpc.gov.cn/nyjt/nyzywx/t20071102_170122.htm (last access: 1 May 2012), 2005 (in Chinese).
- 10 National Development and Reform Commission: National Natural Gas Utilization Policy, available at: http://www.sdpc.gov.cn/zcfb/zcfbtz/2007tongzhi/t20070904_157244.htm, (last access: 1 May 2012), 2007a (in Chinese).
- National Development and Reform Commission: Medium and Long Term Development Plan for Renewable Energy, available at: http://www.sdpc.gov.cn/zcfb/zcfbtz/2007tongzhi/t20070904_157352.htm (last access: 1 May 2012), 2007b (in Chinese).
- 15 National Population Development Strategy Research Group: Research report on national population development strategy, Beijing, 19 pp., 2007 (in Chinese).
- Ohara, T., Akimoto, H., Kurokawa, J., Horii, N., Yamaji, K., Yan, X., and Hayasaka, T.: An Asian emission inventory of anthropogenic emission sources for the period 1980–2020, *Atmos. Chem. Phys.*, 7, 4419–4444, doi:10.5194/acp-7-4419-2007, 2007.
- 20 Olivier, J. G. J., Bouwman, A. F., Van der Hoek, K. W., and Berdowski, J. J. M.: Global air emission inventories for anthropogenic sources of NO_x, NH₃ and N₂O in 1990, *Environ. Pollut.*, 102, 135–148, 1998.
- 25 Olivier, J. G. J., van Aardenne, J. A., Dentener, F., Pagliari, V., Ganzeveld, L. N., and Peters, J. A. H. W.: Recent trends in global greenhouse gas emissions: Regional trends 1970–2000 and spatial distribution of key sources in 2000, *Environ. Sci.*, 2, 81–99, 2005.
- Qingdao University of Science & Technology: Description on developing the emission standard of pollutants for nitric acid industry (draft), available at: http://www.zhb.gov.cn/info/bgw/bbgth/200901/t20090121_133747.htm (last access: 5 May 2012), 2008 (in Chinese).
- 30 Richter, A., Burrows, J. P., Nuss, H., Granier, C., and Niemeier, U.: Increase in tropospheric nitrogen dioxide over China observed from space, *Nature*, 437, 129–132, doi:10.1038/Nature04092, 2005.

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Shah, J., Nagpal, T., Johnson, T., Amann, M., Carmichael, G., Foell, W., Green, C., Hettelingh, L. P., Hordijk, L., Li, J., Peng, C., Pu, Y. F., Ramankutty, R., and Streets, D.: Integrated analysis for acid rain in Asia: policy implications and results of RAINS-ASIA model, *Annu. Rev. Energ. Env.*, 25, 339–375, 2000.
- 5 Solomon, S., Qin, D., Manning, M., Chen, Z., Marquis, M., Averyt, K. B., Tignor, M., and Miller, H. L.: *Climate Change 2007: the physical science basis*, in: *Contribution of Working Group I to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*, Cambridge University Press, Cambridge, UK and New York, NY, USA, 996 pp., 2007.
- 10 Song, Y.: Measurements of the emissions from diesel engine used in Z6150ZLCZ-5 ships, *Journal of Nantong Vocational & Technical Shipping College*, 6, 59–63, 2007 (in Chinese).
State Environmental Protection Administration: Integrated emission standard of air pollutants, available at: http://kjs.mep.gov.cn/hjbhzbz/bzwb/dqjhjbh/dqgdwrywrwpfbz/199701/t19970101_67504.htm (last access: 5 May 2012), 1996a (in Chinese).
- 15 State Environmental Protection Administration: Emission standard of air pollutants for thermal power plants, available at: http://www.foshan.gov.cn/foshangov/xxgk/ztjs/hbzt/ghbz/bz/200810/t20081021_1096534.html (last access: 5 May 2012), 1996b (in Chinese).
State Environmental Protection Administration: Emission standard of air pollutants for thermal power plants, available at: <http://www.docin.com/p-43627921.html>, last access: 5 May 2012,
- 20 2003 (in Chinese).
Streets, D. G. and Waldhoff, S. T.: Present and future emissions of air pollutants in China: SO₂, NO_x, and CO, *Atmos. Environ.*, 34, 363–374, 2000.
Streets, D. G., Tsai, N. Y., Akimoto, H., and Oka, K.: Trends in emissions of acidifying species in Asia, 1985–1997, *Water. Air. Soil. Poll.*, 130, 187–192, 2001.
- 25 Streets, D. G., Bond, T. C., Carmichael, G. R., Fernandes, S. D., Fu, Q., He, D., Klimont, Z., Nelson, S. M., Tsai, N. Y., Wang, M. Q., Woo, J. H., and Yarber, K. F.: An inventory of gaseous and primary aerosol emissions in Asia in the year 2000, *J. Geophys. Res.-Atmos.*, 108, 8809, doi:10.1029/2002jd003093, 2003a.
- Streets, D. G., Yarber, K. F., Woo, J. H., and Carmichael, G. R.: Biomass burning in Asia: Annual and seasonal estimates and atmospheric emissions, *Global Biogeochem. Cy.*, 17, 1099, doi:10.1029/2003gb002040, 2003b.
- 30 Su, D., Gao, D., and Ye, H.: Harmful gases pollution and its remedy in cement kiln, *Chongqing Environmental Science*, 20, 20–23, 1998 (in Chinese).

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Tang, Q., Lu, X., Wang, S., and Zhou, L.: Industrial kiln gas pollution and its control, *Industrial Boiler*, 4, 42–47, 1995 (in Chinese).
- Tang, W. Q.: Domestic nitric acid production and market analysis, *Chemical Engineering Design*, 16, 34–39, 2006 (in Chinese).
- 5 The State Council of the People's Republic of China: The state council executive meeting sets the GHGs (Greenhouse Gas) reduction target of China, available at: http://www.gov.cn/ldhd/2009-11/26/content_1474016.htm (last access: 12 January 2011), 2009 (in Chinese).
- The State Council of the People's Republic of China: The Twelfth Five-Year Plan for National Economic and Social Development of the People's Republic of China, available at: http://www.gov.cn/2011lh/content_1825838.htm (last access: 2 February 2013), 2011a (in Chinese).
- 10 The State Council of the People's Republic of China: Integrated Work Plan for Energy Saving and Emission Reduction During the Twelfth Five-Year Plan, available at: http://www.gov.cn/zwgk/2011-09/07/content_1941731.htm (last access: 2 February 2013), 2011b (in Chinese).
- 15 The State Council of the People's Republic of China: The Twelfth Five-Year Plan for Energy Saving and Emission Reduction, available at: http://www.gov.cn/zwgk/2012-08/21/content_2207867.htm (last access: 2 February 2013), 2012 (in Chinese).
- Tian, H. Z.: Studies on Present and Future Emissions of Nitrogen Oxides and Its Comprehensive Control Policies in China, Ph.D. thesis, Department of Environmental Science and Engineering, Tsinghua University, Beijing, 2003 (in Chinese).
- 20 US National Research Council: Effectiveness and Impact of Corporate Average Fuel Economy (CAFE) Standards, National Academy Press, Washington DC, 166 pp., 2002.
- Vallack, H. W., Cinderby, S., Kuylenstierna, J. C. I., and Heaps, C.: Emission inventories for SO₂ and NO_x in developing country regions in 1995 with projected emissions for 2025 according to two scenarios, *Water, Air, Soil, Poll.*, 130, 217–222, 2001.
- 25 van Aardenne, J. A., Carmichael, G. R., Levy, H., Streets, D., and Hordijk, L.: Anthropogenic NO_x emissions in Asia in the period 1990–2020, *Atmos. Environ.*, 33, 633–646, 1999.
- van der Werf, G. R., Randerson, J. T., Giglio, L., Collatz, G. J., Mu, M., Kasibhatla, P. S., Morton, D. C., DeFries, R. S., Jin, Y., and van Leeuwen, T. T.: Global fire emissions and the contribution of deforestation, savanna, forest, agricultural, and peat fires (1997–2009), *Atmos. Chem. Phys.*, 10, 11707–11735, doi:10.5194/acp-10-11707-2010, 2010.
- 30

NO_x emissions in China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Velders, G. J. M., Geilenkirchen, G. P., and Lange, R. D.: Higher than expected NO_x emission from trucks may affect attainability of NO₂ limit values in the Netherlands, *Atmos. Environ.*, 45, 3025–3033, 2011.

Wang, M., Huo, H., Johnson, L., and He, D.: Projection of Chinese Motor Vehicle Growth, Oil Demand, and CO₂ Emissions through 2050, Argonne National Laboratory, Argonne, Illinois ANL/ESD/06-6, 69 pp., 2006.

Wang, Q. W. and Zeng, W. P.: Summary of nitric acid production technologies and the outlook of dual-pressure process, *Nitrogenous Fertilizer Technology*, 29, 33–42, 2008 (in Chinese).

Wang, S. X. and Zhang, C. Y.: Spatial and temporal distribution of air pollutant emissions from open burning of crop residues in China, *Sciencepaper Online*, 3, 1–6, 2008 (in Chinese).

Wang, S. X., Wei, W., Du, L., Li, G. H., and Hao, J. M.: Characteristics of gaseous pollutants from biofuel-stoves in rural China, *Atmos. Environ.*, 43, 4148–4154, doi:10.1016/j.atmosenv.2009.05.040, 2009.

Wang, S. X., Xing, J., Chatani, S., Hao, J. M., Klimont, Z., Cofala, J., and Amann, M.: Verification of anthropogenic emissions of China by satellite and ground observations, *Atmos. Environ.*, 45, 6347–6358, doi:10.1016/j.atmosenv.2011.08.054, 2011a.

Wang, S. X., Xing, J., Jang, C. R., Zhu, Y., Fu, J. S., and Hao, J. M.: Impact assessment of ammonia emissions on inorganic aerosols in east China using response surface modeling technique, *Environ. Sci. Technol.*, 45, 9293–9300, doi:10.1021/Es2022347, 2011b.

Wang, X., Westerdahl, D., Hu, J. N., Wu, Y., Yin, H., Pan, X. C., and Zhang, K. M.: On-road diesel vehicle emission factors for nitrogen oxides and black carbon in two Chinese cities, *Atmos. Environ.*, 46, 45–55, 2012.

Wang, Z. X., Ji, X. Z., and Zhi, H. B.: Determination of the emissions of Euro-II diesel engine used in construction machine, *Diesel Engine*, 29, 9–11, 2007 (in Chinese).

Wei, W., Wang, S. X., and Hao, J. M.: Uncertainty analysis of emission inventory for volatile organic compounds from anthropogenic sources in China, *Environ. Sci.*, 32, 305–312, 2011 (in Chinese).

Woo, J. H., Baek, J. M., Kim, J. W., Carmichael, G. R., Thongboonchoo, N., Kim, S. T., and An, J. H.: Development of a multi-resolution emission inventory and its impact on sulfur distribution for Northeast Asia, *Water. Air. Soil. Poll.*, 148, 259–278, 2003.

Wu, Y., Zhang, S. J., Li, M. L., Ge, Y. S., Shu, J. W., Zhou, Y., Xu, Y. Y., Hu, J. N., Liu, H., Fu, L. X., He, K. B., and Hao, J. M.: The challenge to NO_x emission control for heavy-duty

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



diesel vehicles in China, *Atmos. Chem. Phys.*, 12, 9365–9379, doi:10.5194/acp-12-9365-2012, 2012.

Xie, S. D., Song, X. Y., and Shen, X. H.: Calculating the emission factors of Chinese vehicles with CORPERT III, *Environ. Sci.*, 27, 415–419, 2006 (in Chinese).

5 Xing, J., Wang, S. X., Chatani, S., Zhang, C. Y., Wei, W., Hao, J. M., Klimont, Z., Cofala, J., and Amann, M.: Projections of air pollutant emissions and its impacts on regional air quality in China in 2020, *Atmos. Chem. Phys.*, 11, 3119–3136, doi:10.5194/acp-11-3119-2011, 2011.

Xu, Y., Williams, R. H., and Socolow, R. H.: China's rapid deployment of SO₂ scrubbers, *Energ. Environ. Sci.*, 2, 459–465, 2009.

10 Xu, Y. A.: Improvements in the Operation of SO₂ Scrubbers in China's Coal Power Plants, *Environ. Sci. Technol.*, 45, 380–385, doi:10.1021/Es1025678, 2011.

Xu, Y. M.: The bricks and tiles industry in China: the economic condition in 2007 and market forecast for 2008, *Brick & Tile World*, 3, 1–4, 2008 (in Chinese).

Xu, Y. M.: The bricks and tiles industry in China: the economic condition in 2009 and market forecast for 2010, *Brick & Tile World*, 2, 1–4, 2010 (in Chinese).

15 Xue, Z., Yang, Z., and Zhao, X.: Distribution of SO₂, NO_x emissions in China, 1995, the Sixth International Conference on Atmospheric Science and its Applications to Air Quality, Beijing, 1999, 132–140.

Yan, X. Y., Ohara, T., and Akimoto, H.: Bottom-up estimate of biomass burning in mainland China, *Atmos. Environ.*, 40, 5262–5273, doi:10.1016/j.atmosenv.2006.04.040, 2006.

Yevich, R. and Logan, J. A.: An assessment of biofuel use and burning of agricultural waste in the developing world, *Global. Biogeochem. Cy.*, 17, 1095, doi:10.1029/2002gb001952, 2003.

Yu, C.: Study on the Control Technology Choices of NO_x Emission from Power Plants and Industrial Boilers, M.S. thesis, Department of Environmental Science and Engineering, Tsinghua University, Beijing, 79 pp., 2009 (in Chinese).

25 Yuan, J. H., Kang, J. J., Yu, C., and Hu, Z. G.: Energy conservation and emissions reduction in China-Progress and prospective, *Renew. Sust. Energ. Rev.*, 15, 4334–4347, doi:10.1016/j.rser.2011.07.117, 2011.

30 Zhang, C. Y.: Studies on Present and Future Emissions of PM, SO₂, NO_x, M. S. thesis, Department of Environmental Science and Engineering, Tsinghua University, Beijing, 147 pp., 2008 (in Chinese).

**NO_x emissions in
China**

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Zhang, Q.: Study on Regional Fine PM Emissions and Modeling in China, Ph.D. thesis, Department of Environmental Science and Engineering, Tsinghua University, Beijing, 185 pp., 2005 (in Chinese).

Zhang, Q., Streets, D. G., He, K., Wang, Y., Richter, A., Burrows, J. P., Uno, I., Jang, C. J., Chen, D., Yao, Z., and Lei, Y.: NO_x emission trends for China, 1995–2004: the view from the ground and the view from space, *J. Geophys. Res.-Atmos.*, 112, D22306, doi:10.1029/2007jd008684, 2007.

Zhang, Q., Streets, D. G., Carmichael, G. R., He, K. B., Huo, H., Kannari, A., Klimont, Z., Park, I. S., Reddy, S., Fu, J. S., Chen, D., Duan, L., Lei, Y., Wang, L. T., and Yao, Z. L.: Asian emissions in 2006 for the NASA INTEX-B mission, *Atmos. Chem. Phys.*, 9, 5131–5153, doi:10.5194/acp-9-5131-2009, 2009.

Zhao, B., Xu, J. Y., and Hao, J. M.: Impact of energy structure adjustment on air quality: a case study in Beijing, China, *Front. Environ. Sci. En.*, 5, 378–390, doi:10.1007/s11783-011-0357-8, 2011.

Zhao, Y., Wang, S. X., Duan, L., and Lei, Y.: Primary air pollutant emissions of coal-fired power plants in China: current status and future prediction, *Atmos. Environ.*, 42, 8442–8452, 2008.

Zhao, Y., Duan, L., Xing, J., Larssen, T., Nielsen, C. P., and Hao, J. M.: Soil Acidification in China: is controlling SO₂ emissions enough?, *Environ. Sci. Technol.*, 43, 8021–8026, doi:10.1021/Es901430n, 2009.

Zhao, Y., Wang, S. X., Nielsen, C. P., Li, X. H., and Hao, J. M.: Establishment of a database of emission factors for atmospheric pollutants from Chinese coal-fired power plants, *Atmos. Environ.*, 44, 1515–1523, doi:10.1016/j.atmosenv.2010.01.017, 2010.

Zhao, Y., Zhang, J., and Nielsen, C. P.: The effects of recent control policies on trends in emissions of anthropogenic atmospheric pollutants and CO₂ in China, *Atmos. Chem. Phys.*, 13, 487–508, doi:10.5194/acp-13-487-2013, 2013.

NO_x emissions in China

B. Zhao et al.

[Title Page](#)

[Abstract](#) [Introduction](#)

[Conclusions](#) [References](#)

[Tables](#) [Figures](#)

[◀](#) [▶](#)

[◀](#) [▶](#)

[Back](#) [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Table 1. Definition of the energy and emission scenarios in this study.

Energy scenario name	Energy scenario definition	Emission scenario name	Emission scenario definition
Business as usual (abbr. BAU)	The BAU scenario is based on current legislations and implementation status (until the end of 2010), especially that CO ₂ intensity would be 40–45% lower in 2020 than that of 2005.	BAU[0]	The BAU[0] scenario assumes the same energy saving policies as BAU scenario. For end-of-pipe pollution control measures, it assumes that all current legislation (until the end of 2010) and the current implementation status will be followed during 2011–2030.
		BAU[1]	The BAU[1] scenario assumes the same energy saving policies as BAU scenario. For end-of-pipe pollution control measures, it assumes that new pollution control policies would be released and implemented, representing progressive approach towards future environmental policies.
		BAU[2]	The BAU[2] scenario assumes the same energy saving policies as BAU scenario. For end-of-pipe pollution control measures, it assumes that even more ambitious policies will be released and implemented; such scenario could be realized only if the government takes quick and substantially aggressive action.
Alternative policy (abbr. PC)	The PC scenario assumes that new energy-saving policies will be released and enforced more stringently, including life style changes, structural adjustment and energy efficiency improvement.	PC[0]	The PC[0] scenario assumes the same energy saving policies as PC scenario, and the same end-of-pipe pollution control measures as BAU[0] scenario.
		PC[1]	The PC[1] scenario assumes the same energy saving policies as PC scenario, and the same end-of-pipe pollution control measures as BAU[1] scenario.
		PC[2]	The PC[2] scenario assumes the same energy saving policies as PC scenario, and the same end-of-pipe pollution control measures as BAU[2] scenario.

NO_x emissions in
China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Table 2.** Key parameters of the energy scenarios.

	2010	BAU		PC	
		2020	2030	2020	2030
GDP (2005 price)/10 ⁹ CHY ^a	31 165	65 741	117 718	65 741	117 718
Population/billion	1.340	1.440	1.474	1.440	1.474
Urbanization rate/%	49.7	58.0	63.0	58.0	63.0
Power generation/TWh	4205	6690	8506	5598	7457
Share of coal-fired power generation/%	75	74	73	64	57
Thermal efficiency of coal-fired power/%	35.7	38.0	40.0	38.8	41.7
Crude steel production/Mt	627	710	680	610	570
Cement production/Mt	1880	2001	2050	1751	1751
Urban residential building area per capita m ⁻²	23.0	29.0	33.0	27.0	29.0
Rural residential building area per capita m ⁻²	34.1	39.0	42.0	37.0	39.0
Vehicle population per 1000 persons	58.2	191.2	380.2	178.5	325.2
Share of new and renewable energy/% ^b	7.5	8.3	8.9	11.9	15.8
CO ₂ emission per GDP/(t/10 ⁶ CHY) ^c	267	182	120	148	84

^a CHY, Chinese Yuan.^b Including hydro power, solar energy, wind energy, ocean energy, and nuclear energy; excluding biomass.^c The CO₂ emission per GDP was 322 t/10⁶ CHY in 2005, which was adopted as a benchmark value for the national target that the CO₂ emission per GDP should decrease by 40–45 % from 2005 to 2020.

NO_x emissions in
China

B. Zhao et al.

Table 3. Technology evolution of selected industry sectors (%).

Process	Technology	2005	2010	2020 BAU	2030 BAU	2020 PC	2030 PC
Crude steel production	Arc furnace	11.8	11.2	14.0	18.0	25.0	40.0
Cement production	Basic oxygen furnace	88.1	88.8	86.0	82.0	75.0	60.0
	Shaft kiln	50.0	24.0	19.0	15.0	2.0	0.0
	Other rotary kiln	5.0	1.0	0.0	0.0	0.0	0.0
	Precalcined kiln < 2000 td ⁻¹	10.8	8.6	7.3	6.0	6.9	3.0
Glass production	Precalcined kiln 2000–4000 td ⁻¹	19.4	21.4	20.3	17.9	19.6	12.0
	Precalcined kiln > 4000 td ⁻¹	14.9	45.0	53.5	61.2	71.5	85.0
	Float process	80.0	85.0	95.0	100.0	100.0	100.0
Coke production	Vertical process	20.0	15.0	5.0	0.0	0.0	0.0
	Machine coke oven	81.9	87.0	96.0	100.0	100.0	100.0
Ammonia synthesis	Indigenous coke oven	18.1	13.0	4.0	0.0	0.0	0.0
	Ammonia synthesis from oil & natural gas	37.0	23.0	23.0	23.0	23.0	23.0
	Ammonia synthesis from coal	63.0	77.0	77.0	77.0	77.0	77.0
Caustic soda production	Ion-exchange membrane process	34.0	57.0	67.0	75.0	80.0	98.0
	Diaphragm process	66.0	43.0	33.0	25.0	20.0	2.0
Soda production	Combined-soda process	39.5	42.0	45.0	48.0	49.0	56.0
	Ammonia-soda process	60.5	58.0	55.0	52.0	51.0	44.0
Nitric acid production	Dual-pressure process	38.0	54.0	67.0	80.0	75.0	95.0
	Other process	62.0	46.0	33.0	20.0	25.0	5.0
Industrial boiler	Grate boiler	90.0	89.0	85.0	82.0	81.0	75.0
	Circulating fluidized bed boiler	10.0	11.0	15.0	18.0	19.0	25.0

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 4. Uncontrolled NO_x factors for stationary sources.

Technology	Unit	EFs in this study	EFs in other references
Coal-fired power plants ≥ 100 MW (tangentially-fired)	kg t ⁻¹ coal	6.81 ^a (6.17 for bituminous, 9.36 for anthracite)	8.85 ^b (average factor for coal-fired power plants) 5.55–10.5 ^c (vary with size and control measures, the average uncontrolled factor is estimated to be 9.10) 6.27 ^d (uncontrolled factor for coal-fired power plants burning hard coal)
Coal-fired power plants ≥ 100 MW (swirl burner)	kg t ⁻¹ coal	7.67 ^a (6.93 for bituminous, 10.65 for anthracite)	
Coal-fired power plants ≥ 100 MW (tangentially-fired)	kg t ⁻¹ coal	7.29 ^a (6.60 for bituminous, 10.07 for anthracite)	
Coal-fired power plants ≥ 100 MW (swirl burner)	kg t ⁻¹ coal	8.21 ^a (7.40 for bituminous, 11.46 for anthracite)	
Diesel-fired power plants	kg t ⁻¹ diesel	7.21 ^a	10.06 ^b ; 6.56 ^f
Heavy fuel (HF) fired power plants	kg t ⁻¹ HF	5.10 ^g	
Gas-fired power plants	gm ⁻³ gas	4.10 ^b	9.82 ^j ; 1.95 ^g
Coal-fired industrial grate boiler	kg t ⁻¹ coal	5.60 ^g	7.25 ^j ; 3.8–4.0 ^f ; 5.25 ^e ; 6.1 ^f
Coal-fired industrial CFB boiler	kg t ⁻¹ coal	1.20 ^g	
Gas-fired industrial boiler	gm ⁻³ gas	2.10 ^h	2.61 ^e
Sintering production	kg t ⁻¹ sinter	0.64 ^h	0.14 ^g ; 0.50 ^d
Cement - shaft kiln	kg t ⁻¹ coal	1.7 ⁱ	0.4 ^g
Cement - other rotary kiln	kg t ⁻¹ coal	18.5 ⁱ	14.7 ^g
Cement - precalcined kiln	kg t ⁻¹ coal	15.3 ⁱ	9.6 ^g
Brick production	kg t ⁻¹ brick	0.27 ^j	0.06–0.45 ^b ; 0.21 ^c
Lime production	kg t ⁻¹ lime	1.60 ^g	1.75 ^d
Glass production	kg t ⁻¹ glass	5.20 ^j	8.20 ^d
Ceramics production	kg t ⁻¹ ceramics	4.35 ^m	
Refinery	kg t ⁻¹ crude oil input	0.30 ^d	
Nitric acid – dual pressure process	kg t ⁻¹ nitric acid	1.8 ⁿ	1.38 ^g (dual-pressure process); 43.8 ^g (other process); 7.14 ^d (all process)
Nitric acid – other process	kg t ⁻¹ nitric acid	13.6 ⁿ	
Domestic coal stove	kg t ⁻¹ coal	1.88 ^o	
Domestic biomass stove – agricultural residue	kg t ⁻¹ ce	2.19 ^o	2.74 ^b (agricultural residue); 1.23 ^b (firewood); 1.90 ^g (all biomass)
Domestic biomass stove – firewood	kg tce ⁻¹	2.52 ^o	
Biomass open burning	kg t ⁻¹ biomass	3.80 ^o	3.37 ^o

^a Zhao et al. (2010); ^b Tian (2003); ^c Zhang et al. (2007). ^d IIASA GAINS-Asia: <http://gains.iiasa.ac.at/index.php/gains-asia>; ^e Wang et al. (2011a); ^f Yu (2009). ^g Zhang (2008); ^h Lei (2008); ⁱ Lei et al. (2011).

^j Data Codification Committee of the First National Pollution Source Census (2011).

^k Chinese Research Academy of Environmental Sciences (2009).

^l Chinese Research Academy of Environmental Sciences and Bengbu Glass Industry Design & Research Institute (2010);

^m Hunan Research Academy of Environmental Sciences (2008).

ⁿ Qingdao University of Science & Technology (2008); ^o Wang et al. (2009); ^p Li et al. (2007); ^q Wang and Zhang (2008).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in
China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Table 5.** NO_x emission factors of mobile sources.

Technology	Fuel	Emission factors (kg tce ⁻¹)						
		Uncontrolled	Euro-I	Euro-II	Euro-III	Euro-IV	Euro-V	Euro-VI
Heavy duty truck	Diesel	62.90	43.41	46.54	40.25	23.27	13.84	2.52
Medium duty truck	Diesel	45.13	31.14	33.40	28.89	16.71	9.92	1.81
	Gasoline	11.53	2.08	1.14	0.82			
Light duty truck	Diesel	21.43	21.43	21.43	21.43	16.07	8.37	3.63
	Gasoline	18.56	5.39	2.40	1.49	0.73	0.56	0.38
Mini truck	Gasoline	27.60	8.02	3.60	2.20	1.11	0.82	0.56
Heavy duty bus	Diesel	56.55	39.02	41.83	36.18	20.93	12.44	2.25
	Gasoline	15.69	2.84	1.58	1.11			
Medium duty bus	Diesel	36.18	24.97	26.78	23.15	13.38	7.96	1.43
	Gasoline	16.01	2.87	1.61	1.11			
Light duty bus	Diesel	15.25	15.25	15.25	15.25	11.42	5.94	2.61
	Gasoline	19.73	5.74	2.58	1.58	0.79	0.59	0.38
Mini bus	Diesel	12.09	12.09	12.09	12.09	9.07	4.71	2.05
	Gasoline	18.91	5.47	2.46	1.52	0.76	0.56	0.38
Motorcycle	Gasoline	4.77	4.77	4.77	3.54			
Tractor	Diesel	37.11	24.50	18.56	11.12	11.12	7.05	1.49
Agricultural conveyer	Diesel	37.11	24.50	18.56	11.12	11.12	7.05	1.49
Train	Diesel	24.88	16.42	14.93	11.21	7.46	4.74	1.00
Inland waterway ship	Diesel/heavy fuel oil	32.87	21.69	19.73	14.78	9.86	6.23	1.32
Agriculture machine	Diesel	13.43	8.87	6.73	4.04	4.04	2.55	0.53
Construction machine	Diesel	13.43	8.87	6.73	4.04	4.04	2.55	0.53

NO_x emissions in China

B. Zhao et al.

Table 6. Penetrations of air pollution control devices under various emission scenarios (%).

Sector	Technology	Control technology	2005	2010	2020 BAU[0]/ PC[0]	2030 BAU[0]/ PC[0]	2020 BAU[1]/ PC[1]	2030 BAU[1]/ PC[1]	2020 BAU[2]/ PC[2]	2030 BAU[2]/ PC[2]
Power plants	Coal-fired power plants ≥ 100 MW (exc. CFB)	NOC	46	11	5	3	0	0	0	0
		LNB	54	89	95	97	100	100	100	100
		LNB+SNCR	0	0	0	0	0	0	0	0
		LNB+SCR	0	0	0	0	0	0	0	0
		NOC	46	11	5	3	0	0	0	0
		LNB	53	75	82	84	8	0	0	0
Coal-fired power plants ≥ 100 MW (exc. CFB)	Coal-fired power plants ≥ 100 MW (exc. CFB)	LNB+SNCR	0	1	1	1	6	7	4	5
		LNB+SCR	1	12	12	12	86	94	96	95
		NOC	100	100	100	100	65	0	20	0
		LNB	0	0	0	0	0	0	0	0
		LNB+SNCR	0	0	0	0	30	80	70	70
		LNB+SCR	0	0	0	0	5	20	10	30
CFB	CFB	NOC	70	21	8	4	0	0	0	0
		LNB	30	74	87	91	50	10	0	0
		LNB+SNCR	0	1	1	1	5	9	10	10
		LNB+SCR	0	5	5	5	45	81	90	90
		NOC	100	100	100	100	9	0	10	0
		LNB	0	0	0	0	91	100	17	0
Industrial sector	Coal-fired industrial grate boiler	LNB+SNCR	0	0	0	0	0	0	73	100
		NOC	70	70	70	70	20	0	0	0
		LNB	30	30	30	30	30	25	0	0
		LNB+SNCR	0	0	0	0	30	45	20	20
		LNB+SCR	0	0	0	0	20	30	80	80
		Precalcined cement kiln ≥ 2000 td ⁻¹	Precalcined cement kiln ≥ 2000 td ⁻¹	NOC	70	70	70	70	20	0
LNB	30	30	30	30	30	25	0	0		
LNB+SNCR	0	0	0	0	30	45	20	20		
LNB+SCR	0	0	0	0	20	30	80	80		

Notes: NOC – No Control; LNB – Low NO_x burner; SCR – Selective Catalytic Reduction; SNCR – Selective Non-catalytic Reduction; LNB + SCR – combination of LNB and SCR; LNB + SNCR – combination of LNB and SNCR; ABSP – Absorption Method; OXFL – Oxy-fuel Combustion Technology. The table gives the national average penetration of NO_x control technologies. However, the penetrations vary with provinces. The penetration of the “key region” is usually larger than that of other regions.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in
China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I◀

▶I

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 6. Continued.

Sector	Technology	Control technology	2005	2010	2020 BAU[0]/ PC[0]	2030 BAU[0]/ PC[0]	2020 BAU[1]/ PC[1]	2030 BAU[1]/ PC[1]	2020 BAU[2]/ PC[2]	2030 BAU[2]/ PC[2]
Precalcined cement kiln 2000–4000 td ⁻¹		NOC	70	65	65	65	20	0	0	0
		LNB	30	35	35	35	30	25	0	0
		LNB+SNCR	0	0	0	0	30	45	20	20
		LNB+SCR	0	0	0	0	20	30	80	80
Precalcined cement kiln ≥ 4000 td ⁻¹		NOC	70	60	60	60	0	0	0	0
		LNB	30	40	40	40	0	0	0	0
		LNB+SNCR	0	0	0	0	60	60	20	20
		LNB+SCR	0	0	0	0	40	40	80	80
Glass production – float process		NOC	100	100	100	100	10	0	0	0
		OXFL	0	0	0	0	80	88	70	70
		SCR	0	0	0	0	10	12	30	30
Sintering		NOC	100	100	100	100	40	10	0	0
		SNCR	0	0	0	0	36	54	20	20
		SCR	0	0	0	0	24	36	80	80
Nitric acid – dual pressure process		NOC	75	70	70	70	10	0	0	0
		ABSP	10	12	12	12	18	18	18	18
		SCR	15	18	18	18	72	82	82	82
		ABSP+SCR	0	0	0	0	0	0	0	0
Nitric acid – other process		NOC	10	5	0	0	0	0	0	0
		ABSP	60	63	66	66	5	5	5	0
		SCR	30	32	34	34	15	15	15	0
		ABSP+SCR	0	0	0	0	80	80	80	100

Notes: NOC – No Control; LNB – Low NO_x burner; SCR – Selective Catalytic Reduction; SNCR – Selective Non-catalytic Reduction; LNB + SCR – combination of LNB and SCR; LNB + SNCR – combination of LNB and SNCR; ABSP – Absorption Method; OXFL – Oxy-fuel Combustion Technology. The table gives the national average penetration of NO_x control technologies. However, the penetrations vary with provinces. The penetration of the “key region” is usually larger than that of other regions.

NO_x emissions in
China

B. Zhao et al.

Table 7. Capacities of control technologies expected to be installed for the power sector during every five-year period in BAU[0], BAU[1], and BAU[2] scenarios (GW).

		BAU[0]				BAU[1]				BAU[2]			
		2011 to 2015	2016 to 2020	2021 to 2025	2026 to 2030	2011 to 2015	2016 to 2020	2021 to 2025	2026 to 2030	2011 to 2015	2016 to 2020	2021 to 2025	2026 to 2030
Coal-fired units (exc. CFB)	LNB – new units ^a	289.4	247.8	189.7	179.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	SCR – new units	41.1	35.1	26.9	25.5	311.7	266.8	204.3	193.8	318.6	272.7	208.6	197.7
	SCR – existing units ^a	0.0	0.0	0.0	0.0	255.0	67.4	38.6	24.5	408.9	14.0	0.0	0.0
	SNCR – new units	2.8	2.4	1.9	1.8	21.7	18.5	14.2	13.5	14.8	12.7	10.0	9.6
	SNCR – existing units	0.0	0.0	0.0	0.0	17.6	4.7	2.7	1.7	17.4	0.8	0.0	0.0
CFB	SCR – new units	0.0	0.0	0.0	0.0	0.0	3.0	2.4	3.0	0.0	2.2	3.1	10.7
	SCR – existing units	0.0	0.0	0.0	0.0	0.0	0.0	1.8	6.1	0.0	3.7	5.3	0.0
	SNCR – new units	0.0	0.0	0.0	0.0	7.3	11.6	12.9	12.1	14.9	15.5	12.2	4.4
	SNCR – existing units	0.0	0.0	0.0	0.0	0.0	0.0	8.7	15.3	14.1	1.1	5.3	0.0
NGCC	LNB – new units	17.6	16.6	13.6	13.6	6.1	0.6	0.0	0.0	0.0	0.0	0.0	0.0
	SCR – new units	0.8	0.8	0.6	0.6	11.2	15.2	12.9	12.9	16.7	15.7	12.9	12.9
	SCR – existing units	0.0	0.0	0.0	0.0	0.0	0.0	5.6	9.8	19.4	3.6	0.0	0.0
	SNCR – new units	0.1	0.1	0.1	0.1	1.2	1.7	1.4	1.4	1.9	1.7	1.4	1.4
	SNCR – existing units	0.0	0.0	0.0	0.0	0.0	0.0	0.6	1.1	2.2	0.4	0.0	0.0

^a “New units” indicates that the control technologies are installed when the power plants are newly built; “existing units” indicates that the old power plants are retrofitted with certain control technologies during the five-year period.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in
China

B. Zhao et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

**Table 8.** Provincial NO_x emissions during 2005–2030 (Mt).

Province	2005	2010	BAU[0]		BAU[1]		BAU[2]		PC[0]		PC[1]		PC[2]	
			2020	2030	2020	2030	2020	2030	2020	2030	2020	2030	2020	2030
Beijing	0.41	0.48	0.47	0.46	0.33	0.23	0.29	0.19	0.39	0.32	0.27	0.16	0.24	0.13
Tianjin	0.31	0.41	0.46	0.49	0.24	0.20	0.21	0.17	0.37	0.34	0.20	0.14	0.17	0.12
Hebei	1.35	1.62	2.11	2.30	1.27	1.04	1.11	0.88	1.77	1.67	1.07	0.76	0.94	0.64
Shanxi	0.84	1.05	1.35	1.50	0.76	0.63	0.64	0.56	1.09	1.04	0.62	0.45	0.52	0.40
Neimeng	0.70	1.16	1.52	1.70	0.75	0.62	0.60	0.54	1.22	1.17	0.61	0.44	0.49	0.39
Liaoning	0.90	1.15	1.40	1.56	0.88	0.74	0.74	0.64	1.16	1.11	0.72	0.53	0.61	0.46
Jilin	0.46	0.64	0.68	0.78	0.42	0.37	0.35	0.31	0.58	0.59	0.35	0.27	0.29	0.23
Heilongjiang	0.60	0.72	0.88	0.97	0.54	0.43	0.47	0.38	0.74	0.70	0.45	0.31	0.39	0.27
Shanghai	0.41	0.47	0.59	0.65	0.33	0.28	0.27	0.23	0.48	0.44	0.27	0.20	0.22	0.16
Jiangsu	1.49	1.75	2.07	2.22	1.15	0.93	1.01	0.79	1.71	1.57	0.97	0.69	0.85	0.59
Zhejiang	1.08	1.27	1.54	1.63	0.82	0.64	0.73	0.55	1.26	1.14	0.68	0.47	0.61	0.40
Anhui	0.68	0.99	1.21	1.40	0.69	0.56	0.59	0.51	1.03	1.04	0.59	0.43	0.51	0.40
Fujian	0.43	0.73	1.02	1.16	0.68	0.61	0.61	0.57	0.83	0.80	0.55	0.44	0.50	0.41
Jiangxi	0.36	0.50	0.62	0.74	0.41	0.35	0.37	0.32	0.53	0.54	0.35	0.26	0.31	0.24
Shandong	1.97	2.52	3.01	3.13	1.96	1.50	1.74	1.36	2.45	2.18	1.59	1.06	1.41	0.96
Henan	1.40	1.86	2.16	2.45	1.37	1.14	1.19	1.02	1.82	1.77	1.14	0.82	1.00	0.74
Hubei	0.65	0.96	1.09	1.24	0.68	0.56	0.57	0.48	0.91	0.89	0.57	0.41	0.48	0.35
Hunan	0.64	0.84	1.04	1.21	0.65	0.56	0.55	0.48	0.89	0.90	0.55	0.43	0.47	0.37
Guangdong	1.35	1.76	2.16	2.40	1.36	1.13	1.25	1.03	1.77	1.65	1.12	0.81	1.03	0.74
Guangxi	0.39	0.58	0.72	0.84	0.46	0.39	0.39	0.33	0.62	0.62	0.40	0.30	0.34	0.25
Hainan	0.06	0.09	0.12	0.14	0.07	0.06	0.06	0.05	0.10	0.10	0.06	0.04	0.05	0.04
Chongqing	0.27	0.46	0.52	0.61	0.34	0.29	0.29	0.24	0.44	0.44	0.29	0.22	0.25	0.18
Sichuan	0.60	0.98	1.10	1.27	0.75	0.61	0.66	0.54	0.93	0.91	0.63	0.43	0.55	0.38
Guizhou	0.42	0.52	0.69	0.81	0.39	0.34	0.32	0.28	0.56	0.55	0.32	0.24	0.26	0.20
Yunnan	0.36	0.52	0.63	0.75	0.40	0.34	0.33	0.28	0.53	0.55	0.34	0.26	0.28	0.21
xizang	0.01	0.02	0.03	0.03	0.02	0.01	0.02	0.01	0.02	0.02	0.02	0.01	0.02	0.01
Shaanxi	0.46	0.68	0.86	1.02	0.49	0.42	0.42	0.38	0.72	0.73	0.41	0.30	0.35	0.27
Gansu	0.32	0.46	0.59	0.70	0.34	0.29	0.29	0.26	0.50	0.51	0.29	0.21	0.24	0.19
Qinghai	0.06	0.09	0.10	0.12	0.06	0.05	0.05	0.04	0.08	0.08	0.05	0.04	0.05	0.03
Ningxia	0.18	0.30	0.40	0.46	0.19	0.17	0.15	0.15	0.32	0.32	0.16	0.12	0.13	0.11
Xinjiang	0.34	0.49	0.56	0.63	0.37	0.32	0.31	0.26	0.47	0.46	0.30	0.22	0.26	0.19
Total	19.48	26.05	31.69	35.35	19.18	15.82	16.60	13.85	26.32	25.16	15.95	11.47	13.84	10.07

NO_x emissions in China

B. Zhao et al.

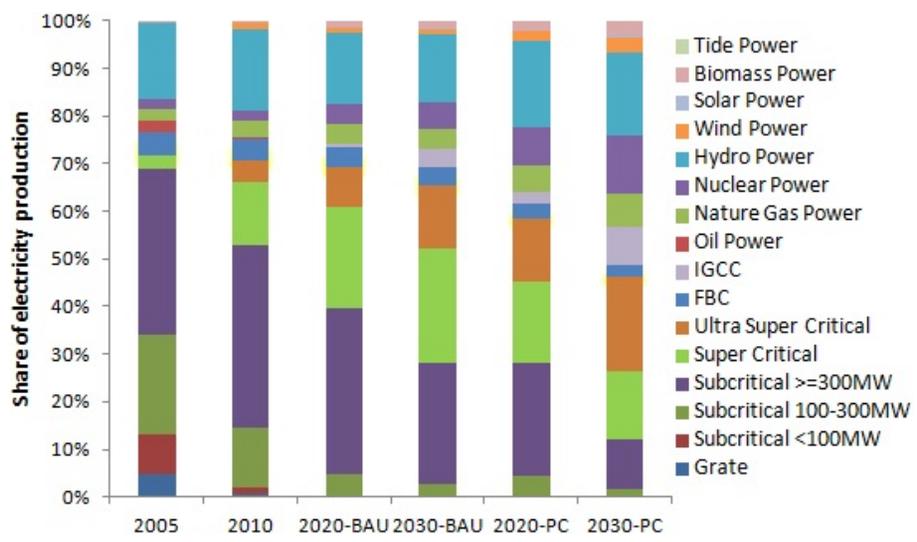


Fig. 1. Structure adjustment of power plants.

Title Page

Abstract	Introduction
Conclusions	References
Tables	Figures

◀
▶

◀
▶

[Back](#)
[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



NO_x emissions in China

B. Zhao et al.

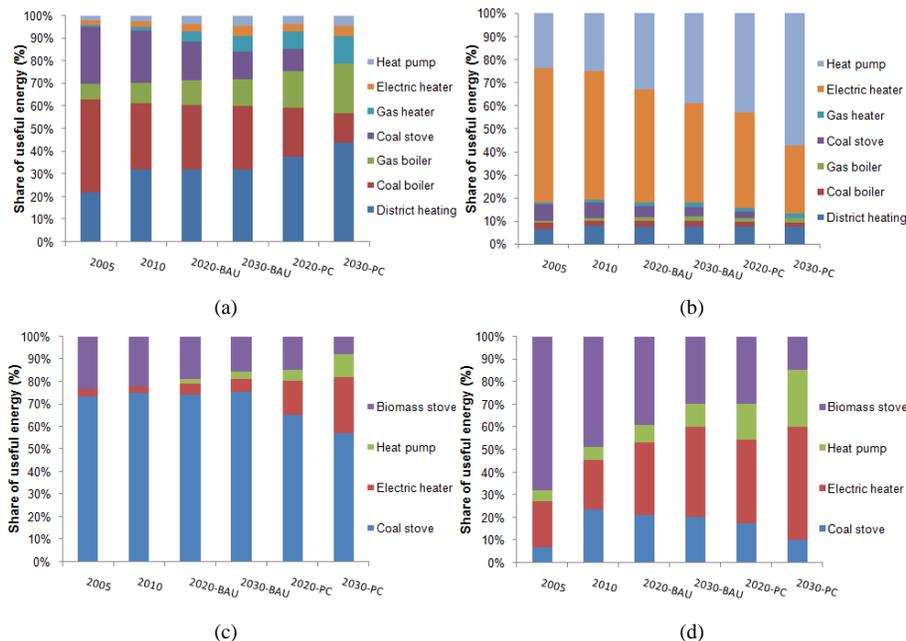


Fig. 2. Structure adjustment of heating: **(a)** urban area in north region; **(b)** urban area in transition region; **(c)** rural area in north region; **(d)** rural area in transition region.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

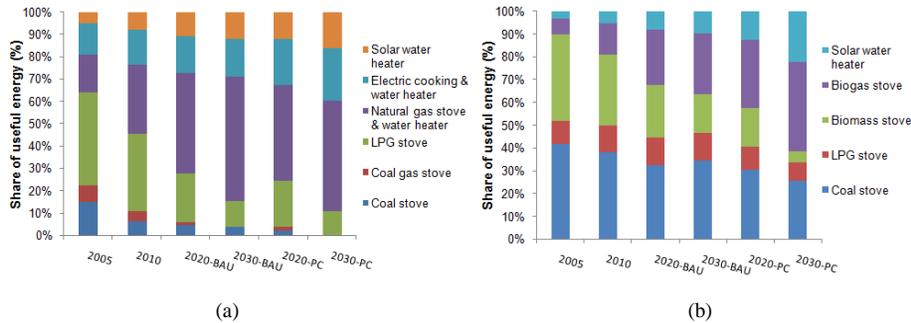


Fig. 3. Structure adjustment of cooking and hot water: **(a)** urban area; **(b)** rural area.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

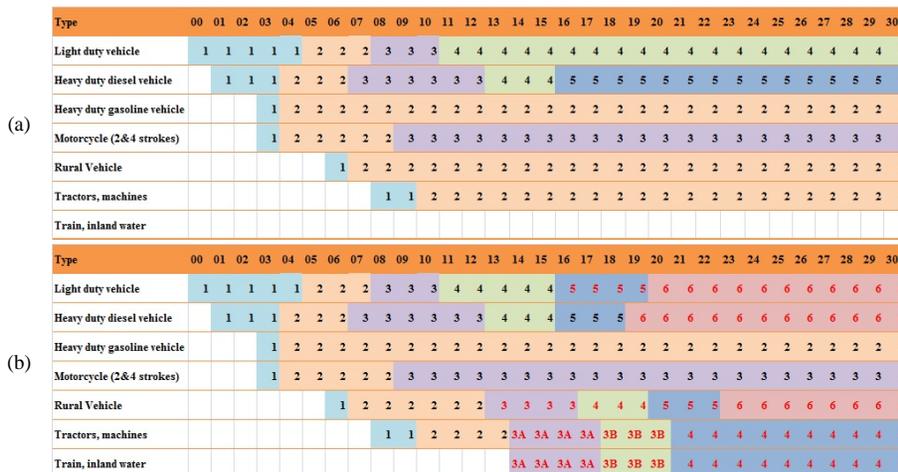


Fig. 4. The implementation time of the vehicle emission standards: **(a)** BAU[0]/PC[0] scenario; **(b)** BAU[1]/PC[1]/BAU[2]/PC[2] scenario. The Arabic numbers 1–6 represent Euro I to Euro VI vehicle emission standards. Numbers in black represent standards released by the end of 2010, and that in red represent those to be released in the future.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

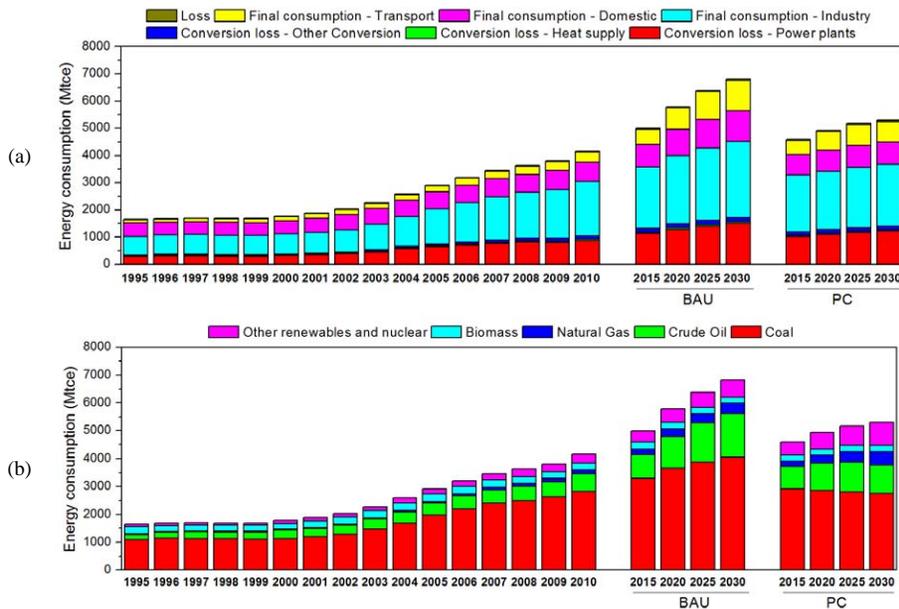


Fig. 5. Temporal evolution of energy consumption from 1995 to 2030: **(a)** energy consumption by sector; **(b)** energy consumption by fuel.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

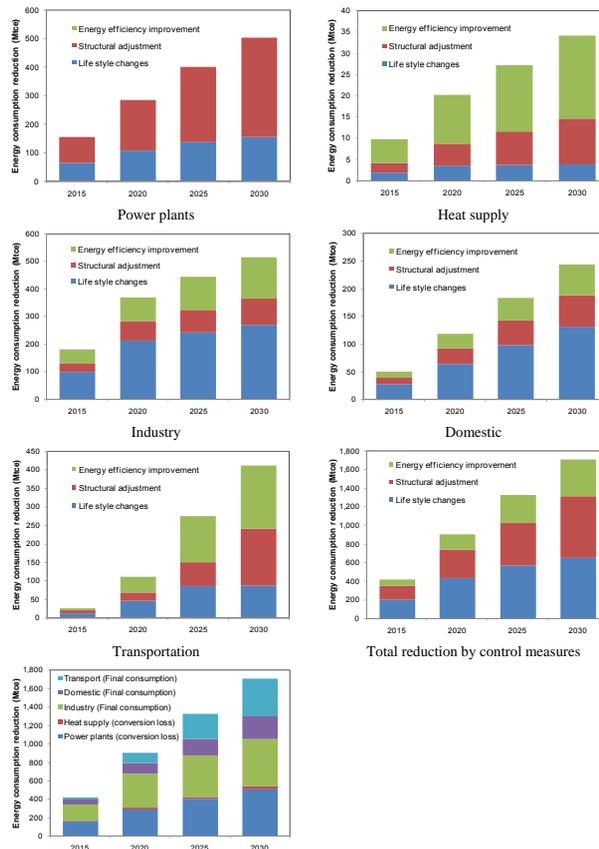


Fig. 6. Contribution of various control measures to the reductions of energy consumption under the PC scenario compared with the BAU scenario. Note: only the conversion loss, i.e. primary energy input minus secondary energy output, was included in the energy consumption to avoid double-counting of the secondary energy output.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

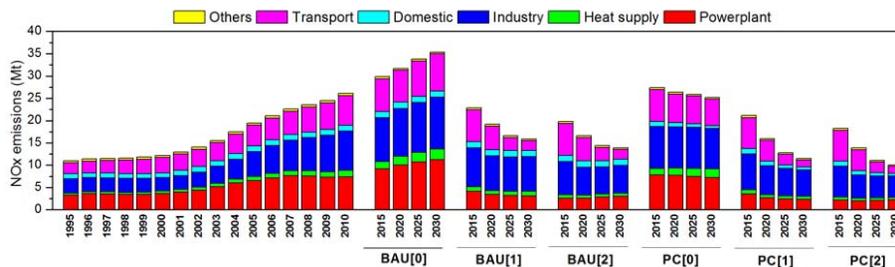


Fig. 7. Temporal evolution of NO_x emissions and their sectoral distribution during 1995–2030.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

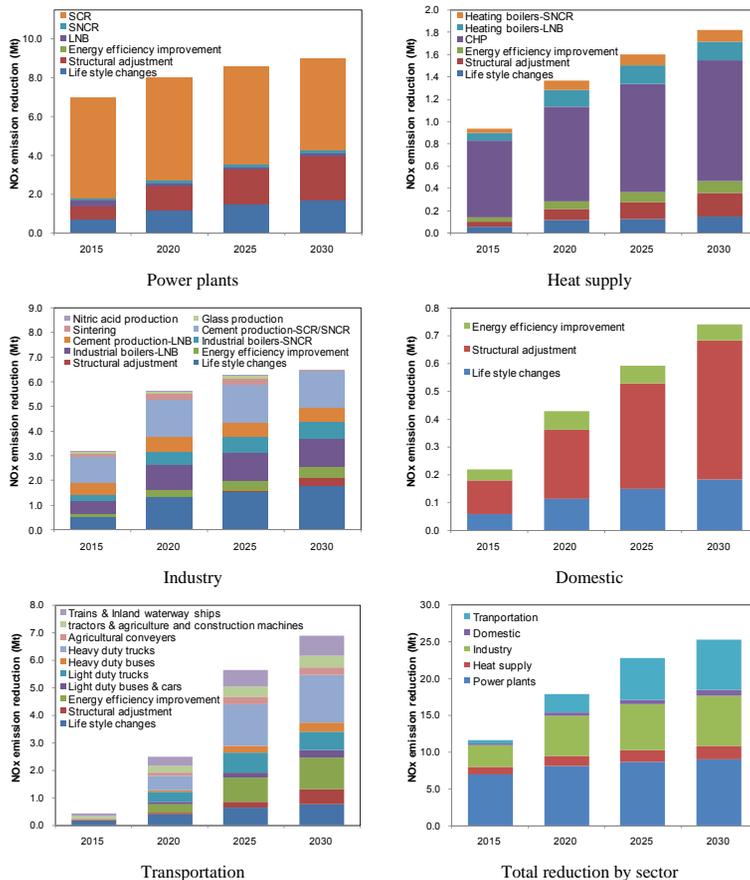


Fig. 8. Contribution of various control measures to the reductions of NO_x emissions under the PC[2] scenario compared with the BAU[0] scenario.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in
China

B. Zhao et al.

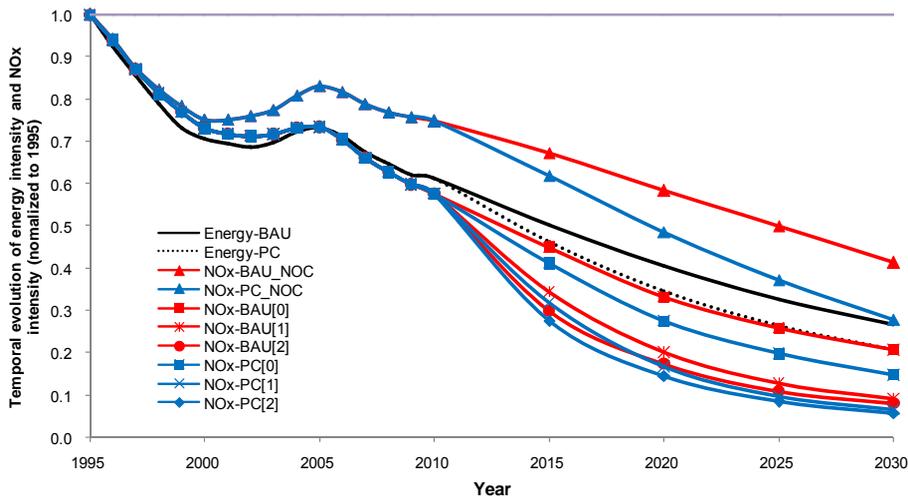


Fig. 9. Temporal evolution of energy intensity and NO_x intensity during 1995–2030 (normalized to 1995). Note that this study focused on the emission pathway every five years. The lines are only used to improve the readability. They do not necessarily indicate the trajectories of energy intensity or emission intensity year by year.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in China

B. Zhao et al.

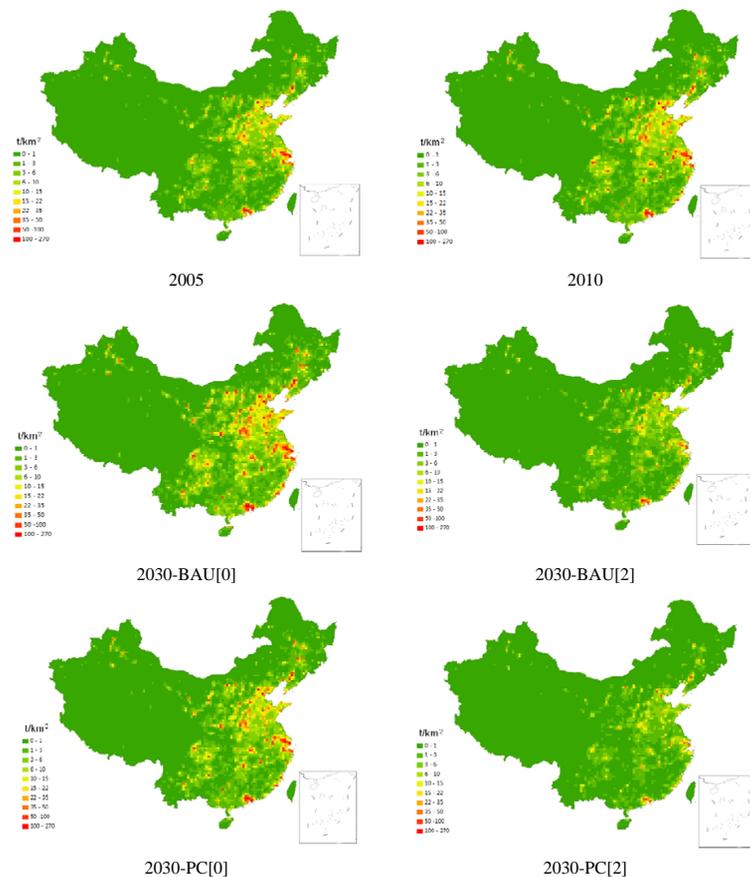


Fig. 10. Spatial distributions of NO_x emissions in 2005, 2010, and 2030 for four scenarios.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



NO_x emissions in
China

B. Zhao et al.

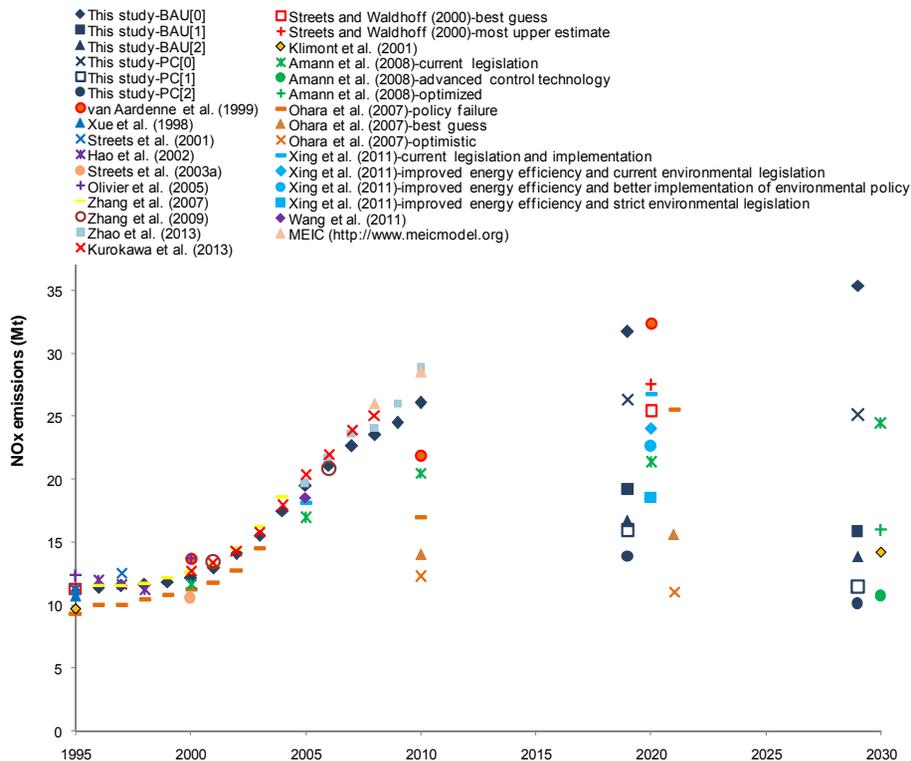


Fig. 11. Comparison of NO_x emission estimates in this study with other studies. Scenarios from the same study are shown with symbols of the same colour, and only the historical emissions for the first scenario are shown. Some points for the years 2020 and 2030 are shifted a little left or right, in order to avoid overlapping. Note that the current legislation scenario in Amann et al. (2008) is consistent with the baseline scenario in Klimont et al. (2009), therefore the latter is not shown in the figure.