



This discussion paper is/has been under review for the journal Atmospheric Chemistry and Physics (ACP). Please refer to the corresponding final paper in ACP if available.

Temperature profiling of the atmospheric boundary layer with rotational Raman lidar during the HD(CP)² observational prototype experiment

E. Hammann¹, A. Behrendt¹, F. Le Mounier², and V. Wulfmeyer¹

¹University of Hohenheim, Institute of Physics and Meteorology, Garbenstrasse 30, 70599 Stuttgart, Germany

²Laboratoire de Météorologie Dynamique, C.N.R.S, Paris, France

Received: 22 July 2014 – Accepted: 16 September 2014 – Published: 21 November 2014

Correspondence to: E. Hammann (eva.hammann@uni-hohenheim.de)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

The temperature measurements of the Rotational Raman Lidar of the University of Hohenheim (UHOH RRL) during the High Definition of Clouds and Precipitation for advancing Climate Prediction (HD(CP)²) Prototype Experiment (HOPE) in April and May 2013 are discussed. The lidar consists of a frequency-tripled Nd:YAG laser at 355 nm with 10 W average power at 50 Hz, a two-mirror scanner, a 40 cm receiving telescope and a highly efficient polychromator with cascading interference filters for separating four signals: the elastic backscatter signal, two rotational Raman signals with different temperature dependence, and the vibrational Raman signal of water vapor. The main measurement variable of the UHOH RRL is temperature. For the HOPE campaign, the lidar receiver was optimized for high and low background levels, respectively, with a novel switch for the passband of the second rotational Raman channel. The instrument delivers atmospheric profiles of water vapor mixing ratio as well as particle backscatter coefficient and particle extinction coefficient as further products. As examples for the measurement performance, measurements of the temperature gradient and water vapor mixing ratio revealing the development of the atmospheric boundary layer within 25 h are presented. As expected from simulations, a significant advance during nighttime was achieved with the new low-background setting. A two-mirror scanner allows for measurements in different directions. When pointing the scanner to low elevation, measurements close to the ground become possible which are otherwise impossible due to the non-total overlap of laser beam and receiving telescope field-of-view in the near range. We present an example of a low-level temperature measurement which resolves the temperature gradient at the top of the stable nighttime boundary layer a hundred meters above the ground.

28974

ACPD

14, 28973–29018, 2014

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1 Introduction

In recent years, different techniques for measuring the atmospheric temperature profile with lidar have been developed, namely the rotational Raman technique, the integration technique (using elastic and Raman signals, respectively), the resonance fluorescence technique as well as the high-spectral resolution lidar (HSRL) technique and differential absorption lidar (DIAL) (see Behrendt, 2005 for an overview). For daytime measurements in the troposphere, rotational Raman lidar (RRL) is presently the most reliable technique. Its capabilities in providing temperature profiles with high temporal and spatial resolution and low systematic and noise errors at night- and daytime even within aerosol layers and thin clouds are advantageous so far to all other techniques particularly if measurements from the surface to the lower troposphere are concerned (Behrendt and Reichardt, 2000; Behrendt et al., 2002, 2004; Di Girolamo et al., 2004; Arshinov et al., 2005; Radlach et al., 2008).

Most rotational Raman systems operate at wavelengths of 532 or 355 nm, the second and third harmonic wavelengths of Nd:YAG lasers. UV systems are able to perform daytime measurements with lower uncertainties due to the higher backscatter cross section and less solar background (Zeyn et al., 1996; Behrendt et al., 2005). The rotational Raman lidars of NASA Goddard Space Flight Center (Di Girolamo et al., 2004), of University of Hohenheim (Radlach et al., 2008), of University of Basilicata (Di Girolamo et al., 2009), of Xi'an University (Mao et al., 2009) and of Hampton University (Su et al., 2013) all operate in the UV with interference-filter polychromators. Rotational Raman lidar at 532 nm show lower performance at daytime but reach larger range at night than an UV system due to the higher laser power available at 532 nm compared to 355 nm, higher efficiency in signal separation, and lower atmospheric extinction. Some of the systems at 532 nm are also based on interference filters (Behrendt and Reichardt, 2000; Behrendt et al., 2002, 2004; Achtert et al., 2013) and some employ double-grating polychromators (Balin et al., 2004; Arshinov et al., 2005).

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Daytime temperature measurements are the main focus of the RRL of UHOH. But besides temperature also the particle backscatter coefficient and the particle extinction coefficient can be measured independently. Furthermore, the system was extended recently with a water vapor Raman channel. For water vapor measurements, two different lidar techniques are available: the DIAL technique and the Raman lidar technique. While water vapor Raman lidar uses the vibrational Raman backscatter signals of water vapor (Melfi et al., 1969; Whiteman et al., 1992; Turner et al., 1999; Leblanc and McDermid, 2008), the DIAL technique (Schotland, 1974; Wulfmeyer and Bösenberg, 1998; Behrendt et al., 2009; Wagner et al., 2013) relies on the different absorption of water vapor at two near-by wavelengths. In contrast to water vapor DIAL with its self-calibrating property, which leads to a high accuracy of the measurements (Bhawar et al., 2011), a water vapor Raman lidar has to be calibrated and shows also lower performance at daytime. However, the laser transmitter is less complex and if a certain lidar system contains already rotational Raman channels, only one more detection channel is needed to derive in addition the water vapor mixing ratio (Behrendt et al., 2002). Thus we have decided to extend the UHOH RRL with a water vapor channel. Furthermore, this capability permits relative humidity measurements, which are, e.g., useful for aerosol (Wulfmeyer and Feingold, 2000) and convection initiation studies (Behrendt et al., 2011; Corsmeier et al., 2011). In parallel to the RRL, the UHOH has developed also a water vapor DIAL, which recent measurements are presented in (Muppa et al., 2014; Späth et al., 2014).

Within the HD(CP)² project, a new model for high-resolution weather forecast will be developed (Stevens and Bony, 2013) and other model systems will be tested (Schwitalla and Wulfmeyer, 2014). To verify the model, high resolution data sets are required. The HD(CP)² observation prototype experiment (HOPE) providing such a data set took place during April and May 2013 in the area around the Research Center Jülich in Northwest Germany. The area had already an existing infrastructure of dense standard meteorological instrumentation.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Both system of UHOH have been operated together in the HOPE field campaign and provided thus a synergetic data set of the thermodynamic properties of the atmosphere. The lidars were located at one supersite close to the village of Hambach together with the KITcube, an instrument suite of the Karlsruhe Institute of Technology (KIT) (Kalthoff et al., 2013). The site was slightly elevated to the surrounding. The RRL and the Water Vapor DIAL of UHOH were collocated with a Doppler lidar from KIT to acquire a complete data set of temperature, water vapor content and vertical wind for the determination of fluxes of sensible and latent heat (e.g., Behrendt et al., 2011). It was also the launch site for radiosoundings.

Besides presenting the novel switch for low- and high-background RRL, it is the goal of this paper to introduce the measurement performance of the UHOH RRL during HOPE and present highlights of the measurements. During the 18 intensive observation periods more than 200 h of measurements were collected. Except of two night-long measurements, only the time between sunrise and sunset was covered in absence of rain or continuing dense cloud cover. On one day, RHI (Range-Height-Indicator) scans were performed. One day and one night, the lidar was pointing in low elevation above ground. Water vapor measurement started in the beginning of May, therefore only 100 h of water vapor data are available. Case studies using the combination of data from the instrument set – also from the other two supersites – are in preparation and will be presented later based on the results shown here.

Our main research interest is land–surface–atmosphere feedback, which requires measurements of land–surface exchange, the surface layer, the atmospheric boundary layer, and the lower free troposphere. For investigating not only mean profiles or mean 3-dimensional fields but also the turbulent features of the convective boundary layer, instruments providing data with high temporal and spatial resolution also in conditions of high-background light are needed. The rotational Raman lidar of UHOH was optimized for such conditions. A new technical feature we implemented during the HOPE campaign was a switch to optimize the performance of the temperature measurements for low and high background conditions, respectively. We made detailed simulations

which showed that it is favorable to use another pair of filter center wavelengths in low background conditions than in cases with high solar background. The change between the settings can be made in short time of a few seconds. Thus, it was possible to switch easily between the settings and acquire continuous time periods of data which included such changes.

This paper is structured as follows: In Sect. 2 the new setup of the UHOH RRL is explained. Also the simulations for two settings for the second rotational Raman channel are presented. Section 3 discusses the experimental results of the new system. Section 4 gives a short summary.

2 Methods and performance simulations

2.1 Methods

The rotational Raman lidar of UHOH makes use of the rotational Raman technique for deriving atmospheric temperature profiles (Cooney, 1972). Two parts of the rotational Raman spectrum of air with different temperature dependency are acquired (see Fig. 1). By taking the ratio of the two signals (Fig. 2) and calibrating it, the temperature is obtained without further assumptions on the state of the atmosphere. Figure 2 shows the rotational Raman signals P_{RR1} and P_{RR2} in dependency of the temperature. For P_{RR2} there are the two settings shown in Fig. 1 with different central wavelengths CWL2: One for low background (L), one for high background (H) conditions. The setting L results in a lower signal intensity in the second Raman channel. Also the ratio Q between P_{RR2} and P_{RR1} is lower and has a different slope than the one for the H setting. There are several formulas in use for the calibration (Behrendt and Reichardt, 2000; Behrendt, 2005). For temperatures measurements up to a few km altitude, we

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

are using mostly

$$Q(T) = \exp\left(a - \frac{b}{T}\right) \quad (1)$$

where Q is the ratio between the signals in the Raman channels RR2 and RR1, a and b are calibration constants. This equation is exact for the ratio of two single rotational Raman lines. If several rotational Raman lines are extracted by the two channels, more complicated equations with more constants are needed when temperature measurements over a larger range of temperatures are made (Behrendt and Reichardt, 2000; Behrendt, 2005). But this is not our purpose here so that this equation can still be used resulting in a high accuracy of the inversion. Therefore we can get the atmospheric temperature from Q by rearranging Eq. (1) to

$$T = \frac{b}{a - \ln(Q)}. \quad (2)$$

The statistical error of the temperature measurements can be determined from the signal intensities of the photo counting data and applying Poisson statistics. For a signal with count number s , the $1-\sigma$ statistical error is

$$\Delta s = \sqrt{s}. \quad (3)$$

This results in a noise error for the temperature ΔT (Behrendt et al., 2002) of

$$\Delta T = \frac{\partial T}{\partial Q} Q \sqrt{\frac{P_{RR1} + P_{B1}}{P_{RR1}^2} + \frac{P_{RR2} + P_{B2}}{P_{RR2}^2}}. \quad (4)$$

P_{RR1} is the background-corrected signal in the first Raman channel, P_{B1} the background in this channel, P_{RR2} and P_{B2} are the same for the second Raman channel. One can

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



see from Eq. (1) that the error ΔT scales with

$$\Delta T \sim \frac{1}{\sqrt{PtA\eta}} \quad (5)$$

where P is the laser power, t the integration time, A the telescope area and η the overall detection efficiency.

5 The statistical error ΔT_{Grad} of a temperature gradient measurements is then

$$\Delta T_{\text{Grad}} = \frac{2\Delta T}{\Delta r} \quad (6)$$

with Δr the range interval over which the gradient was calculated.

The two rotational Raman signals can also be used to form a temperature-independent reference signal P_{RR} for the determination of the particle backscatter coefficient, the particle extinction coefficient or the water vapor mixing ratio (Behrendt et al., 10 2002, 2004).

The water vapor mixing ratio MR at a distance r is calculated with

$$\text{MR}(r) = C \cdot \frac{P_{\text{WV}}(r)}{P_{\text{RR}}(r)} \Gamma(r) \quad (7)$$

15 where C is a calibration constant, P_{WV} and P_{RR} are the background-corrected signals of the vibrational Raman line of water vapor and the rotational Raman lines of nitrogen and oxygen, respectively (Whiteman et al., 1992; Sherlock et al., 1999). $\Gamma(r)$ is a correction for the different atmospheric extinction Γ at the two wavelengths λ_{N_2} and $\lambda_{\text{H}_2\text{O}}$

$$\Gamma(r) = \frac{\exp\left[-\int_{r_0}^r \alpha(\lambda_{\text{N}_2}, r') dr'\right]}{\exp\left[-\int_{r_0}^r \alpha(\lambda_{\text{H}_2\text{O}}, r') dr'\right]} \quad (8)$$

To determine the calibration constant C , we use a collocated radio sounding. It was found that a correction for the different extinction coefficient of the two wavelengths is negligible for ranges of up to a few kilometers because the difference is less than 0.1 % up to 3 km.

The statistical error of the water vapor measurements can be calculated with Poisson statistics and one gets

$$\Delta MR = C \frac{P_{WV}}{P_{RR}} \sqrt{\frac{P_{WV} + P_{BWV}}{P_{WV}^2} + \frac{P_{RR} + P_{BRR}}{P_{RR}^2}}. \quad (9)$$

While the error analysis based on Poisson statistics determines the so-called shot noise errors, the total statistical error can be estimated with an analysis of the turbulent fluctuations in the atmosphere (Lenschow et al., 2000). For this, data with high temporal resolution is needed in order to resolve the time scale of these fluctuations. The method based on the analysis of the autocovariance function was developed in (Senff et al., 1994; Wulfmeyer et al., 1999a, b), and summarized in (Lenschow et al., 2000). Recently, this technique was applied to WV DIAL (e.g., Muppa et al., 2014) and Doppler lidar data (Lenschow et al., 2012), elastic backscatter lidar data (Pal et al., 2010), and water vapor Raman lidar data (Wulfmeyer et al., 2010; Turner et al., 2014a, b). Recently it was applied for the first time to temperature lidar data by using measurements of the UHOH RRL during HOPE (Behrendt et al., 2014). The comparison between the errors derived with Poisson statistics and turbulence analysis confirms that the total statistical error is mainly due to photon shot noise.

2.2 Current setup

The rotational Raman lidar of UHOH aims at measurements in the atmospheric boundary layer and lower free troposphere during daytime. A scheme of the setup is shown in Fig. 3. As laser source an injection-seeded frequency-tripled Nd:YAG-laser (Spectra

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Physics GCR290-50) is used. Only the third harmonic radiation at 354.83 nm is transmitted into the atmosphere. The human eye is less sensitive to UV wavelengths than to wavelengths in the visible spectrum and therefore eye safety is fulfilled already at a smaller distances for UV lidars than for lidars using e.g., the second harmonic radiation of a Nd:YAG laser. In consequence, the first and second harmonic are separated in our transmitter from the third using a Pellin-Broca prism and directed into beam dumps. The separation by a prism is preferable to a beam splitter due to the fact that the wavelengths are separated spatially and definitely no radiation at the other wavelengths is remaining in the outgoing light. The transmitted power in the UV is around 10 W at a repetition rate of 50 Hz. The beam is expanded by a factor of 6.5 to prevent damage on the transmitting optics and to achieve eye safety in less than 400 m distance (taking also hotspots in the beam profile into account). The expanded beam is directed via three mirrors (10 cm diameter) onto the first mirror of the beam steering unit. Together with a second mirror, this setup enables us to direct the beam to any azimuth and elevation angle of interest. The whole system is mounted on a mobile platform which can be moved to different measurement sites for field campaigns.

The receiving telescope is of Ritchey–Chrétien–Cassegrain type. Its primary mirror has a diameter of 40 cm. To reduce the daylight background, the focused signal passes a pinhole with selectable diameter. The diameter was set to 3 mm during the HOPE campaign which results in a full field of view of 0.75 mrad. After passing this field stop, the light is parallelized with a lens and then split by a dichroic beam splitter: while light with wavelengths shorter than 375 nm is transmitted into the main receiver unit, longer wavelengths are reflected. The vibrational-rotational Raman signal of water vapor excited by 354.83 nm is shifted by wavenumbers around 3657.05 cm^{-1} (e.g., Avila et al., 2004) from the excitation wavelength and is thus around 407.7 nm in our case and obtained from the light reflected by the beam splitter. The transmission efficiency of the beam splitter is 0.93 for 355 nm and 0.02 for 408 nm. Reflectivity at 408 nm is above 0.95.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The signal transmitted by the beam splitter passes a daylight reducing filter IF0 (Eu-reca, peak transmission of 0.56) and enters the main part of the receiver for the de-
5 tecton of the elastic and rotational Raman signals, which follows a cascading scheme (Behrendt and Reichardt, 2000; Behrendt et al., 2002, 2004; Radlach et al., 2008). In front of the first rotational Raman channel, two identical interference filters IF2a and IF2b are used to achieve sufficient suppression of the elastic signal. In Table 1 all filter parameters are listed. The first filter pair has a transmission of 0.34 for 354.15 nm and 10^{-6} for 354.83 nm. The passbands have a full width at half maximum of 0.3 nm. The filter for extracting the second rotational Raman signal can be toggled between
10 two distinct angles to optimize the performance of temperature measurements during conditions of high and low background, respectively (see below). It has a peak transmission of 0.52 and is 0.5 nm broad. The angles of incidence are 6° for the interference filters IF2a and b and 4.5° and 6.2° for the second interference filter for the high- and low-background setting, respectively. The beam divergence in the polychromator is
15 0.45° . All narrowband interference filters were manufactured by Materion, Barr Precision Optics & Thin Film Coating. As photomultiplier for the rotational Raman signals a Hamamatsu R1924P is used. The elastic channel is equipped with a neutral density filter (transmission of 0.2) to prevent saturation of the photomultiplier (Hamamatsu R7400-U02) in the presence of optically thick clouds in the near-range.

20 In the branch of the water vapor channel, an interference filter (IF4) transmits the desired wavelength range, details see Table 1. The total suppression has an efficiency of 10^{-8} for 355 nm and 10^{-6} for other wavelengths. Signal is focused on a photomultiplier (Hamamatsu R1924P) for detection.

25 Presently, we are using two data acquisition systems for the four lidar signals. First, there is a transient recorder (LICEL GmbH, Berlin) with three acquisition channels. Each photomultiplier signal is recorded in analog mode with 3.75 m range resolution and in photo-counting mode with range resolutions of 3.75 m and 37.5 m (see Table 2). In standard operation, backscatter signals of 500 shots are averaged to get a profile with 10 s integration time. At the beginning of the HOPE campaign, the elastic signal

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and the two Raman channels were recorded with this system. From early May on the water vapor detection channel signal was implemented and its signal was recorded with the LICEL data acquisition instead of the elastic signal. The strong elastic signal was then stored with a transient recorder system (Compuscope 14100 card of GaGe Applied Inc.) with resolutions of 3 m and 1 s but only in analog mode.

The data analysis contains the following steps. First, the photo-counting data are corrected for photomultiplier dead-time effects. Then, the signals are background corrected and smoothed in range and time with gliding average lengths that depend on the noise conditions and application. E.g., for turbulence analysis (Behrendt et al., 2014) high temporal resolution of 10 s is needed while for studies of the temperature gradient a low statistical error is essential. Temperature and other data products are then determined with the analog and photon-counting signals separately and merged afterwards if needed. We found that the alternative approach of first merging the analog and photon-counting signals and then deriving the data products in a second step with the merged signals (Newsom et al., 2009) results in unstable temperature calibration functions because the merging procedure produces small erroneous fluctuations which influence the temperature measurements critically. Only for determining the statistical uncertainties of the data, we scale the analog data to the photon counting signals in order to attribute virtual count rates to the analog data. It turned out that these scaling results in accurate error estimates also for the analog data (Behrendt et al., 2014).

From the combination of the two temperature-dependent signals a temperature independent molecular reference signal can also be obtained. The weighted sum of the signals with a weighting factor that depends on the system characteristics (Behrendt et al., 2002) can be used as reference signal for the calculation of the water vapor mixing ratio MR, particle backscatter coefficient β and extinction coefficient α (see also Fig. 4); no further vibrational nitrogen Raman signal like used in other Raman lidar systems is needed. It should also be noted that the statistical uncertainty of the rotational Raman reference signals is lower than the uncertainty of the weaker nitrogen vibrational Raman signal.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

The measured temperature profiles can be used to further derive, e.g., profiles of potential temperature θ , temperature gradients, variance or other higher-order moments of turbulent temperature fluctuations. If profiles of vertical wind w are available with high temporal resolution, e.g., from a Doppler lidar the sensible heat flux can be calculated. Also other products like buoyancy (Corsmeier et al., 2011), CAPE (Convective Available Potential Energy) and CIN (Convective Inhibition) (Behrendt et al., 2011) are possible.

2.3 Determination of optimum configurations for low and high background

A switch for the central wavelength of the interference filter of the second rotational-Raman-channel was introduced during the HOPE campaign. By selecting lines for the second (high J) rotational Raman backscatter channel with larger spectral distance to the excitation wavelength one can enhance the temperature sensitivity of the system. But while these lines are more temperature sensitive, they are also weaker in intensity. Consequently, there is a tradeoff between temperature dependence and signal intensity which results in optimum settings which depend on the signal background relative to the Raman signal intensities (Radlach, 2009). In the following, we present refined simulation results on this problem of lowest possible statistical uncertainty of the temperature measurements depending on the background. While the passband of the second rotational Raman channel is changed, the passband of the first rotational Raman channel (low J) stays constant. This first channel is already so close to the laser wavelength that further change to weaker signals would decrease the blocking of the elastically backscattered light in the signal to critical values.

Refined simulations to what has already been described in (Radlach et al., 2008) were performed for the present laser wavelength and with the goal to find an optimum setting for the central wavelength of the second rotational Raman channel for high and low background, respectively. In the following the central wavelength of the first rotational Raman signal detection channel is called CWL1 and the second CWL2 respectively. From Eq. (4), the $1-\sigma$ -statistical uncertainty of temperature measurements

can be calculated for two close temperatures T_1 and T_2 with

$$\Delta T = \frac{\partial T}{\partial Q} \Delta Q \approx \frac{(T_1 - T_2)}{(Q_1 - Q_2)} Q \sqrt{\frac{P_{RR1} + P_{B1}}{P_{RR1}^2} + \frac{P_{RR2} + P_{B2}}{P_{RR2}^2}}. \quad (10)$$

A simulation of the spectrum at two temperatures T_1 and T_2 five kelvin apart combined with the filter transmission curves gives the ratio Q of the two channels. Scaling parameters of the background are the ratio of the background per 0.1 nm filter bandwidth and the intensity P_J^{\max} of the strongest line of the rotational Raman spectrum (Radlach, 2009). This gives as background

$$P_B = S \frac{\Delta \lambda_{FWHM}}{0.1 \text{ nm}} P_J^{\max}. \quad (11)$$

For the scaling factor S we chose 1 in the high-background case and 0 in the low-background case. As the intensity of the Raman signal depends on height but the background is constant for all height bins of a profile, the scaling factor S changes for the different heights of a measured profile and, of course, with the solar background and thus latitude, time of the day, and season as well as the laser power and receiver efficiency of the lidar system. At daytime, S will be nearly 0 at low altitudes for well-designed high-power lidar with high signal to background ratio, but S will increase quickly with altitude as the signal intensity decreases. With optimizations to $S = 0$ and $S = 1$, one is even prepared for high background conditions e.g. near cumulus clouds at noon. We found that larger values for S do not change the optimum central wavelengths significantly compared to $S = 1$. But as detailed in the following, the differences between $S = 0$ and $S = 1$ are significant which is the motivation for the new switch.

In Fig. 5 the results of the simulations are presented for both high and low background for temperature regimes of 180, 240, 270, and 300 K. The simulation was performed assuming a beam divergence of 0.45° on the interference filters in the receiver which modifies the filter transmission curves accordingly. The relative uncertainty ΔT

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

is normalized to the smallest value in each case. The values of ΔT are of course lower at night than at day but this simulation is made to find an optimum setting within each regime and comparing than the optimum settings. The central wavelengths of the first filter are limited to 354.2 nm and smaller values due to otherwise too low blocking of the elastic signal for this channel.

We decided to select the pair of central wavelengths of 354.15 nm for CWL1 and 353.35 nm for CWL2 for high background conditions (H). With low background during night this setting is not preferable and therefore the pair of central wavelengths of 354.15 nm and 353.05 nm respectively was selected for low background condition (L). We use correspondingly the angles of incidence already mentioned in Table 1. In Fig. 6, an overview of all these temperature regimes is given. One can see that the measurements with our settings are not more than 20 % higher than the minimum uncertainty for all temperatures between 240 and 300 K. But this is only achieved by the two settings for CWL2.

To be able to use the advantages of both wavelengths, it is crucial to be able to toggle between the two settings in a short time in order to avoid measurement gaps. Furthermore, the setting should be reproducible to avoid changes in calibration or overlap. This is realized by a filter holder which can be fixed by a pivot tooth at two positions. It was built by our workshop and tested on the campaign. Results are shown in Sect. 3.1.

3 Measurement examples

3.1 RR2 switch

To test the performance of the switch, we made a 24 h measurement and changed between the high- and low-background setting (referred to hereafter as H and L). The switching time coincided with a radiosonde launch during nighttime. In general, we define nighttime here as the time where the background is small compared to the rotational Raman signals in our altitude range of interest, i.e., between about half an hour

after sunset and half an hour before sunrise. This was the case during the consecutive observation periods where we had a radiosonde launch at 20:00 UTC and early in the morning. All in all, we had therefore three cases for the evaluation of the performance of the switch.

5 On average it took about 5 min to interrupt the data acquisition in a controlled way, change filter position, readjust the stray-light cover and restart the data acquisition. When changing from high- to low-background setting, the signal intensity in the second Raman channel decreases which results in a lower ratio Q (Fig. 7). But, as already discussed above, the relative sensitivity to temperature increases. The enhanced sensitivity is seen in Fig. 8, where the ratio between the two channels is normalized to the value at an arbitrary altitude (here we chose that altitude in which the temperature profile of the radiosonde was 273 K, which was 2.6 km). In this visualization the different slope can be seen, which is larger for L than for H.

15 Finally, we compare the Q vs. T curves from simulation and experiment (Fig. 9). For the experimental data, we attributed Q to T values of the radiosonde in the same height. The simulation calculates the resulting Q for temperatures from 240 to 300 K in 1 K steps and includes the actual filter curves including the central wavelengths. For the low-background setting, simulation and experiment agree very closely to within the statistical error bars; for the high-background, small deviations up to 3% are found. But this deviation is only present in higher altitudes where the performance of the setting is not optimized ($T \approx 250$ K) and also the radiosonde used to relate the altitude to a temperature can show deviations (sampling of different air mass). Therefore we can state a good agreement between experiment and simulation.

25 The statistical errors for different background values with both settings were calculated. We used nighttime measurements and added the high background according to a scaling factor of exactly $S = 1$ at 1 km. In comparison with actually measured background values at noon with or without cloud coverage the used background values are higher because our rotational Raman signals are quite strong. Thus, the compar-

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

ison shows the performance in circumstances which can be considered a worst case scenario.

Figure 10 shows the statistical errors with low background (measurement from 20:00 UTC, 20 min average) and both settings. Like expected, the setting L shows smaller errors and is favorable up to 7 km. The simulated error for high background is shown in Fig. 11. Absolute values are higher than with low background. Below 1 km, S is smaller than 1 which results in a better performance of the low background setting than the high background setting. Above 1 km, S is larger than 1 and the statistical errors are smaller with the high-background configuration.

To show the advantage of the new setting the ratio between the error with high background setting ΔT_{HBS} and the error with low background setting ΔT_{LBS} was calculated for the different background conditions respectively. The result is shown in Fig. 12. Using setting L is favorable during night up to a height of 7 km. This change in advantage from L to H with low background was expected from the simulation. There the H setting shows less uncertainty at low temperatures than the L setting. In low altitudes, the signal intensity is high enough so that $S < 1$. Here both settings show similar statistical errors with small advantages of the low background configuration. With $S = 1$ at 1 km, setting H is in advantage above this altitude.

Because the background factor S assumed in the simulations is higher than in reality for the strong signals we obtain with our system during cloud-free conditions, the altitude where the high background setting shows advantages is found for us even at higher altitudes than 1 km unless clouds cause higher background by scattering sunlight. By applying the setting H in daytime, we can guarantee even under these very high background conditions a good to optimum measurement performance. It is interesting to note that also smaller laser power would result in higher values of S . Thus our optimization approach can be used to adapt the optimum receiver passbands to the system parameters of other lidars.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.2 Temperature gradient and humidity

Figure 13 shows the water vapor mixing ratio MR and the temperature gradient during a 25 h measurement period between 18 May 2013 15:00 UTC and 19 May 2013 16:00 UTC. MR data are shown with one-minute averaging. A 78 m gliding height average was applied to the data. The boundary layer top can be seen due to the gradient between the moist boundary layer and the lower values of MR in the free troposphere. The time series starts at 15:00 UTC and the boundary layer is still convective at this time. With sunset at 19:22 UTC there is a transition to a stable nocturnal boundary layer. Also a residual layer with a mixing ratio of 3 g kg^{-1} can be observed above the boundary layer with around 6 g kg^{-1} . Due to the lower solar background a moist layer between 2 and 3 km can be observed during night. Sunrise is at 03:39 UTC, what can be seen by the increase of noise around this time. From 10:00 UTC on the convective boundary layer starts to increase in altitude and shows higher values of mixing ratio (around 8 g kg^{-1}) than the day before. The height of the boundary layer top does not change significantly after 14:00 UTC.

For the altitude region marked with the white box the temperature gradient is shown in the lower panel. The resolution of temperature gradient data is 30 min and 105 m. These values have been chosen to monitor the mean boundary layer height continuously. A high positive gradient is result of an inversion on top of a layer. Here we see a positive gradient at 1.5 km with a value around $1.2 \text{ K}/100 \text{ m}$ between 17:30 and 19:00 UTC which is surprising to see in the late afternoon just before sunset. After sunset the gradient gets weaker and splits to the top of the nocturnal boundary layer and a residual layer at 1.7 km which already was observed with the water vapor mixing ratio time series. The residual layer stays at this altitude during the whole measurement period. From 03:00 till 07:00 UTC another inversion can be seen between 1 km and 1.3 km. A strong inversion is present on top of the growing convective boundary layer 10:00 till 15:00 UTC. This demonstrates that with temperature gradient layers can be identified and observed during longer time periods.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Figure 14 shows the time period from 17:30 to 18:30 UTC in more detail. The temperature gradient is shown with 50 s gliding average over 10 s profiles, the water vapor mixing ratio has the same resolution as in Fig. 13. The altitude of the positive gradient and the top of the moist layer agree well for the shown time period even in this high temporal resolution.

The profiles of temperature, potential temperature, temperature gradient and water vapor mixing ratio measured on 19 May 2013 between 13:00 and 13:30 UTC are shown in Fig. 15 with their corresponding statistical uncertainties. This time period near local noon was chosen because the highest background values during this 25 h measurement period were found here; these examples thus illustrate the lower limit of the measurement performance with all other periods having smaller statistical uncertainties. For the temperature profiles an average of 167 raw data profiles was used and a gliding height average of 105 m was applied. A pressure profile measured by the radiosonde started at 13:00 UTC was used to calculate potential temperature. In the profiles of temperature, potential temperature and temperature gradient one can see the characteristics of a well-mixed boundary layer up to about 1100 m. In the interfacial layer above, differences between the measurements of both instruments can be identified. As the lidar measurement is an average over half an hour and the radiosonde profile is just a snapshot, this is reasonable. For the water vapor profile measured with the lidar (Fig. 15d) a 154 m gliding average was applied. The moist boundary layer, a very dry layer just above, and a second moist layer above 2 km were found. In the dry layer, the uncertainty of the water vapor Raman lidar measurement gets larger in absence of moisture due to the small water vapor Raman backscatter signal.

The profiles are shown with error bars derived by Poisson statistics. A detailed error analysis including errors derived by turbulence analysis is discussed by (Behrendt, et al., 2014).

**Temperature Profiling
of the atmospheric
boundary layer with
rotational Raman
lidar**

E. Hammann et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Avila, G., Fernandez, J. M., Tejeda, G., and Montero, S.: The Raman Spectra and cross-sections of H₂O, D₂O, and HDO in the OH/OD-stretching regions, *J. Mol. Spectrosc.*, 228, 38–65, 2004.

Balin, I., Serikov, I., Bobrovnikov, S., Simeonov, V., Calpini, B., Arshinov, Y., and van der Bergh, H.: Simultaneous measurement of atmospheric temperature, humidity, and aerosol extinction and backscatter coefficients by a combined vibrational-pure-rotational Raman lidar, *Appl. Phys. B*, 79, 775–782, 2004.

Behrendt, A.: *Temperature Measurements with Lidar*, Lidar: Range-Resolved Optical Remote Sensing of the Atmosphere, Springer, New York, 2005.

Behrendt, A. and Reichardt, J.: Atmospheric temperature profiling in the presence of clouds with a pure rotational Raman lidar by use of an interference-filter-based polychromator, *Appl. Optics*, 39, 1372–1378, 2000.

Behrendt, A., Nakamura, T., Onishi, M., Baumgart, R., and Tsuda, T.: Combined Raman lidar for the measurement of atmospheric temperature, water vapor, particle extinction coefficient, and backscatter coefficient, *Appl. Optics*, 36, 7657–7666, 2002.

Behrendt, A., Nakamura, T., and Tsuda, T.: Combined temperature lidar for measurements in troposphere, stratosphere and mesosphere, *Appl. Optics*, 14, 2930–2939, 2004.

Behrendt, A., Wulfmeyer, V., Riede, A., Wagner, G., Pal, S., Bauer, H., Radlach, M., Späth, F.: Three-dimensional observations of atmospheric humidity with a scanning differential absorption lidar, *Proc. SPIE*, 7475, 2009.

Behrendt, A., Pal, S., Aoshima, F., Bender, M., Blyth, A., Corsmeier, U., Cuesta, J., Dick, G., Dorninger, M., Flamant, C., Di Girolamo, P., Gorgas, T., Huang, Y., Kalthoff, N., Khodayar, S., Mannstein, H., Träumner, K., Wieser, A., and Wulfmeyer, V.: Observation of convection initiation processes with a suite of state-of-the-art research instruments during COPS IOP 8b, *Q. J. Roy. Meteor. Soc.*, 137, 81–100, 2011.

Behrendt, A., Wulfmeyer, V., Hammann, E., Muppa, S. K., and Pal, S.: Profiles of second- to third-order moments of turbulent temperature fluctuations in the convective boundary layer: first measurements with rotational Raman lidar, *Atmos. Chem. Phys. Discuss.*, 14, 29019–29055, doi:10.5194/acpd-14-29019-2014, 2014.

Bhavar, R., Di Girolamo, P., Summa, D., Flamant, C., Althausen, D., Behrendt, A., Kiemle, C., Bossler, P., Cacciani, M., Champollion, C., Di Iorio, T., Engelmann, R., Herold, C., Pal, S., Riede, A., Wirth, M., and Wulfmeyer, V.: The water vapour intercomparison effort in the frame-

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- work of the convective and orographically-induced precipitation study: airborne-to-ground-based and airborne-to-airborne lidar systems, *Q. J. Roy. Meteor. Soc.*, 137, 325–348, 2011.
- Cooney, J.: Measurement of atmospheric temperature profiles by Raman Backscatter, *J. Appl. Meteorol.*, 11, 108–112, 1972.
- 5 Corsmeier, U., Kalthoff, N., Barthlott, C., Aoshima, F., Behrendt, A., Di Girolamo, P., Dorninger, M., Handwerker, J., Kottmeier, C., Mahlke, H., Mobbs, S., Norton, E. G., Wickert, J., and Wulfmeyer, V.: Processes driving deep convection over complex terrain: a multi-scale analysis of observations from COPS IOP 9c, *Q. J. Roy. Meteor. Soc.*, 137, 137–155, 2011.
- 10 Di Girolamo, P., Marchese, R., Whiteman, D. N., and Demoz, B. B.: Rotational Raman lidar measurements of atmospheric temperature in the UV, *Geophys. Res. Lett.*, 31, L01106, doi:10.1029/2003GL018342, 2004.
- Di Girolamo, P., Summa, D., and Ferretti, R.: Multiparameter Raman lidar measurements for the characterization of a dry stratospheric intrusion event, *J. Atmos. Ocean. Tech.*, 26, 1742–1762, 2009.
- 15 Kalthoff, N., Adler, B., Wieser, A., Kohler, M., Träumner, K., Handwerker, J., Corsmeier, U., Khodayar, S., Lambert, D., Kopmann, A., Kunka, N., Dick, G., Ramatschi, M., Wickert, J., and Kottmeier, C.: KITcube – a mobile observation platform for convection studies deployed during HyMeX, *Meteorol. Z.*, 22, 6, 633–647, 2013.
- 20 Leblanc, T. and McDermid, I. S.: Accuracy of Raman lidar water vapor calibration and its applicability to longterm measurements, *Appl. Optics*, 30, 5592–5603, 2008.
- Lenschow, D. H., Wulfmeyer, V., and Senff, C.: Measuring second-through fourth-order moments in noisy data, *J. Atmos. Ocean. Tech.*, 17, 1330–1346, 2000.
- Lenschow, D. H., Lothon, M., Mayor, S. D., and Sullivan, P. P.: A comparison of higher-order vertical velocity moments in the convective boundary layer from lidar with in situ measurements and LES, *Bund.-Lay. Meteorol.*, 143, 107–123, 2012.
- 25 Mao, J., Hua, D., Wang, Y., Gao, F., and Wang, L.: Accurate temperature profiling of the atmospheric boundary layer using an ultraviolet rotational Raman lidar, *Opt. Commun.*, 282, 3113–3118, 2009.
- 30 Melfi, S. H., Lawrence, J. D., McCormick, M. P.: Observation of Raman scattering by water vapor in the atmosphere, *Appl. Phys. Lett.*, 15, 9, 295–297, 1969.

**Temperature Profiling
of the atmospheric
boundary layer with
rotational Raman
lidar**

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Muppa, S. K., Behrendt, A., Späth, F., Wulfmeyer, V., Metzendorf, S., and Riede, A.: Turbulent humidity fluctuations in the convective boundary layer: case studies using DIAL measurements, *Atmos. Chem. Phys.*, in preparation, 2014.

Newsom, R. K., Turner, D. D., Mielke, B., Clayton, M., Ferrare, R., and Sivaraman, C.: Simultaneous analog and photon counting detection for Raman lidar, *Appl. Optics*, 20, 3903–3914, 2009.

Pal, S., Behrendt, A., and Wulfmeyer, V.: Elastic-backscatter-lidar-based characterization of the convective boundary layer and investigation of related statistics, *Ann. Geophys.*, 28, 825–847, doi:10.5194/angeo-28-825-2010, 2010.

Radlach, M.: A scanning eye-safe rotational Raman lidar in the ultraviolet for measurements of tropospheric temperature fields, doctoral thesis, Stuttgart, 2009.

Radlach, M., Behrendt, A., and Wulfmeyer, V.: Scanning rotational Raman lidar at 355 nm for the measurement of tropospheric temperature fields, *Atmos. Chem. Phys.*, 8, 159–169, doi:10.5194/acp-8-159-2008, 2008.

Schwitalla, T. and Wulfmeyer, V.: Radar data assimilation experiments using the IPM WRF Rapid Update Cycle, *Meteorol. Z.* 1, 79–102, 2014.

Schotland, R. M.: Errors in the lidar measurement of atmospheric gases by differential absorption, *J. Appl. Meteorol.*, 13, 71–77, 1974.

Senff, C., Bösenberg, J., and Peters, G.: Measurements of water vapor flux profiles in the convective boundary layer with lidar and radar-RASS, *J. Atmos. Ocean. Tech.*, 11, 85–93, 1994.

Sherlock, V., Garnier, A., Hauchecorne, A., and Keckhut, P.: Implementation and validation of a Raman lidar measurement of middle and upper tropospheric water vapor, *Appl. Optics*, 27, 5838–5850, 1999.

Späth, F., Behrendt, A., Muppa, S. K., Metzendorf, S., Riede, A., and Wulfmeyer, V.: High-resolution atmospheric water vapor measurements with a scanning differential absorption lidar, *Atmos. Chem. Phys. Discuss.*, 14, 29057–29099, doi:10.5194/acpd-14-29057-2014, 2014.

Stevens, B. and Bony, S.: What are climate models missing?, *Science*, 340, 1053–1054, 2013.

Su, J., McCormick, M. P., Wu, Y., Lee III, R. B., Lei, L., Liu, Z., and Leavor, K. R.: Cloud temperature measurement using rotational Raman lidar, *J. Quant. Spectrosc. Ra.*, 125, 45–50, 2013.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Turner, D. D. and Goldsmith, J. E. M.: Twenty-four-hour Raman lidar water vapor measurements during the atmospheric radiation measurement program's 1996 and 1997 water vapor intensive observation periods, *J. Atmos. Ocean. Tech.*, 16, 1062–1076, 1999.

Turner, D. D., Ferrare, R. A., Wulfmeyer, V., and Scarino, A. J.: Aircraft evaluation of ground-based Raman lidar water vapor turbulence profiles in convective mixed layers, *J. Atmos. Ocean. Tech.*, 31, 1078–1088, 2014a.

Turner, D. D., Wulfmeyer, V., Berg, L. K., and Schween, J. H.: Water vapor turbulence profiles in stationary continental convective mixed layers, *J. Geophys. Res.*, accepted, 2014b.

Wagner, G., Behrendt, A., Wulfmeyer, V., Späth, F., and Schiller, M.: High-power Ti:sapphire laser at 820 nm for scanning ground-based water–vapor differential absorption lidar, *Appl. Optics*, 52, 11, 2454–2469, 2013.

Whiteman, D. N., Melfi, S. H., and Ferrare, R. A.: Raman lidar system for the measurement of water vapor and aerosols in the Earth's atmosphere, *Appl. Optics*, 31, 16, 3068–3082, 1992.

Wulfmeyer, V.: Investigation of turbulent processes in the lower troposphere with water-vapor DIAL and Radar-RASS, *J. Atmos. Sci.*, 56, 1055–1076, 1999a.

Wulfmeyer, V.: Investigations of humidity skewness and variance profiles in the convective boundary layer and comparison of the latter with large eddy simulation results, *J. Atmos. Sci.*, 56, 1077–1087, 1999b.

Wulfmeyer, V. and Bösenberg, J.: Ground-based differential absorption lidar for water-vapor profiling: assessment of accuracy, resolution, and meteorological applications, *Appl. Optics*, 37, 18, 3825–3844, 1998.

Wulfmeyer, V. and Feingold, G.: On the relationship between relative humidity and particle backscattering coefficient in the marine boundary layer determined with differential absorption lidar, *J. Geophys. Res.*, 105, 4729–4741, 2000.

Wulfmeyer, V., Pal, S., Turner, D. D., and Wagner, E.: Can water vapour Raman lidar resolve profiles of turbulent variables in the convective boundary layer?, *Bound.-Lay. Meteorol.*, 136, 253–284, 2010.

Zeyn, J., Lahmann, W., and Weitkamp, C.: Remote daytime measurements of tropospheric temperature profiles with a rotational Raman lidar, *Opt. Lett.*, 21, 16, 1301–1303, 1996.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Table 1. Parameter of interference filters. AOI: angle of incidence, CWL: central wavelength, FWHM: full width at half maximum.

	IF0	IF1	IF2a	IF2b	IF3	IF4
AOI, deg	0	4.8	6.0	6.0	4.5/6.2	3.9
CWL, nm	355	354.8	354.15	354.15	353.35/353.05	407.7
FWHM	8.5	0.3	0.3	0.3	0.5	0.3
Peak Transmission	0.56	0.62	0.53	0.65	0.52	0.75
Refl. at 354.8 nm		< 0.1				
Transm. at 354.8 nm	0.56	0.62	< 1E-3	< 1E-3	< 1E-6	< 1E-7

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Table 2. Signal raw resolution.

Raw data	Temporal resolution	Spatial resolution	Recording Mode
Elastic signal	10 s	3.75 m	Analog + photocounting
	1 s	3 m	Analog
Rotational Raman 1	10 s	3.75 m	Analog + photocounting
Rotational Raman 2	10 s	3.75 m	Analog + photocounting
Vibrational Water Vapor	10 s	3.75 m	Analog + photocounting

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Table 3. Relative statistical temperature error for the high- and low-background setting of the center wavelength CWL2 of the interference filter of the second (high J) rotational Raman channel (H and L, respectively). S is the scaling factor for the background level (see text for details). While $S = 0$ stands for no background, $S = 1$ characterizes high background conditions. The resulting relative errors for the selected configurations are bold. With the optimized settings for CWL2 the statistical errors are not exceeding 20% higher values than the absolute optimum for atmospheric temperatures between 240 and 300 K.

CWL2	$S = 0$				$S = 1$			
	180 K	240 K	270 K	300 K	180 K	240 K	270 K	300 K
353.35 (H)	1.24	1.25	1.29	1.35	1.54	1.17	1.13	1.13
352.95 (L)	1.36	1.13	1.10	1.10	3.46	1.70	1.39	1.21

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

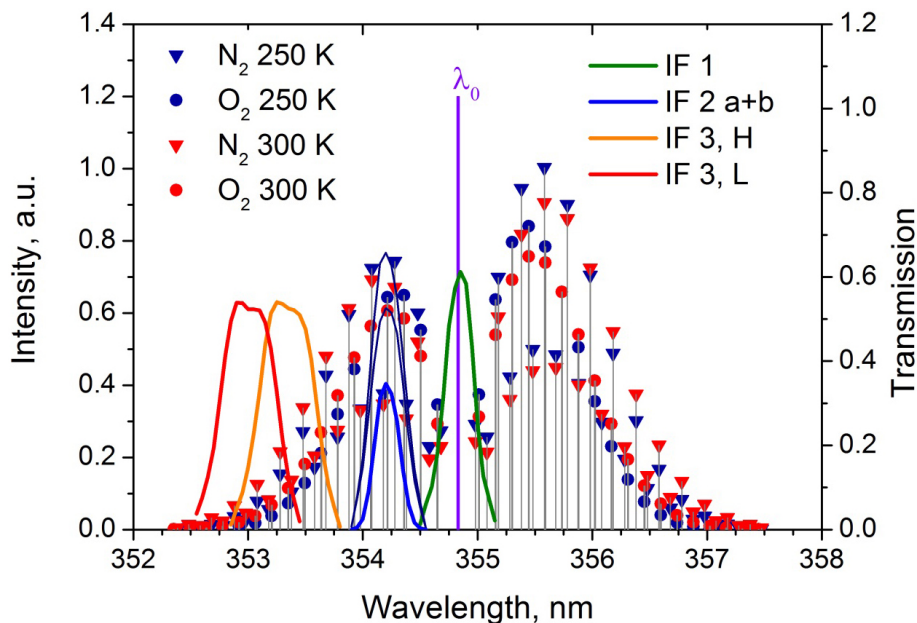


Figure 1. Rotational Raman spectrum of atmospheric nitrogen and oxygen for an excitation wavelength λ_0 of 354.83 nm and for two temperatures (250 and 300 K). Transmission curves of the interference filters are shown for comparison. Although the Stokes lines ($\lambda > \lambda_0$) are more intense, anti-Stokes lines ($\lambda < \lambda_0$) are used by us to avoid possible measurement errors due to fluorescence. For IF3, the filter positions for both the low- and high-background settings are shown (L and H, respectively).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

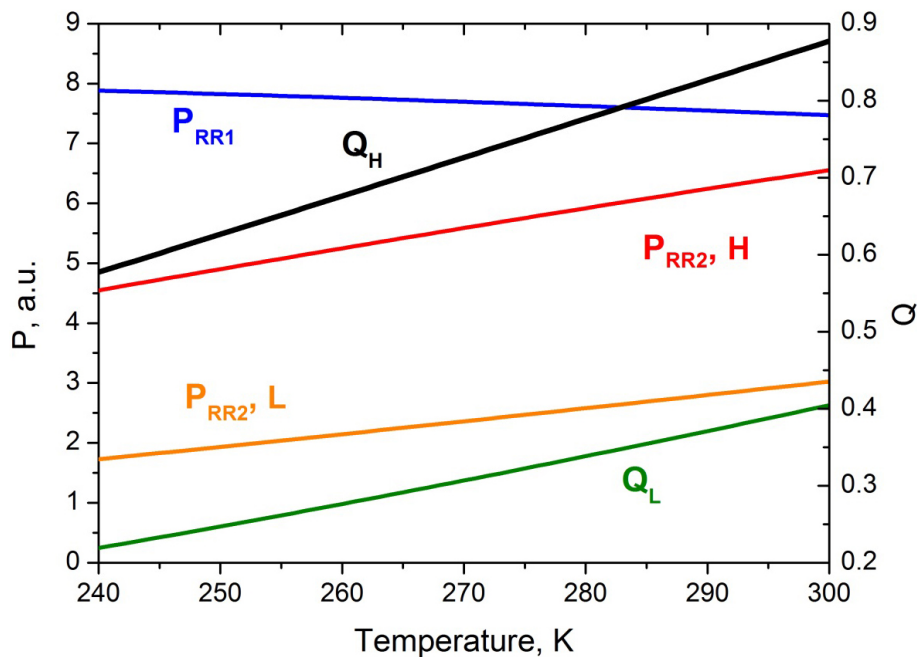


Figure 2. Simulated signal intensities for the filter configurations shown in Fig. 1: rotational Raman signal intensities for the H and L setting and corresponding ratios $Q = P_{RR2}/P_{RR1}$.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

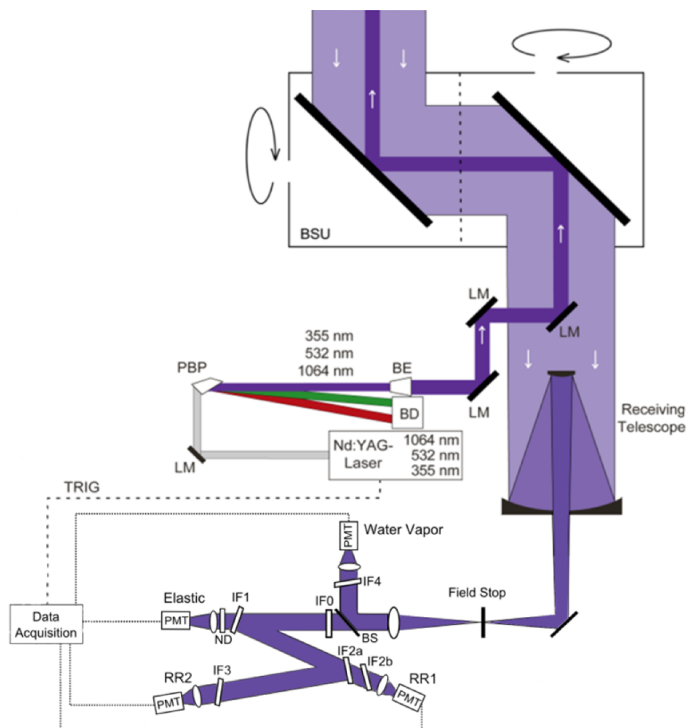


Figure 3. Setup of the rotational Raman lidar of University of Hohenheim. LM stands for laser mirror and the wavelengths are separated by a Pellin-Broca-Prism. Whereas 532 and 1064 nm are sent to a beam dump (BD), 355 nm is expanded by a beam expander (BE) and sent to the atmosphere through the beam steering unit (BSU). Angles in the polychromator are enlarged for clarity. IF0 is a daylight oppressing filter (see Table 1 for details). IF1 to IF4 are the interference filters, BS is a beam splitter to separate the vibrational Raman lines from the elastic backscattered and rotational Raman signal. In front of the elastic channel a neutral density filter (ND) is mounted. Photomultipliers are marked with PMT.


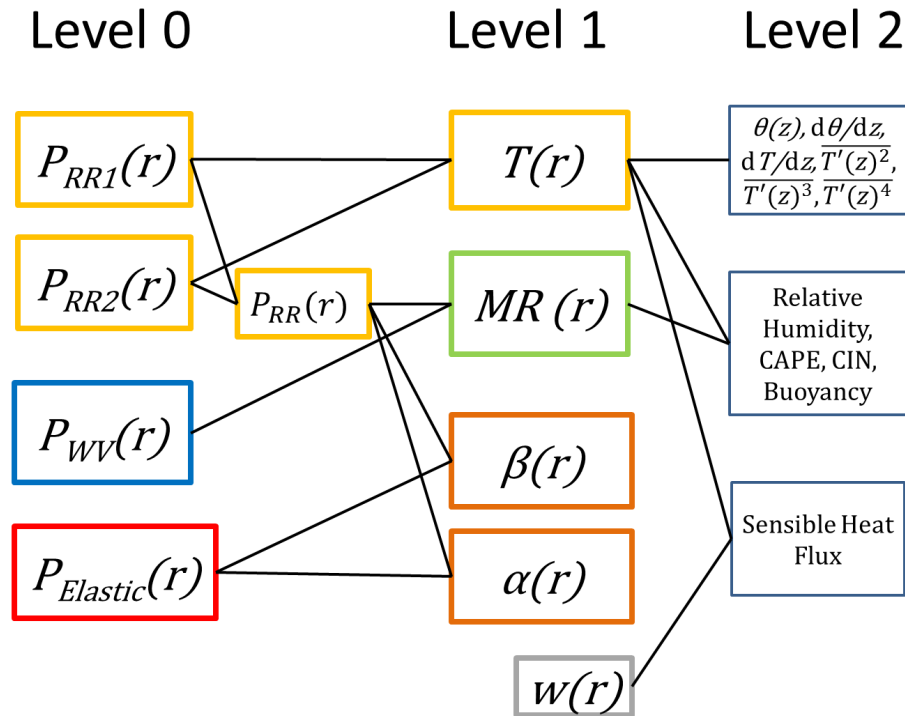


Figure 4. Diagram of the data products. Level 0 data are the background corrected rotational Raman signals (yellow), the vibrational Raman signal of water vapor (blue) and the elastic backscatter signal (red). A temperature independent reference signal P_{RR} is obtained from the temperature-dependent rotational Raman signals. Level 1 data products are temperature T , water vapor mixing ratio MR , particle backscatter coefficient β and particle extinction coefficient α . Higher-level products derived from level 1 data: potential temperature θ , gradient of temperature and potential temperature, higher moments of turbulent temperature fluctuations T' , relative humidity, buoyancy, CAPE, and CIN. For deriving the sensible heat flux, profiles of the vertical wind w , e.g. from a Doppler lidar, are used.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

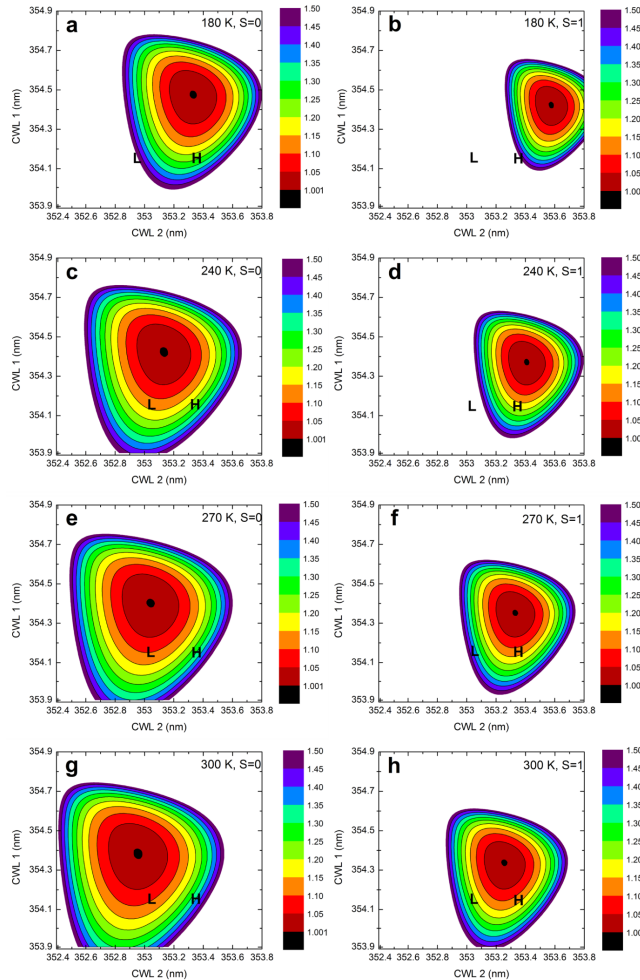

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Figure 5. Statistical temperature uncertainty ΔT for different central wavelengths (CWL) of the RR filters. **(a)**, **(c)**, **(e)** and **(g)** without background ($S = 0$), **(b)**, **(d)**, **(f)** and **(h)** with background ($S = 1$). H denotes the configuration selected for high background measurements, L the configuration for low background measurements. The uncertainty values were normalized to the smallest value of each plot. The laser wavelength is 354.83 nm.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

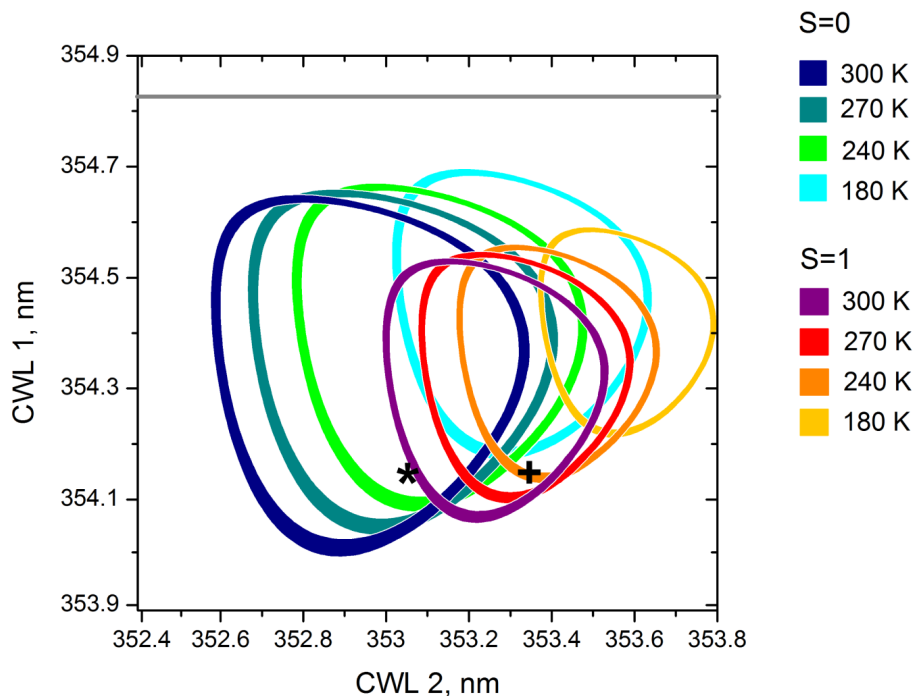


Figure 6. Overview of all cases shown in Fig. 5. The outer and inner borders of the rings mark 1.20 and 1.17 relative uncertainty, respectively. The selected configurations for high and low-background conditions (marked with + and *, respectively) show lower relative uncertainties than 1.2 for all temperatures between 240 and 300 K (see also Table 3). The gray line marks the laser wavelength.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



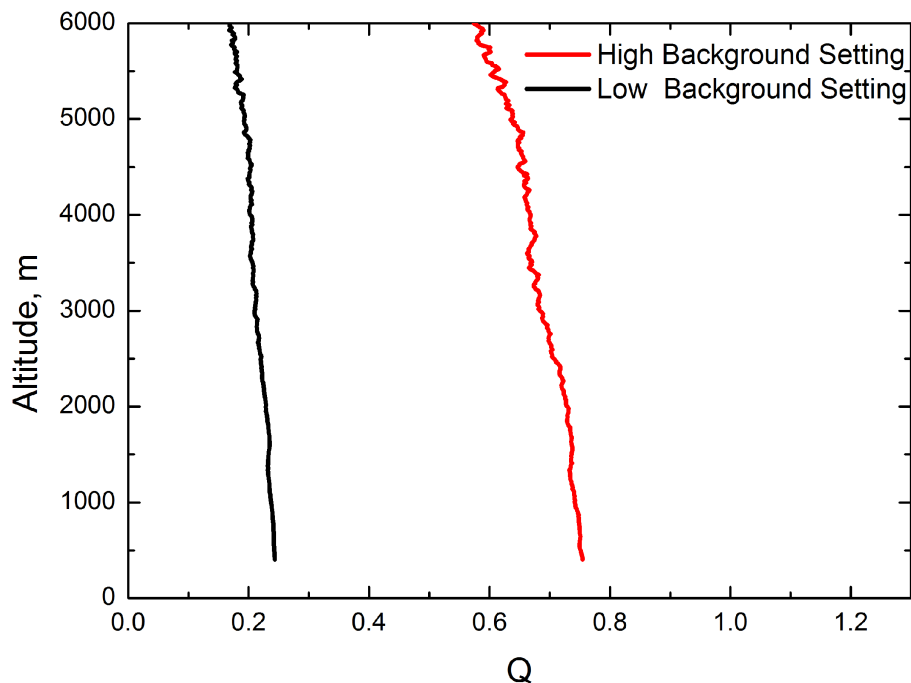


Figure 7. Measured ratio Q of the rotational Raman signals with the high- and low-background setting, H and L respectively, at night. The data for the setting H were collected between 19:38 and 19:58 UTC on 18 May 2013; data for the setting L just afterwards between 20:05 and 20:25 UTC. The intensity of the RR2 signal decreased by switching to L, hence the smaller ratio Q . The rotational signals were smoothed with a gliding average of 105 m height before the ratio was calculated.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

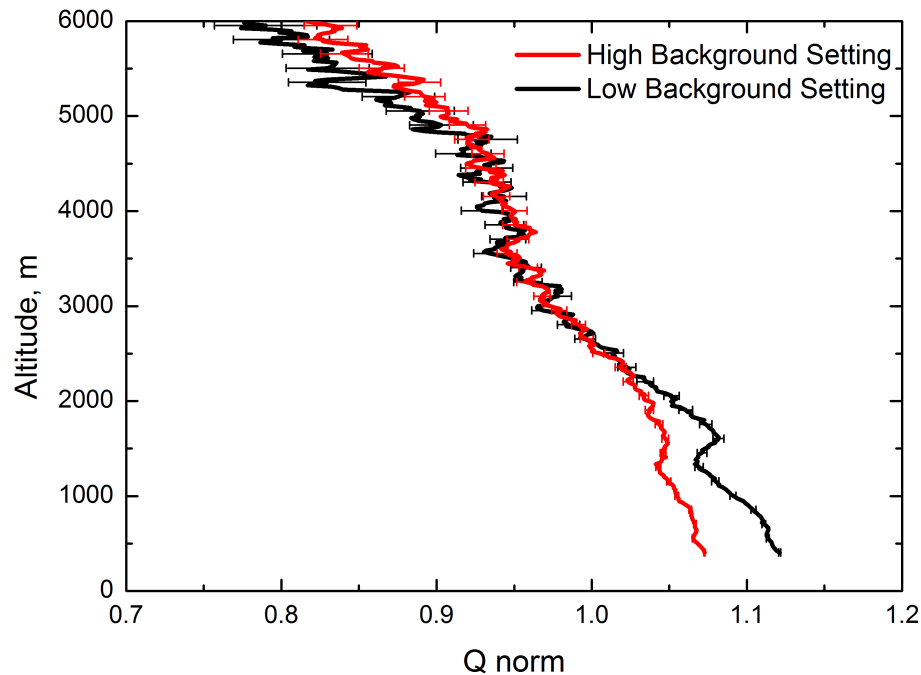


Figure 8. Same as Fig. 7 but normalized to 1 at a height of 2.6 km to illustrate the higher relative sensitivity of the low-background setting. Error bars show the statistical uncertainties.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

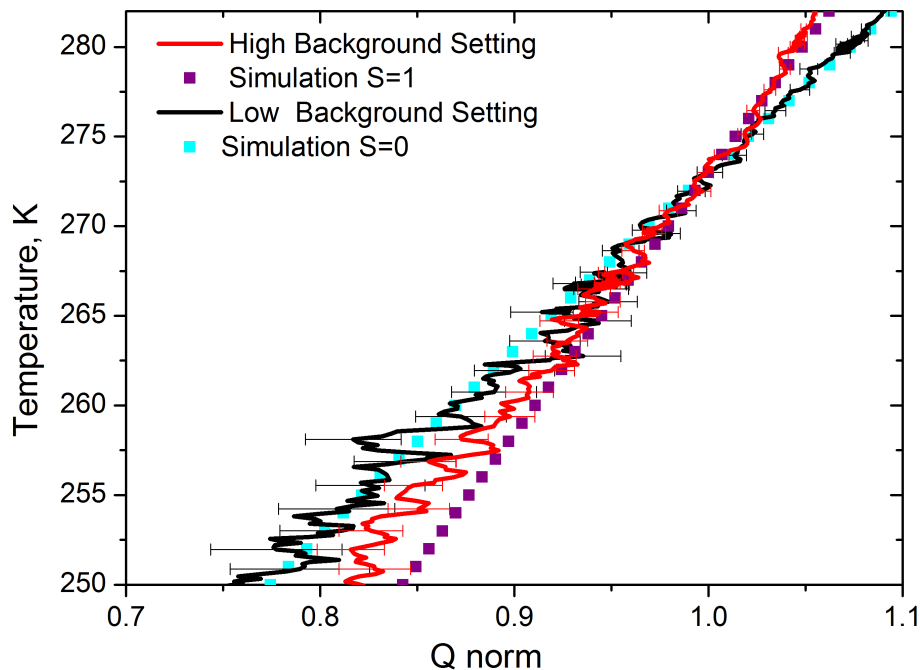


Figure 9. Same as Fig. 8 but against radiosonde temperature at the same height. In addition to the measurements, simulation data for the two settings are shown. In red and black are the measured values for Q with the statistical error, in blue and violet the corresponding simulation.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

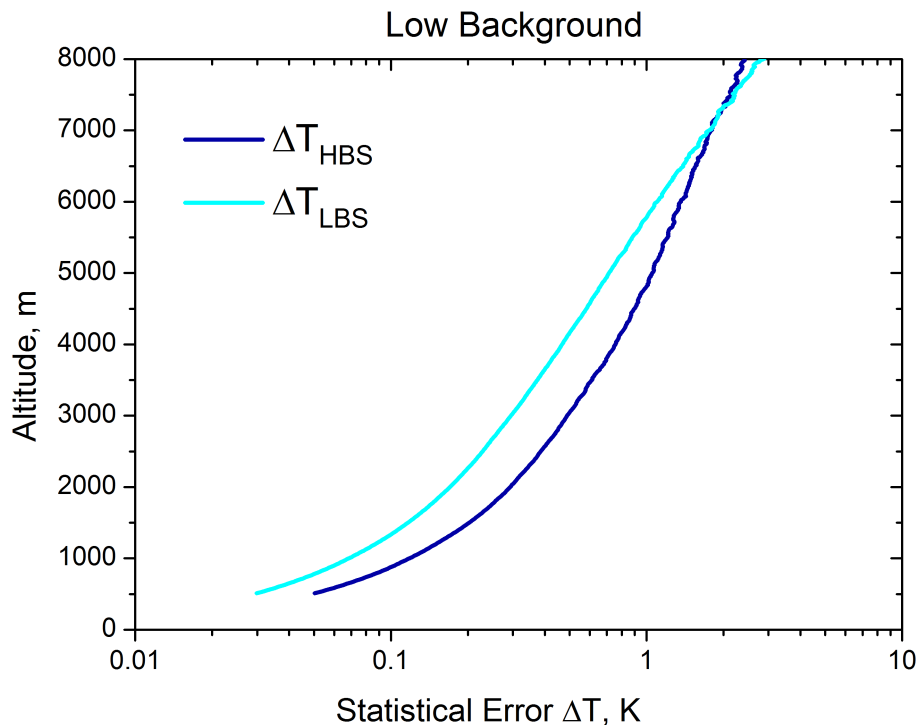


Figure 10. Comparison of the statistical error of the temperature measurements with both settings, ΔT_{HBS} and ΔT_{LBS} at low background conditions. The profiles were derived from data collected during about 20 min (55 000 laser shots) and with 105 m gliding average. Above 7 km altitude, the high background configuration shows smaller errors due to the lower atmospheric temperatures in these heights and also the decrease in signal-to-noise ratio.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

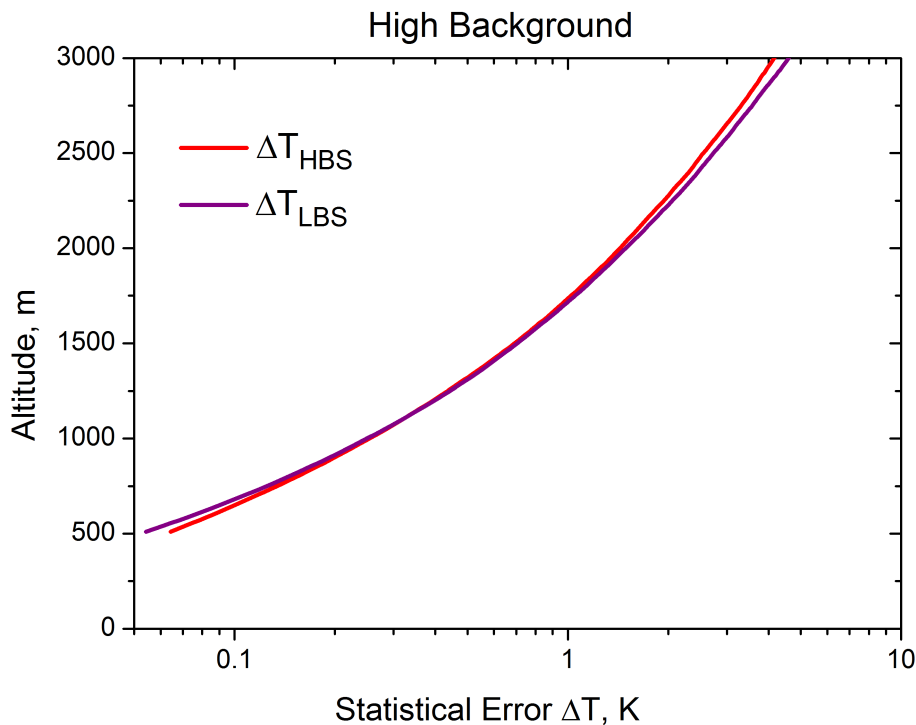


Figure 11. Same as Fig. 10 but for high background conditions ($S = 1$ in 1 km altitude). The high-background setting is superior for measurements above 1 km altitude.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

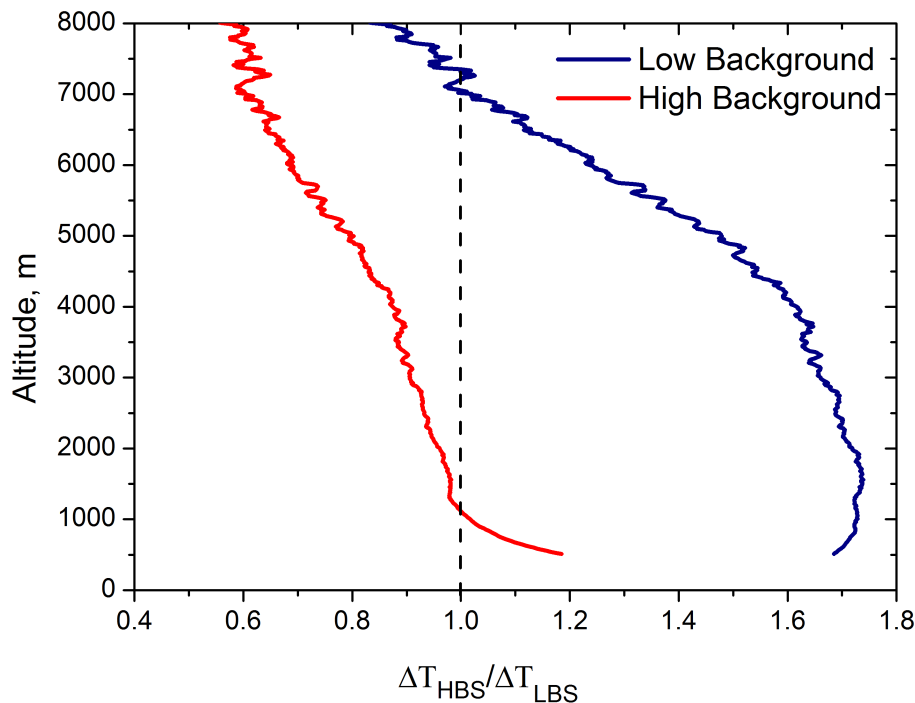


Figure 12. Ratio of high-background-setting uncertainties ΔT_{HBS} to low-background-setting uncertainties ΔT_{LBS} . A ratio above 1 shows better performance of the low-background setting compared to the high-background setting. In cases with no background, this advantage is clearly significant in lower altitudes but decreases with height. On the other hand, the high-background setting is superior already above 1 km in high background conditions. But it should be noted that the altitude where the high-background setting becomes preferable depends on the signal-to-background ratio.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

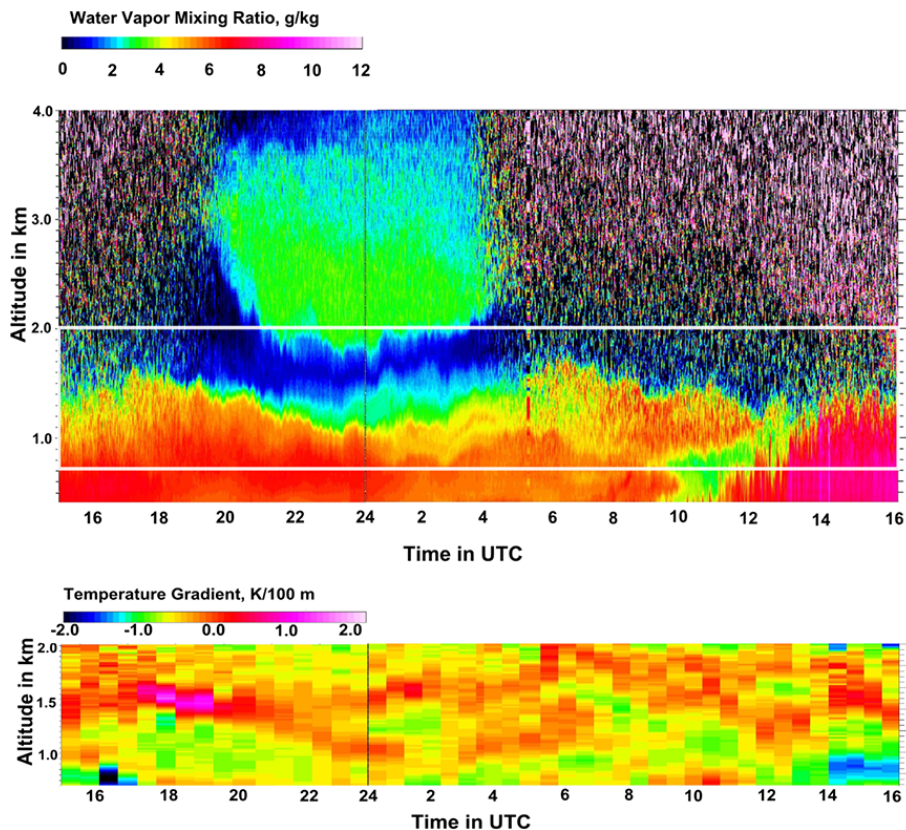


Figure 13. Time series of the water vapor mixing ratio (upper panel) and temperature gradient (lower panel) measured between 15:00 UTC on 18 May 2013 and 16:00 UTC on 19 May 2013. The white lines in the lower panel mark the height range of the data in the upper panel.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

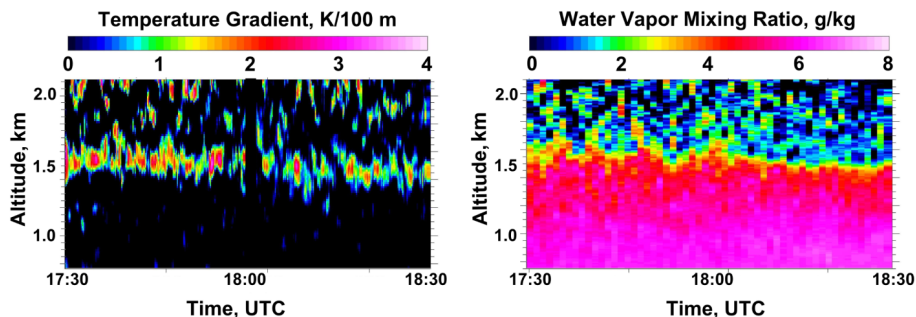


Figure 14. Detail from Fig. 13 of the time period from 17:30 to 18:30 UTC on 18 May. Left temperature gradient with 10 s profiles and 50 s gliding time average, right one minute water vapor profiles.

Temperature Profiling
of the atmospheric
boundary layer with
rotational Raman
lidar

E. Hammann et al.

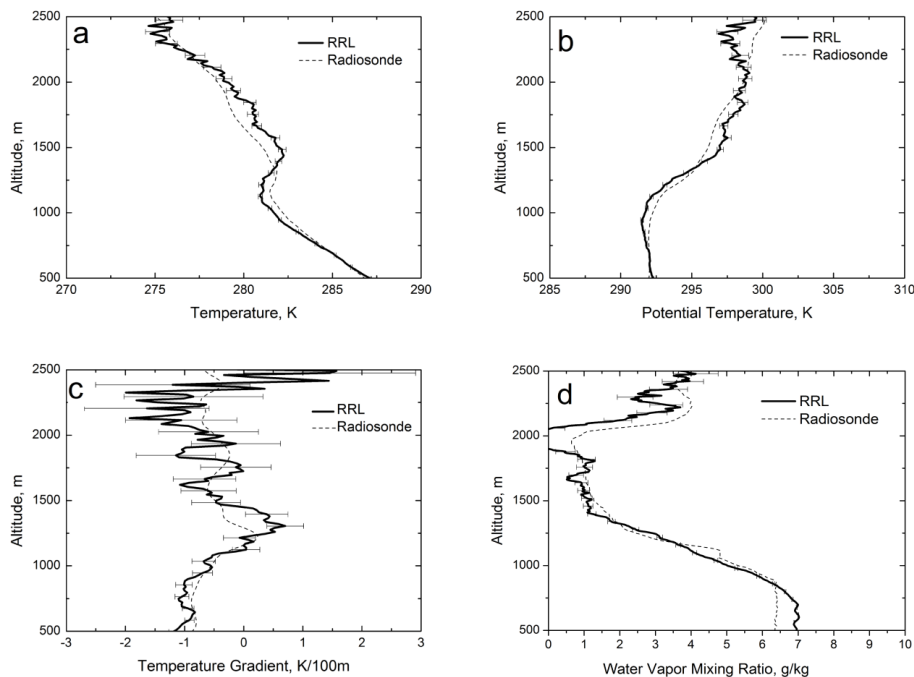


Figure 15. Measurements of the UHOH RRL between 13:00 and 13:30 UTC on 19 May 2013 with data of a local radiosonde launched at 13:00 UTC (dashed) for comparison. **(a)** Temperature **(b)** potential temperature **(c)** temperature gradient **(d)** water vapor mixing ratio. Error bars show the statistical errors of the lidar data. Altitudes below 500 m are affected by non-total overlap and are therefore not shown.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

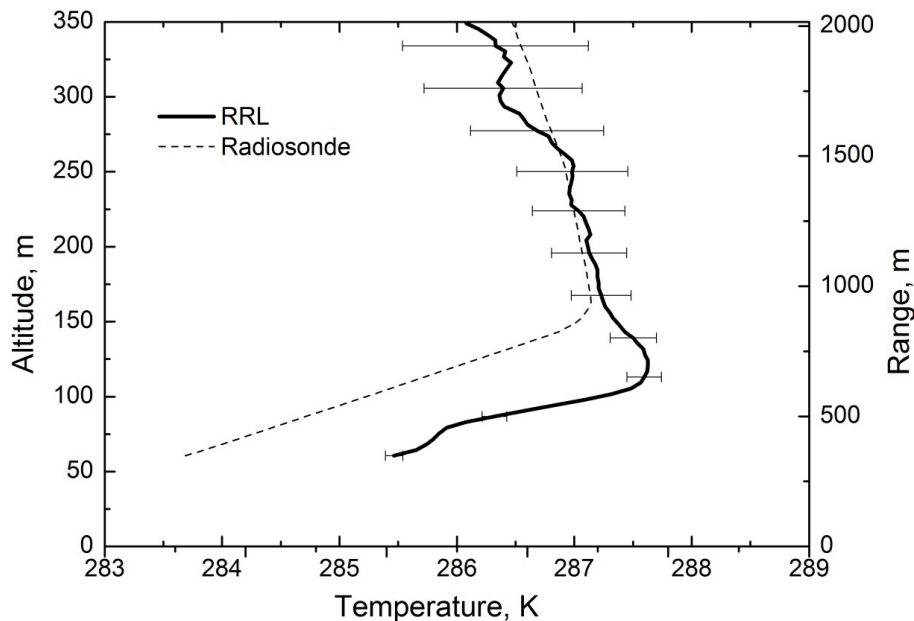


Figure 16. Results of low-elevation measurements: temperature measured with the UHOH RRL and a radiosonde (RS) against height a.g.l. The lidar data were collected from 02:40 to 02:57 UTC on 28 May 2013. The radiosonde measurement was started at 03:00 UTC. The altitude for the lidar profile is calculated from the range and corrected for topography. Lidar data at altitudes below 50 m are affected by overlap effects.

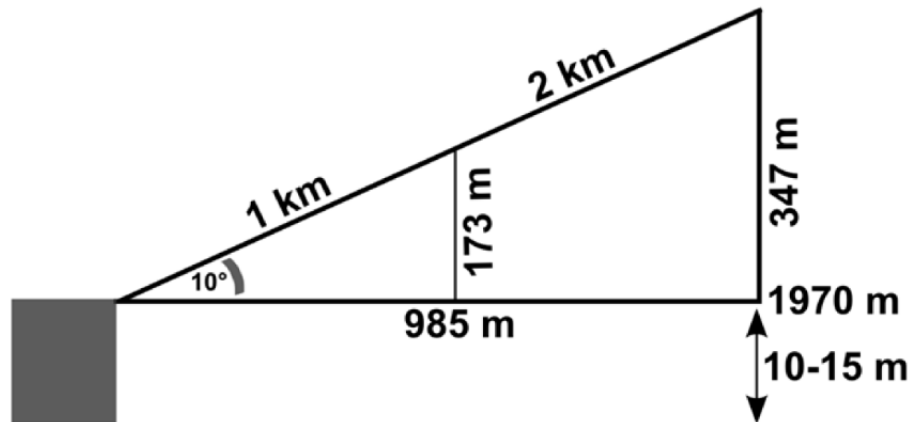


Figure 17. Illustration of the measurement geometry of Fig. 16.

Temperature Profiling of the atmospheric boundary layer with rotational Raman lidar

E. Hammann et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

