

Observations of the spectral dependence of linear particle depolarization ratio of aerosols using NASA Langley airborne High Spectral Resolution Lidar

S. P. Burton¹, J. W. Hair¹, M. Kahnert^{2,3}, R. A. Ferrare¹, C. A. Hostetler¹, A. L. Cook¹, D. B. Harper¹, T. A. Berkoff¹,
S. T. Seaman^{1,4}, J. E. Collins^{1,5}, M. A. Fenn^{1,5}, R. R. Rogers^{1,6}

¹NASA Langley Research Center, MS 475, Hampton, VA, 23681, USA

²Research Department, Swedish Meteorological and Hydrological Institute, Folkborgsvägen 17, 60176 Norrköping, Sweden

³Department of Earth and Space Science, Chalmers University of Technology, 41296 Gothenburg, Sweden

⁴National Institute of Aerospace, 100 Exploration Way, Hampton, VA, 23666, USA

⁵Science Systems and Applications, Inc., One Enterprise Pkwy, Hampton, VA, 23666, USA

⁶now at Lord Fairfax Community College, Middletown, VA 22645, USA

Email: Sharon.P.Burton@NASA.gov

Abstract

Linear particle depolarization ratio is presented for three case studies from the NASA Langley airborne High Spectral Resolution Lidar-2 (HSRL-2). Particle depolarization ratio from lidar is an indicator of non-spherical particles and is sensitive to the fraction of non-spherical particles and their size. The HSRL-2 instrument measures depolarization at three wavelengths: 355 nm, 532 nm, and 1064 nm. The three measurement cases presented here include two cases of dust-dominated aerosol and one case of smoke aerosol. These cases have partial analogs in earlier HSRL-1 depolarization measurements at 532 nm and 1064 nm and in literature, but the availability of three wavelengths gives additional insight into different scenarios for non-spherical particles in the atmosphere. A case of transported Saharan dust has a spectral dependence with a peak of 0.30 at 532 nm with smaller particle depolarization ratios of 0.27 and 0.25 at 1064 and 355 nm, respectively. A case of aerosol containing locally generated wind-blown North American dust has a maximum of 0.38 at 1064 nm, decreasing to 0.37 and 0.24 at 532 nm and 355 nm, respectively. The cause of the maximum at 1064 nm is inferred to be very large particles that have not settled out of the dust layer. The smoke layer has the opposite spectral dependence, with the peak of 0.24 at 355 nm, decreasing to 0.09 and 0.02 at 532 nm and 1064 nm. The depolarization in the smoke case may be explained by the presence of coated soot aggregates. We note that in these specific case studies, the linear particle depolarization ratio for smoke and dust-dominated aerosol are more similar at 355 nm than at 532 nm, having possible implications for using particle depolarization ratio at a single wavelength for aerosol typing.

1. Introduction

The impact of aerosols on climate depends on their horizontal and vertical distribution and microphysical properties. Lidar is an important tool for remote sensing of aerosol, because it provides vertically resolved information on aerosol abundance and aerosol type. One extremely useful lidar aerosol measurement is the linear particle depolarization ratio, an indicator of non-

spherical particles. Polarization lidar is an a large and active field, with recent contributions from ground-based networks such as the European Aerosol Research Lidar Network (EARLINET; Pappalardo et al., 2014; Mamouri and Ansmann, 2014; Nisantzi et al., 2014) and the National Institute of Environmental Studies (NIES) East Asian network of lidars (Sugimoto et al., 2005; Nishizawa et al., 2011); directed field campaigns, such as the Saharan Mineral Dust Experiment (SAMUM; Freudenthaler et al., 2009; Tesche et al., 2011) and the Saharan Aerosol Long-range Transport and Aerosol-Cloud Experiment (SALTRACE; Groß et al., 2015; Haarig et al., 2015); and others.

There is also considerable interest in global lidar observations from satellites. Global lidar observations of aerosol have been provided by the Cloud-Aerosol Lidar and Infrared Pathfinder Satellite Observations (CALIPSO) satellite since 2006 (Winker et al., 2007). Another satellite lidar, the experimental Cloud-Aerosol Transport System (CATS) instrument on the International Space Station (ISS) (McGill et al., 2012) was recently launched in January 2015, and the Earth Clouds Aerosols and Radiation Explorer (EarthCARE) satellite (Illingworth et al., 2015) is due to launch in 2018. CALIPSO linear particle depolarization ratio data have been used, for example, to assess the global distribution and transport of dust (e.g. Johnson et al., 2012; Liu et al., 2013; Yang et al., 2013). This measurement will also be part of the suite of measurements made by the ATLID (Atmospheric Lidar) on EarthCARE; however, CALIPSO measures depolarization at 532 nm and ATLID will measure it at 355 nm (Groß et al., 2014; Illingworth et al., 2015).

NASA Langley airborne High Spectral Resolution Lidars, HSRL-1 and HSRL-2, have participated in many process-oriented field campaigns, have provided validation and calibration data for CALIPSO since 2006 (Rogers et al., 2011; Rogers et al., 2014), and will also be useful for validating the EarthCARE lidar measurements. Since the airborne HSRL-2 measures particle depolarization ratio at both the CALIPSO and EarthCARE wavelengths and also at 1064 nm, observations from this instrument are useful for assessing how the measurements from the two satellite instruments will correspond. NASA's airborne HSRL-2 is the first HSRL system making depolarization measurements at three wavelengths. A ground-based Raman system operated by the Leibniz Institute of Tropospheric Research has also been recently upgraded to make three-wavelength depolarization measurements (Haarig et al., 2014).

Aerosol classification is one specific application of aerosol polarization measurements (Burton et al., 2012; Groß et al., 2013; Burton et al., 2013; Groß et al., 2014). Aerosol particle depolarization ratio from lidar is of key importance for the detection and assessment of dust and volcanic ash since it is a clear indicator of non-spherical particles. The particle depolarization ratio is also used to infer the amount of dust or ash in a mixture (Sugimoto and Lee, 2006; Tesche et al., 2009a; Tesche et al., 2011; Ansmann et al., 2011; Ansmann et al., 2012; David et al., 2013; Burton et al., 2014; Mamouri and Ansmann, 2014). It is also sensitive to the size of the non-spherical particles (Ansmann et al., 2009; Sakai et al., 2010; Gasteiger et al., 2011; Gasteiger and Freudenthaler, 2014).

While a significant amount of study has been made of depolarization by dust and ash, smoke has also been observed to produce significant depolarization of lidar light in some cases (e.g. Fiebig et al., 2002; Sassen and Khvorostyanov, 2008; Sugimoto et al., 2010; Dahlkötter et al., 2014), but not in others (e.g. Müller et al., 2005). Even for cases with significant depolarization, the

depolarization signature for smoke is generally smaller than for dust, at the wavelengths of 532 nm and 1064 nm where most lidar depolarization measurements of smoke have been made.

We will describe two dust-dominated cases and a smoke-dominated case where depolarizing aerosol was observed simultaneously at three wavelengths by the NASA Langley airborne HSRL-2 instrument. We show consistency between the three HSRL-2 cases and three previously published cases from the predecessor HSRL-1 instrument in which similar measurements were made at 532 nm and 1064 nm, and we also discuss similarities and differences with published lidar measurements globally. We find that the three cases each have a different spectral dependence of the particle depolarization ratio. Accordingly, we discuss possible explanations for these differences with reference to published studies. We also point out implications for future space-based observations of aerosol depolarization. We begin in Section 2 with a description of the NASA Langley airborne HSRL instruments and the methodology for polarization measurements, including an assessment of systematic uncertainty. In Section 3 we describe and discuss the dust cases and in Section 4 we describe and discuss the smoke case. We summarize the discussion and conclude in Section 5. In the Appendix we give more details about the estimation of systematic uncertainty.

2. Instrument Description and Measurement Methodology

The NASA Langley second-generation airborne High Spectral Resolution Lidar-2 (HSRL-2) uses the HSRL technique (Shipley et al., 1983) to independently measure aerosol extinction and backscatter at 355 and 532 nm and the standard backscatter technique (Fernald, 1984) to measure aerosol backscatter at 1064 nm. It also measures linear depolarization ratio at all three wavelengths. It is a follow-on to the successful airborne HSRL-1 instrument (Hair et al., 2008), which has made measurements at 532 nm and 1064 nm since 2006 (Rogers et al., 2009). For measurements at 532 nm and 1064 nm, HSRL-2 is essentially identical to HSRL-1. HSRL measurements of extinction and backscatter at 355 nm are made using an interferometer rather than an iodine filter. For 355 nm measurements of depolarization discussed here, the setup is very similar to the other channels; the small differences are explained in section 2a. Data are sampled at 0.5-s temporal and 30-m vertical resolutions. Aerosol backscatter and depolarization products are averaged 10-s horizontally (~1 km at nominal aircraft speed) and aerosol extinction products are averaged 60-s (~6 km) horizontally and 150-m vertically. Besides aerosol backscatter, extinction, and depolarization ratio, products also include horizontally- and vertically-resolved curtains of backscatter Ångström exponent and extinction Ångström exponent. Operational retrievals also provide mixing ratio of nonspherical-to-spherical backscatter (Sugimoto and Lee, 2006), aerosol type and partitioning of aerosol optical depth (AOD) by type (Burton et al., 2012), aerosol mixed-layer height (Scarino et al., 2014), and aerosol microphysics for spherical particles (Müller et al., 2014). HSRL-2 has been successfully deployed from the NASA LaRC King Air B200 aircraft on four field missions since 2012 and has obtained over 350 science flight hours. The typical flight altitude of the B200 during lidar operations is 9 km. The data for the case studies presented here are available on the DISCOVER-AQ (Deriving Information on Surface Conditions from Column and Vertically Resolved Observations Relevant to Air Quality) data archive at <http://www-air.larc.nasa.gov/missions/discover-aq/discover-aq.html> or using the data doi: [10.5067/Aircraft/DISCOVER-AQ/Aerosol-TraceGas](https://doi.org/10.5067/Aircraft/DISCOVER-AQ/Aerosol-TraceGas).

a. Depolarization Optics

In this paper, we will focus on the measurements of linear particle depolarization ratio. Figure 1 shows a simplified diagram of the optics of the transmission system that are relevant to the measurement of depolarization. The primary optical components for the polarization of the transmitted beams are Glan Laser Polarizers, which have a very high polarization transmittance ratio of 2e5:1 (i.e. the light is highly linear polarized with an extremely small fraction of cross-polarized light). The calibration of depolarization for HSRL-2 is done in a manner similar to HSRL-1 (Hair et al., 2008) for all three wavelengths. The polarization axis of the outgoing light is matched to that of the receiver with an approach similar to that outlined by Alvarez et al. (2006) using seven fixed polarization angles between $\pm 45^\circ$, using the half-wave calibration wave plates indicated in Figure 1. Following the alignment, the polarization gain ratio between the cross-polarized and co-polarized channels is routinely determined in flight by rotating the transmitted polarization 45° relative to the receiver, so that both channels measure equal components of the co-polarized and cross-polarized backscatter returns, in a cloud-free portion of the profile. See Hair et al. (2008) for a detailed description of the calibrations. See the caption accompanying Figure 1 for more details of the HSRL-2 transmission optics.

The receiver optics relevant to depolarization measurements are shown in Figure 2. The collimated light arrives from the telescope and is split into the three wavelengths using dichroic beam splitters. Each beam is then passed through an interference filter (1064 nm) or a combination of interference filter and etalon (355 and 532 nm) to remove background scattering. The effective full-width half-max (FWHM) bandwidths for the three channels are 0.4 nm (3.5 cm^{-1}) at 1064 nm, 0.03 nm (1.1 cm^{-1}) at 532 nm, and 0.045 nm (3.6 cm^{-1}) at 355 nm. Note that these bandwidths are narrow enough to completely exclude the rotational Raman sidebands from the receiver optics, which are found starting at $\pm 11.9 \text{ cm}^{-1}$ for N_2 and $\pm 14.4 \text{ cm}^{-1}$ for O_2 (Behrendt and Nakamura, 2002). The 1064 nm channel includes a half-wave plate which can be used to correct any small polarization misalignment in the receiver system, since the 532 nm and 1064 nm beams are transmitted together. This half-wave plate is set during installation and is not rotated during normal operations. Next, each beam passes through Polarization Beam Splitters (PBS) to be separated into components that are co-polarized and cross-polarized with respect to the transmitted beam. Since the transmittance ratio of the light exiting a PBS is greater in the transmitted direction than in the reflected direction, a second “clean-up” PBS is included for each detector wavelength to further improve the extinction ratio for the co-polarized light. The polarization transmittance ratio measured in the system is 300:1 for the cross-polarized light at 355 nm, 431:1 for the co-polarized light at 355 nm (with two PBS) and greater than 1000:1 for both polarization states at 532 nm and 1064 nm. After exiting the polarization optics, the light in the 1064 nm channel goes directly to the Avalanche Photodetectors (APD). The co-polarized signal and cross-polarized signal are used to determine the volume depolarization ratio. As described by Hair et al. (2008) for HSRL-1, the co-polarized 532 nm channel is also split into a portion that is passed through an iodine cell leaving only molecular return and a channel with both molecular and aerosol return. At 355 nm, a portion of the co-polarized light is captured for the determination of the volume depolarization ratio, while the rest of the co-polarized light is transmitted through an interferometer to produce one channel that is dominated by the aerosol return with little signal from molecular scattering and a complementary channel that is

dominated by the molecular signal with much less aerosol backscatter signal. The separation of the aerosol and molecular signals is the basis of the HSRL technique for extinction and backscatter retrieval. Since it also affects the systematic uncertainty in particle depolarization ratio, it is included in the systematic uncertainty budget discussed in Section 2b, below, and more details can be found in the Appendix.

The volume (or total) linear depolarization ratio is the ratio of the signal in the cross-polarized channel to that in the co-polarized channel, normalized by the measured polarization gain ratio.

$$\delta_{tot} = G_{dep} \frac{P^{\perp}}{P^{\parallel}} \quad (1)$$

In Eq (1), P^{\parallel} and P^{\perp} are proportional to the light measured by the photodetectors or photomultipliers in the co-polarized channel and the cross-polarized channel, respectively; G_{dep} is the electro-optical gain ratio between the two (for each wavelength) and δ^{tot} is the volume depolarization ratio, which is the ratio of the cross-polarized to co-polarized channel returns using the polarization gain ratio.

The particle depolarization ratio is calculated from the volume depolarization ratio using the following (Cairo et al., 1999):

$$\delta_a = \frac{R\delta_{tot}(\delta_m + 1) - \delta_m(\delta_{tot} + 1)}{R(\delta_m + 1) - (\delta_{tot} + 1)} \quad (2)$$

where δ_a indicates the particulate depolarization ratio which will be used in all of the following discussion; δ_m indicates the estimated molecular depolarization ratio; and R indicates the total aerosol scattering ratio, which is the ratio of the aerosol plus molecular backscatter to the molecular backscatter, including both polarization components.

$$R = \frac{\beta_a + \beta_m}{\beta_m} \quad (3)$$

b. Systematic Errors

Systematic error can be a concern for polarization measurements. Potential sources of systematic error in volume depolarization ratio arise in the polarization optics and calibration. The retrieval of particle depolarization ratio can potentially introduce additional systematic error related to the total aerosol scattering ratio or uncertainty in the molecular depolarization ratio value. We will provide an overview of the potential systematic errors here, including systematic uncertainty for volume depolarization ratio and propagated systematic uncertainty for the particle depolarization ratio. More details about these potential errors and the means of estimating the systematic uncertainty are given in the Appendix.

The linear volume depolarization ratio, given by Eq (1), is the more basic measurement. Systematic errors in the volume depolarization ratio can arise from various sources, including calibration errors either in the polarization angle calibration or the polarization gain ratio calibration. A major concern for the measurement of depolarization is the potential for cross-talk, which can arise from a number of sources, including imperfect polarization angle alignment,

signal impurities due to imperfections in the polarization beam splitter (particularly the reflected channel), or other optics, including the aircraft window. Considering these sources, we estimate the systematic uncertainty in the volume depolarization ratio measurement to be the larger of 4.7% (relative) or 0.001 (absolute) in the 355 nm channel, the larger of 5% (relative) or 0.007 (absolute) in the 532 nm channel, and the larger of 2.6% (relative) or 0.007 (absolute) in the 1064 nm channel. Further discussion of these estimates is given in the Appendix.

As can be seen in Eq. (2), the particle depolarization ratio, δ_a , depends on the volume depolarization ratio, the molecular depolarization ratio, and the total aerosol scattering ratio. Therefore, an error in the assumed value of δ_{mol} or any systematic error in the total aerosol scattering ratio, R , can also cause systematic error in the particle depolarization ratio. Since the rotational Raman scattering sidebands are completely excluded from the receiver by the narrow-bandwidth background filters, the molecular depolarization arises only from the central Cabannes line and is very well characterized (She, 2001; Behrendt and Nakamura, 2002). More critically important is any potential systematic error in the total aerosol scattering ratio, R . We estimate the systematic uncertainty to be 4.1% in the 532 nm channel from an analysis of the stability of the aerosol-to-molecular gain ratio; 5% in the 355 nm channel including potential errors associated with gain ratio calibration transfer from the 532 nm channel; and 20% in the 1064 nm channel taking into account the retrieval of backscatter using an estimated lidar ratio. Again, further discussion can be found in the Appendix.

The estimates given above are intended to be a conservative estimates of the systematic uncertainty confidence limit, such that we expect a high probability that the systematic error is less than this value. The systematic uncertainties on the three quantities, δ_{mol} , δ_{tot} , and R , are combined in quadrature using standard propagation of errors for independent variables, as described in the Appendix. The propagated systematic uncertainties for the case studies are included in the figures and tables in Sections 3 and 4.

3. Dust

In this section we discuss two case studies in which HSRL-2 made three-wavelength measurements of the depolarization of dust.

a. Case study: 13 July 2014, Dust in the residual layer in North American Midwest

On 13 July 2014, HSRL-2 aboard the B200 made measurements at three wavelengths on a transit flight from Virginia to Colorado for the DISCOVER-AQ field mission (<http://discover-aq.larc.nasa.gov/>). The aerosol backscatter at three wavelengths and aerosol extinction at two wavelengths are shown in Figure 3 for a 180 km portion of the flight track in Missouri and Kansas, in the Midwestern United States. Several aerosol layers are evident. For this case study, we will focus on a dust-dominated layer that extends from just above the boundary layer to about 3200 m ASL. Back-trajectories derived from the NOAA Hybrid Single Particle Lagrangian Integrated Trajectory Model (HYSPPLIT) tool (ready.arl.noaa.gov) indicate that this layer probably has a Saharan origin and has undergone a very long transport period of about 14 days. Non-spherical particles, such as dust, have a distinct signature in lidar particle depolarization measurements. The linear particle depolarization ratio measurement curtains for all three wavelengths are shown in Figure 4. Peak values of particle depolarization ratio in the 1600-2300 m altitude range are

approximately 0.246 ± 0.018 (standard deviation for the sample) \pm (0.055 systematic), $0.304 \pm 0.005 \pm (0.022)$, and $0.270 \pm 0.005 \pm (0.009)$ at 355 nm, 532 nm, and 1064 nm, respectively. These high values of the particle depolarization ratio indicate that the layer is dominated by dust (approximately 90% dust using the methodology of Sugimoto and Lee (2006)). Note that the particle depolarization ratio at 532 nm for this layer is larger than at either 355 nm or 1064 nm. The 532 nm layer optical depth is approximately 0.1 and the total aerosol scattering ratio at 532 nm is 2.3. The backscatter Ångström exponent (532/1064 nm) is 0.45 ± 0.03 (standard deviation) for this layer. Table 1 includes these values for this sample and for the other cases discussed here. Values for the particle depolarization ratios and backscatter Ångström exponents are within the interquartile range we previously reported for dust-dominated aerosol measurements from HSRL-1 (Burton et al., 2013).

Figure 5 shows both the particle depolarization ratio and volume depolarization ratio measurements for all altitudes at time = 17.2 UT (17:12 UT). The particle depolarization ratio random and systematic uncertainties are also shown.

The predecessor of the HSRL-2, the NASA Langley HSRL-1 instrument, observed several cases of transported Saharan dust in the Caribbean in August 2010, for example the case on 18 August 2010 that is shown by Burton et al. (2012). For that case, the particle depolarization ratios at 532 nm and 1064 nm are 0.33 ± 0.02 (standard deviation) and 0.28 ± 0.01 , slightly higher than the 13 July 2014 case but agreeing within the spread of the measurement sample. The backscatter Ångström exponent (532/1064 nm) is 0.68 ± 0.13 (Table 1). As on 13 July 2014, the particle depolarization ratios and the backscatter Ångström exponent are within the interquartile range of values for dust-dominated aerosol reported for HSRL-1. The backscatter Ångström exponents (532/1064 nm) are larger than the value reported for pure Saharan aerosol in Morocco (Teschke et al., 2009b), which is 0.28 ± 0.16 . The larger values may be consistent with large particle loss during transport, discussed in more detail below.

The spectral dependence of the particle depolarization ratio can also be compared to measurements of Saharan dust particle depolarization ratio reported by Freudenthaler et al. (2009) for the SAMUM I campaign. For the four dates presented in their Figure 7, the minimum and maximum values for 355 nm from the Portable Lidar System POLIS were 0.21-0.31 (compare 0.25 for NASA HSRL-2 case); at 532 nm they were 0.29-0.33 from the German Aerospace Center (DLR) HSRL (compare 0.30 and 0.33 from NASA HSRL-2 and HSRL-1) and at 1064 nm they were 0.22-0.29 from the DLR HSRL (compare 0.27 and 0.28 from NASA HSRL-2 and HSRL-1). Again, the reported values at 532 nm exceed those at the other wavelengths. Indeed all three of these case studies, Saharan dust close to the source (Freudenthaler et al., 2009), transported Saharan dust observed in the Caribbean by HSRL-1 and transported Saharan dust observed by HSRL-2 in the Midwestern U.S., have similar wavelength dependence of the particle depolarization ratio.

b. Case study: 8 February 2013, Dust in North American Southwest

A less typical observation of dust-dominated aerosol was made by the HSRL-2 instrument on 8 February 2013. On a transit flight to Virginia at the conclusion of the DISCOVER-AQ California field campaign, HSRL-2 aboard the B200 made three-wavelength measurements of a locally produced dust layer very close to the source in the U.S. Southwest. Figure 6 shows the lidar

curtain of the aerosol backscatter coefficient at 532 nm for a segment of approximately 280 km in Arizona and New Mexico. The highest backscatter values are near the surface and are associated with the dust layer. More tenuous layers are also visible between 3 and 5 km, which are probably smoke. The discussion will focus primarily on the dust layer for this example. Figure 7 shows particle depolarization ratio at three wavelengths for the same flight segment.

The maximum backscatter values occur within 400 m of the ground at about 17:08 UT (17.14 UT), near the Potrillo volcanic fields in New Mexico in the Chihuahuan Desert. The layer is shallower than the previous case, and the layer AOD is only about 0.02 at 532 nm, but it is very strongly scattering, with 532 nm total aerosol scattering ratio of 3.1. The peak particle depolarization ratio is $0.24 \pm 0.05 \pm (0.05)$, $0.37 \pm 0.01 \pm (0.02)$, and $0.383 \pm 0.006 \pm (0.011)$ at 355, 532, and 1064 nm respectively (the first uncertainty value represents standard deviation and parenthesis indicate systematic uncertainty). Given that these very large depolarization ratio values occur very close to the ground, we infer that this observation is close to the source region. This observed dust layer is locally generated, wind driven aerosol from a bare soil surface in desert scrubland. The large particle depolarization ratios provide confidence that this air mass is dominated by dust aerosol rather than a mixture from distinct sources. The backscatter Ångström exponent (532/1064 nm) is -0.09 ± 0.04 .

Figure 8 shows line plots of the profiles of volume depolarization ratio and particle depolarization ratio, plus error bars. The systematic uncertainties are generally larger at 355 nm. This error magnification at 355 nm occurs in both dust-dominated cases because of the spectral dependence of the scattering and consequent small total aerosol scattering ratio at 355 nm ($R = 1.2$ at 355 nm). However, the systematic uncertainties are small enough to clearly reveal that the wavelength dependence of the particle depolarization ratio is quite different from the Saharan dust cases discussed previously, both those measured by the NASA Langley HSRL-1 and HSRL-2 instruments and by other researchers. In our previous observations of transported Saharan aerosol, the particle depolarization ratio at 532 nm exceeds the value at 1064 nm, but this case differs in that the 1064 nm particle depolarization ratio slightly exceeds the 532 nm value. The difference is primarily in the 1064 nm value, since the 355 nm and 532 nm particle depolarization ratios are similar to the Saharan aerosol cases. However, there was a previous observation by HSRL-1 of windblown North American dust on the slope of the Pico de Orizaba near Veracruz, Mexico on 12 March 2006 (Burton et al., 2014; de Foy et al., 2011) which provides an analogous case for comparison. In this case the particle depolarization ratios are 0.33 ± 0.02 (standard deviation) and 0.40 ± 0.01 at 532 nm and 1064 nm, respectively, similar to the Chihuahuan desert aerosol on 8 Feb 2013, and the backscatter Ångström exponent (532/1064 nm) is -0.9 ± 0.4 . Note that these backscatter Ångström exponents are significantly smaller than the transported Saharan dust-dominated aerosol cases discussed in Section 3a.

c. Discussion of spectral dependence of particle depolarization ratio of dust-dominated aerosol

Figure 9 shows the linear particle depolarization ratio at all three wavelengths for the four HSRL-1 and HSRL-2 cases discussed so far. The HSRL-2 observations of transported Saharan aerosol have spectral dependence consistent with the elevated Saharan dust-dominated aerosol reported by Freudenthaler et al. (2009) for the DLR airborne HSRL and ground-based lidar. However, the NASA HSRL-1 and HSRL-2 observations of North American dust at low altitude close to the

source appear to fall into a different category. Although all of the observations discussed here from the NASA HSRL-2 and those of Saharan desert aerosol in Africa (Freudenthaler et al., 2009) have particle depolarization ratios at 355 nm that are less than those at 532 nm, there is a large difference at the longest wavelength, with larger 1064 nm particle depolarization ratios for the local dust-dominated cases.

Furthermore, the backscatter Ångström exponents in the Chihuahuan desert observation on 8 Feb 2013 and on Pico de Orizaba on 12 March 2006 are much smaller compared to 0.45-0.68 for the cases of transported Saharan dust. These smaller values are an indication of larger particle sizes (Sasano and Browell, 1989) (although it must be noted that the backscatter Ångström exponent is also sensitive to other factors besides particle size, such as relative humidity (Su et al., 2008)). Maring et al. (2003) shows measured size distributions for dust layers over the Canary Islands and Puerto Rico at different stages of transport, and concluded by modeling of these distributions that a combination of Stokes gravitational settling and an offset upward velocity would explain these observations. According to that model, the volume mean diameter decreases only 20% after 10 days of atmospheric transport, but 80% of that change occurs within the first 2 days. In other words, the size distributions for transported dust-dominated aerosol are similar whether transported long distances or short distances, but even layers transported short distances probably have already lost the largest particles to settling. This model applies to Saharan dust transport, but it raises the possibility that dust-dominated aerosol size distributions immediately over the source such as the North American dust cases presented here will have some proportion of particles significantly larger than those found in the transported layers.

The spectral dependence of particle depolarization ratio is known to be related to the size of the non-spherical particles (Mishchenko and Sassen, 1998). We infer that the difference in depolarization spectral dependence, and in particular the 1064 nm values, are due to larger particles in the observations of windblown dust close to the surface. Ground-based lidar observations by Ansmann et al. (2009) of convective plumes of dust and sand being lifted from the surface in Morocco included extremely large particle depolarization ratios of 0.50-1.0 at 710 nm. This supports the connection between large particle depolarization ratios at the longer wavelengths and large particles sizes. However, the long-wavelength values in the current case study are not nearly as extreme, suggesting perhaps that the particle sizes are not as large.

Theoretical calculations to date have shown that it is difficult to quantitatively predict the spectral dependence of the particle depolarization ratio for dust (Gasteiger et al., 2011; Wiegner et al., 2009; Gasteiger and Freudenthaler, 2014), due in part to the need for parameterizing the shape of the dust aerosols as spheroids or other simplified shapes.

In a theoretical treatment of a particular measurement case, Gasteiger et al. (2011) modeled particle depolarization ratio at multiple wavelengths using size distributions and refractive indices appropriate for SAMUM measurements, parameterizing the shapes of dust particles using spheroids. For their reference distribution, the modeled particle depolarization ratio reflects a spectral dependence with a peak in the middle of the wavelength range. Calculated values at 355, 532, 710 and 1064 nm were 0.275, 0.306, 0.311, 0.298, consistent with the measurements we report for the Saharan dust-dominated cases from the NASA HSRL-1 and HSRL-2. However, for the dust-dominated cases in the immediate vicinity of North American

sources, the measured maximum shifts to longer wavelengths, and there is no longer agreement with the modeled values at 1064 nm.

Gasteiger et al. (2011) do not show results for size distributions with different size particles, but Gasteiger and Freudenthaer (2014) perform theoretical calculations using spheroids for various size parameters (single particles). These calculations show that the first peak in the spectral depolarization ratio shifts to larger wavelengths as particle size increases. This result, based on highly simplified modeling of dust aerosol, should be used only cautiously, but in general supports the notion that the spectral particle depolarization ratio is sensitive to particle size.

4. Smoke

a. Case study: 17 July 2014 North American Wildfire Smoke

Our third three-wavelength case study is an observation of a smoke plume with large particle depolarization ratios measured during the Colorado deployment of the DISCOVER-AQ field mission on 17 July 2014 at about 8 km altitude. At this time, wildfire smoke from fires in the Pacific Northwest of the United States blanketed much of the region, visible in a composited Moderate Resolution Imaging Spectroradiometer (MODIS) true color image in Figure 10. (The smoke situation on that day is also discussed in University of Maryland Baltimore County's U.S. Air Quality Smog Blog, see http://alg.umbc.edu/usaq/archives/2014_07.html, accessed 26 Feb 2015). Figure 11 shows a view of the smoke plume from the B200.

Figure 12 and Figure 13 show HSRL-2 measurements of 532 nm backscatter and three wavelength linear particle depolarization ratio as time-height curtains and Figure 14 illustrates a profile at 19.3 UT (19:18 UT) as a line plot with random and systematic uncertainty error bars. The pictured flight segment began near the Boulder Atmospheric Observatory tall tower north of downtown Denver and proceeded south for about 70 km to Chatfield Park, then turned north again on a parallel track for 135 km to Fort Collins. The layer optical thickness is about 0.05 at 532 nm and the total aerosol scattering ratio is 2.9. This layer was at high altitude near the aircraft, in the overlap region, where there is a range dependence of the detected backscattered light (Hair et al., 2008). While backscattered light from a distant target is fully imaged in the detector, light from a near-field target is focused beyond the field stop, resulting in overfilling of the field stop at small range from the lidar. This loss of signal is range dependent and prevents the retrieval of aerosol extinction. For this reason, the layer optical depth given above is an estimate using the backscatter measurements and an assumed lidar ratio of 70 sr, which is typical for smoke. Volume depolarization ratio measurements and total aerosol scattering ratio measurements are ratios of two channels that are equally affected and therefore have no range-dependent overlap function. For this layer, the particle depolarization ratio is greatest at 355 nm, about $0.24 \pm 0.01 \pm (0.02)$ at the southern end of the flight track, and about 0.17-0.22 in the more northern portions. The particle depolarization ratio at 532 nm is as large as $0.09 \pm 0.02 \pm (0.01)$ at the southern end of the flight track and down to about 0.06 at the northern end. Particle depolarization ratio at 1064 nm is about $0.018 \pm 0.002 \pm (0.008)$ throughout the region (parenthesis indicate systematic uncertainties). Note that the wavelength dependence of the particle depolarization ratio is opposite to what was observed for dust on 8 February 2013, in that the smoke plume has significantly larger particle depolarization ratio at the shorter wavelengths. Since this smoke layer has a very high total aerosol scattering ratio, the systematic uncertainties are relatively small, and it is clear even at the

upper limit of the systematic uncertainty that the 355 nm particle depolarization ratio significantly exceeds the 532 nm value and the 532 nm value significantly exceeds the 1064 nm value.

The pattern of larger particle depolarization ratio at 532 nm compared to 1064 nm has regularly been observed for smoke with the HSRL-1 instrument; indeed the HSRL-1 aerosol classification methodology (Burton et al., 2012) takes advantage of this spectral dependence. One such example is the aged southwest Canadian smoke plume observed on the eastern seaboard of the U.S. on 2 August 2007 that was shown by Burton et al. (2012). For that prior case, the particle depolarization ratios were 0.07 ± 0.01 and 0.019 ± 0.005 at 532 and 1064 nm, respectively. The observation by HSRL-2 is the first time to our knowledge that particle depolarization ratio has been reported for pure smoke at three wavelengths. Note that while the 532 nm particle depolarization ratio for the smoke case is only about 25-30% of the value for pure dust, the large particle depolarization ratio at 355 nm for the smoke layer is quite comparable to the 355 nm value for dust.

b. Discussion of particle depolarization ratio of smoke

Observed linear particle depolarization ratios for smoke are quite variable. Frequently the 532 nm particle depolarization ratio is observed to be only a few percent at most and often discounted as negligibly close to zero (e.g. Mattis et al., 2003; Müller et al., 2005). For example, small values of about 2-3% at 532 nm were observed by HSRL-1 in smoke plumes in Mexico City during the Megacity Initiative: Local and Global Research Observations (MILAGRO) field mission described by de Foy et al. (2011). In the published images of HSRL-1 measurements, the smoke plumes are obvious as local minima in the particle depolarization ratio compared to the relatively high ambient values which are due to regional dusty background conditions. However, higher values of particle depolarization ratio at 532 nm of 0.05-0.11 have sometimes been observed in aged smoke layers, as for example 0.07 observed by HSRL-1 on 2 August 2007 noted above (Burton et al., 2012), 0.06-0.11 for transported Canadian smoke reported in Lindenberg, Germany during the Lindenberg Aerosol Characterization Experiment (LACE) 1998 by Fiebig et al. (2002), 0.06 to 0.08 for 3-4 day old smoke from North America observed over Germany in 2011 by Dahlkötter et al. (2014), 0.06 for transported Siberian smoke observed in Tokyo in 2003 by Murayama et al. (2004) and 0.05 for Alaskan forest fire smoke observed by Sassen and Khvorostyanov (2008) in 2004. Sugimoto et al. (2010) discuss a case in which much higher 532 nm particle depolarization ratios were observed for smoke from a Mongolian forest fire transported to Japan in 2007. The particle depolarization ratios measured for this smoke were 0.12, 0.14 and 0.15 for layers at two different altitudes observed at Nagasaki and Tsukuba. Nisantzi et al. (2014) observe values of 0.09 to 0.18 at 532 nm for aerosol from Turkish fires observed in Cyprus after one to four days of transport.

The causes of depolarization by smoke are not well understood. Two possible explanations are frequently cited in literature: lifting and entrainment of surface soil into the smoke plume and asymmetry of smoke particles themselves.

For example, the smoke observed by Sugimoto et al. (2010) was associated with pyrocumulonimbus and therefore it is inferred that strong convection lifted soil particles from the surface into the smoke plume, explaining the unusually large particle depolarization ratios. Lifting of soil particles is also cited as a possible explanation of the more moderate but still non-

negligible particle depolarization ratios reported by Fiebig et al. (2002), since chemical composition analysis of this plume reveals the presence of aluminosilicates and iron oxides/hydroxides. Nisantzi et al. (2014) assume that the depolarization is due to fine mode dust and infer the mass fraction of dust mixed in the smoke plumes using lab measurements of fine and coarse dust by Sakai et al. (2010). However, this explanation is not sufficient in every case. Murayama et al. (2004) discount soil lifting for their observations of depolarizing smoke since no signature of mineral dust is found in a chemical analysis of this plume. Instead, they cite non-sphericity of smoke particle aggregates as the probable cause. Martins et al. (1998) discuss the non-sphericity of smoke particles observed by scanning electron microscope images and an electro-optical aerosol asymmetry analyzer for a variety of smoke types during the Smoke, Clouds, and Radiation – Brazil (SCAR-B) project in 1995. They concluded that most of the non-spherical particles in the observed smoke were chain aggregates of small black carbon particles, and that the non-sphericity tends to increase with the black carbon ratio. Young smoke (<1 hour) is composed of open clusters of high non-sphericity while aged smoke is composed of tighter clusters with lesser non-sphericity. They also point out that flaming fires (high combustion efficiency) tend to produce more non-spherical particles than smoldering fires.

Referring back to the theoretical calculations of spectral depolarization for spheroids discussed in Section 3.c., the larger particle depolarization ratio at 355 nm compared to longer wavelengths may indicate a smaller size for the non-spherical particles than the dust cases, although of course these results may be only qualitatively applicable to more general particle shapes.

Theoretical calculations of linear particle depolarization ratio by aggregates of soot are given by (e.g. Sorensen, 2001; Bescond et al., 2013; Kahnert et al., 2012). Calculations for bare carbon aggregates (Sorensen, 2001; Bescond et al., 2013) tend to produce small values of the particle depolarization ratio, much smaller than what was measured in the HSRL-2 case study. However, Kahnert et al. (2012) model the scattering properties of a more realistic particle morphology, light absorbing carbon (LAC) aggregates embedded in a sulfate shell, and obtain larger values. They use the discrete dipole method to calculate the depolarization ratio of the aggregate particle in the backscatter direction at 304.0, 533.2 and 1010.1 nm. They show that the particle depolarization ratio generally increases with aggregate particle radius (defined as volume-equivalent radius) and with the volume fraction of LAC in the aggregate. The values also increase with decreasing wavelength for aggregate volume-equivalent radii of 400 nm and smaller; but for 500 nm particles, the particle depolarization ratio peaks at the middle wavelength, 533.2 nm. The maximum calculated particle depolarization ratios for 7% LAC fraction by volume is 0.08-0.11 for 500 nm particles at 533.2 nm. This is comparable to the 532 nm measurement on 17 July 2014; however, the calculated value at 304.0 nm for the same size and LAC volume fraction is 0.05-0.07, much smaller than the measured value (at 355 nm) of 0.24. The largest values calculated for the 304.0 nm wavelength are about 0.12-0.21, occurring for the case of 400 nm particle volume-equivalent radius and 20% LAC volume fraction. The full set of theoretical calculations of particle depolarization ratio for 20% LAC volume fraction are replotted in Figure 15 for all three wavelengths to highlight the wavelength dependence. Figure 15 also indicates the HSRL-2 observed particle depolarization ratio in the 17 July smoke plume (at 355, 532, and 1064 nm). The calculated particle depolarization ratios are roughly comparable in magnitude to the HSRL-2

measurements for volume-equivalent radii in the 400-500 nm range, but the wavelength dependence matches better for smaller particle sizes. LAC volume fraction of 20% is quite high and may be unrealistic for this smoke layer and the modeled single scattering albedos for 20% LAC volume fraction, shown by Kahnert et al. (2012), are quite low (below 0.7 at 533.2 nm), indicating exceptionally absorbing particles, so this model is probably not an exact match for the observation in this case. Yet, it is encouraging that an estimate of particle depolarization ratio of the right magnitude can be made by modeling coated soot aggregates. The model results were for a constant fractal dimension of 2.6, structural prefactor of 1.2, and a monomer radius of 25 nm, values chosen to be consistent with the findings for soot aerosol in Mexico City (Adachi and Buseck, 2008). In the HSRL-2 case study, there could be a different fractal dimension, different size monomer component, different coating or a different fraction of soot per aggregate. In addition, the spectral dependence of the refractive index is not well known, and this will have a significant effect on the spectral dependence of the particle depolarization ratio. While the current state of knowledge is not sufficient to perform a retrieval of particle size using the depolarization measurements alone, it is certainly worth noting that the particle depolarization ratio at three wavelengths is sensitive to and contains some information about the particle size of smoke particles, information that may play a role in future microphysical retrievals.

5. Summary and Discussion

We have presented three case studies of depolarizing aerosol observed at three wavelengths (355 nm, 532 nm and 1064 nm) by the NASA airborne HSRL-2 instrument. These three aerosol layers, two dust-dominated layers and a smoke layer, each have a different spectral dependence of linear particle depolarization ratio, but in each case, the 532 nm and 1064 nm values agree well with prior analogs in the long record of observations by the predecessor instrument, HSRL-1, and with comparable measurements in literature. The first case, transported Saharan desert aerosol, has a peak in the spectral dependence of the particle depolarization ratio at 532 nm. This is in accordance with prior measurements of Saharan desert aerosol aloft both close to the source and transported to the Caribbean Sea. The second case, also a dust-dominated measurement, but near the surface and very close to the source, has a spectral dependence increasing monotonically with wavelength, differing from the previous case primarily at the longest wavelength, 1064 nm. We infer the cause of this difference to be a greater fraction of very large particles due to proximity to the source region; we believe that the largest particles have settled out of the observed Saharan layers but not the locally produced North American dust plumes in this case and a prior HSRL-1 case. Our third case study is of an elevated, transported smoke layer and has spectral depolarization ratio decreasing monotonically with wavelength. Again we infer that the difference in spectral dependence is due to the size of the non-spherical particles, and specifically, that the depolarization is probably due to smoke aerosols and may be explained by soot aggregates.

Microphysical retrievals (Müller et al., 2014) were not available for these HSRL-2 measurement cases, because the current state of these retrievals is limited to spherical particles. However, as suggested by Gasteiger and Freudenthaler (2014) for dust and ash, these observations suggest the

possibility that the particle depolarization ratio measurements may aid in retrievals of particle size of non-spherical dust and smoke particles in the future.

More immediately, since the upcoming EarthCARE satellite mission will include a lidar instrument that measures particle depolarization ratio and lidar ratio at 355 nm only, it is valuable to have measurements of the spectral dependence of depolarization ratio for depolarizing aerosol types. These data will help to build the basis for comparing observations from EarthCARE to existing measurements at 532 nm from the CALIPSO satellite. Studying such correspondence is particularly motivated by the desire to identify different aerosol types observed by the EarthCARE satellite. Particle depolarization ratio is hoped to be particularly useful for distinguishing dust and ash from smoke and other aerosol types (Groß et al., 2014; Illingworth et al., 2015), as it already is for CALIPSO (Omar et al., 2009).

However, as illustrated by the case studies presented here, there is not a single consistent spectral dependence of particle depolarization ratio. On the positive side (from the perspective of corresponding CALIPSO and EarthCARE measurements), for aerosols dominated by dust the 355 nm and 532 nm particle depolarization ratios appear to be fairly consistent even for different particle sizes and may be relatively easily converted. Variation in the 532 nm and 355 nm particle depolarization ratio for dusty aerosols has been primarily linked to the fraction of dust particles in a sample (Sugimoto et al., 2003) so there is no reason to think that inferences of dust mixing ratio (e.g. Sugimoto and Lee, 2006; Tesche et al., 2009a; Nishizawa et al., 2011; Burton et al., 2014) may not be done with 355 nm measurements. However, in the case of dust-dominated aerosol, the 355 nm signal consistently is significantly both smaller and more difficult to measure accurately than the 532 nm signal, and so the signature of dust may be harder to detect from space at 355 nm than at 532 nm for dilute dust mixtures.

On the other hand, the third case study presented here showed that smoke particle depolarization ratio can be significantly larger at 355 nm than at 532 nm, and in fact the particle depolarization ratio at 355 nm for this smoke case was quite comparable to the dust-dominated cases. If this is not an isolated case, and this signature proves typical for some subsets of smoke aerosol in particular conditions, the EarthCARE satellite may observe significant particle depolarization in some types of smoke as well as in dust-dominated aerosol. If this is the case, global observations of smoke depolarization will present an exciting opportunity for improving our understanding of the optical properties of smoke and how they change with age and processing; however, it will also present a challenge. That is, a significant particle depolarization ratio signature at the single wavelength of 532 nm has been sufficient for distinguishing dust-dominated aerosol from smoke aerosol, but at 355 nm this signature by itself is more ambiguous, if the smoke case presented here is not an isolated case. . EarthCARE will also measure lidar ratio at 355 nm; this is related to absorption but has significant variability for smoke (Groß et al., 2014). EarthCARE will not have backscatter or extinction measurements at a second wavelength to give an indicator of particle size. Therefore, for any cases where particle depolarization ratio is ambiguous, smoke and dust may not be easily separable.

Appendix: Systematic Uncertainties

In Section 2.b. we provided systematic uncertainties in the linear volume depolarization ratio of the larger of 4.7% (relative) or 0.001 (absolute) in the 355 nm channel, the larger of 5% (relative) or 0.007 (absolute) in the 532 nm channel, and the larger of 2.6% (relative) or 0.007 (absolute) in the 1064 nm channel. For R (total aerosol scattering ratio) we estimate the systematic uncertainty to be 4.1% for the 532 nm channel, 5% for the 355 channel, and 20% for the 1064 nm channels. The systematic uncertainties are estimated conservatively as confidence limits, such that we expect a high probability that the true systematic error is within this uncertainty. Here in the Appendix, we discuss the error sources and estimates of the uncertainties in more detail.

For the linear volume depolarization ratio, potential sources of systematic error include an error in the polarization gain ratio calibration or cross-talk between the co-polarized and cross-polarized signals. The polarization gain ratio calibration generally occurs once or twice per flight as described above in Section 2.a. Since gain ratios can potentially change during a flight, due to temperature changes for example, our best estimate of uncertainty in the gain ratio during a flight is obtained by examining the change in the gain ratio between successive calibrations in the same flight. Conservatively choosing the mean difference plus two standard deviations (calculated for all flights with at least two calibrations per flight in the most recent field campaign) as a realistic limit on the probable polarization gain ratio systematic error yields 4.7% uncertainty for the 355 nm channel, 5.0% for the 532 nm channel, and 2.6% for the 1064 nm channel. The relative systematic uncertainty from the polarization gain ratio propagates directly to the volume depolarization ratio, since the volume depolarization ratio is linearly related to the polarization gain ratio.

Residual cross-talk is known to occur in polarization lidars, and must be carefully characterized and eliminated as much as possible. A well-known potential source of cross talk occurs in the reflected channel from a polarization beam splitter. Therefore, this system has been designed with extra polarization beam splitters to eliminate that potential concern, as described in Section 2.a and illustrated in Figure 2. Clear-air studies have found a small residual cross-talk, which appears as a value of the “clear air” volume depolarization ratio that exceeds the theoretical (molecular only) value. As described in Section 2.a., the narrow bandwidths in the system completely eliminate the rotational Raman scattering sidebands, and so the molecular depolarization ratio is temperature independent and is calculated to be 0.0036 using N₂ and O₂ molecules (ignoring a negligible wavelength dependence due to non-linear molecules like CO₂) (Behrendt and Nakamura, 2002). Since 2006, we have historically measured minimum depolarization ratios in clear air that exceed the theoretical value, namely values of approximately 0.006 in the 355 nm channel, approximately 0.008 in the 1064 nm channel, and 0.0085-0.0135 in the 532 nm channel, which we attribute to a small remaining ellipticity in the optics or stress birefringence in the aircraft window. Cross talk due to ellipticity in the transmission system can be modeled, as follows.

We start with the polarization Stokes vector (Born and Wolf, 1999)

$$\vec{S} = \begin{pmatrix} 1 \\ \cos(2\theta)\cos(2\psi) \\ \cos(2\theta)\sin(2\psi) \\ \sin(2\theta) \end{pmatrix} \quad (4)$$

1 where the angles θ and ψ represent the ellipticity angle and polarization offset angle, plus the
 2 Mueller matrix for a partially depolarizing backward scattering process (Mishchenko and
 3 Hovenier, 1995; Gimmestad, 2008),

$$\hat{\mathbf{M}} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 - \frac{2\delta_{tot}}{\delta_{tot} + 1} & 0 & 0 \\ 0 & 0 & \frac{2\delta_{tot}}{\delta_{tot} + 1} - 1 & 0 \\ 0 & 0 & 0 & \frac{4\delta_{tot}}{\delta_{tot} + 1} - 1 \end{pmatrix} \quad (5)$$

4 Assuming there is a polarization offset angle (rotation) or ellipticity in the transmission, we derive
 5 the correction to the measured depolarization ratio to be

$$\delta_{corr} = \frac{\delta_{meas} + \chi + \chi\delta_{meas} - 1}{\chi - \delta_{meas} + \chi\delta_{meas} + 1} \quad (6)$$

6 where

$$\chi = \cos(2\theta)\cos(2\psi) \quad (7)$$

7 The subscript ‘meas’ indicates the measured depolarization ratio and ‘corr’ represents the
 8 corrected depolarization ratio, assuming the measurement to be affected by cross-talk, caused by
 9 ellipticity or an angle offset, or both. Eqs (6) and (7) make no distinction between the ellipticity
 10 and polarization offset angles θ and ψ . Therefore, we can model cross talk due to either source
 11 using the same correction, although noting that an offset angle would additionally affect the
 12 polarization gain ratio, treated separately. Equation (6) represents a fairly constant shift in the
 13 volume depolarization ratio approximately equal to the offset between the measured clear air
 14 value and the molecular-only depolarization ratio. An ellipticity angle of 5.8° ($\chi=0.980$) would
 15 explain the error in the depolarization ratio at 532 nm where the error is largest. A partial
 16 correction for the cross-talk was implemented in the archived HSRL-2 data (A full correction as
 17 in Eq (6) will be included in the next version of processed HSRL-2 data). Taking the partial
 18 correction into account, we include a component of 0.007 (absolute) due to cross-talk in the
 19 estimated volume depolarization ratio error for the 532 nm and 1064 nm channels and 0.001
 20 (absolute) for the 355 nm channel.

21 We believe that the polarization angle error is much smaller than the inferred angle of 5.8° . The
 22 angle calibration procedure has been carefully designed and used successfully on both the HSRL-
 23 1 and HSRL-2 systems since 2006, and the accuracy of the polarization angle is high. The
 24 polarization angle calibration indicates the zero-point of the wave-plate angle where the
 25 polarization of the detector is properly aligned compared to the transmitted beams; if the wave-
 26 plate was not already set at this zero-point it is rotated to that point for subsequent science
 27 measurements. Adjustments indicated during polarization angle calibrations are at most 0.4° of
 28 polarization (0.2° rotation of the half-wave plate) for all channels (assessed, as before, using the
 29 mean plus two standard deviations for all flights having multiple polarization angle calibrations
 30 during the latest field mission), which is a good indicator of the systematic uncertainty in the
 31 polarization angle for measurements between calibrations. Since the polarization angle

1 calibration error is much smaller than the inferred ellipticity (0.4° compared to 6°), we do not
2 include polarization angle calibration directly in the systematic uncertainty budget.

3 Note that not only the volume depolarization ratio measurement itself but also the polarization
4 gain ratio calibration depend on the correct alignment of the calibration waveplates in Figure 1.
5 The polarization gain ratio assessment depends on a polarization alignment of 45° during
6 calibration. This effect on the measured gain will be reflected in the error of the gain ratio, and
7 so is already included in the polarization gain ratio systematic uncertainty discussed above.

8 The calculated particle depolarization ratio, δ_i , is additionally affected by any errors in the total
9 aerosol scattering ratio, R , in Eq (2). For 532 nm, the only significant potential systematic error in
10 R is an error in the gain ratio between the aerosol and molecular channels. The uncertainty of the
11 aerosol-to-molecular gain ratio was assessed in a similar manner to the offset angle and
12 polarization gain ratios given above, by examining the change in the gain ratio on flights where
13 multiple aerosol-to-molecular gain calibrations occurred during a flight. The uncertainty in the
14 532 nm aerosol-to-molecular gain ratio is estimated to be 4.1%. A systematic uncertainty of 4.1%
15 in the aerosol-to-molecular gain ratio propagates directly to a 4.1% uncertainty in R for the 532
16 nm channel, since the aerosol-to-molecular gain ratio and the total aerosol scattering ratio are
17 linearly related.

18 The 355 nm and 1064 nm channels are somewhat more complicated, because it is not possible to
19 calibrate them directly in the same way as 532 nm. The iodine filter for the 532 nm HSRL channel
20 allows for essentially complete separation of the aerosol signal from the total (aerosol plus
21 molecular) signal, but this is not the case for the interferometer used at 355 nm, and the 1064 nm
22 channel has only one total channel with no separation. So for these channels, the calibration is
23 transferred from 532 nm in a cloud-free region in the free troposphere, as described by Hair et al.
24 (2008). In the calibration transfer region, we do not assume that there is no aerosol, but do look
25 for regions where the aerosol backscatter ratio is small and can be inferred from the value at 532
26 nm assuming a constant backscatter Ångström exponent. By using a range of reasonable
27 backscatter Ångström exponents, we conservatively estimate an uncertainty of 3% in total aerosol
28 scattering ratio for the 355 nm channel. The 1064 nm aerosol backscatter ratio is also affected by
29 the assumption of the lidar ratio to use for separating the aerosol and molecular part; this
30 sensitivity is relatively small for backscatter at 1064 nm, compared to shorter wavelengths or
31 compared to the sensitivity of extinction. Taking these sources into account, we conservatively
32 use 20% as the uncertainty in total aerosol scattering ratio, R , at 1064 nm.

33 For the 355 nm channel, the system implements an interferometer to spectrally separate the
34 aerosol and molecular scattering components. The ratio of the aerosol signal in the aerosol-
35 dominated channel to the aerosol signal in the molecular-dominated channel is referred to as the
36 contrast ratio, which needs to be determined to accurately derive the total aerosol scattering ratio.
37 For the HSRL-2 system, fairly high contrast ratios of 15-20 are routinely achieved. Our estimate
38 of the error in the contrast ratio definition is usually a few percent but can be up to 20%. A 20%
39 error in the contrast ratio for the smoke case presented here would produce an error in the total
40 aerosol scattering ratio of less than 4%. Adding the contrast ratio uncertainty, 4%, and the
41 calibration transfer uncertainty, 3%, in quadrature yields an uncertainty of 5% for the 355 nm total
42 aerosol scattering ratio.

The uncertainties given above are intended to be an upper bound on the probable systematic errors. The systematic errors on the three quantities, δ_{mol} , δ_{tot} , and R , are independent and, since their actual values within these uncertainty estimates are unknown, they should be treated statistically. We therefore combine the three sources of systematic uncertainty in quadrature to assess the systematic uncertainty in the particle depolarization ratio, δ_a . The propagation is described by the following equation:

$$\left(\frac{\Delta\delta_a}{\delta_a}\right)^2 = F_R \left(\frac{\Delta R}{R}\right)^2 + F_{\delta_{\text{tot}}} \left(\frac{\Delta\delta_{\text{tot}}}{\delta_{\text{tot}}}\right)^2 + F_{\delta_m} \left(\frac{\Delta\delta_m}{\delta_m}\right)^2 \quad (8)$$

Here, the Δ symbol indicates the systematic uncertainty associated with the various quantities and the propagation factors F_x are defined like this:

$$F_x = \left(\frac{x}{\delta_a} \frac{\partial \delta_a}{\partial x}\right)^2 \quad (9)$$

The partial derivatives are calculated easily from Eq. (2) which relates the particle depolarization ratio to the factors R , δ_{tot} , and δ_m . From Eq. (8), the propagation factors, F_x , are the factors by which the relative uncertainty in the particle depolarization ratio is magnified with respect to the relative uncertainty in the component variables.

These factors vary with total aerosol scattering ratio and volume depolarization ratio but do not depend on the systematic uncertainties. To illustrate the behavior of the particle depolarization ratio systematic uncertainty, Table 2 gives the value of particle depolarization ratio and its propagated systematic uncertainty (as a percent error) for benchmark values of the total aerosol scattering ratio and the volume and molecular depolarization ratios, plus their estimated systematic uncertainties. It also gives the propagation factors, F_x . From Table 2, it is clear that the propagation factor for the uncertainty in the molecular depolarization ratio is always small, the propagation factor for the volume depolarization ratio uncertainty is typically 1-2, and the propagation factor for uncertainty in the total aerosol scattering ratio, F_R , varies significantly with the total aerosol scattering ratio. F_R is comparable to $F_{\delta_{\text{tot}}}$ except when the total aerosol scattering ratio is fairly small; in the case of small scattering, it is significantly larger.

Acknowledgements

Funding for this research came from the NASA HQ Science Mission Directorate Radiation Sciences Program and the DISCOVER-AQ project. M. Kahnert acknowledges funding by the Swedish Research Council (*Vetenskapsrådet*) under project 621-2011-3346. The authors also acknowledge the NOAA Air Resources Laboratory (ARL) for the provision of the HYSPLIT transport and dispersion model and READY website (<http://www.arl.noaa.gov/ready.php>) used for some of the analysis described in this work. The MODIS images used in Figure 7 were obtained from the MODIS Adaptive Processing System (MODAPS) archive. Thank you to Rich Hare and Terry Mack of the NASA Langley Engineering Directorate for their exceptional work on the HSRL-2 instrument. The authors are also very grateful to the NASA Langley B200 King Air crew from the California and Colorado deployments: Mike Basnett, Dale Bowser, Les Kagey,

- 1 Howie Lewis, Scott Sims, Mike Wusk, and Rick Yasky from LaRC and also Kurt Blankenship and
- 2 Munro Dearing for their dedication in support of HSRL measurements.

1 Tables

2 Table 1. Measured properties for specific dust and smoke samples. To obtain these values, samples were taken at
3 specific times and altitudes comprising 400-4500 distinct measurement points. For the dust cases, values were
4 chosen near the peak value of the 532 nm particle depolarization ratio, where it can be inferred that the aerosol is
5 nearly pure dust. The values are reported as mean±standard deviation for the sample. Systematic uncertainties for
6 particle depolarization ratio from HSRL-2 are indicated in parentheses.

		Layer AOD (532 nm)	Linear particle depolarization ratio (1064 nm)	Linear particle depolarization ratio (532 nm)	Linear particle depolarization ratio (355 nm) (HSRL-2 only)	Aerosol Backscatter Ångström exponent (532/1064)
Midwest U.S. 13 July 2014	transported Saharan dust	0.10	0.270±0.005(0.009)	0.304±0.005(0.022)	0.246±0.018(0.055)	0.46±0.03
Caribbean 18 August 2010	transported Saharan dust	0.25	0.278±0.012	0.327±0.018	--	0.68±0.13
Chihuahuan desert 8 February 2013	local North American dust	0.02	0.383±0.006(0.011)	0.373±0.014(0.023)	0.243±0.046(0.045)	-0.09±0.04
Pico de Orizaba 12 March 2006	local North American dust	0.31	0.400±0.009	0.334±0.018	--	-0.9±0.4
Denver 17 July 2014	smoke	0.05	0.018±0.002(0.008)	0.093±0.015(0.012)	0.240±0.010(0.021)	1.1±0.1
East Coast US 2 August 2007	smoke	0.06	0.019±0.005	0.068±0.010	--	0.62±0.25

7

8

Table 2. Illustrates the systematic uncertainty in linear particle depolarization ratio propagated from the systematic uncertainties in total aerosol scattering ratio, linear volume depolarization ratio, and linear molecular depolarization ratio. Benchmark values of R (total aerosol scattering ratio), δ_{tot} (the volume depolarization ratio) and δ_{mol} (the molecular depolarization ratio) and typical systematic uncertainties are given in the first three columns. Columns 4-6 give the propagation factors, as described in the text. Column 7 gives the resulting particle depolarization ratio and systematic uncertainty for each benchmark set. Note: percentages given in this table are relative uncertainties (not depolarization ratio units).

R	δ_{tot}	δ_{m}	F_R	$F_{\delta_{\text{tot}}}$	$F_{\delta_{\text{m}}}$	δ_a
$3.0 \pm 5\%$	$0.15 \pm 5\%$	$0.0036 \pm 1\%$	0.37	1.2	$1e-4$	$0.24 \pm 6\%$
$3.0 \pm 5\%$	$0.05 \pm 5\%$	$0.0036 \pm 1\%$	0.26	1.1	$8e-4$	$0.07 \pm 6\%$
$2.0 \pm 5\%$	$0.2 \pm 5\%$	$0.0036 \pm 1\%$	2.2	1.6	$3e-4$	$0.49 \pm 10\%$
$2.0 \pm 5\%$	$0.1 \pm 5\%$	$0.0036 \pm 1\%$	1.4	1.3	$6e-4$	$0.22 \pm 8\%$
$2.0 \pm 5\%$	$0.05 \pm 5\%$	$0.0036 \pm 1\%$	1.1	1.2	0.002	$0.10 \pm 8\%$
$1.2 \pm 5\%$	$0.05 \pm 5\%$	$0.0036 \pm 1\%$	45	1.9	0.008	$0.37 \pm 34\%$

Figure Captions

Figure 1. A simplified block diagram of the transmitter optics relevant for linear depolarization measurements by HSRL-2. The two Glan Laser Polarizers are the primary components ensuring the transmitted laser light is polarized. The motorized Calibration Waveplates are used to align the output polarization to the receiver polarization analyzers. The 532 nm and 1064 nm laser beams are maintained as a single beam. Since they do not exit the laser at the same polarization, a Co-alignment waveplate is used to align the polarization from the two wavelengths so that the Glan Laser Polarizer does not significantly reduce the amount of light transmitted at one of the wavelengths. The attenuator waveplate is used to attenuate the 532 nm beam for eye safety considerations when flying at low altitudes, and for maximizing the power output otherwise.

Figure 2. A simplified block diagram of the receiver optics relevant for linear depolarization measurements by HSRL-2. Abbreviations: PMT=Photomultiplier Tube; APD = Silicon Avalanche Photo Detector; DS = Dichroic Beam Splitter; PBS = Polarizing Beam Splitter; Co-pol = Co-polarized channel (with respect to the transmitted light); X-pol = Cross-polarized channel. The collimated light arrives from the telescope and is split into the three wavelengths using Dichroic Beam Splitters. The first optical component filters solar background using either an interference filter (indicated "Filter") or an interference filter and etalon in combination (indicated "Filter*"). The 1064 nm channel also includes an additional half-wave plate which can be used to correct any small polarization misalignment in the receiver system since the 532 nm and 1064 nm beams are transmitted together. This half-wave plate is set during installation and is not rotated during normal operations. The light then passes through Polarization Beam Splitters to be separated into components co-polarized and cross-polarized with respect to the transmitted beam. Since the transmittance ratio of the light exiting a PBS is greater in the transmitted direction than in the reflected direction, a second "clean-up" PBS is included for each detector wavelength to further improve the transmittance ratio for the co-polarized light. (An extra clean up PBS is also included for the cross-polarized light in the 532 nm channel.) The co-polarized signal and cross-polarized signal are used to determine volume depolarization ratio at each wavelength. The 355 nm and 532 nm co-polarized channels are split again and passed through additional optics to separate the aerosol and molecular signals (see text).

Figure 3. Curtains of aerosol backscatter and extinction coefficients from HSRL-2 for observations on 13 July 2014 for a flight segment in Missouri and Kansas in the Midwestern United States.

Figure 4. Linear particle depolarization ratio at three wavelengths measured by the HSRL-2 for the same flight segment shown in Figure 3.

Figure 5. Line plots illustrating the volume and aerosol linear depolarization ratio profile for the HSRL-2 measurements at 17.2 UT (17:12 UT) on 13 July 2014. The volume depolarization ratio is shown as a thin black line. The error bars on the volume depolarization ratio represent random error (most are small and mostly obscured except 1064 nm). The particle depolarization ratio is shown as a thick colored line. Colored error bars indicate random error (most are small enough to be obscured by the line) while gray error bars indicate systematic uncertainty, estimated as described in the text. Systematic uncertainty is not shown for the volume depolarization ratio but see text for estimate. The vertical resolution of these measurements is 30 m and the horizontal resolution is 10 s for all wavelengths.

Figure 6. Measurement curtain of aerosol backscatter coefficient at 532 nm from the HSRL-2 instrument for a 280 km flight segment over the Southwestern U.S. on 8 February 2013, showing locally generated dust in approximately the first kilometer above the surface, as well as very tenuous smoke plumes at higher altitude. This flight segment was part of a transit flight from a field mission in California back to the B200 home base in Virginia. The selected flight segment is approximately 280 km and begins (at the left margin) on the slopes of the Dos Cabezas Mountains of Arizona and ends (at the right margin) at the Franklin Mountains in New Mexico. The ground surface is marked with a white line.

Figure 7. Linear particle depolarization ratio at three wavelengths observed by HSRL-2 on 8 February 2013 in the Southwestern U.S. for the flight segment shown in Figure 6.

Figure 8. Line plots illustrating the volume and aerosol linear depolarization ratio profile for the HSRL-2 measurements at 17.14 UT (17:08 UT) on 8 Feb 2013. Error bars and resolutions as described for Figure 5.

Figure 9. Linear particle depolarization ratio measured by HSRL-2 and HSRL-1 for the four dust cases discussed in the text. Note the spectral dependence (and in particular the 1064 nm channel) is different for the two local dust-dominated aerosol cases compared to the transported Saharan dust-dominated aerosol cases.

Figure 10. MODIS Aqua true color images of much of North America on 17 July 2014, composited from four granules at 19:45, 19:50, 21:25, and 21:30 UT. The approximate location of the HSRL-2 observations discussed in the text (Denver, Colorado) is marked with a yellow dot. The bright white is clouds and snow cover and the gray is smoke. Several distinct smoke plumes indicate sources in the U.S. Pacific Northwest and in Western Canada within the cloud-free area on the western part of the continent. Significant smoke layers from these fires blanket the mid-continent cloud-free areas in the northern portion of the image. The HSRL-2 measurements are close to the southern edge of the extensive smoke field.

Figure 11. View of the smoke plume aloft on 17 July 2013 taken from the B200. Photo credit: Tim Berkoff.

Figure 12. 532 nm aerosol backscatter coefficient measurement curtain from HSRL-2 for a portion of a flight on 17 July 2014 in and around Denver, Colorado. Approximately the first third of the pictured curtain is a southbound track between the Boulder Atmospheric Observatory Tall Tower and Chatfield Park, CO. The remainder of the flight is a northbound leg between Chatfield Park and Fort Collins. The blank region indicates a tight turn at Chatfield Park where the lasers were shuttered. Scattered clouds are visible at the top of the boundary layer. Some of these have off-scale backscatter values (tan color) and some are thick enough to cause significant attenuation of the beam; beneath these, data are blanked out due to low signal. The white line indicates underlying terrain. The smoke layer at approximately 8 km is discussed in the text.


Figure 13. Linear particle depolarization ratio measurement curtains for the flight segment shown in Figure 12.

Figure 14. Line plots illustrating the volume and aerosol linear depolarization ratio profile for the HSRL-2 measurements at 19.3 UT (19:18 UT) on 17 July 2014. Error bars and resolutions as described for Figure 5.

Figure 15. Linear particle depolarization ratio at three wavelengths for soot aggregates embedded in a sulfate shell reproduced from Kahnert et al. (2012), for 20% LAC volume fraction. Dots indicate five realizations with randomly generated geometries, per aggregate volume-equivalent particle radius, and the colored lines connect the averages of the five for each wavelength. The legend shows the aggregate volume-equivalent particle radii at which the calculation was performed. The thick black line indicates the particle depolarization ratios measured by airborne HSRL-2 within a smoke plume observed on 17 July 2014 at 355, 532, and 1064 nm.

1 **Figures**

2

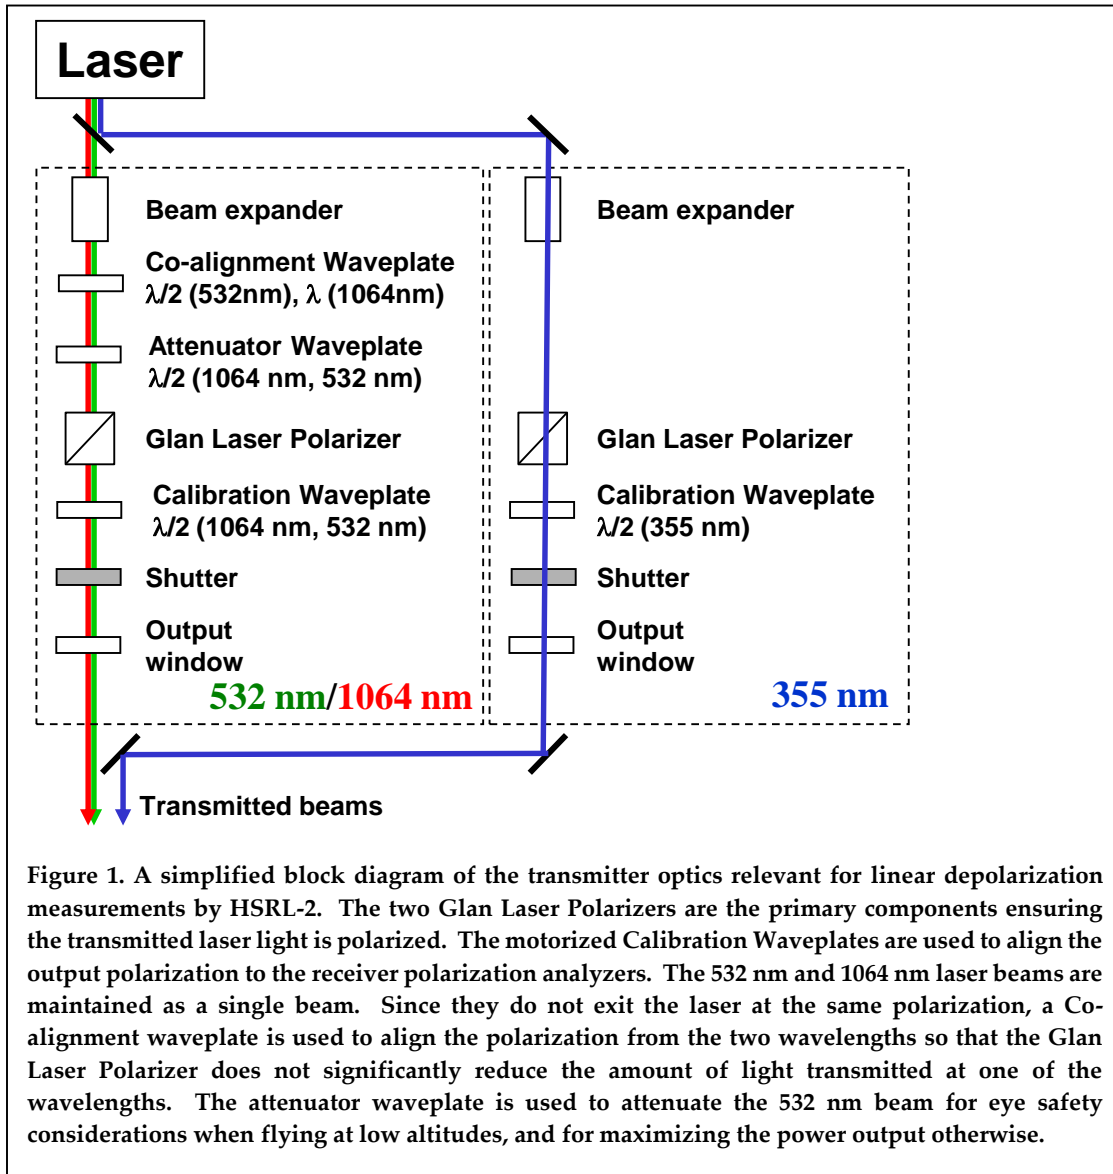

3

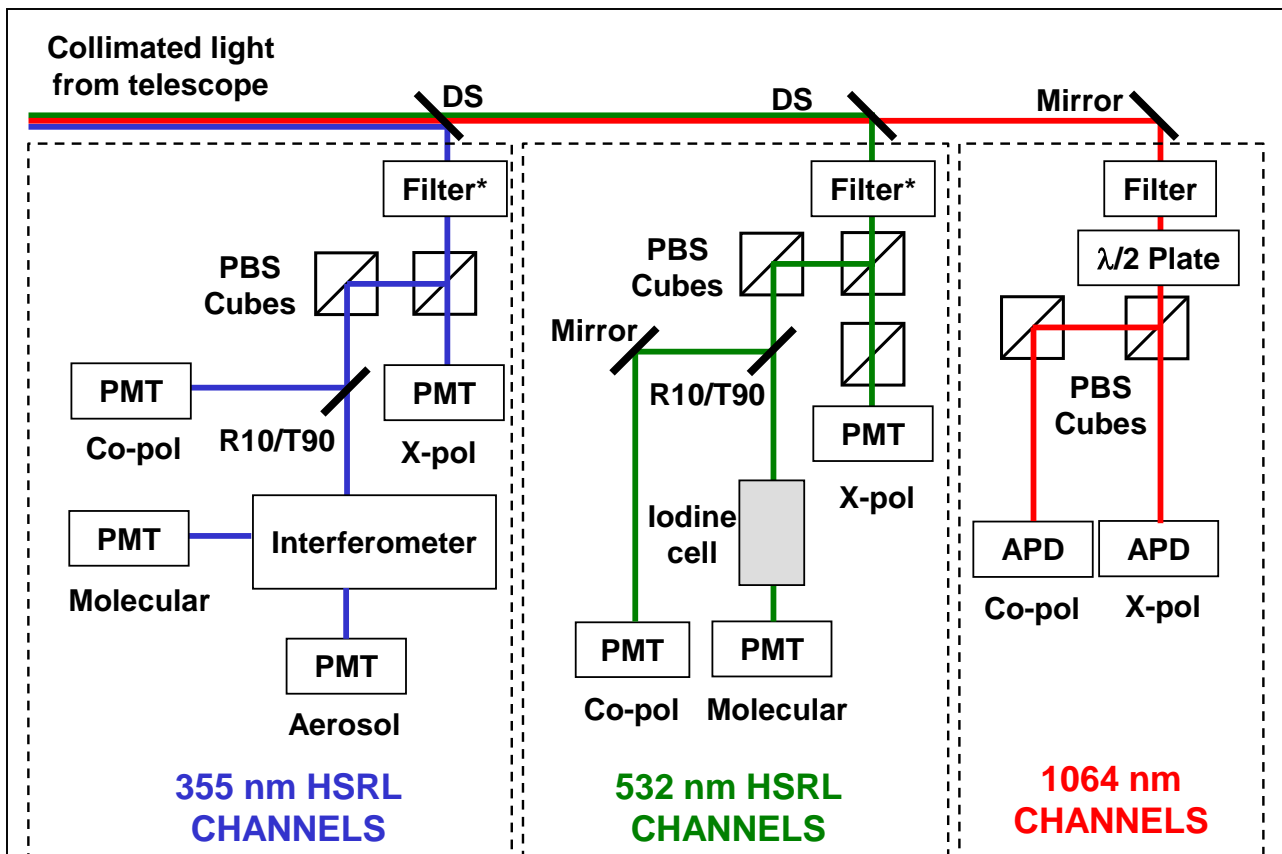


Figure 2. A simplified block diagram of the receiver optics relevant for linear depolarization measurements by HSRL-2. Abbreviations: PMT=Photomultiplier Tube; APD = Silicon Avalanche Photo Detector; DS = Dichroic Beam Splitter; PBS = Polarizing Beam Splitter; Co-pol = Co-polarized channel (with respect to the transmitted light); X-pol = Cross-polarized channel. The collimated light arrives from the telescope and is split into the three wavelengths using Dichroic Beam Splitters. The first optical component filters solar background using either an interference filter (indicated "Filter") or an interference filter and etalon in combination (indicated "Filter*"). The 1064 nm channel also includes an additional half-wave plate which can be used to correct any small polarization misalignment in the receiver system since the 532 nm and 1064 nm beams are transmitted together. This half-wave plate is set during installation and is not rotated during normal operations. The light then passes through Polarization Beam Splitters to be separated into components co-polarized and cross-polarized with respect to the transmitted beam. Since the transmittance ratio of the light exiting a PBS is greater in the transmitted direction than in the reflected direction, a second "clean-up" PBS is included for each detector wavelength to further improve the transmittance ratio for the co-polarized light. (An extra clean up PBS is also included for the cross-polarized light in the 532 nm channel.) The co-polarized signal and cross-polarized signal are used to determine volume depolarization ratio at each wavelength. The 355 nm and 532 nm co-polarized channels are split again and passed through additional optics to separate the aerosol and molecular signals (see text).

1
2

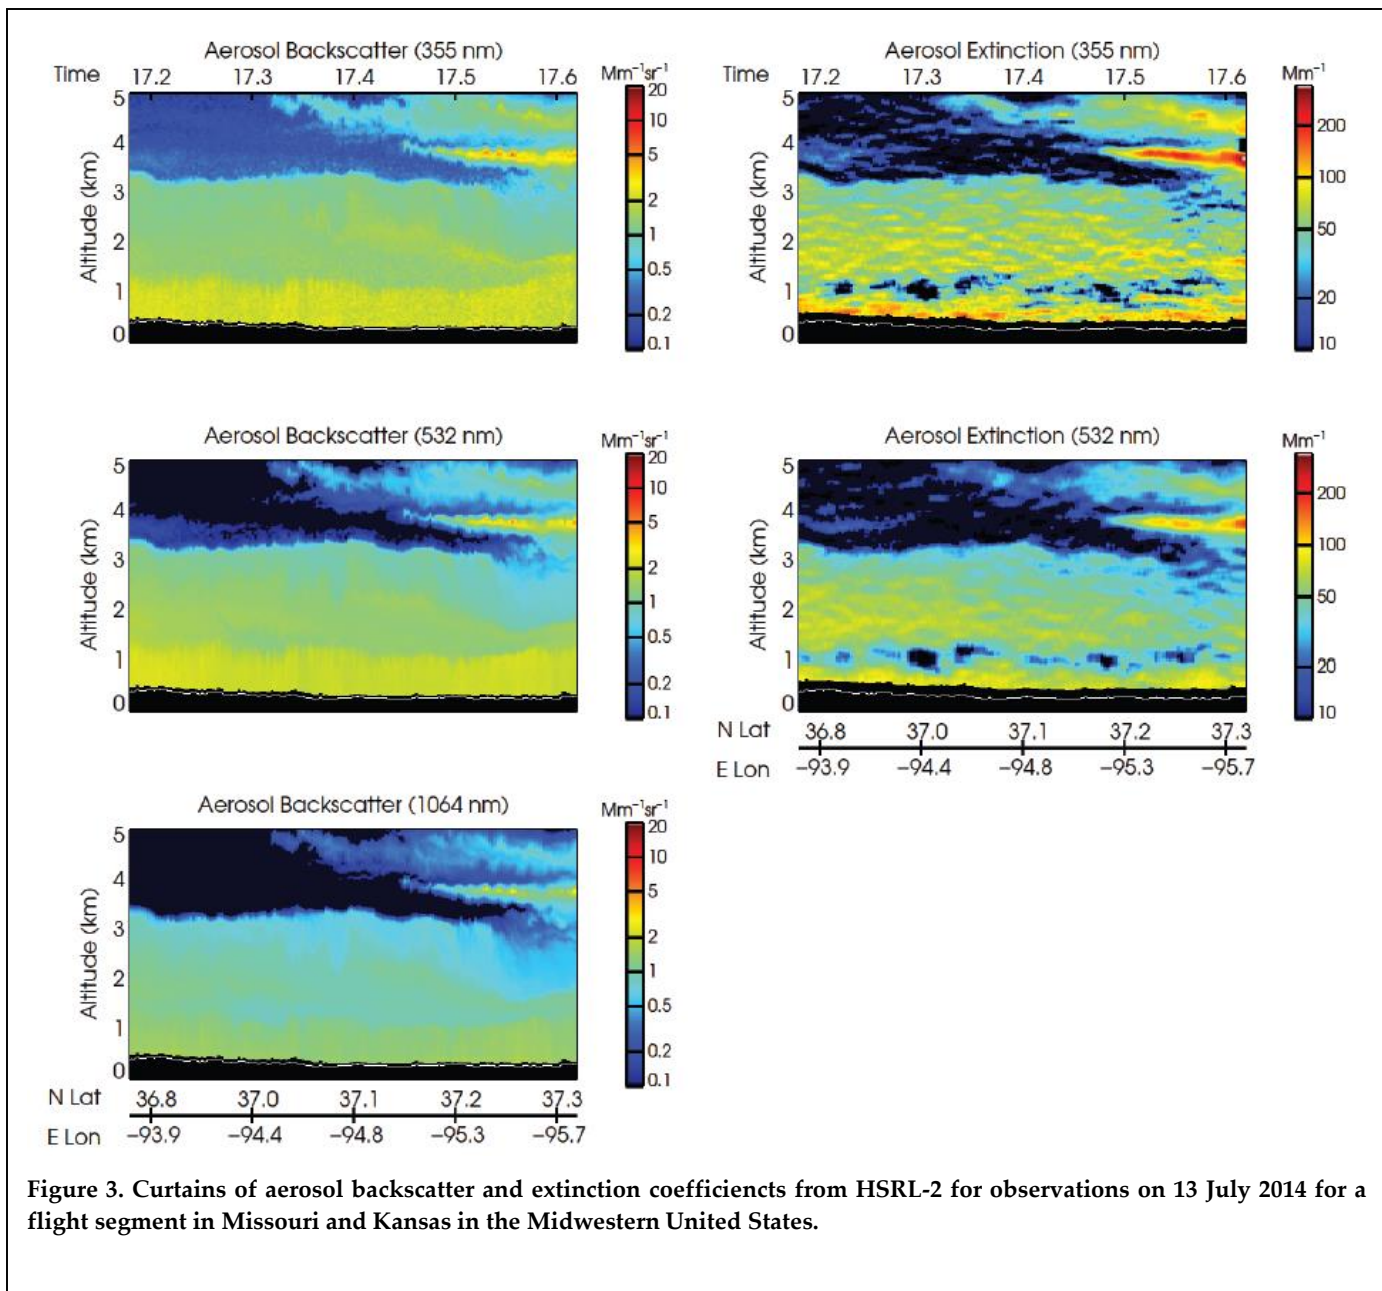


Figure 3. Curtains of aerosol backscatter and extinction coefficients from HSRL-2 for observations on 13 July 2014 for a flight segment in Missouri and Kansas in the Midwestern United States.

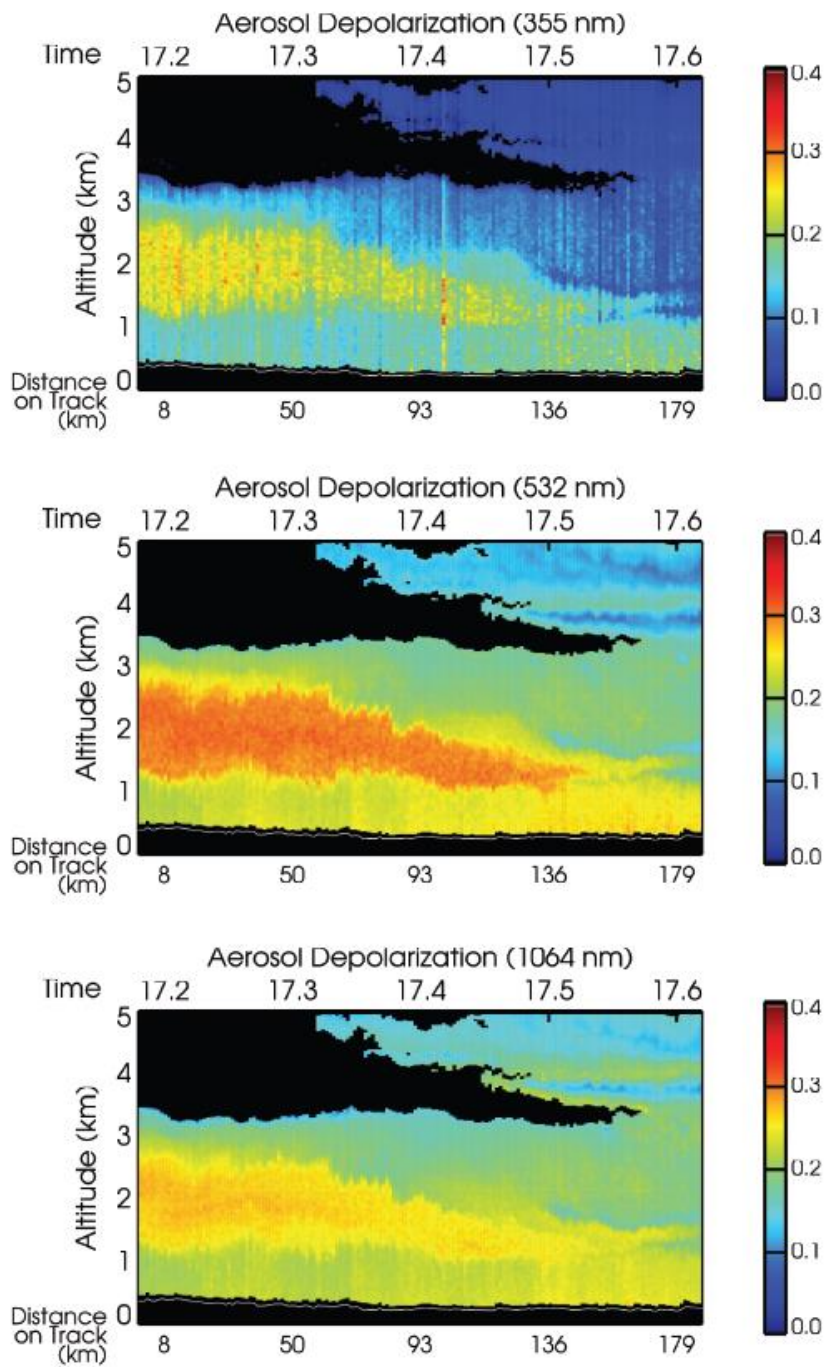


Figure 4. Linear particle depolarization ratio at three wavelengths measured by the HSRL-2 for the same flight segment shown in Figure 3.


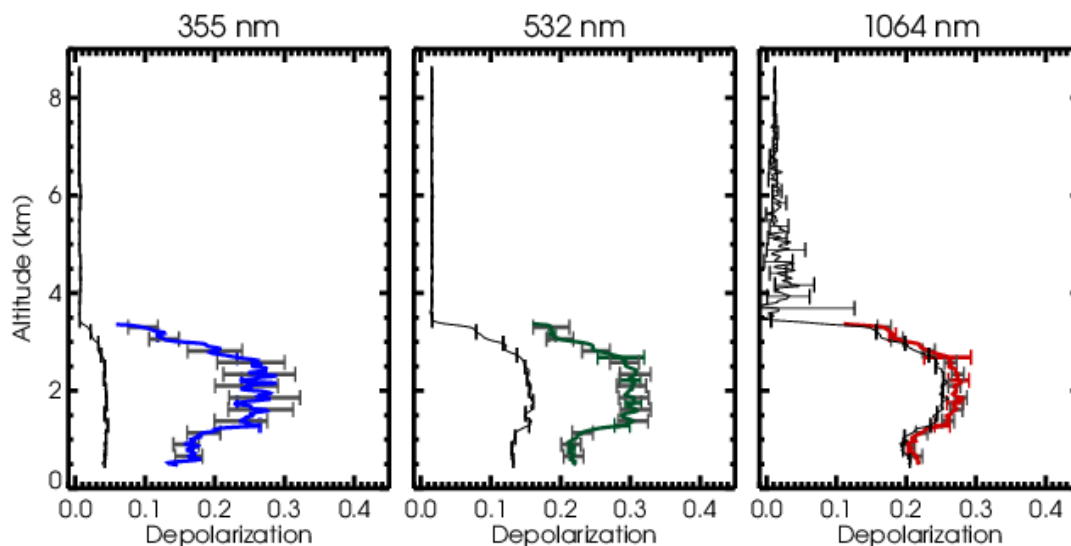


Figure 5. Line plots illustrating the volume and aerosol linear depolarization ratio profile for the HSRL-2 measurements at 17.2 UT (17:12 UT) on 13 July 2014. The volume depolarization ratio is shown as a thin black line. The error bars on the volume depolarization ratio represent random error (most are small and mostly obscured except 1064 nm). The particle depolarization ratio is shown as a thick colored line. Colored error bars indicate random error (most are small enough to be obscured by the line) while gray error bars indicate systematic uncertainty, estimated as described in the text. Systematic uncertainty is not shown for the volume depolarization ratio but see text for estimate. The vertical resolution of these measurements is 30 m and the horizontal resolution is 10 s for all wavelengths.

1

2

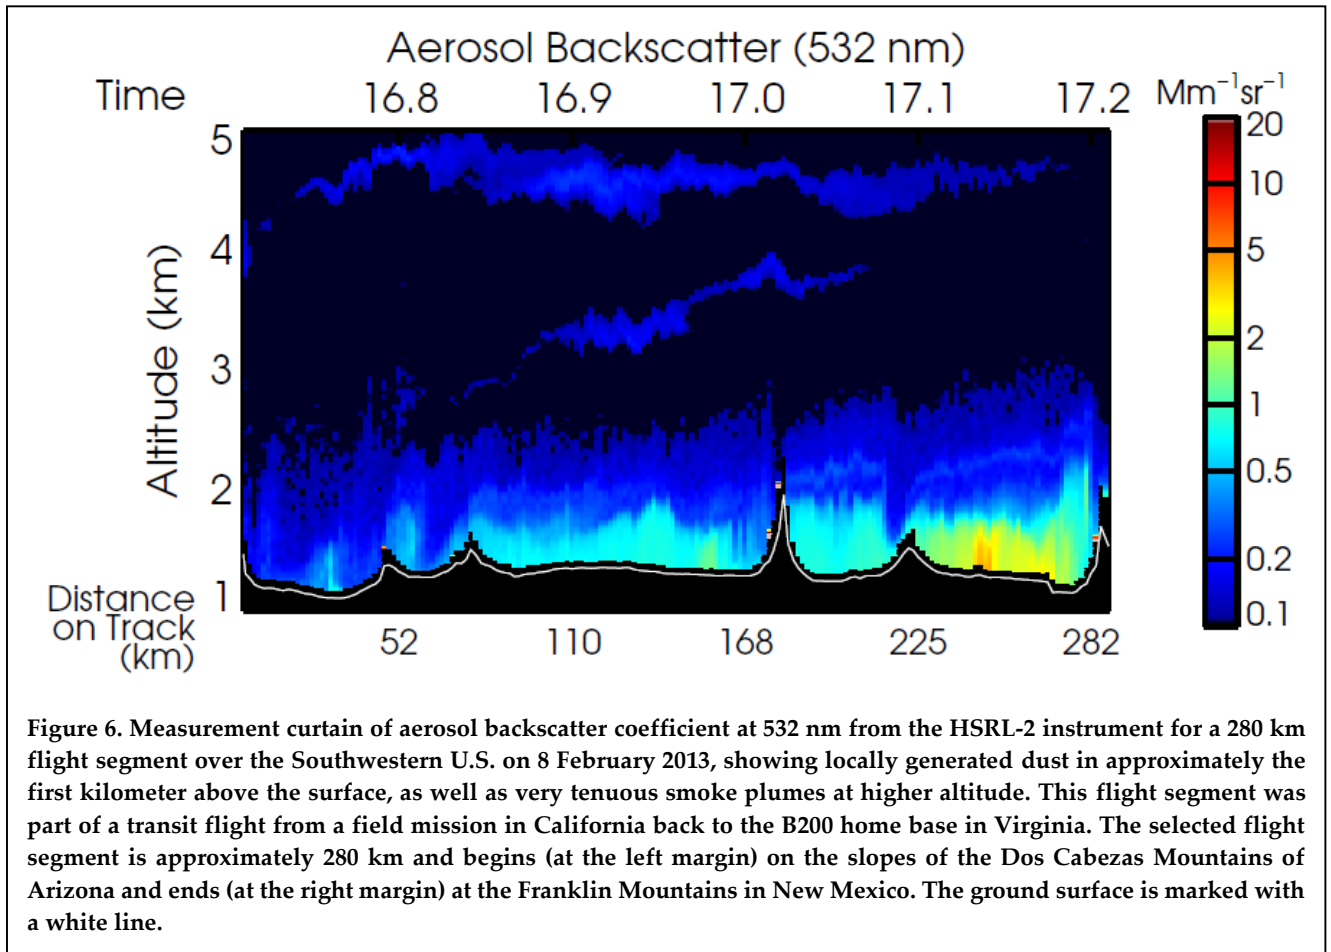

3

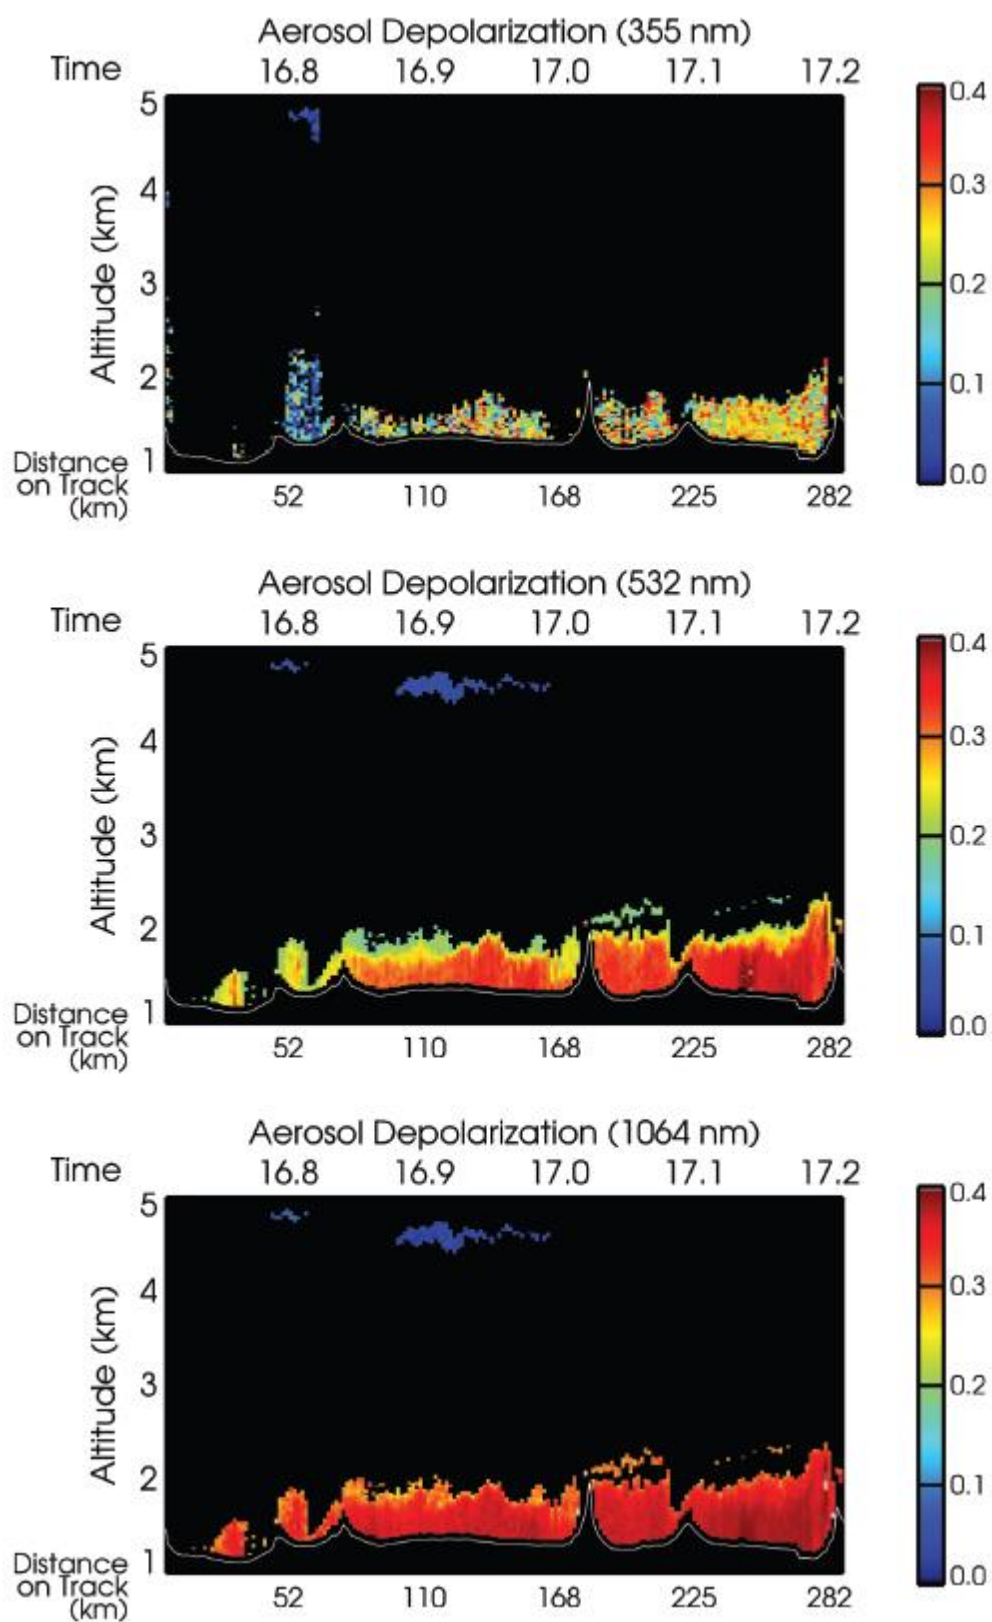


Figure 7. Linear particle depolarization ratio at three wavelengths observed by HSRL-2 on 8 February 2013 in the Southwestern U.S. for the flight segment shown in Figure 6.

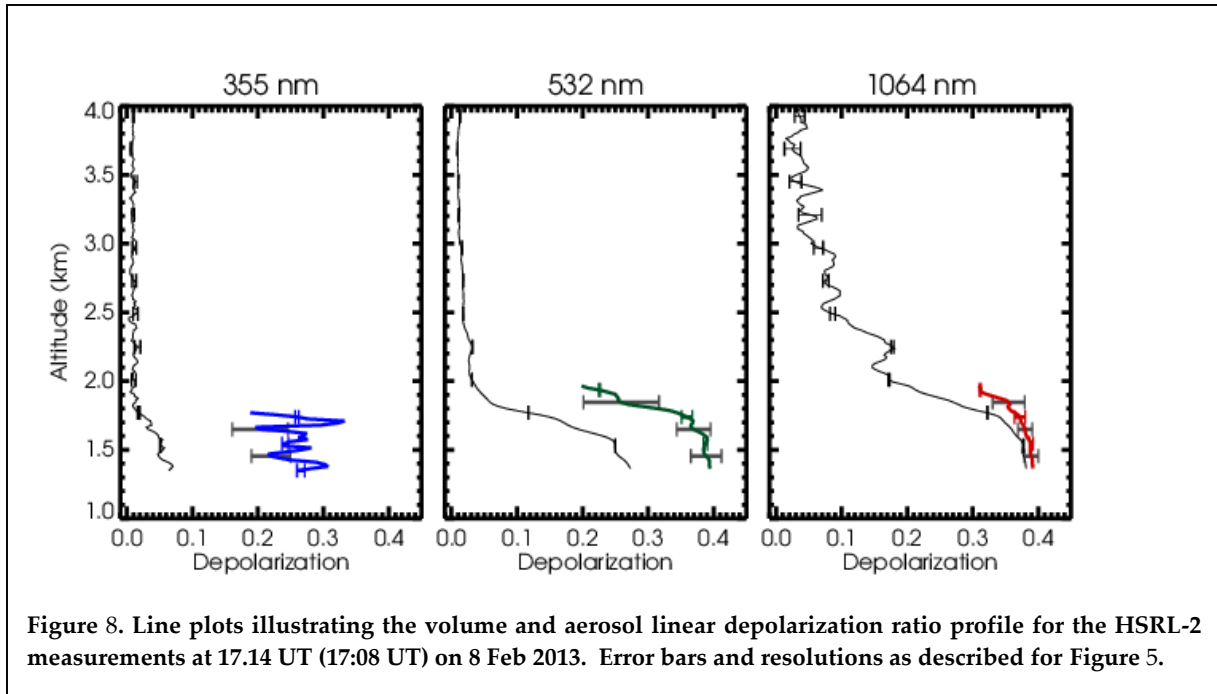


Figure 8. Line plots illustrating the volume and aerosol linear depolarization ratio profile for the HSRL-2 measurements at 17.14 UT (17:08 UT) on 8 Feb 2013. Error bars and resolutions as described for Figure 5.

1

2

1

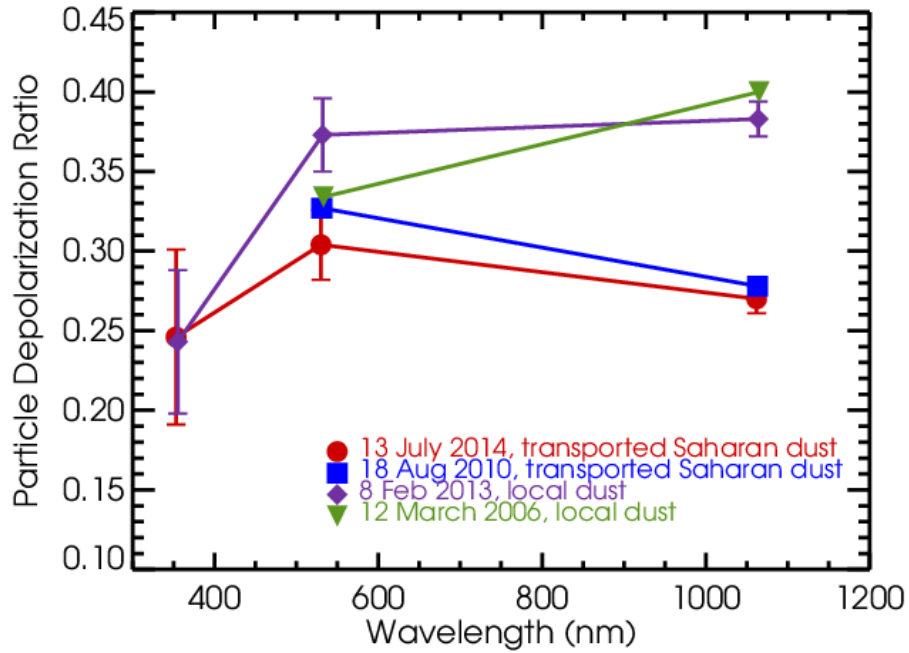


Figure 9. Linear particle depolarization ratio measured by HSRL-2 and HSRL-1 for the four dust cases discussed in the text. Note the spectral dependence (and in particular the 1064 nm channel) is different for the two local dust-dominated aerosol cases compared to the transported Saharan dust-dominated aerosol cases. Error bars represent systematic uncertainty in HSRL-2 measurements, estimated as described in the text.

2

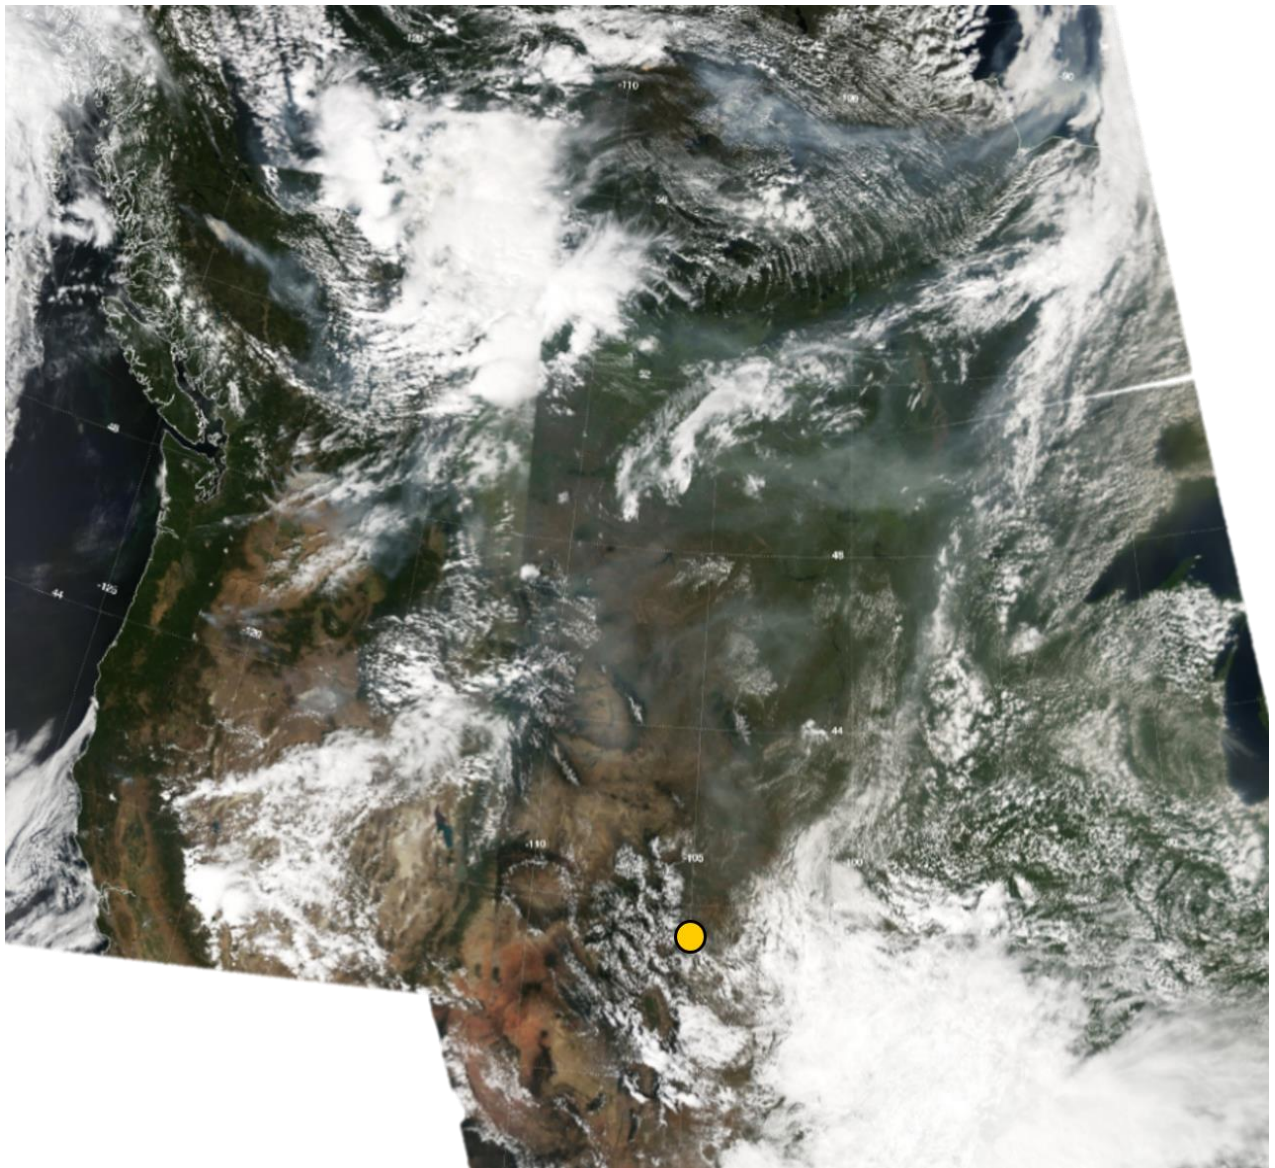


Figure 10. MODIS Aqua true color images of much of North America on 17 July 2014, composited from four granules at 19:45, 19:50, 21:25, and 21:30 UT. The approximate location of the HSRL-2 observations discussed in the text (Denver, Colorado) is marked with a yellow dot. The bright white is clouds and snow cover and the gray is smoke. Several distinct smoke plumes indicate sources in the U.S. Pacific Northwest and in Western Canada within the cloud-free area on the western part of the continent. Significant smoke layers from these fires blanket the mid-continent cloud-free areas in the northern portion of the image. The HSRL-2 measurements are close to the southern edge of the extensive smoke field.


1

2



Figure 11. View of the smoke plume aloft on 17 July 2013 taken from the B200. Photo credit: Tim Berkoff.

1

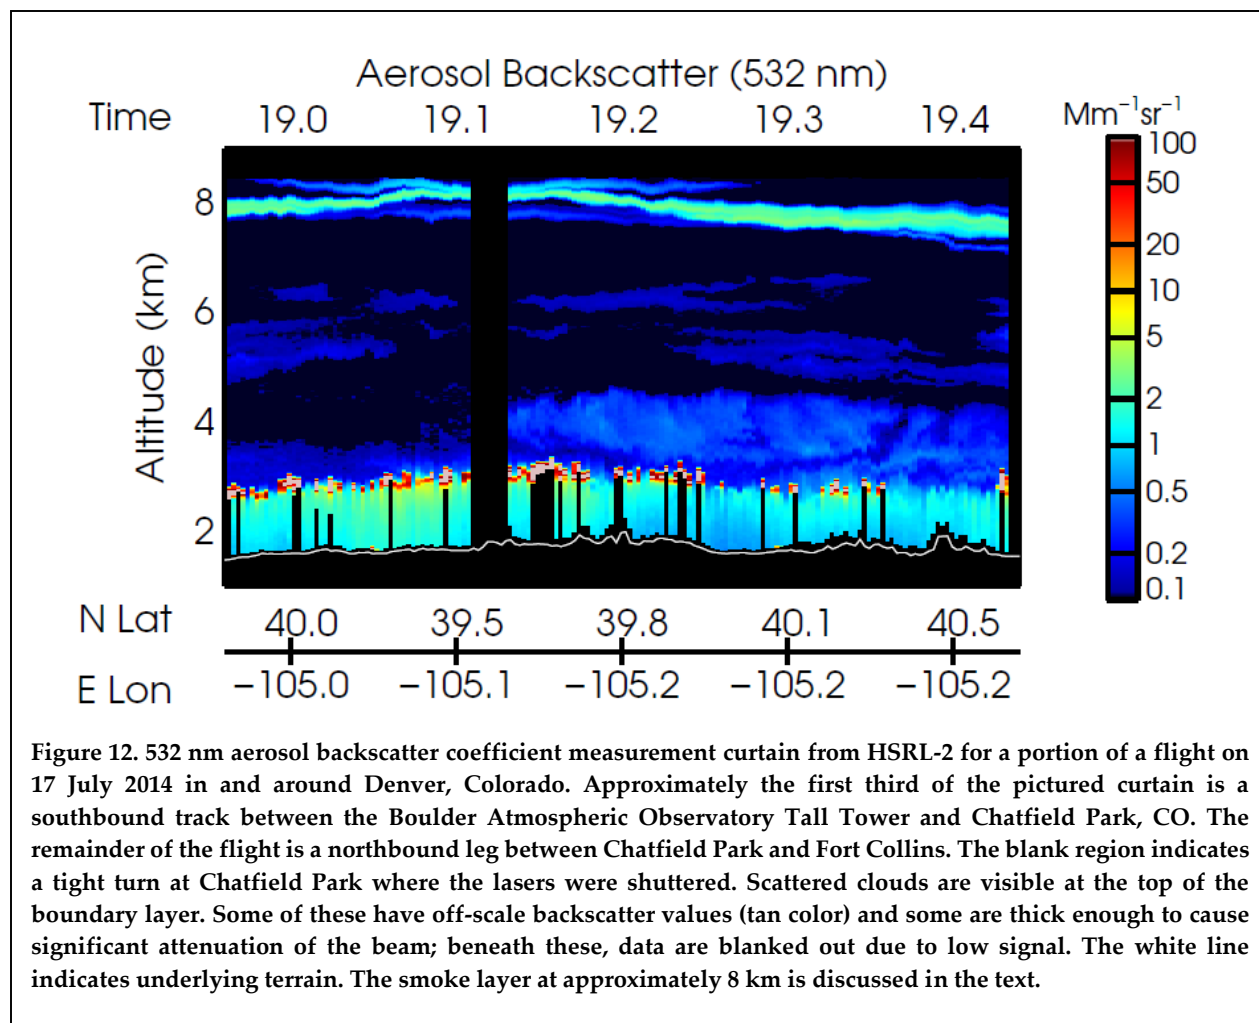

1


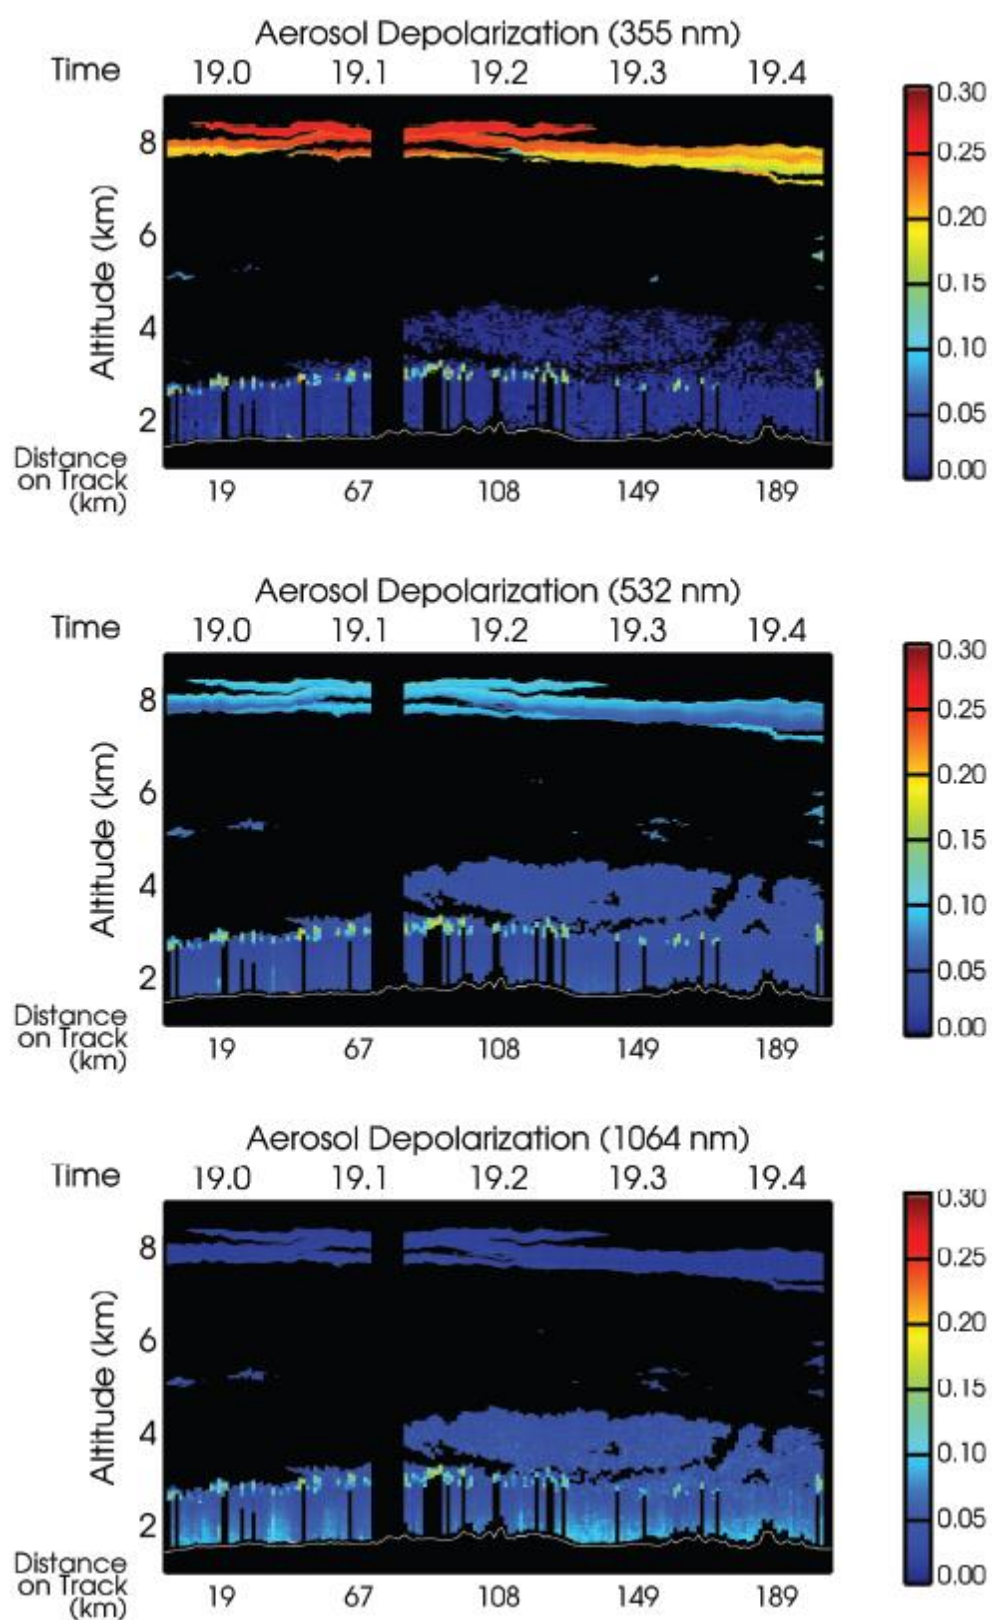


Figure 13. Linear particle depolarization ratio measurement curtains for the flight segment shown in Figure 12.

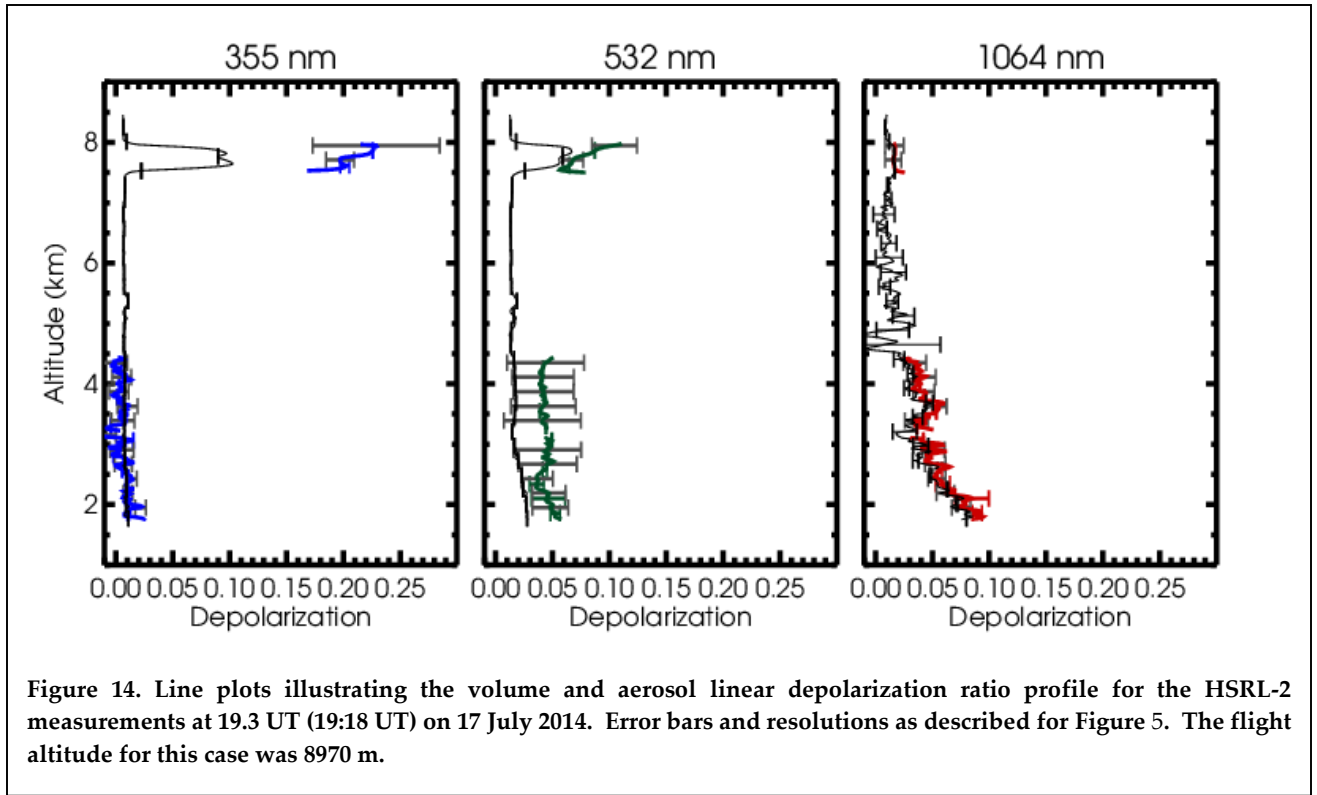

1

2

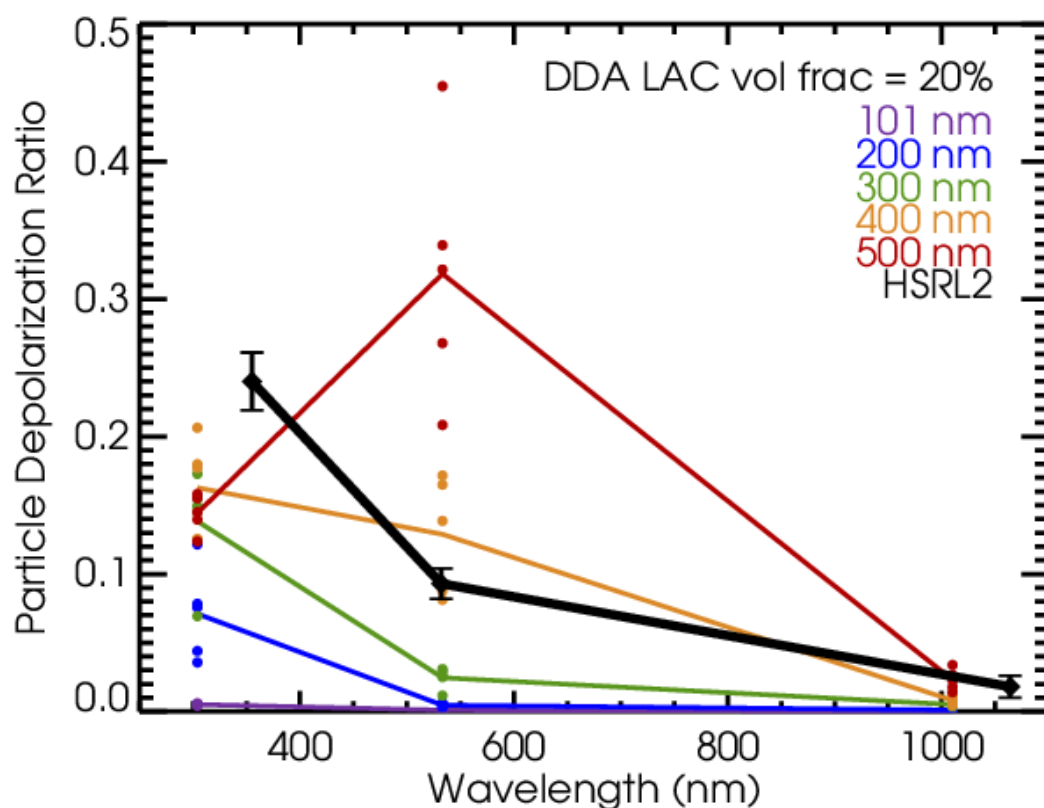


Figure 15. Linear particle depolarization ratio at three wavelengths for soot aggregates embedded in a sulfate shell reproduced from Kahnert et al. (2012), for 20% LAC volume fraction. Dots indicate five realizations with randomly generated geometries, per aggregate volume-equivalent particle radius, and the colored lines connect the averages of the five for each wavelength. The legend shows the aggregate volume-equivalent particle radii at which the calculation was performed. The thick black line indicates the particle depolarization ratios measured by airborne HSRL-2 within a smoke plume observed on 17 July 2014 at 355, 532, and 1064 nm. Error bars represent systematic uncertainty in HSRL-2 particle depolarization ratio, estimated as described in the text.

References

- Adachi, K., and Buseck, P. R.: Internally mixed soot, sulfates, and organic matter in aerosol particles from Mexico City, *Atmos. Chem. Phys.*, 8, 6469-6481, 10.5194/acp-8-6469-2008, 2008.
- Alvarez, J. M., Vaughan, M. A., Hostetler, C. A., Hunt, W. H., and Winker, D. M.: Calibration Technique for Polarization-Sensitive Lidars, *J Atmos Ocean Tech*, 23, 683-699, 10.1175/jtech1872.1, 2006.
- Ansmann, A., Tesche, M., Knippertz, P., Bierwirth, E., Althausen, D., Muller, D., and Schulz, O.: Vertical profiling of convective dust plumes in southern Morocco during SAMUM, *Tellus Ser. B-Chem. Phys. Meteorol.*, 61, 340-353, DOI 10.1111/j.1600-0889.2008.00384.x, 2009.
- Ansmann, A., Tesche, M., Seifert, P., Groß, S., Freudenthaler, V., Apituley, A., Wilson, K. M., Serikov, I., Linné, H., Heinold, B., Hiebsch, A., Schnell, F., Schmidt, J., Mattis, I., Wandinger, U., and Wiegner, M.: Ash and fine-mode particle mass profiles from EARLINET-AERONET observations over central Europe after the eruptions of the Eyjafjallajökull volcano in 2010, *Journal of Geophysical Research: Atmospheres*, 116, n/a-n/a, 10.1029/2010JD015567, 2011.
- Ansmann, A., Seifert, P., Tesche, M., and Wandinger, U.: Profiling of fine and coarse particle mass: case studies of Saharan dust and Eyjafjallajökull/Grimsvötn volcanic plumes, *Atmos. Chem. Phys.*, 12, 9399-9415, 10.5194/acp-12-9399-2012, 2012.
- Behrendt, A., and Nakamura, T.: Calculation of the calibration constant of polarization lidar and its dependency on atmospheric temperature, *Optics Express*, 10, 805-817, 10.1364/OE.10.000805, 2002.
- Bescond, A., Yon, J., Girasole, T., Jouen, C., Rozé, C., and Coppalle, A.: Numerical investigation of the possibility to determine the primary particle size of fractal aggregates by measuring light depolarization, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 126, 130-139, 2013.
- Born, M., and Wolf, E.: Principles of optics: electromagnetic theory of propagation, interference and diffraction of light, Cambridge university press, 1999.
- Burton, S. P., Ferrare, R. A., Hostetler, C. A., Hair, J. W., Rogers, R. R., Obland, M. D., Butler, C. F., Cook, A. L., Harper, D. B., and Froyd, K. D.: Aerosol Classification of Airborne High Spectral Resolution Lidar Measurements - Methodology and Examples, *Atmospheric Measurement Techniques*, 5, 73-98, 10.5194/amt-5-73-2012, 2012.
- Burton, S. P., Ferrare, R. A., Vaughan, M. A., Omar, A. H., Rogers, R. R., Hostetler, C. A., and Hair, J. W.: Aerosol classification from airborne HSRL and comparisons with the CALIPSO vertical feature mask, *Atmos. Meas. Tech.*, 6, 1397-1412, 10.5194/amt-6-1397-2013, 2013.
- Burton, S. P., Vaughan, M. A., Ferrare, R. A., and Hostetler, C. A.: Separating mixtures of aerosol types in airborne High Spectral Resolution Lidar data, *Atmos. Meas. Tech.*, 7, 419-436, 10.5194/amt-7-419-2014, 2014.

- Cairo, F., Di Donfrancesco, G., Adriani, A., Pulvirenti, L., and Fierli, F.: Comparison of Various Linear Depolarization Parameters Measured by Lidar, *Appl. Opt.*, 38, 4425-4432, 1999.
- Dahlkötter, F., Gysel, M., Sauer, D., Minikin, A., Baumann, R., Seifert, P., Ansmann, A., Fromm, M., Voigt, C., and Weinzierl, B.: The Pagami Creek smoke plume after long-range transport to the upper troposphere over Europe -- aerosol properties and black carbon mixing state, *Atmos. Chem. Phys.*, 14, 6111-6137, 10.5194/acp-14-6111-2014, 2014.
- David, G., Thomas, B., Nousiainen, T., Miffre, A., and Rairoux, P.: Retrieving simulated volcanic, desert dust and sea-salt particle properties from two/three-component particle mixtures using UV-VIS polarization lidar and T matrix, *Atmos. Chem. Phys.*, 13, 6757-6776, 10.5194/acp-13-6757-2013, 2013.
- de Foy, B., Burton, S. P., Ferrare, R. A., Hostetler, C. A., Hair, J. W., Wiedinmyer, C., and Molina, L. T.: Aerosol plume transport and transformation in high spectral resolution lidar measurements and WRF-Flexpart simulations during the MILAGRO Field Campaign, *Atmos Chem Phys*, 11, 3543-3563, 10.5194/acp-11-3543-2011, 2011.
- Fernald, F. G.: Analysis of Atmospheric Lidar Observations - Some Comments, *Appl Optics*, 23, 652-653, 1984.
- Fiebig, M., Petzold, A., Wandinger, U., Wendisch, M., Kiemle, C., Stifter, A., Ebert, M., Rother, T., and Leiterer, U.: Optical closure for an aerosol column: Method, accuracy, and inferable properties applied to a biomass-burning aerosol and its radiative forcing, *J. Geophys. Res.*, 107, 8130, 10.1029/2000jd000192, 2002.
- Freudenthaler, V., Esselborn, M., Wiegner, M., Heese, B., Tesche, M., Ansmann, A., Müller, D., Althausen, D., Wirth, M., Fix, A., Ehret, G., Knippertz, P., Toledano, C., Gasteiger, J., Garhammer, M., and Seefeldner, M.: Depolarization ratio profiling at several wavelengths in pure Saharan dust during SAMUM 2006, *Tellus B*, 61, 165-179, 10.1111/j.1600-0889.2008.00396.x, 2009.
- Gasteiger, J., Wiegner, M., Groß, S., Freudenthaler, V., Toledano, C., Tesche, M., and Kandler, K.: Modelling lidar-relevant optical properties of complex mineral dust aerosols, *Tellus B*, 63, 725-741, 10.1111/j.1600-0889.2011.00559.x, 2011.
- Gasteiger, J., and Freudenthaler, V.: Benefit of depolarization ratio at $\lambda = 1064$ nm for the retrieval of the aerosol microphysics from lidar measurements, *Atmos. Meas. Tech.*, 7, 3773-3781, 10.5194/amt-7-3773-2014, 2014.
- Gimmestad, G. G.: Reexamination of depolarization in lidar measurements, *Appl. Opt.*, 47, 3795-3802, 2008.
- Groß, S., Esselborn, M., Weinzierl, B., Wirth, M., Fix, A., and Petzold, A.: Aerosol classification by airborne high spectral resolution lidar observations, *Atmos. Chem. Phys.*, 13, 2487-2505, 10.5194/acp-13-2487-2013, 2013.
- Groß, S., Freudenthaler, V., Wirth, M., and Weinzierl, B.: Towards an aerosol classification scheme for future EarthCARE lidar observations and implications for research needs, *Atmospheric Science Letters*, n/a-n/a, 10.1002/asl2.524, 2014.

- Groß, S., Freudenthaler, V., Schepanski, K., Toledano, C., Schäfler, A., Ansmann, A., and Weinzierl, B.: Optical properties of long-range transported Saharan dust over Barbados as measured by dual-wavelength depolarization Raman lidar measurements, *Atmos. Chem. Phys.*, 15, 11067-11080, 10.5194/acp-15-11067-2015, 2015.
- Haarig, M., Althausen, D., Ansmann, A., Klepel, A., Baars, H., Engelmann, R., and Groß, S.: Measurement of the linear depolarization ratio of aged dust at three wavelengths (355, 532 and 1064 nm) simultaneously over Barbados, *International Laser Radar Conference*, New York, NY, 2015.
- Hair, J. W., Hostetler, C. A., Cook, A. L., Harper, D. B., Ferrare, R. A., Mack, T. L., Welch, W., Izquierdo, L. R., and Hovis, F. E.: Airborne High Spectral Resolution Lidar for profiling aerosol optical properties, *Appl Optics*, 47, 6734-6752, 10.1364/AO.47.006734, 2008.
- Illingworth, A. J., Barker, H. W., Beljaars, A., Ceccaldi, M., Chepfer, H., Cole, J., Delanoë, J., Domenech, C., Donovan, D. P., Fukuda, S., Hirakata, M., Hogan, R. J., Huenerbein, A., Kollias, P., Kubota, T., Nakajima, T., Nakajima, T. Y., Nishizawa, T., Ohno, Y., Okamoto, H., Oki, R., Sato, K., Satoh, M., Shephard, M., Wandinger, U., Wehr, T., and van Zadelhoff, G. J.: THE EARTHCARE SATELLITE: The next step forward in global measurements of clouds, aerosols, precipitation and radiation, *B Am Meteorol Soc*, 10.1175/BAMS-D-12-00227.1, 2015.
- Johnson, M. S., Meskhidze, N., and Praju Kiliyanpilakkil, V.: A global comparison of GEOS-Chem-predicted and remotely-sensed mineral dust aerosol optical depth and extinction profiles, *Journal of Advances in Modeling Earth Systems*, 4, M07001, 10.1029/2011MS000109, 2012.
- Kahnert, M., Nousiainen, T., Lindqvist, H., and Ebert, M.: Optical properties of light absorbing carbon aggregates mixed with sulfate: assessment of different model geometries for climate forcing calculations, *Optics express*, 20, 10042-10058, 10.1364/OE.20.010042, 2012.
- Liu, Z., Fairlie, T. D., Uno, I., Huang, J., Wu, D., Omar, A., Kar, J., Vaughan, M., Rogers, R., Winker, D., Trepte, C., Hu, Y., Sun, W., Lin, B., and Cheng, A.: Transpacific transport and evolution of the optical properties of Asian dust, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 116, 24-33, 10.1016/j.jqsrt.2012.11.011, 2013.
- Mamouri, R. E., and Ansmann, A.: Fine and coarse dust separation with polarization lidar, *Atmos. Meas. Tech.*, 7, 3717-3735, 10.5194/amt-7-3717-2014, 2014.
- Maring, H., Savoie, D. L., Izaguirre, M. A., Custals, L., and Reid, J. S.: Mineral dust aerosol size distribution change during atmospheric transport, *Journal of Geophysical Research: Atmospheres*, 108, 8592, 10.1029/2002jd002536, 2003.
- Martins, J. V., Hobbs, P. V., Weiss, R. E., and Artaxo, P.: Sphericity and morphology of smoke particles from biomass burning in Brazil, *Journal of Geophysical Research: Atmospheres*, 103, 32051-32057, 10.1029/98JD01153, 1998.
- Mattis, I., Ansmann, A., Wandinger, U., and Müller, D.: Unexpectedly high aerosol load in the free troposphere over central Europe in spring/summer 2003, *Geophys Res Lett*, 30, D2178, 10.1029/2003gl018442, 2003.

- 1 McGill, M. J., Welton, E. J., Yorks, J. E., and Scott, V. S.: CATS: A New Earth Science Capability,
2 in *The Earth Observer*, edited, pp. 4-8, NASA Earth Observing System Project Science
3 Office 2012.
- 4 Mishchenko, M. I., and Hovenier, J. W.: Depolarization of light backscattered by randomly
5 oriented nonspherical particles, *Opt. Lett.*, 20, 1356-1358, 1995.
- 6 Mishchenko, M. I., and Sassen, K.: Depolarization of lidar returns by small ice crystals: An
7 application to contrails, *Geophys Res Lett*, 25, 309-312, 1998.
- 8 Müller, D., Mattis, I., Wandinger, U., Ansmann, A., Althausen, D., and Stohl, A.: Raman lidar
9 observations of aged Siberian and Canadian forest fire smoke in the free troposphere over
10 Germany in 2003: Microphysical particle characterization, *J Geophys Res-Atmos*, 110,
11 D17201, 10.1029/2004jd005756, 2005.
- 12 Müller, D., Hostetler, C. A., Ferrare, R. A., Burton, S. P., Chemyakin, E., Kolgotin, A., Hair, J. W.,
13 Cook, A. L., Harper, D. B., Rogers, R. R., Hare, R. W., Cleckner, C. S., Obland, M. D.,
14 Tomlinson, J., Berg, L. K., and Schmid, B.: Airborne Multiwavelength High Spectral
15 Resolution Lidar (HSRL-2) observations during TCAP 2012: vertical profiles of optical and
16 microphysical properties of a smoke/urban haze plume over the northeastern coast of the
17 US, *Atmos. Meas. Tech.*, 7, 3487-3496, 10.5194/amt-7-3487-2014, 2014.
- 18 Murayama, T., Müller, D., Wada, K., Shimizu, A., Sekiguchi, M., and Tsukamoto, T.:
19 Characterization of Asian dust and Siberian smoke with multiwavelength Raman lidar
20 over Tokyo, Japan in spring 2003, *Geophys Res Lett*, 31, 10.1029/2004gl021105, 2004.
- 21 Nisantzi, A., Mamouri, R. E., Ansmann, A., and Hadjimitsis, D.: Injection of mineral dust into the
22 free troposphere during fire events observed with polarization lidar at Limassol, Cyprus,
23 *Atmos. Chem. Phys.*, 14, 12155-12165, 10.5194/acp-14-12155-2014, 2014.
- 24 Nishizawa, T., Sugimoto, N., Matsui, I., Shimizu, A., and Okamoto, H.: Algorithms to retrieve
25 optical properties of three component aerosols from two-wavelength backscatter and one-
26 wavelength polarization lidar measurements considering nonsphericity of dust, *Journal*
27 *of Quantitative Spectroscopy and Radiative Transfer*, 112, 254-267, DOI:
28 10.1016/j.jqsrt.2010.06.002, 2011.
- 29 Omar, A. H., Winker, D. M., Kittaka, C., Vaughan, M. A., Liu, Z. Y., Hu, Y. X., Trepte, C. R.,
30 Rogers, R. R., Ferrare, R. A., Lee, K. P., Kuehn, R. E., and Hostetler, C. A.: The CALIPSO
31 Automated Aerosol Classification and Lidar Ratio Selection Algorithm, *J Atmos Ocean*
32 *Tech*, 26, 1994-2014, 10.1175/2009jtecha1231.1, 2009.
- 33 Pappalardo, G., Amodeo, A., Apituley, A., Comeron, A., Freudenthaler, V., Linné, H., Ansmann,
34 A., Bösenberg, J., D'Amico, G., Mattis, I., Mona, L., Wandinger, U., Amiridis, V., Alados-
35 Arboledas, L., Nicolae, D., and Wiegner, M.: EARLINET: towards an advanced
36 sustainable European aerosol lidar network, *Atmos. Meas. Tech.*, 7, 2389-2409,
37 10.5194/amt-7-2389-2014, 2014.
- 38 Rogers, R. R., Hair, J. W., Hostetler, C. A., Ferrare, R. A., Obland, M. D., Cook, A. L., Harper, D.
39 B., Burton, S. P., Shinozuka, Y., McNaughton, C. S., Clarke, A. D., Redemann, J., Russell,
40 P. B., Livingston, J. M., and Kleinman, L. I.: NASA LaRC airborne high spectral resolution

- lidar aerosol measurements during MILAGRO: observations and validation, *Atmos Chem Phys*, 9, 4811-4826, 10.5194/acp-9-4811-2009, 2009.
- Rogers, R. R., Hostetler, C. A., Hair, J. W., Ferrare, R. A., Liu, Z., Obland, M. D., Harper, D. B., Cook, A. L., Powell, K. A., Vaughan, M. A., and Winker, D. M.: Assessment of the CALIPSO Lidar 532 nm attenuated backscatter calibration using the NASA LaRC airborne High Spectral Resolution Lidar, *Atmos. Chem. Phys.*, 11, 1295-1311, 10.5194/acp-11-1295-2011, 2011.
- Rogers, R. R., Vaughan, M. A., Hostetler, C. A., Burton, S. P., Ferrare, R. A., Young, S. A., Hair, J. W., Obland, M. D., Harper, D. B., Cook, A. L., and Winker, D. M.: Looking Through the Haze: Evaluating the CALIPSO Level 2 Aerosol Layer Optical Depth using Airborne High Spectral Resolution Lidar Data, *Atmos. Meas. Tech.*, 7, 4317-4340, 10.5194/amt-7-4317-2014, 2014.
- Sakai, T., Nagai, T., Zaizen, Y., and Mano, Y.: Backscattering linear depolarization ratio measurements of mineral, sea-salt, and ammonium sulfate particles simulated in a laboratory chamber, *Appl. Opt.*, 49, 4441-4449, 2010.
- Sasano, Y., and Browell, E. V.: Light-Scattering Characteristics of Various Aerosol Types Derived from Multiple Wavelength Lidar Observations, *Appl Optics*, 28, 1670-1679, 1989.
- Sassen, K., and Khvorostyanov, V. I.: Cloud effects from boreal forest fire smoke: Evidence for ice nucleation from polarization lidar data and cloud model simulations, *Environ Res Lett*, 3, 025006, 10.1088/1748-9326/3/2/025006, 2008.
- Scarino, A. J., Obland, M. D., Fast, J. D., Burton, S. P., Ferrare, R. A., Hostetler, C. A., Berg, L. K., Lefer, B., Haman, C., Hair, J. W., Rogers, R. R., Butler, C., Cook, A. L., and Harper, D. B.: Comparison of mixed layer heights from airborne high spectral resolution lidar, ground-based measurements, and the WRF-Chem model during CalNex and CARES, *Atmos. Chem. Phys.*, 14, 5547-5560, 10.5194/acp-14-5547-2014, 2014.
- She, C.-Y.: Spectral Structure of Laser Light Scattering Revisited: Bandwidths of Nonresonant Scattering Lidars, *Appl. Opt.*, 40, 4875-4884, 2001.
- Shipley, S. T., Tracy, D. H., Eloranta, E. W., Trauger, J. T., Sroga, J. T., Roesler, F. L., and Weinman, J. A.: High Spectral Resolution Lidar to Measure Optical-Scattering Properties of Atmospheric Aerosols .1. Theory and Instrumentation, *Appl Optics*, 22, 3716-3724, 1983.
- Sorensen, C.: Light scattering by fractal aggregates: a review, *Aerosol Science & Technology*, 35, 648-687, 2001.
- Su, W. Y., Schuster, G. L., Loeb, N. G., Rogers, R. R., Ferrare, R. A., Hostetler, C. A., Hair, J. W., and Obland, M. D.: Aerosol and cloud interaction observed from high spectral resolution lidar data, *J Geophys Res-Atmos*, 113, D24202, 10.1029/2008jd010588, 2008.
- Sugimoto, N., Uno, I., Nishikawa, M., Shimizu, A., Matsui, I., Dong, X., Chen, Y., and Quan, H.: Record heavy Asian dust in Beijing in 2002: Observations and model analysis of recent events, *Geophys Res Lett*, 30, 1640, 10.1029/2002gl016349, 2003.

- 1 Sugimoto, N., and Lee, C. H.: Characteristics of dust aerosols inferred from lidar depolarization
2 measurements at two wavelengths, *Appl Optics*, 45, 7468-7474, 2006.
- 3 Sugimoto, N., Tatarov, B., Shimizu, A., Matsui, I., and Nishizawa, T.: Optical Characteristics of
4 Forest-Fire Smoke Observed with Two-Wavelength Mie-Scattering Lidars and a High-
5 Spectral-Resolution Lidar over Japan, *SOLA*, 6, 93-96, 10.2151/sola.2010-024, 2010.
- 6 Tesche, M., Ansmann, A., Müller, D., Althausen, D., Engelmann, R., Freudenthaler, V., and Groß,
7 S.: Vertically resolved separation of dust and smoke over Cape Verde using
8 multiwavelength Raman and polarization lidars during Saharan Mineral Dust
9 Experiment 2008, *J. Geophys. Res.*, 114, D13202, 10.1029/2009jd011862, 2009a.
- 10 Tesche, M., Ansmann, A., Müller, D., Althausen, D., Mattis, I., Heese, B., Freudenthaler, V.,
11 Wiegner, M., Esselborn, M., Pisani, G., and Knippertz, P.: Vertical profiling of Saharan
12 dust with Raman lidars and airborne HSRL in southern Morocco during SAMUM, *Tellus*
13 *Ser. B-Chem. Phys. Meteorol.*, 61, 144-164, 10.1111/j.1600-0889.2008.00390.x, 2009b.
- 14 Tesche, M., Müller, D., Gross, S., Ansmann, A., Althausen, D., Freudenthaler, V., Weinzierl, B.,
15 Veira, A., and Petzold, A.: Optical and microphysical properties of smoke over Cape
16 Verde inferred from multiwavelength lidar measurements, *Tellus B*, 63, 677-694,
17 10.1111/j.1600-0889.2011.00549.x, 2011.
- 18 Wiegner, M., Gasteiger, J., Kandler, K., Weinzierl, B., Rasp, K., Esselborn, M., Freudenthaler, V.,
19 Heese, B., Toledano, C., Tesche, M., and Althausen, D.: Numerical simulations of optical
20 properties of Saharan dust aerosols with emphasis on lidar applications, *Tellus Ser. B-
21 Chem. Phys. Meteorol.*, 61, 180-194, DOI 10.1111/j.1600-0889.2008.00381.x, 2009.
- 22 Winker, D. M., Hunt, W. H., and McGill, M. J.: Initial performance assessment of CALIOP,
23 *Geophys. Res. Lett.*, 34, L19803, 10.1029/2007gl030135, 2007.
- 24 Yang, W., Marshak, A., Kostinski, A. B., and Várnai, T.: Shape-induced gravitational sorting of
25 Saharan dust during transatlantic voyage: Evidence from CALIOP lidar depolarization
26 measurements, *Geophys Res Lett*, 40, 3281-3286, 10.1002/grl.50603, 2013.
- 27
28
29
30
31