

**Sunlit simulation
chamber**

B. Bohn and H. Zilken

Model-aided radiometric determination of photolysis frequencies in a sunlit atmosphere simulation chamber

B. Bohn¹ and H. Zilken²

¹Institut für Chemie und Dynamik der Geosphäre II: Troposphäre, Forschungszentrum Jülich, 52425 Jülich, Germany

²Zentralinstitut für Angewandte Mathematik, Forschungszentrum Jülich, 52425 Jülich, Germany

Received: 3 September 2004 – Accepted: 15 October 2004 – Published: 29 October 2004

Correspondence to: B. Bohn (b.bohn@fz-juelich.de)

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion


© EGU 2004

Abstract

In this work diurnal and seasonal variations of mean photolysis frequencies for the atmosphere simulation chamber SAPHIR at Forschungszentrum Jülich are calculated. SAPHIR has a complex construction with UV permeable teflon walls allowing natural sunlight to enter the reactor volume. The calculations are based on external measurements of solar spectral actinic flux and a model considering the time-dependent impact of shadows from construction elements as well as the influence of the teflon walls. Overcast and clear-sky conditions are treated in a consistent way and different assumptions concerning diffuse sky radiance distributions are tested. Radiometric measurements inside the chamber are used for an inspection of model predictions. Under overcast conditions we obtain 74% and 67% of external values for photolysis frequencies $j(\text{NO}_2)$ ($\text{NO}_2 + h\nu \rightarrow \text{NO} + \text{O}(^3\text{P})$) and $j(\text{O}^1\text{D})$ ($\text{O}_3 + h\nu \rightarrow \text{O}_2 + \text{O}^1\text{D}$), respectively. On a clear sky summer day these values are time-dependent within ranges 0.65–0.86 and 0.60–0.73, for $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$, respectively. A succeeding paper (Bohn et al., 2004¹) is dealing with an on-road test of the model approach by comparison with photolysis frequencies from chemical actinometry experiments within SAPHIR.

1. Introduction

Ultraviolet sunlight is driving atmospheric chemistry. Highly reactive species are produced by photolyses of trace gases followed by complex secondary chemistry. For example, photolysis of ozone in the UV-B forms electronically excited O^1D atoms which can react with water vapour producing OH radicals:



OH radicals react with the majority of trace gases initiating their degradation in the troposphere. In secondary steps peroxy radicals (RO_2) are produced which oxidise

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Sunlit simulation chamber

 B. Bohn and H. Zilken

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Print Version](#)
[Interactive Discussion](#)

© EGU 2004

NO to NO₂ in the presence of NO_x(=NO+NO₂). Photolysis of NO₂ then leads to a net production of ozone commonly observed in polluted areas:



Evidently, photolysis processes play a vital role in atmospheric chemistry. They are quantified by first-order rate constants referred to as photolysis frequencies:

$$j = \int \sigma \phi F_\lambda(\lambda) d\lambda \quad (6)$$

In this equation F_λ is the solar spectral actinic photon flux. σ is the absorption cross section of the absorbing molecule and ϕ is the quantum yield of the photo-fragments.

Different photolysis processes are governed by different wavelength dependencies of absorption cross sections of precursor molecules and quantum yields of photo-products. Of course, under natural conditions F_λ and therefore photolysis frequencies are strongly variable. In field measurements spectral actinic flux F_λ can be measured, for example, by using double monochromators combined with specially designed detector optics (Müller et al., 1995; Kraus and Hofzumahaus, 1998; Hofzumahaus et al., 1999; Shetter and Müller, 1999). A measurement of F_λ allows to determine any photolysis frequency provided the parameters σ and ϕ are known.

The atmosphere simulation chamber SAPHIR at Forschungszentrum Jülich (50.91° N, 6.41° E, Fig. 1) was designed to study tropospheric chemistry under ambient conditions with respect to temperature, pressure and UV-radiation. Natural sunlight is used as a light source entering the chamber through UV-permeable teflon walls. The concentrations of trace gases are comparable to ambient levels but, in contrast to field experiments, chemical composition is controlled and not affected by transport processes. This separation of transport and chemistry allows a more precise experimental

study of tropospheric chemistry by applying the usual range of techniques established in field experiments including radical measurements.

However, with respect to spectral actinic flux and photolysis frequency measurements the situation is less favourable. While under tropospheric conditions, photolysis frequencies are variable at a given location as result of diurnal and seasonal variations there is usually little small-scale spatial variability. Under field conditions, a photolysis frequency measurement is therefore considered representative for a larger area. This is not the case in SAPHIR. The radiation field within the inner reactor is complex because it is influenced by shadows casted by construction elements as well as reflections and scattering at chamber walls. Chemical data analysis (for most purposes) needs mean photolysis frequencies for the reactor as a whole but radiometric measurements within the reactor are only feasible at few selected points. As a consequence, these measurements are not appropriate.

In this work we present an approach to derive mean photolysis frequencies for SAPHIR based on outside measurements of spectral actinic flux. This approach was developed after a number of experiments with radiometric sensors positioned inside and outside of SAPHIR. It turned out that caused by local effects (mainly shadows) the conversion to mean photolysis frequencies is less complicated if it is based on measurements outside the chamber rather than inside. The conversion concept is composed of (i) a distinction between direct sunlight and diffuse sky radiation, (ii) a model predicting relative time dependencies for these light sources and (iii) an absolute calibration using the whole chamber as a chemical actinometer. The last point is described in a separate paper (Bohn et al., 2004¹).

¹Bohn, B., Rohrer, F., Brauers, T., and Wahner, A.: Actinometric measurements of NO₂ photolysis frequencies in the atmosphere simulation chamber SAPHIR, in preparation, 2004.

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

2. Experimental

2.1. Radiometric measurements

A co-channel spectroradiometer (Bentham 300) was used to measure the 2π sr solar spectral actinic flux on the roof of a building close to SAPHIR (distance 70 m, 12 m above chamber ground). Spectra were taken in the range 280–420 nm in most cases with a spectral resolution of 1 nm which takes about 2 min. Absolute calibration of the spectroradiometer was made using an 1000 W irradiance standard (BN-9101, Gigahertz-Optik, PTB traceable) and 45 W secondary standards (Optronic Laboratories) for regular checks. From the spectra, photolysis frequencies were calculated using literature data on absorption cross sections and quantum yields for the process under consideration (Eq. 6). More details concerning the spectroradiometer, the detector heads and the determination of photolysis frequencies are given by Hofzumahaus et al. (1999). The accuracy of the method is of the order 5–7%, not considering uncertainties of the molecular data σ and ϕ .

A shadow ring obstructing direct sunlight was used with one of the detector heads (Fig. 2, left). The ring has a diameter of 600 mm and a width of 60 mm. The ring plane is tilted by an angle of $39^\circ (=90^\circ - \text{latitude})$ with respect to the horizontal in south–north direction. At equinox the detector head is positioned at the centre of the ring plane. In the course of a year the ring has to be shifted up and down along an axis perpendicular to the ring plane. Typically, adjustments have to be made every four days. The actinic flux measured with the shaded detector head is corrected with respect to the solid angle obstructed by the ring in the upper hemisphere. The corresponding geometrical correction factor was derived analytically. It varies between 1.05 and 1.13 at winter and summer solstice, respectively. This correction is assuming an isotropic radiance distribution of diffuse sky radiation which does not apply for natural conditions. As a consequence, other correction factors will be derived in Sect. 3.5. In order to test these ring corrections experimentally, spot check measurements were made where direct sunlight was blocked manually also from the unshaded detector (Fig. 2, right) by a disk

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

obstructing an about 6° area around the sun. This area corresponds to the minimum obstruction by the shadow ring in direction perpendicular to the ring plane. Accordingly, diffuse sky radiation coming from a 6° area around the sun is considered direct sunlight which is sufficiently precise for the intention of this work.

5 Some spectroradiometer measurements were made within the simulation chamber to determine the ratios of up- and down-welling actinic flux. Moreover, measurements with two spectroradiometers operating simultaneously inside and outside the chamber were made to investigate the spectral influence of the chamber walls. The angle dependent spectral transmission of the chamber wall material was also determined in
10 laboratory experiments using the spectroradiometer.

2.2. Simulation chamber

The simulation chamber SAPHIR consists of an almost cylindrical, double-wall teflon tube held in a steel frame (Fig. 1). The chamber is aligned with its long axis in north-south direction. The inner tube ($r=2.5$ m, $l=18.4$ m) is used as a reactor for simulation
15 experiments ($V=270$ m³). The gap between the inner and the outer tube is about 0.1 m. The inner tube consists of FEP film with a thickness of 125 μ m except from the ground (52 m²) made of 500 μ m FEP film. The outer tube consists of 250 μ m FEP material. Teflon FEP (DuPont) is a co-polymer of fluorinated ethene and propene. It has been selected because it is chemically inert and UV permeable allowing sunlight to enter the
20 chamber. The reactor can be covered by a movable, opaque roof construction within about 1 min and vice versa. Upon closing the roof, the signal of a $j(\text{NO}_2)$ filterradiometer inside the chamber (measuring integrated actinic flux in the UV-A) decreases by at least a factor of 10^3 . More details concerning the instrumentation and performance of

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

SAPHIR are given by Brauers et al. (2004)² and Rohrer et al. (2004)³.

3. Model calculations

Light coming from different directions is entering the chamber with different efficiency because SAPHIR has no hemispheric symmetry. This results in time-dependent effects caused by opaque construction elements (shadows) and the FEP walls (angle- and wavelength dependent transmission).

The general idea already outlined in the introduction is to describe the mean spectral actinic flux inside of SAPHIR in terms of the external fluxes $F_{\lambda}^{\text{diffuse}}$ and $F_{\lambda}^{\text{direct}}$:

$$F_{\lambda}^{\text{diffuse}}(\lambda) = F_{\lambda}^{\text{ring}}(\lambda) f_{\text{ring}} \quad (7)$$

$$F_{\lambda}^{\text{direct}}(\lambda) = F_{\lambda}^{\text{total}}(\lambda) - F_{\lambda}^{\text{ring}}(\lambda) f_{\text{ring}} \quad (8)$$

In these equations $F_{\lambda}^{\text{ring}}$ and $F_{\lambda}^{\text{total}}$ are the spectral actinic fluxes measured outside with and without shadow ring, respectively. f_{ring} is the shadow ring correction factor.

Mean chamber fluxes F_{λ}^{c} are obtained by applying weighting factors f_{direct} and f_{diffuse} to the two components, as well as an absolute scaling factor h^{c} .

$$F_{\lambda}^{\text{c}}(\lambda, t) = h^{\text{c}} \left\{ F_{\lambda}^{\text{direct}}(\lambda) f_{\text{direct}}(t, \lambda) + F_{\lambda}^{\text{diffuse}}(\lambda) f_{\text{diffuse}}(t, \lambda) \right\} \quad (9)$$

The time- and wavelength-dependent weighting factors will be derived from model calculations in this work including some experimental input, while the constant scaling

²Brauers, T., Johnen, F.-J., Häseler, R., Rohrer, F., Bohn, B., Tillmann, R., Rodriguez-Bares, S., and Wahner, A.: The atmosphere simulation chamber SAPHIR: A tool for the investigation of photochemistry, in preparation, 2004.

³Rohrer, F., Bohn, B., Brauers, T., Brüning, D., Johnen, F.-J., Wahner, A., and Kleffmann, J.: Characterisation of the photolytic HONO source in the atmosphere simulation chamber SAPHIR, Atmos. Chem. Phys., submitted, 2004.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

**Sunlit simulation
chamber**

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

factor h^c is determined experimentally in actinometric experiments (Bohn et al., 2004¹). However, 4π spectroradiometric measurements of actinic flux within the chamber will be used in this work to derive a preliminary h^c .

To allow a distinction between effects caused by shadows and the FEP walls, two direction weighting functions are defined by the following integrals:

$$f^V(\vartheta, \varphi) = \frac{1}{V^c} \int_{V^c} s(\mathbf{r}, \vartheta, \varphi) dV \quad (10)$$

$$f^T(\vartheta, \varphi, \lambda) = \frac{1}{V^c} \int_{V^c} s(\mathbf{r}, \vartheta, \varphi) \tau(\mathbf{r}, \vartheta, \varphi, \lambda) dV \quad (11)$$

V^c is the inner volume of the chamber. s is a location dependent function with codomain $\{0, 1\}$ denoting whether or not a location \mathbf{r} is receiving light from a direction in the sky described by its zenith- and azimuth angles, ϑ and φ , respectively. τ is the corresponding transmission of the FEP walls dependent on wavelength and angle of incidence. Thus, f^V is the illuminated volume fraction neglecting the influence of the FEP walls while f^T considers the combined effects of shadows and FEP wall transmissions. Only the upper hemisphere is considered in this treatment, i.e. $\vartheta \leq 90^\circ$. The lower hemisphere is neglected because of low ground albedo of the surrounding area and for geometrical reasons (opaque chamber ground).

It should be noted that this model is neglecting scattering processes at the FEP walls and reflections within the chamber (e.g. at the chamber ground). Scattering processes are addressed indirectly in Sect. 3.2. Reflections within the chamber are expected to lead to an amplification of actinic flux which will be assigned to the scaling factor h^c of Eq. (9), i.e. $h^c > 1$ is expected.

The integrals of Eqs. (10) and (11) are approximated by averaging over a sufficient number of uniformly distributed locations within the reactor volume:

$$f^V(\vartheta, \varphi) \approx \frac{1}{N} \sum_{n=0}^N s(\mathbf{r}_n, \vartheta, \varphi) \quad (12)$$

$$f^{\text{T}}(\vartheta, \varphi, \lambda) \approx \frac{1}{N} \sum_{n=0}^N s(r_n, \vartheta, \varphi) \tau(r_n, \vartheta, \varphi, \lambda) \quad (13)$$

Weighting factors $f_{\text{direct,V}}$ and $f_{\text{direct,T}}$ for direct sunlight in terms of Eq. (9) are derived from the direction weighting functions by inserting the corresponding solar zenith- and azimuth angles at time t , ϑ_{\circ} and φ_{\circ} , respectively.

$$f_{\text{direct,V}}(t) = f^{\text{V}}(\vartheta_{\circ}, \varphi_{\circ}) \quad (14)$$

$$f_{\text{direct,T}}(t, \lambda) = f^{\text{T}}(\vartheta_{\circ}, \varphi_{\circ}, \lambda) \quad (15)$$

For diffuse sky radiation the corresponding weighting factors are derived from f^{V} and f^{T} by multiplication with the 2π sr-normalised radiance L and integration of the upper hemisphere.

$$f_{\text{diffuse,V}}(t) = \int_0^{2\pi} \int_0^{\pi/2} f^{\text{V}}(\vartheta, \varphi) L(\vartheta, \varphi, t) \sin(\vartheta) d\vartheta d\varphi \quad (16)$$

$$f_{\text{diffuse,T}}(t, \lambda) = \int_0^{2\pi} \int_0^{\pi/2} f^{\text{T}}(\vartheta, \varphi, \lambda) L(\vartheta, \varphi, t) \sin(\vartheta) d\vartheta d\varphi \quad (17)$$

Any wavelength dependence of radiance L is neglected here (see Sect. 3.3). The integrations of Eqs. (16) and (17) were also approximated for numerical calculation, e.g. in the case of $f_{\text{diffuse,T}}$:

$$f_{\text{diffuse,T}}(t, \lambda) \approx \frac{\sum_{p=0}^P \sum_{q=0}^Q f^{\text{T}}(\vartheta_p, \varphi_q, \lambda) L(\vartheta_p, \varphi_q, t)}{\sum_{p=0}^P \sum_{q=0}^Q L(\vartheta_p, \varphi_q, t)} \quad (18)$$

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

This calculation provides a homogeneous scan of the upper hemisphere with respect to solid angle with adjustable resolution. For f_{diffuse}^V a corresponding expression applies by inserting f^V instead of f^T in Eq. (18).

3.1. Steel frame, s and f^V

A CAD model of the chamber steel frame was obtained from the construction company (Plantec GmbH, Bremen) where the surfaces of all solid elements are described by triangles. This model was extended by objects mounted at the steel frame, e.g. sealing bars holding the FEP film and guideways of roller shutters. The original resolution was then downgraded reducing the number of triangles from 32 000 to 4400. This reduction was made to save computing time and affects curved parts of the construction approximated by straight elements. The description is still reasonable, as is evident from Fig. 3.

A programme was developed which can process the triangle data to obtain the function s of Eqs. (10)–(13) for any location r . Basically it is checked whether or not any of the triangles is blocking light from direction ϑ , φ . The fraction f^V of the illuminated reactor volume was obtained by scanning the reactor volume and averaging the resulting s (Eq. 12). Tests showed that f^V became constant at a spatial resolution of 0.1 m or better. The bulk of calculations was therefore made with this resolution where each location r represents 10^{-3} m^3 of air in the chamber ($N \approx 270\,000$).

For a total of about 1400 ϑ , φ -combinations in the range $\vartheta=0-90^\circ$ and $\varphi=90-180^\circ$ the corresponding calculations were made and the f^V as well as the arrays of s were saved. The limited range of azimuth angles was selected for symmetry reasons. The ϑ , φ -combinations were chosen to obtain an approximately homogeneous scan of the upper hemisphere. The array of $f^V(\vartheta, \varphi)$ results was then parameterised by a function returning the illuminated volume fraction upon input of zenith- and azimuth angle. In Fig. 4 the data are shown in a contour plot projection of the hemisphere. The results are strongly variable. They range from 0.24 in few directions at $\varphi=0^\circ$ (180°) and very

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

high zenith angles, to 0.96 at $\varphi=90^\circ$ (270°) at moderate zenith angles.

3.2. FEP walls, τ and f^T

3.2.1. Angles of incidence

Light entering the inner volume of SAPHIR is influenced by the FEP walls. Similar to the steel frame, a triangle-based model of the FEP walls of the chamber was constructed. A total of 1970 triangles was used for each tube to describe the partly curved areas (see Fig. 3). A programme was developed which for a selected location r calculates the angle of incidence α with respect to the FEP walls for light from any direction ϑ, φ . For the same ϑ, φ -combinations and locations within the reactor as in the previous section, the α were calculated and saved in output files. Calculations were only made for the outer wall because the narrow interfacial gap produces negligible differences.

3.2.2. FEP transmission

Furthermore, transmissions corresponding to the angle of incidence for each location r are needed to calculate the f^T according to Eq. (13). In general the transmission is expected to depend on wavelength, angle of incidence and thickness of the material. Angle dependent transmission measurements were made with FEP films in the laboratory using the spectroradiometer. These measurements accounted for light transmitted in a direction similar to the direction of incidence. The corresponding transmission is denoted τ_d . A collection of scattered light transmitted in other directions (τ_s) was not feasible with the available equipment. However, literature data show that with decreasing wavelength scattering processes are becoming important for FEP (Wallner, 2000). Our measurements of τ_d therefore underestimate total, hemispheric transmission (τ_h):

$$\tau_h = \tau_d + \tau_s \quad (19)$$

Although scattering processes are not considered explicitly in the model (Eq. 11), the use of hemispheric transmissions is presumed to be more appropriate for the simu-

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

**Sunlit simulation
chamber**

B. Bohn and H. Zilken

 Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

lation chamber because also the scattered light is entering the chamber. Yet, angle dependent measurements of hemispheric FEP film transmissions are not available in literature making the following considerations necessary.

Wallner (2000) measured spectral hemispheric transmissions τ_h and spectral diffuse transmissions τ_s of FEP film at different thicknesses in the range $d=12\text{--}125\ \mu\text{m}$ at $\alpha=0$. Exponential fits as a function of d were made to these data for each wavelength in the range 300–420 nm:

$$\tau_h^0(\lambda, d) = \tau_h^{00}(\lambda) \exp \{-\rho_h(\lambda) d\} \quad (20)$$

The upper index 0 denotes an angle of incidence $\alpha=0$, the index 00 means $\alpha=0$ and $d=0$. As is shown in Fig. 5, the fitted parameters τ_h^{00} and ρ_h exhibit a smooth dependence on wavelength. Optical densities ρ_h increase strongly towards smaller wavelengths which can be explained by increasing losses by scattering in the bulk of the film.

For the α -dependence of the transmission of FEP film of any thickness the following relationship is assumed:

$$\tau_h(\lambda, \alpha, d) = \tau_h^{00}(\lambda) \tau_F(\alpha) / \tau_F^0 \exp \{-\rho_h(\lambda) d / \cos(\beta)\} \quad (21)$$

Here β is the angle of transmittance and τ_F is the angle dependent transmission neglecting any bulk effects (Fresnel equations). No angle correction for diffusively transmitted light is made which is justified in the case of isotropic scattering.

A similar approach was applied for the undisturbed, direct transmission utilising the data of Wallner (2000) ($\tau_d = \tau_h - \tau_s$). In Fig. 6 the calculated, angle dependent τ_d for two selected wavelengths are compared with the experimental data from the FEP film actually used for the construction of the chamber walls. The agreement is satisfactory justifying the use of Eq. (21) to calculate τ_d and τ_h .

3.2.3. Calculation of f^T

The use of τ_d instead of τ_h would underestimate the absolute level of transmission and overestimate wavelength dependence (Fig. 6). On the other hand, neglecting bulk effects by using τ_F would produce the opposite effects: higher transmissions and no wavelength dependence. However, so far favouring τ_h for the chamber is an assumption not yet backed by experimental data. The calculations of f^T were therefore made using τ_d , τ_h and τ_F for comparison.

For the ϑ , φ combinations also used in Sect. 3.1, the f^T were calculated wavelength dependent in the range 280–420 nm using 5 nm steps (Eq. 13). Similar to the f^V also the f^T are strongly variable. As an example Fig. 7 shows a contour plot of f^T based on hemispheric transmission at a wavelength of 360 nm. Compared to the f^V (Fig. 4) the figure looks similar qualitatively but values are lower and contours are slightly shifted. The f^T range from 0.14 in few directions at $\varphi=0^\circ$ (180°) and very high zenith angles to 0.77 at $\varphi=90^\circ$ (270°) at medium-high zenith angles.

Despite this strong variability, the relative wavelength dependencies are smooth, as shown in Fig. 8 where the ratios $f^T(\lambda)/f^T(360\text{ nm})$ are plotted. The relative wavelength dependencies closely resemble that of the corresponding transmissions of the FEP walls at medium angles of incidence also plotted in Fig. 8. Consequently, the ϑ , φ dependencies can be separated from the relative wavelength dependencies by selecting a reference wavelength (360 nm). Moreover, the ratios of f^T based on different transmissions at fixed wavelengths show little variability. At 360 nm the mean f^T ratios are 0.728 (τ_d/τ_h) with a standard deviation of 1.3%, and 1.124 (τ_F/τ_h) with a standard deviation of 0.5%. Thus, different FEP transmissions are producing different relative wavelength dependencies and scaling factors rather than differences in direction weighting. Therefore, unless stated otherwise, the f^T obtained at 360 nm assuming hemispheric FEP transmission (Fig. 7) are used in the following. As in the case of f^V the data were parameterised by a function returning the $f^T(\vartheta, \varphi)$ upon input of zenith-

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

and azimuth angle.

The actual wavelength dependence of f^T will be obtained from ratios of actinic flux spectra measured simultaneously at a fixed location within and outside the chamber under overcast conditions (Sect. 4.3). In terms of the model this can be rationalised by looking at the products $s(r, \vartheta, \varphi) \tau(r, \vartheta, \varphi, \lambda)$ (Eq. 13) for single locations not too close to the chamber walls. If these products for different ϑ, φ are averaged, relative wavelength dependencies similar to those of Fig. 8 are obtained. Averaging is justified in the case of an isotropic spectral radiance distribution, approximately fulfilled under overcast conditions (Sect. 3.3). Therefore, although absolute values are dependent on location, the relative wavelength dependence of ratios of actinic flux spectra measured inside and outside under such conditions are assumed representative for the chamber.

3.3. f_{direct} and f_{diffuse}

Figure 9 gives an example of diurnal variations of $f_{\text{direct},T}$ on three distinct days of the year. The data were obtained by inserting solar zenith- and azimuth angles into the f^T parametrisation (Eq. 15). For comparison also the illuminated volume fractions $f_{\text{direct},V}$ (Eq. 14) and the ratios $f_{\text{direct},V}/f_{\text{direct},T}$ are plotted to demonstrate the relative contributions of shadows and FEP wall transmissions. Obviously, the fraction of the chamber illuminated by direct sunlight is highly variable with a daily minimum at noon caused by the orientation of the chamber. The effect of shadows is dominating the time dependence for direct light. However, inclusion of wall transmission leads to additional time-dependent effects which tend to amplify the impact of the shadows, particularly at winter time.

Calculation of $f_{\text{diffuse},T}$ (Eq. 18) is complicated by the unknown distribution of radiance $L(\vartheta, \varphi, t)$ of diffuse sky radiation. Under overcast conditions the assumption of an isotropic distribution is simplest, i.e. $L = \text{constant}$. Such a distribution is usually denoted UOC (uniform overcast sky). Grant and Heisler (1997) measured radiance distributions at overcast conditions in the UV range. Their data are in accord with a cosine

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

dependence on zenith angle exhibiting little wavelength dependence:

$$L(\vartheta) \propto 1 + 1.23 \cos(\vartheta) \quad (22)$$

This distribution is denoted SOC (standard overcast sky).

In the UOC and SOC cases weighting factors f_{diffuse} are independent of time. They were calculated by numerical integrations according to Eq. (18). Different resolutions were tested for these sky scans. The use of $P=90$ corresponding to a solid angle resolution of 3×10^{-4} sr ($1^\circ \times 1^\circ$ at $\vartheta=90^\circ$, $\approx 21\,000$ sky positions) was found to be sufficiently precise, i.e. within 0.3% compared to a calculation using $P=720$ ($\approx 10^6$ sky positions). The resulting $f_{\text{diffuse},V}$ are 0.711 and 0.718 for the UOC and SOC distributions, respectively. For $f_{\text{diffuse},T}$ the corresponding values are 0.536 (UOC) and 0.544 (SOC) for a wavelength of 360 nm. Apparently, under overcast conditions the different radiance distributions produce little differences.

Under clear sky conditions the UOC and SOC assumptions are inadequate. With the available equipment a measurement of actual radiance distributions was not feasible. Instead, analytical expressions of radiance distributions by Grant et al. (1997) were used. These expressions are based on experimental data obtained within wavelength ranges UV-A (320–400 nm) and UV-B (300–320 nm) dependent on zenith angle and time-dependent scattering angle ψ (angular separation with respect to the sun). Calculations of $f_{\text{diffuse},V}$ and $f_{\text{diffuse},T}$ for clear sky conditions were made with the same resolution as above for the UOC and SOC distributions. In Fig. 10 examples are shown for the same days as in Fig. 9. Compared to $f_{\text{direct},T}$ the $f_{\text{diffuse},T}$ based on the clear sky radiance distributions exhibit less pronounced diurnal and seasonal dependencies. The ratios $f_{\text{diffuse},V}/f_{\text{diffuse},T}$ reveal that again the effect of the shadows is dominating the time-dependence. Except from a constant factor of about 0.75, inclusion of wall transmission leads to minor time-dependent effects ($\leq 1.5\%$). UV-A and UV-B radiance distributions produce very similar results with diurnal and seasonal effects slightly less pronounced in the UV-B.

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

3.4. Horizon obstruction

In addition to the chamber itself, objects in the surrounding area obstructing the horizon (buildings and tree rows) were mapped and approximated by 44 triangular elements (facades). These objects were not included in the calculations so far because they exhibit a more complex symmetry with respect to azimuth angle. Because the distance between the chamber and the surrounding objects is relatively large compared to the chamber itself, the question whether or not an object is obstructing a direction is addressed for a single location at the centre of the chamber. The corresponding function is denoted $s_c(\vartheta, \varphi) = \{0, 1\}$. For the weighting functions of direct light this simply means multiplication by a factor 0 or 1, i.e. sunrise is delayed and sunset is premature.

$$f_{\text{direct},T}^c(t, \lambda) = f_{\text{direct},T}(t, \lambda) s_c(\vartheta_o, \varphi_o) \quad (23)$$

However, obstruction only occurs in some directions at zenith angles $\vartheta \geq 80^\circ$.

For the weighting functions of diffuse sky radiation there are two possibilities to consider horizon obstruction. Firstly, only the numerator in Eq. (18) is multiplied by s_c . This yields weighting factors with respect to full view of the upper hemisphere. Secondly, the numerator and denominator in Eq. (18) are multiplied by s_c which creates weighting factors with respect to a hypothetic external measurement at the chamber-site:

$$f_{\text{diffuse},T}^c(t, \lambda) = \frac{\sum_{p=0}^P \sum_{q=0}^Q f^T(\vartheta_p, \varphi_q, \lambda) L(\vartheta_p, \varphi_q, t) s_c(\vartheta_p, \varphi_q)}{\sum_{p=0}^P \sum_{q=0}^Q L(\vartheta_p, \varphi_q, t) s_c(\vartheta_p, \varphi_q)} \quad (24)$$

With respect to the integers P and Q the same relations apply as in Eq. (18). This second approach is more useful because also the measurement site of the spectroradiometer is subject to horizon obstruction. In Fig. 11 the $f_{\text{diffuse},T}^c$ are shown to demonstrate the influence of the surrounding objects. Compared to Fig. 10 there is a slight

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

change of the shape of the curves which are also shifted upwards by about 0.02. The strongest shift is obtained at winter time.

Finally, differences between the chamber site and the site of the spectroradiometer measurements caused by horizon obstruction are accounted for by a separate function:

$$f_{rc}(t) = \frac{\sum_{p=0}^P \sum_{q=0}^Q L(\vartheta_p, \varphi_q, t) s_c(\vartheta_p, \varphi_q)}{\sum_{p=0}^P \sum_{q=0}^Q L(\vartheta_p, \varphi_q, t) s_r(\vartheta_p, \varphi_q)} \quad (25)$$

Here $s_r(\vartheta, \varphi) = \{0, 1\}$ is addressing horizon obstruction at the site of the radiometer measurement. For P and Q the same relations apply as in Eq. (18). Due to the higher altitude of the spectroradiometer measurement site the f_{rc} are generally slightly below unity in a range 0.97–1.0.

Overall, horizon obstruction plays a minor role with negligible time-dependent effects.

3.5. Shadow ring correction

To derive $F_{\lambda}^{\text{direct}}$ and $F_{\lambda}^{\text{diffuse}}$ as a model input according to Eqs. (7) and (8), the correction factor f_{ring} is needed. As described in the Experimental section, an analytical correction factor was derived considering ring geometry. However, this approach assumes an isotropic radiance distribution (UOC) and full view of the upper hemisphere.

In order to calculate ring corrections for other radiance distributions and to allow for horizon obstruction, a triangle-based model of the shadow ring with its mountings was created. Similar to the real shadow ring, the modelled ring can be tilted and shifted along an axis perpendicular to the ring plane. 200 triangles were used for a precise description of the shadow ring. Ring correction factors are obtained by performing

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

numerical sky scans as in the previous sections (Eq. 18, 24 and 25):

$$f_{\text{ring}}(t) = \frac{\sum_{p=0}^P \sum_{q=0}^Q s_{\text{ring}}(\vartheta_p, \varphi_q) L(\vartheta_p, \varphi_q, t)}{\sum_{p=0}^P \sum_{q=0}^Q L(\vartheta_p, \varphi_q, t)} \quad (26)$$

In this equation the function $s_{\text{ring}}(\vartheta, \varphi) = \{0, 1\}$ determines whether or not a ring element is blocking light coming from direction ϑ, φ with respect to the detector position (approximated by a single point). Concerning P and Q refer to Eq. (18).

In Fig. 12 examples are shown for three days of different seasons. SOC and UOC correction factors are independent of time for a given day of the year, i.e. for a fixed position of the ring. Moreover, they are not too different with a maximum difference of 1.3% during winter. At the chosen resolution of the sky scans ($P=90$), the numerical UOC correction factors are in excellent agreement with the analytical ring corrections ($\leq 0.2\%$ deviation).

Under clear sky conditions the f_{ring} exhibit a dependence on time of day and wavelength band if the analytical radiance distributions by Grant et al. (1997) are used. Correction factors are somewhat higher compared to UOC and SOC distributions because the shadow ring is obstructing areas with high circumsolar radiance. This effect is slightly less pronounced in the UV-B.

In the calculations concerning ring corrections an about 0.1 rad ($\approx 6^\circ$) scattering angle area around the sun was excluded from the sky scans. As mentioned in the Experimental section, there are practical reasons to do so. Another reason for this exclusion is that an extrapolation of the radiance distributions by Grant et al. (1997) to a position too close to the sun is not useful because the experimental data by Grant et al. (1997) were obtained at scattering angles $\psi \geq 15^\circ$. Calculations including the 6° area around the sun give ring corrections higher by about 2.5% as a result of the strongly increasing radiance in this region, i.e. they tend to slightly increase the contribution of diffuse sky

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

radiation (Eqs. 7 and 8). It is beyond the scope of this work to accurately distinguish direct sunlight from sky radiation. In the present approach diffuse sky radiation coming from a 6° -area around the sun is considered direct sunlight. This is correct in the sense that the direction where the light comes from is very close to the sun and with respect to the chamber the same corrections apply as for direct sunlight.

Ring correction factors f_{ring}^r including horizon obstruction were calculated by multiplying the numerator and the denominator of Eq. (26) by s_r (see Sect. 3.4). However, the ratios $f_{\text{ring}}^r/f_{\text{ring}}$ are very close to unity (0.98–1.0) because few directions are obstructed by both the shadow ring and surrounding objects.

4. Solar actinic flux measurements and calculation of photolysis frequencies

4.1. External contributions of direct sunlight and diffuse sky radiation

The partitioning of spectral actinic flux in direct sunlight and diffuse sky radiation is highly variable under natural conditions in particular in the presence of broken cloud fields. Under clear sky conditions the direct and diffuse contributions are expected to vary more smoothly dependent on wavelength and solar zenith angle. However, actual values also depend on other parameters such as ozone column and aerosol load which may vary in the course of a day.

As an example Fig. 13, shows actinic flux spectra and the contributions of direct and diffuse sunlight obtained under clear sky conditions on 28 July 2002 in the early morning ($\vartheta_o=75^\circ$) and at local noon ($\vartheta_o=32^\circ$). As expected, the contribution of direct sunlight is decreasing with decreasing wavelength and increasing solar zenith angle. A solar zenith angle of 32° is close to the local minimum at summer solstice (27°) while 75° is reached at local noon during winter solstice. This demonstrates the strong seasonal and diurnal dependence of the contributions of direct sunlight under clear sky conditions.

In Fig. 14 the diurnal variations of photolysis frequencies $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$ on 28

**Sunlit simulation
chamber**B. Bohn and H. Zilken

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

July 2002 are plotted. These data were calculated according to Eq. (6) using selected data of absorption cross sections and quantum yields for the photolysis processes (4) and (1) (Merienne et al., 1995; Troe, 2000; Malicet et al., 1995; Matsumi et al., 2002). $j(\text{O}^1\text{D})$ and $j(\text{NO}_2)$ were chosen as examples because the corresponding photolyses are taking place in the UV-B and UV-A/VIS (≤ 420 nm) regions, respectively. Because of the different wavelength regimes, the relative diurnal variations as well as the contributions of diffuse and direct radiation are different for $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$. For example, in the case of $j(\text{NO}_2)$ up to 50% are direct sunlight at noon. The time-dependent effects with respect to the simulation chamber are therefore expected to be more pronounced for $j(\text{NO}_2)$ rather than for $j(\text{O}^1\text{D})$. Other important photolysis processes (HONO, HCHO etc.) lie in between these extremes.

It should be noted that 28 July 2002 was an exceptionally clear day where the diurnal variations of total photolysis frequencies look almost perfectly symmetrical. However, the contributions of direct and diffuse radiation show slight variations which are compensating each other. Such variations are very common on clear sky days and can be attributed to changes in aerosol load.

4.2. Experimental check of shadow ring corrections

In Figs. 13 and 14 the contributions of diffuse and direct light were calculated using a shadow ring correction based on a UOC radiance distribution because the actual, wavelength dependent sky radiance distributions are unknown. Under overcast conditions, ring correction factors can be checked by comparison of the actinic fluxes obtained with and without shadow ring but at overcast conditions no ring correction is needed. To determine the f_{ring}^r under clear sky conditions, measurements were made where direct sunlight was occasionally blocked manually from the unshaded detector by a small disk as described in the Experimental section. Ring correction factors are then obtained by dividing the actinic flux obtained with disc by those obtained with shadow ring. In Fig. 15 results of spot check measurements on another clear sky day (17 April 2003) are compared with the numerically calculated ring corrections for dif-

**Sunlit simulation
chamber**B. Bohn and H. Zilken

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

ferent radiance distributions. Photolysis frequencies $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$ are used for this comparison because they can be assigned to the spectral ranges UV-A and UV-B, respectively. Before and after these measurements the two channels of the spectroradiometer agreed within 1% which was checked by removing the shadow ring. As is evident from Fig. 15, the agreement between measured and calculated ring corrections based on distributions by Grant et al. (1997) is satisfactory for the UV-A while SOC and UOC factors are too low. For the UV-B the result is not as clear. Measured ring corrections are somewhat lower than calculated for the UV-B clear sky radiance distributions but the data agree within 2%. These comparisons show that, at least in the UV-A at clear sky conditions, the use of radiance distributions according to Grant et al. (1997) yields better ring corrections compared to the simpler SOC and UOC distributions.

4.3. Experimental determination of the f^T wavelength dependence

On two days with changing cloud cover (28–29 May 2002) measurements were made with two spectroradiometers operating simultaneously inside and outside the chamber. From the 640 spectra recorded on these two days, 150 were selected where conditions were completely overcast. The selection criterion was that the two channels outside (with/without shadow ring) received integrated actinic flux similar within 2% after shadow ring correction. As was shown in Sect. 3.2, the ratio inside/outside of actinic flux spectra under such conditions should resemble the relative wavelength dependence of the chamber as a whole, multiplied with a location dependent scaling factor. In Fig. 16 the experimental data are compared with the model calculations. A constant factor of 0.548 was factored out for this comparison to obtain a ratio of unity at 360 nm. The experimental wavelength dependence lies between the modelled behaviour for hemispheric and direct transmission, but closer to the hemispheric as expected. Within experimental uncertainties there is no significant curvature recognisable

and consequently a straight line was fitted to the data:

$$\frac{f^T(\lambda)}{f^T(360 \text{ nm})} = 1 + 0.00173(\lambda/\text{nm} - 360) \quad (27)$$

The scaling factors calculated for the actual measurement location are 0.645 (τ_F), 0.577 (τ_h) and 0.425 (τ_d). The calculated value of 0.577 assuming hemispheric transmission compares best with the experimental factor of 0.548 in accordance with the relative wavelength dependence.

4.4. Calculation of actinic flux spectra and photolysis frequencies for SAPHIR

With the model tools and experimental information gathered so far, mean actinic flux spectra and photolysis frequencies for the simulation chamber can be calculated upon input of external direct and diffuse spectra, at least on a relative basis excluding the scaling factor h^c (Eq. 9). h^c is reserved for determination by chemical actinometry (Bohn et al., 2004¹) which can compensate deficiencies of the model calculations with respect to internal reflections (Sect. 3). However, a reasonable attempt is to estimate h^c from 4π sr spectroradiometer measurements of ratios of up- and down-welling actinic flux within the chamber:

$$h^c \approx 1 + \frac{F_\lambda^\uparrow}{F_\lambda^\downarrow} \quad (28)$$

From measurements on eight days with changing conditions $h^c \approx 1.3$ is estimated, independent of wavelength. This preliminary factor will be used here to complete the model predictions by putting them closer to reality without anticipating the actinometric result.

Under overcast conditions the calculation of mean chamber photolysis frequencies consists of four steps. (1) The externally measured actinic flux spectra are corrected with respect to wavelength (Eq. 27). (2) The time-independent factors $f_{\text{diffuse},T}^c$ and f_{rc}

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

**Sunlit simulation
chamber**B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

are applied (Eqs. 24 and 25). The factors corresponding to an SOC radiance distribution at 360 nm are 0.555 and 0.990, respectively. These factors are preferred because the radiance distribution was derived from measured data (Grant and Heisler, 1997). However, UOC factors are very similar and the difference is considered insignificant within experimental uncertainties ($\approx 1\%$). (3) The factor h^c is applied and (4) photolysis frequencies are calculated (Eq. 6). This results in typical ratios inside/outside of 0.74 and 0.67 for $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$, respectively. The difference is caused by the wavelength correction (Eq. 27) which also introduces a slight time-dependence for the photolysis frequencies ($\leq 1\%$) because the spectral distributions are changing in the course of a day.

Under clear sky conditions the procedure is more complex consisting of five steps. (1) Direct and diffuse external actinic flux spectra are calculated by applying shadow ring corrections f_{ring}^r (Eqs. 7 and 8). (2) The resulting spectra are corrected with respect to wavelength (Eq. 27). (3) The factors $f_{\text{direct},T}^c$ and $f_{\text{diffuse},T}^c \times f_{rc}$ are applied for the direct and diffuse spectra, respectively (Eqs. 23–25). (4) The factor h^c is applied and (5) photolysis frequencies are calculated (Eq. 6).

To investigate the differences introduced by different radiance distributions, clear-sky calculations were made based on UV-A, UV-B, SOC and UOC distributions. 28 July 2002 was again selected for this comparison because the contribution of direct sunlight is at a maximum on a clear-sky summer day. Note that the different radiance distributions are affecting the shadow ring corrections as well as the chamber-specific factors. The comparison shows that differences between SOC and UOC distributions are again small ($\leq 1\%$). Also the differences between UV-A and UV-B distributions are minor ($\leq 1\%$) and considered negligible.

In Figs. 17 and 18 the results using SOC and UV-A radiance distributions are compared. $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$ are again used to mark the limiting behaviour also for other photolysis frequencies. Since SOC shadow ring corrections are smaller, the calculated fraction of direct sunlight is larger compared to the UV-A distribution. However, the difference is small and hardly affects the mean total photolysis frequencies for the

Sunlit simulation chamberB. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

chamber which can be explained as follows. In the SOC case the diffuse sky radiation is lower, but time independent. On the other hand, the larger direct part is subject to a stronger time-dependent variation. As a consequence the j ratios SOC/UV-A for the chamber are close to unity. They are merely varying between 0.990 at sunrise and 1.020 at noon for $j(\text{NO}_2)$ and between 0.985 at sunrise and 1.025 at noon for $j(\text{O}^1\text{D})$.

As expected, the ratios inside/outside are strongly time-dependent under clear sky conditions on 28 July 2002. They vary between 0.65 and 0.86 with a mean of 0.78 for $j(\text{NO}_2)$ and between 0.60 and 0.73 with a mean of 0.68 for $j(\text{O}^1\text{D})$.

5. Conclusions

In this work mean photolysis frequencies for a sunlit, non-hemispheric atmosphere simulation chamber with opaque construction elements were derived based on external measurements of diffuse and direct solar actinic flux and model calculations. Time-dependent effects are most pronounced for direct sunlight (up to a factor of two, Fig. 9). Both diurnal and seasonal effects are of importance. The influence of the FEP walls, of different distributions of diffuse sky radiation and of horizon obstruction were found to be of minor importance. The distinction between direct and diffuse actinic flux by using a simple shadow ring for the external measurement was found to be sufficiently precise for the purpose of this work.

To investigate the quality of the predictions the calculated photolysis frequencies were compared with data from chemical actinometry within the chamber. The validity of the model assumptions is confirmed by a linear correlation of the data, independent of external conditions and season. More details concerning this comparison are given elsewhere (Bohn et al., 2004¹).

In the future, the experimental input can be improved by using a movable disk to obstruct the sun. Moreover, actual radiance distributions should be monitored by a UV sensitive sky imager which also allows to assess the effect of heterogeneous or broken cloud cover. The influence of scattering processes at the chamber walls and

of reflections within the chamber will be investigated by an extended model based on more detailed information concerning FEP film scattering properties.

The method described in this work can also be used to predict lighting conditions in other complex environments e.g. in the vicinity of buildings or vegetation. Such information is necessary to model local photochemistry, but also, for example, to assess the exposure of humans to UV radiation as a function of time and external conditions.

Acknowledgements. The authors thank H. Schütze (Plantec GmbH) for providing SAPHIR CAD data, D. Bartel (FZ-Jülich) for his help with AUTOCAD, G. M. Wallner (University of Leoben, Austria) for providing data on the spectral transmission of FEP film and F. Rohrer and T. Brauers for useful discussions. Financial support by the Helmholtz-Gemeinschaft (B.B.) is gratefully acknowledged.

References

- Grant, R. H. and Heisler, G. M.: Obscured overcast sky radiance distributions for ultraviolet and photosynthetically active radiation, *J. Appl. Meteorol.*, 36, 1336–1345, 1997. [6980](#), [6989](#)
- Grant, R. H., Heisler, G. M., and Gao, W.: Clear sky radiance distributions in ultraviolet wavelength bands, *Theo. Appl. Climatol.*, 56, 123–135, 1997. [6981](#), [6984](#), [6987](#), [7002](#), [7003](#), [7004](#)
- Hofzumahaus, A., Kraus, A., and Müller, M.: Solar actinic flux spectroradiometry: A technique for measuring photolysis frequencies in the atmosphere, *Applied Optics*, 38, 4443–4460, 1999. [6969](#), [6971](#)
- Kraus, A. and Hofzumahaus, A.: Field measurements of atmospheric photolysis frequencies for O₃, NO₂, HCHO, H₂O₂ and HONO by UV spectroradiometry, *J. Atmos. Chem.*, 31, 161–180, 1998. [6969](#)
- Malicet, J., Daumont, D., Charbonnier, J., Parisse, C., Chakir, A., and Brion, J.: Ozone UV Spectroscopy II: Absorption cross-sections and temperature dependence, *J. Atmos. Chem.*, 21, 263–273, 1995. [6986](#)
- Matsumi, Y., Comes, F. J., Hancock, G., Hofzumahaus, A., Hynes, A. J., Kawasaki, M., and Ravishankara, A. R.: Quantum yields for production of O(¹D) in the ultraviolet photolysis of ozone: Recommendation based on evaluation of laboratory data, 107, 2002. [6986](#)

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Merienne, M. F., Jenouvrier, A., and Coquart, B.: The NO₂ absorption spectrum: 1. Absorption cross-sections at ambient temperature in the 300 - 500 nm region, J. Atmos. Chem., 20, 281–297, 1995. [6986](#)

5 Müller, M., Kraus, A., and Hofzumahaus, A.: O₃ → O(¹D) photolysis frequencies determined from spectroradiometric measurements of solar actinic UV-radiation: Comparison with chemical actinometer measurements, Geophys. Res. Lett., 22, 679–682, 1995. [6969](#)

Shetter, R. E. and Müller, M.: Photolysis frequency measurements using actinic flux spectroradiometry during PEM-Tropics Mission: Instrumentation description and some results, J. Geophys. Res., 104, 5647–5661, 1999. [6969](#)

10 Troe, J.: Are primary quantum yields of NO₂ photolysis at $\lambda \leq 398$ nm smaller than unity?, Z. Phys. Chem., 214, 573–581, 2000. [6986](#)

Wallner, G. M.: Kunststoffe für die transparente Wärmedämmung - Polymerphysikalische Einfüsse und Modellierung, PhD-Thesis, University of Leoben, 2000. [6977](#), [6978](#)

Sunlit simulation chamber

B. Bohn and H. Zilken

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Sunlit simulation chamber

B. Bohn and H. Zilken



Fig. 1. The atmosphere simulation chamber SAPHIR with opened roof. The photograph was taken from the site of the external spectroradiometer measurements.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Print Version](#)

[Interactive Discussion](#)

© EGU 2004

Sunlit simulation chamber

B. Bohn and H. Zilken



Fig. 2. Actinic flux detector heads of the spectroradiometer with shadow ring obstructing direct sunlight.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

Sunlit simulation chamber

B. Bohn and H. Zilken

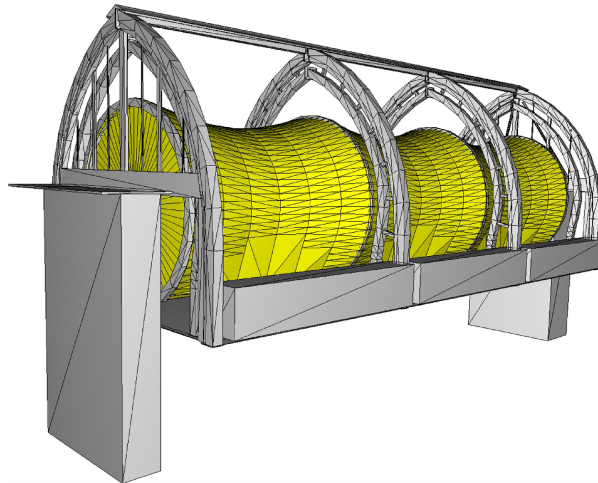


Fig. 3. Model of the SAPHIR frame construction (grey) and FEP tubes (yellow) approximated by 4400 and 1970 triangles, respectively.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

**Sunlit simulation
chamber**

B. Bohn and H. Zilken

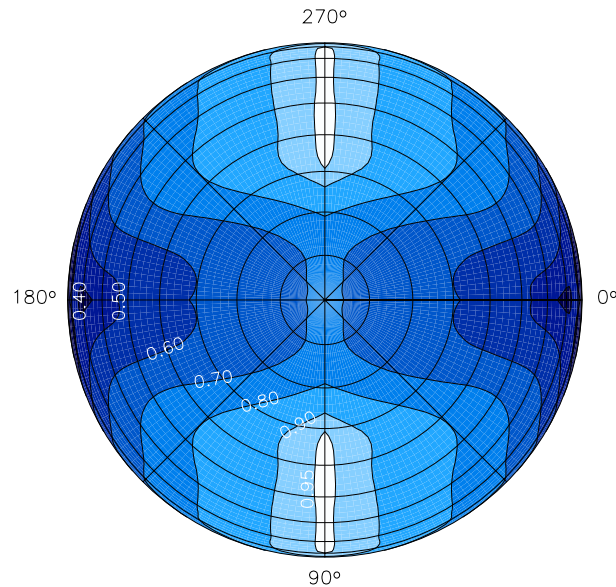


Fig. 4. Contour plot of direction weighting function f^V (illuminated volume fraction) as a function of ϑ and φ (orthographic projection looking from the zenith). Azimuth angles φ are indicated (0° =north, 180° =south).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation
chamber

B. Bohn and H. Zilken

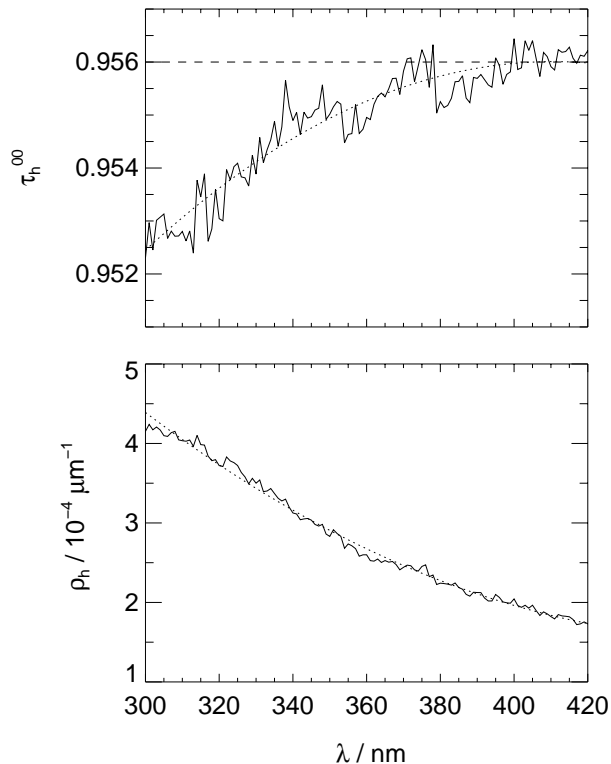


Fig. 5. Parameters describing hemispheric transmission of FEP film at $\alpha=0$ as a function of thickness (Eq. 20, full lines) and fitted second-order polynomials (dotted lines). Upper panel: Hemispheric transmission extrapolated to $d=0$. The dashed horizontal line indicates the expected transmission for a refractive index $n=1.4$. Lower panel: optical densities caused by bulk effects (mainly scattering).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

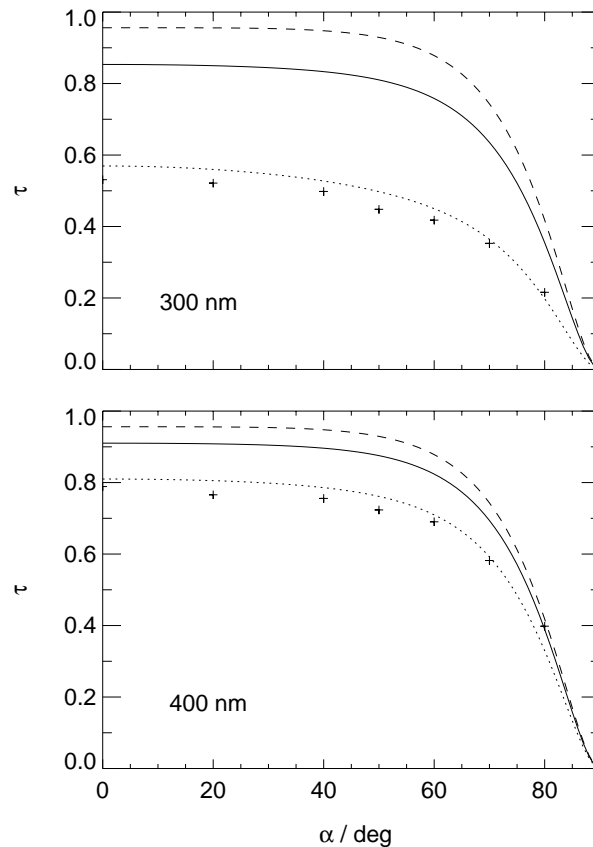


Fig. 6. Angle of incidence dependencies of FEP transmissions τ_h (full lines) and τ_d (dotted lines) according to Eq. (21) for a $250 \mu\text{m}$ FEP film. Upper panel: $\lambda=300 \text{ nm}$, lower panel: $\lambda=400 \text{ nm}$. Crosses indicate experimental data for the FEP material used in the construction of SAPHIR. The dashed line shows τ_F for comparison (no bulk effects, see text).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

**Sunlit simulation
chamber**

B. Bohn and H. Zilken

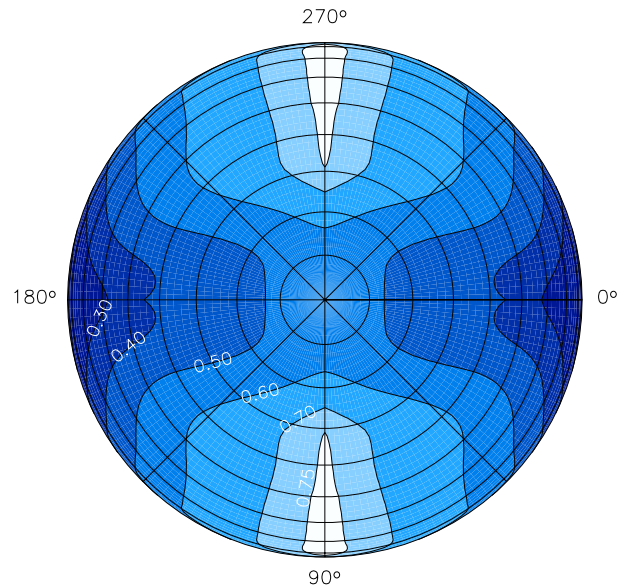


Fig. 7. Contour plot of direction weighting function t^T (360 nm, based on hemispheric FEP transmission) as a function of ϑ and φ (orthographic projection looking from the zenith). Azimuth angles φ are indicated (0° =north, 180° =south).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation chamber

 B. Bohn and H. Zilken

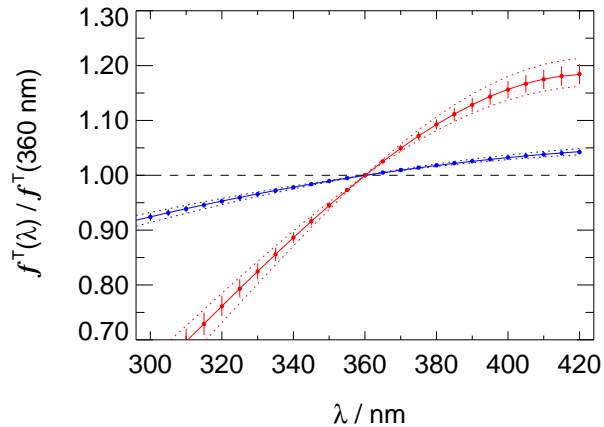


Fig. 8. Relative wavelength dependence of weighting factors f^T using a wavelength of 360 nm as reference. Blue: $f^T(\tau_h)$, red: $f^T(\tau_d)$. For each wavelength position the vertical bar indicates the range of results obtained within the range of zenith- and azimuth angles considered in the f^T calculations. The full lines are polynomials fitted to the averaged values. Dotted lines show relative wavelength dependencies of the corresponding transmissions of the FEP walls at angles of incidence of 0° and 60° , respectively.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Print Version](#)
[Interactive Discussion](#)

© EGU 2004

Sunlit simulation chamber

B. Bohn and H. Zilken

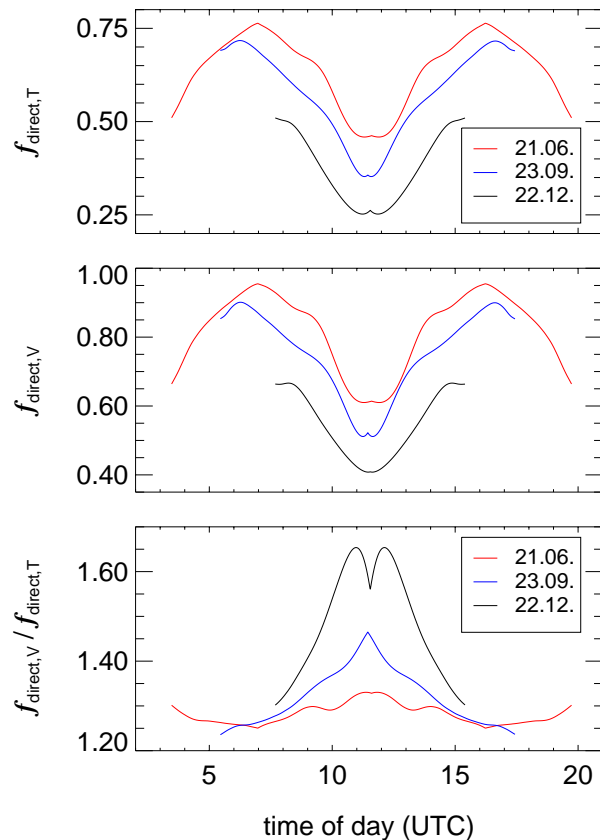


Fig. 9. Upper panels: Diurnal variations of weighting factors $f_{\text{direct},T}$ and $f_{\text{direct},V}$ on three days of the year ($\lambda=360$ nm). Lower panel: Ratio $f_{\text{direct},V}/f_{\text{direct},T}$ showing the relative importance of FEP walls transmission. Plot ranges indicate times where $\vartheta_o \leq 90^\circ$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

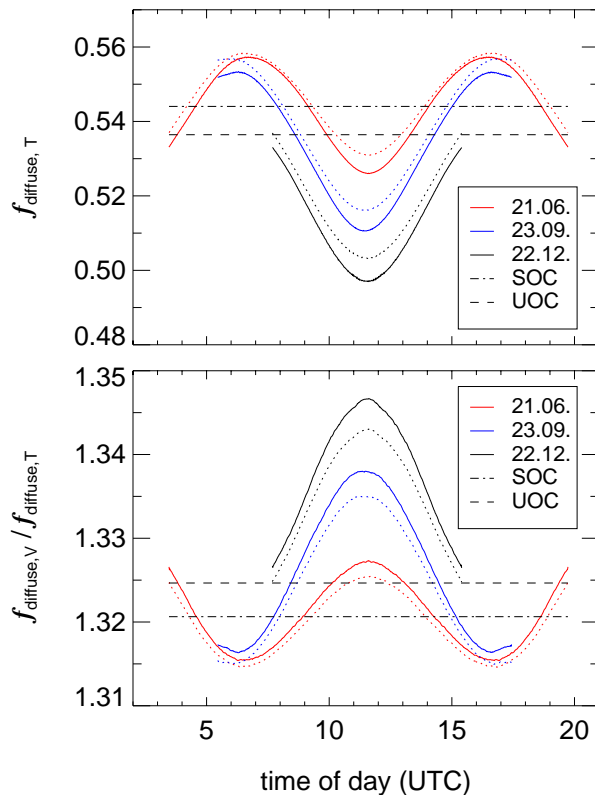


Fig. 10. Upper panel: Diurnal variations of weighting factors $f_{\text{diffuse},T}$ on three days of the year ($\lambda=360$ nm). Full and dotted lines were obtained with UV-A and UV-B radiance distributions by Grant et al. (1997), respectively. Lower panel: Ratios $f_{\text{diffuse},V}/f_{\text{diffuse},T}$ indicating the relative importance of FEP walls transmission. In both panels dashed and dashed-dotted lines show the time-independent results for UOC and SOC radiance distributions, respectively. Plot ranges indicate times where $\vartheta_o \leq 90^\circ$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

Sunlit simulation chamber

B. Bohn and H. Zilken

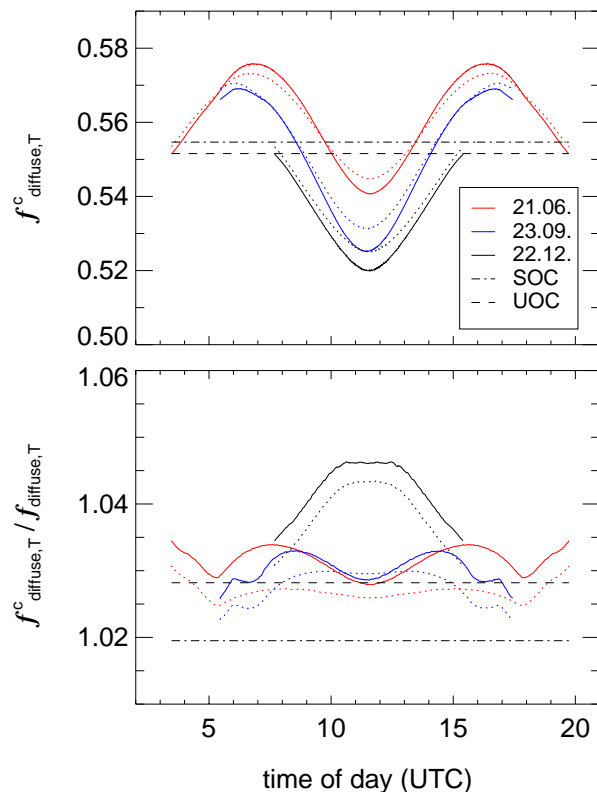


Fig. 11. Upper panel: Diurnal variations of weighting factors $f_{\text{diffuse},T}^c$ on three days of the year ($\lambda=360$ nm). Compared to Fig. 10 horizon obstruction was included in the calculations and y-axes are slightly shifted. Full and dotted lines were obtained with UV-A and UV-B radiance distributions by Grant et al. (1997), respectively. Lower panel: Ratios $f_{\text{diffuse},T}^c / f_{\text{diffuse},T}$. In both panels dashed and dashed-dotted lines indicate the time-independent results for UOC and SOC radiance distributions, respectively. Plot ranges indicate times where $\vartheta_{\leq 90^\circ}$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Print Version

Interactive Discussion

© EGU 2004

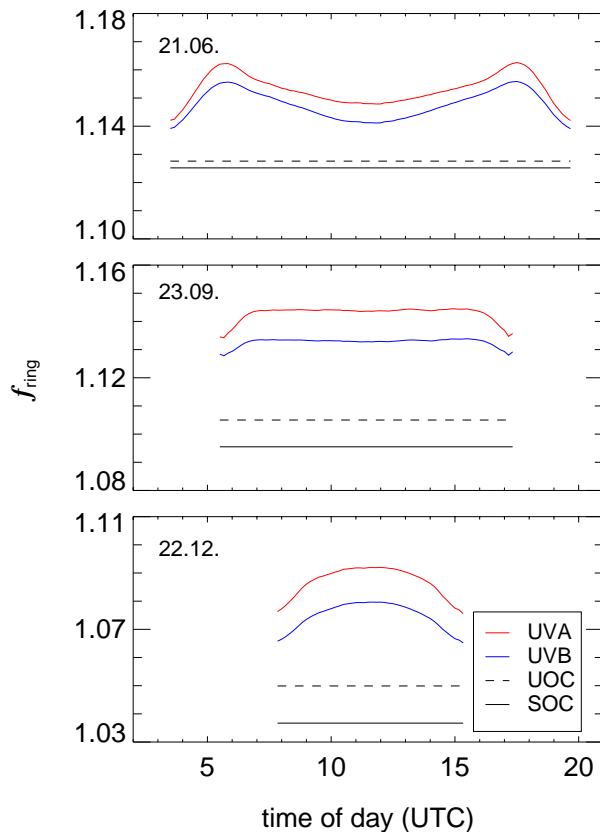


Fig. 12. Numerical ring correction factors f_{ring} on three days of the year. UV-A, UV-B: clear sky radiance distributions according to Grant et al. (1997). SOC, UOC: overcast radiance distributions. Plot ranges indicates times where $\vartheta_o \leq 90^\circ$.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation chamber

B. Bohn and H. Zilken

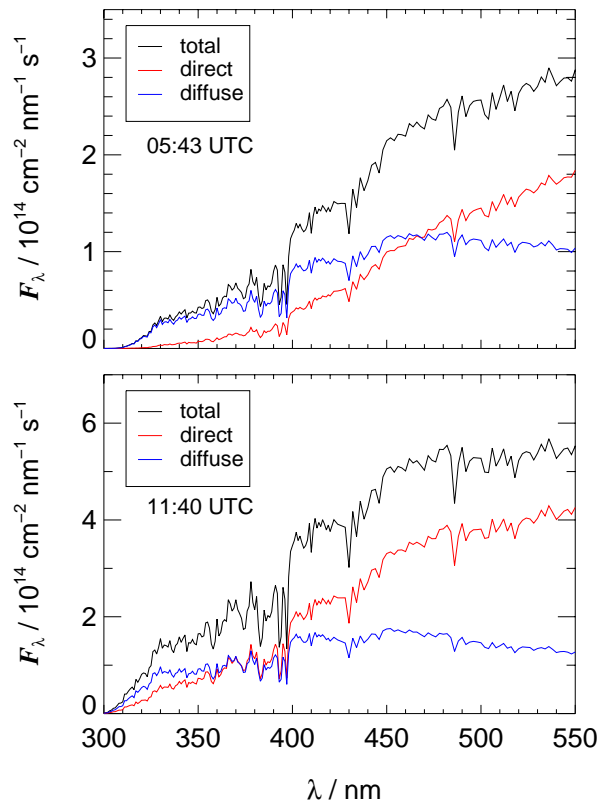


Fig. 13. Examples of solar actinic flux spectra at different times of day under clear sky conditions (28 July 2002). Upper panel: $\vartheta_o=75^\circ$. Lower panel: $\vartheta_o=32^\circ$ (local noon). The measured total actinic flux (black) is divided in direct sunlight (red) and diffuse sky radiation (blue) according to Eqs. (7) and (8).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation
chamber

B. Bohn and H. Zilken

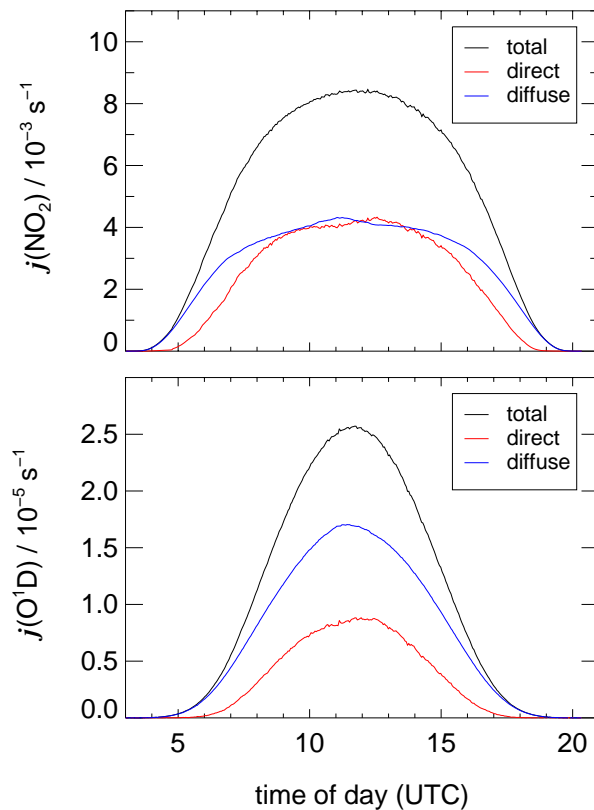


Fig. 14. Diurnal variations of $j(\text{NO}_2)$ (upper panel) and $j(\text{O}^1\text{D})$ (lower panel) under clear sky conditions (28 July 2002). The contributions of direct sunlight reach maxima of about 50% and 30% for $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$, respectively.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation
chamber

B. Bohn and H. Zilken

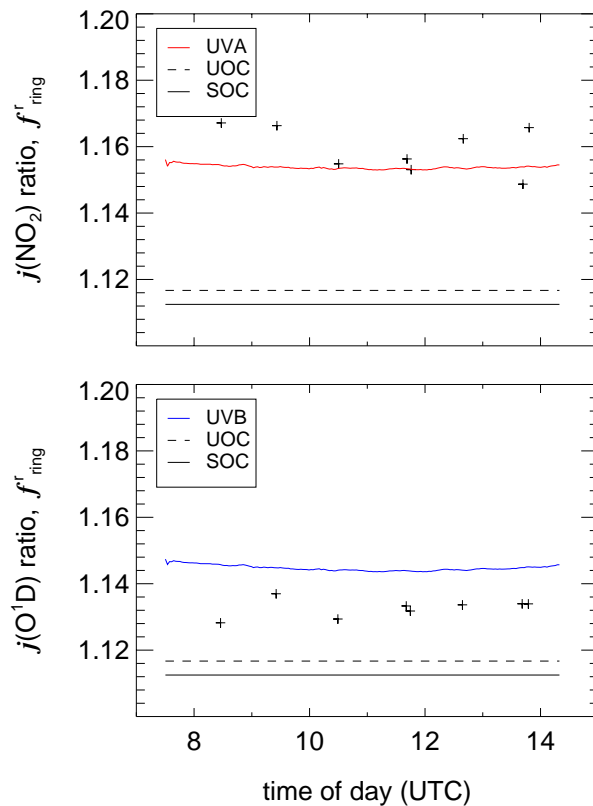


Fig. 15. Measured $j(\text{NO}_2)$ and $j(\text{O}^1\text{D})$ ratios obtained with detector heads obscured by a disc or by the shadow ring, and numerical shadow ring correction factors assuming different radiance distributions (17 April 2003).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation
chamber

B. Bohn and H. Zilken

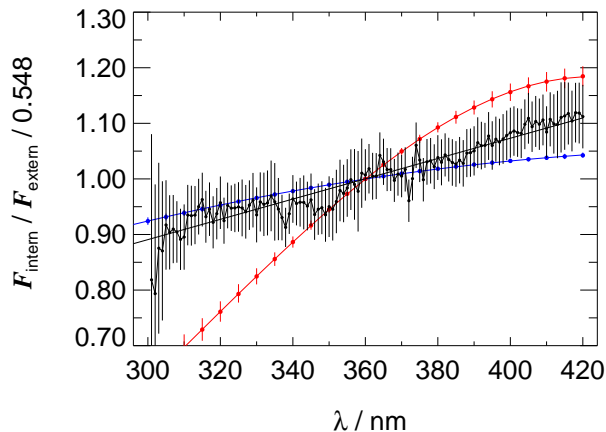


Fig. 16. Experimental ratios of solar actinic flux inside and outside the chamber and relative wavelength dependence of weighting factors f^T . Black: Ratio of spectra obtained at a single location within the chamber and outside under overcast conditions (normalised to unity at 360 nm). Vertical bars indicate the standard deviations of the ratios. The straight line shows a fit to the data (Eq. 27). Blue: $f^T(\tau_h)$. Red: $f^T(\tau_d)$ (see Fig. 8).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004

Sunlit simulation chamber

B. Bohn and H. Zilken

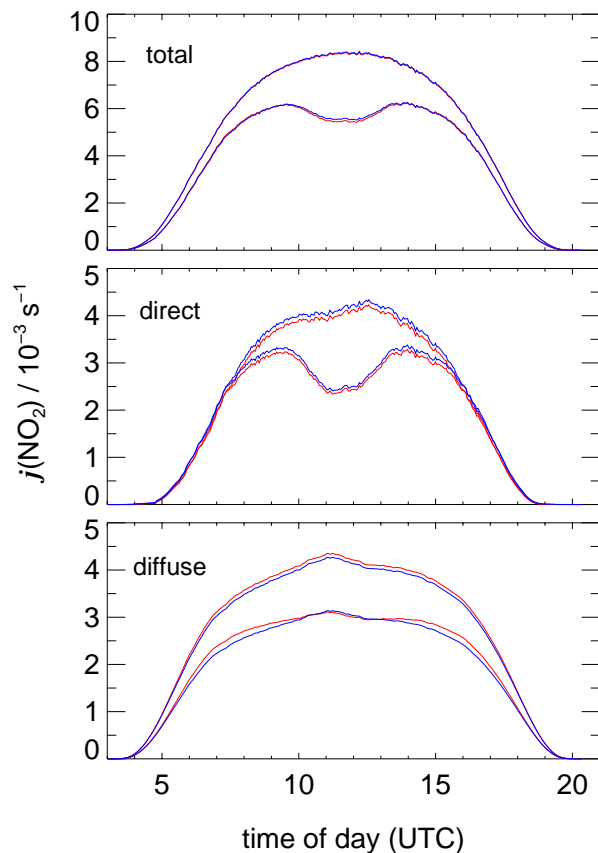


Fig. 17. Diurnal variations of $j(\text{NO}_2)$ on a clear sky day (28 July 2002) based on different assumptions. Blue: SOC radiance distribution. Red: UV-A radiance distribution. In all panels the upper curves correspond to the external photolysis frequencies at the site of the simulation chamber. The lower curves show the photolysis frequencies inside the chamber based on the external data, modelled weighting factors and a preliminary, radiometric scaling factor $h^c=1.3$.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

Sunlit simulation
chamber

B. Bohn and H. Zilken

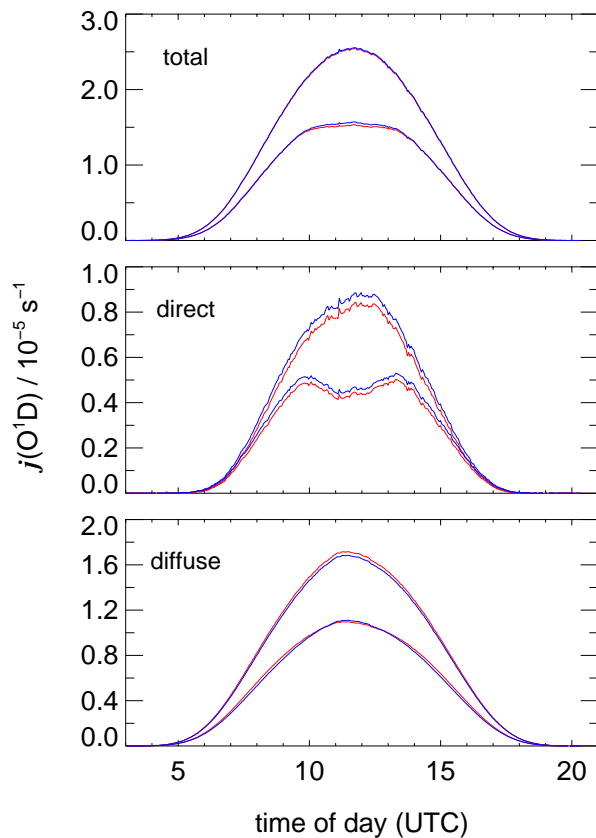


Fig. 18. Diurnal variations of $j(\text{O}^1\text{D})$ on a clear sky day (28 July 2002). See Fig. 17 for explanation.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Print Version](#)[Interactive Discussion](#)

© EGU 2004