

## Reviewer 1:

It is a pleasure to review the manuscript "Impact of buildings on surface solar radiation over urban Beijing" by Zhao et al. This manuscript addresses a challenging problem: How to take into account building effects for calculating downward solar radiation in complex urban areas, which is critical for estimating urban heat islands and for urban modeling. It examines the building effects on solar radiation by comparing, at different spatial resolutions (4 km and 800-m), results from a 3-D radiation parameterization with results from a relatively simple plane-parallel approach. The paper is well organized and well written, and the research quality is high. I suggest to accepting this manuscript after the authors clarify the following points:

Response: We would like to thank the reviewer for kind words and appreciate his/her constructive comments to improve the quality of our manuscript. In the following, the original comments are in black, while our responses are in blue.

- The deviations of radiation fluxes calculated from the above two models are remarkably small ( $\sim 1\text{-}10\text{ W m}^{-2}$  at 800-m grid resolution and  $1\text{ W m}^{-2}$  at 4-km resolution) from mesoscale modeling perspectives. Can the authors elaborate on the types of urban data are used in their 3-D model? Judging from Fig. 1, I understand that the SRTM data provides information regarding the average building height and perhaps gaps between buildings. Does this dataset also describe building width? A more general question is: does this 3-D radiation model take into account the building geometry? If not, what would be uncertainties of not account it in the calculated deviations?

Response: We appreciate the reviewer's valuable comment. In the 3-D model, we use topography data at a resolution of 3 arc-second (about 90 m) from the Shuttle Radar Topography Mission (SRTM), which provides the elevation of each 90-m pixel. In other words, the SRTM data mimic buildings as numerous  $90\times 90\text{ m}^2$  cuboids and define the width of large buildings comprising of a number of 90-m pixels. However, the detailed geometry of buildings is not resolved, representing a limitation of this study, which could introduce uncertainty in evaluating the building effect on solar fluxes.

The quantification of this uncertainty is beyond the scope of this study – a subject requiring further investigations. Nevertheless, we present a brief discussion in the following.

The grid resolutions used in our 3-D radiation simulation (4 km and 800 m) are considerably larger than most buildings. We found that positive and negative flux deviations on different sides of buildings often offset each other within a model grid. For this reason, the detailed geometry of buildings produces relatively minor effects on simulated solar fluxes. The effects could be much larger if we would use a grid resolution comparable to the dimension of most buildings, which is, however, beyond the scope of this study.

We have also described the urban topography data used and their limitation in the revised manuscript (Page 5 Line 17-21, and Page 14 Line 14-23 of the revised manuscript).

- Section 3.1, page 2, Line 18, "these grids are": which grids are referring to here? It may be useful to add a figure to show the geometry features of grids, which is not obvious from Fig. 1.

Response: We thank the reviewer for this comment. We have revised this sentence as follows to make it clearer.

Figure 1 shows that the typical urban area defined in Domain 2 (i.e., rectangle C) is mostly located in the eastern side of the buildings rather than in the western side. (Page 8 Line 27-29 of the revised manuscript)

As described above, the SRTM topography data used in this study cannot resolve the detailed geometry of buildings, but only provide the elevation of each 90-m pixel, as shown in Figure 1.

- Section 3.2, Line 17: authors mentioned sky view factor (SVF). Does the 3-D model consider SVF and if yes, how? Does the calculation of SVF involve the use of building geometry characteristics?

Response: We thank the reviewer for this valuable comment. The 3-D model does consider sky view factor when quantifying the building effect on solar radiation. The 3-D model parameterizes solar flux deviations from horizontal surface as a function of grid-average topographic parameters. Sky view factor is one of these topographic parameters. The governing equation of the 3-D model is shown as follows:

$$\begin{pmatrix} F'_{dir} \\ F'_{dif} \\ F'_{rdir} \\ F'_{rdif} \\ F'_{coup} \end{pmatrix} = \begin{pmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ a_5 \end{pmatrix} + \begin{pmatrix} b_{11} & b_{12} & 0 & 0 \\ b_{21} & b_{22} & 0 & b_{24} \\ 0 & b_{32} & b_{33} & 0 \\ 0 & b_{42} & b_{43} & 0 \\ b_{51} & b_{52} & b_{53} & 0 \end{pmatrix} \begin{pmatrix} \langle \tilde{\mu}_i \rangle \\ \langle \tilde{V}_d \rangle \\ \langle \tilde{C}_t \rangle \\ \sigma(h) \end{pmatrix} \quad (1)$$

where  $F'_i$  is the relative deviation of each flux component,  $i = \text{dir}$  (direct flux),  $\text{dif}$  (diffuse flux),  $\text{rdir}$  (direct-reflected flux),  $\text{rdif}$  (diffuse-reflected flux), and  $\text{coup}$  (coupled flux).  $a_i$  is the interception,  $b_{ij}$  is the regression coefficient for a specific independent variable.  $\tilde{\mu}_i$  is the cosine of the solar zenith angle normalized by the cosine of the slope,  $\tilde{V}_d$  is the sky view factor normalized by the cosine of the slope,  $\tilde{C}_t$  is the terrain configuration factor normalized by the cosine of the slope,  $\sigma(h)$  is the standard deviation of elevation, and angle brackets denote the spatial mean of the variable within a model grid.

The sky view factor is calculated using the SRTM elevation data at ~90 m resolution. The overall heights, widths, and intervals of buildings are defined in the SRTM data and thus used in sky view factor calculation, but the detailed building geometry is not accounted for. We first calculate the sky view factor for each 90-m pixel, followed by evaluating the average sky view factor for each 4-km or 800-m grid in simulation domains.

If one assumes that the diffuse flux is isotropic, the sky view factor represents the portion of the sky dome visible to a target point. The latter can be obtained by calculating the area of unobstructed hemisphere given by

$$\begin{aligned}
V_d &= \frac{1}{\pi} \int_0^{2\pi} \int_0^{H_\varphi} \sin \theta \left[ \cos \theta \cos \theta_s + \sin \theta \sin \theta_s \cos(\varphi - \varphi_s) \right] d\theta d\varphi \\
&\approx \frac{1}{2\pi} \int_0^{2\pi} \left[ \cos \theta_s \sin^2 H_\varphi + \sin \theta_s \cos(\varphi - \varphi_s) \times (H_\varphi - \sin H_\varphi \cos H_\varphi) \right] d\varphi
\end{aligned} \tag{2}$$

where  $\theta_s$  is the slope,  $\varphi_s$  is the aspect of the slope, and  $H_\varphi$  is the horizon angle measured from the zenith down to the local horizon at the orientation direction  $\varphi$ , which can result either from “self-shadowing” by the slope itself or from nearby buildings. For more details about the calculation of sky view factor, please refer to our previous paper (Lee et al., 2011).

We have given these descriptions in the revised manuscript (from Page 4 Line 10 to Page 5 Line 4, and Page 5 Line 17-24 of the revised manuscript).

Reference:

Lee, W. L., Liou, K. N., and Hall, A.: Parameterization of solar fluxes over mountain surfaces for application to climate models, *J Geophys Res-Atmos*, 116, D01101, DOI 10.1029/2010jd014722, 2011.

- Section 3.3.1, Line 6: should “are now shown” be “are not shown”?

Response: We apologize for this mistake. We have changed “are now shown” to “are not shown”.

- Suggest including a plot of SRTM heights at 90-m resolution in Fig. 6.

Response: We appreciate the reviewer’s comment. In fact, we have provided a plot of SRTM heights at ~90-m resolution in the right panel of Figure 1. To make it clearer, we added a sentence in the caption of Figure 6 which refers the reader to Figure 1 for the elevation map. The revised caption of Figure 6 is shown as follows.

Figure 6. Surface solar flux deviations between the 3-D radiation parameterization and the plane-parallel scheme on April 1st at a grid resolution of 3 arc-second (about 90 m). (a) 7:00 BT; (b) 12:00 BT; (c) 17:00 BT. The size of the simulation domain is the same as Domain 2 defined in Fig. 1. An elevation map at a 90-m resolution for the simulation domain is also shown in the right panel of Fig. 1.

- Section 3.3.2: authors briefly mentioned the limit of applying their models for high resolution < 1-km? Can they elaborate more on the theoretical basis of such limitation (with reference perhaps)? It is an important issue because their models are used in this manuscript for 800-m resolution too.

Response: We appreciate the reviewer’s valuable comment. We mentioned that the parameterization may not be applicable to a fine resolution < about 1 km with good accuracy (Lee et al., 2013). Here “about 1 km” is not a strict limit but rather a rough estimate. The theoretical basis is that the 3-D radiation parameterization is based on grid-average topographic parameters, so it is valid only if a model grid comprises a number of topographic pixels (Lee et al., 2011, 2013). The present parameterization is applicable to a grid resolution as fine as 800 m since an 800×800 m<sup>2</sup> grid encompasses a large number of 90-m pixels. In Section 2.2, we demonstrated the applicability of an 800-m resolution by comparing flux

deviations in each  $4 \times 4 \text{ km}^2$  grid calculated directly from the 3-D parameterization and those from the summation of all  $800 \times 800 \text{ m}^2$  grids. (from Page 5 Line 28 to Page 6 Line 5, and Page 11 Line 2-6 of the revised manuscript).

#### References:

Lee, W. L., Liou, K. N., and Hall, A.: Parameterization of solar fluxes over mountain surfaces for application to climate models, *J Geophys Res-Atmos*, 116, D01101, DOI 10.1029/2010jd014722, 2011.

Lee, W. L., Liou, K. N., and Wang, C. C.: Impact of 3-d topography on surface radiation budget over the tibetan plateau, *Theor Appl Climatol*, 113, 95-103, 10.1007/s00704-012-0767-y, 2013.

- Section 3.3.3: albedo 0.15-0.2 from WRF. These albedo values likely are output of Pleim-Xue land model. Does that land model consider building effects on solar radiation (even in a crude way)? If yes, would the use of these albedo values in the 3-D model somewhat double account for building effects?

Response: The Pleim-Xiu land surface model does not consider any building effect on solar radiation (Pleim and Xiu, 1995). Therefore, we did not double count the building effect in this study. We have clarified this point in the revised manuscript (Page 6 Line 23-25 of the revised manuscript).

#### Reference:

Pleim, J. E., and Xiu, A.: Development and testing of a surface flux and planetary boundary layer model for application in mesoscale models, *J Appl Meteorol*, 34, 16-32, 1995.

- WRF includes urban canopy models (Chen et al. 2011, *International Journal of Climatology*), which consider building geometry features to calculate sky view factor etc to determine effects of shadows and reflection on solar radiation. Detailed description of these models and their treatments of effects of buildings on solar radiation can be found in Kusaka and Kimura (2004, *Journal of the Meteorological Society of Japan*) and in Martilli and Rotach (2002, *Boundary-Layer Meteorology*). How does the 3-D model differ from these simplified building-radiation schemes in WRF? I think it would be useful to compare the 3-D model results with these calculated by WRF-urban at 1-4 km scales, which are commonly used in mesoscale models for urban areas.

Response: We appreciate the reviewer's valuable comment. The 3-D radiation parameterization used in this study and the urban canopy models used in many previous urban climate studies investigate the building effect on solar radiation with different methods. The present 3-D radiation parameterization was developed on the basis of a 3-D Monte Carlo photon tracing approach. We parameterize the downward surface solar fluxes using the grid-average topographic information to reproduce the results in order to reduce the computational burden of 3-D Monte Carlo photon tracing calculations. In urban canopy models, the radiative transfer equation was established by employing simplified, evenly spaced buildings. Then, the average building geometry parameters (e.g., building height, building width, street width, etc.) are calculated for each model grid and subsequently used in radiative transfer calculation (Chen et al. 2011; Grimmond et al., 2010; Kusaka and Kimura, 2004; Martilli et al., 2002).

The present 3-D radiation parameterization and the commonly used urban canopy models both have their advantages and limitations. The 3-D radiation parameterization directly relates surface solar fluxes to “real” (rather than simplified) topographic data, resulting in the realistic spatiotemporal distribution of solar fluxes. In addition, the 3-D radiation parameterization treats individual flux components (i.e., the direct, diffuse, direct-reflected, diffuse-reflected, and coupled fluxes) separately taking into account the distinct feature of different flux components. However, the diffuse, diffuse-reflected, and coupled fluxes are usually oversimplified in urban canopy models (e.g. isotropic radiation is assumed). Some advantages of urban canopy models include a more detailed treatment of building geometrical features as well as the partitioning of total fluxes at roof, wall, and road to facilitate computations of the energy exchange at building domain.

We fully agree with the reviewer that it would be useful to compare the present 3-D model results with those calculated by urban canopy models. However, such a comparison would involve substantial and collaborative efforts, resources, and coordination with scientists who have already developed a successful urban canopy model. We will be pleased to work on a future paper if the reviewer could be so kind as to direct us to the opportunity for collaborative work.

We have added the discussions above in the revised manuscript (from Page 13 Line 22 to Page 14 Line 26 of the revised manuscript).

#### References:

- Chen, F., Kusaka, H., Bornstein, R., et al.: The integrated wrf/urban modelling system: Development, evaluation, and applications to urban environmental problems, *Int J Climatol*, 31, 273-288, 10.1002/joc.2158, 2011.
- Grimmond, C. S. B., Blackett, M., Best, M. J., et al.: The international urban energy balance models comparison project: First results from phase 1, *J Appl Meteorol Clim*, 49, 1268-1292, 10.1175/2010JAMC2354.1, 2010.
- Kusaka, H., and Kimura, F.: Coupling a single-layer urban canopy model with a simple atmospheric model: Impact on urban heat island simulation for an idealized case, *J Meteorol Soc Jpn*, 82, 67-80, Doi 10.2151/Jmsj.82.67, 2004.
- Martilli, A., Clappier, A., and Rotach, M. W.: An urban surface exchange parameterisation for mesoscale models, *Bound-Lay Meteorol*, 104, 261-304, 10.1023/a:1016099921195, 2002.

#### **Reviewer 2:**

This study systematically examines the impact of buildings on downward surface solar fluxes over Beijing by using a 3-D radiation parameterization that accounts for 3-D building structures versus the conventional plane-parallel scheme. Results show that the downward surface solar flux deviations between the two schemes are 1–10 Wm<sup>-2</sup> at 800-m grid resolution. However, flux deviations are much smaller at 4-km resolution because the pairs of positive-negative flux deviations on different sides of buildings offset each other. Diurnal variations of flux deviations and contribution of individual flux

components (e.g. direct flux, diffuse flux, etc.) are also analyzed. Further sensitivity experiments show that atmospheric aerosols can evidently reduce the magnitude of flux deviations while the surface albedo generally has a rather moderate impact. The results imply that the building effect on downward surface solar fluxes can play a crucial role in fine-resolution atmospheric models with grid spacing of 1 m – 1 km.

The subject is interesting, the paper is well written and the results are useful for urban-scale and meso-scale modeling applications. In fact I have two minor comments only:

Response: We thank the reviewer for two useful comments to improve the presentation of the text. In the following, the original comments are in black, while our responses are in blue.

1. The authors mainly compare the surface downward solar fluxes simulated by 3-D radiation parameterization and plane-parallel schemes. What about the difference between those simulated by 3-D radiation parameterization and by single- or multiple layer urban canopy scheme? Some discussion about this would be helpful given that urban canopy schemes are widely used in urban climate applications.

Response: We appreciate the reviewer's valuable comment. The 3-D radiation parameterization used in this study and urban canopy schemes used in many previous urban climate studies investigate the building effect on solar radiation with different methods. The present 3-D radiation parameterization was developed on the basis of a 3-D Monte Carlo photon tracing approach through which we parameterize downward surface solar fluxes by means of grid-average topographic information to reproduce flux results in order to optimize the computational burden involving 3-D Monte Carlo photon tracing calculations. In urban canopy schemes, the radiative transfer equation was first established using simplified, evenly spaced buildings. The average building geometry parameters (e.g., building height, building width, street width, etc.) are subsequently calculated for each model grid and used in radiative transfer calculations (Chen et al. 2011; Grimmond et al., 2010; Kusaka and Kimura, 2004; Martilli et al., 2002).

The present 3-D radiation parameterization and the commonly used urban canopy schemes both have their strengths. The 3-D radiation parameterization treats individual flux components (i.e., the direct, diffuse, direct-reflected, diffuse-reflected, and coupled fluxes) separately taking into account the distinct feature of different flux components. However, the diffuse, diffuse-reflected, and coupled fluxes are usually oversimplified in urban canopy schemes (e.g. isotropic radiation is assumed). Besides, the 3-D radiation parameterization directly relates surface solar fluxes to "real" (rather than simplified) topographic data, resulting in the realistic spatiotemporal distribution of solar fluxes. Some advantages of urban canopy schemes include a more detailed treatment of building geometrical features as well as the partitioning of total fluxes at roof, wall, and road to facilitate computations of the energy exchange at building domain.

It would be interesting to compare solar fluxes simulated by 3-D radiation parameterization and by single- or multiple layer urban canopy schemes. Such a comparison, however, would involve substantial and collaborative efforts, resources, as well as the coordination with scientists who have already developed an urban canopy scheme. We submit that such a comparison appears to be beyond the purview of the present study. We will be pleased to work on a future paper if the reviewer could enlighten us to the opportunity for collaborative work.

We have added the discussions above in the revised manuscript (from Page 13 Line 22 to Page 14 Line 26 of the revised manuscript).

#### References:

Chen, F., Kusaka, H., Bornstein, R., et al.: The integrated wrf/urban modelling system: Development, evaluation, and applications to urban environmental problems, *Int J Climatol*, 31, 273-288, 10.1002/joc.2158, 2011.

Grimmond, C. S. B., Blackett, M., Best, M. J., et al.: The international urban energy balance models comparison project: First results from phase 1, *J Appl Meteorol Clim*, 49, 1268-1292, 10.1175/2010JAMC2354.1, 2010.

Kusaka, H., and Kimura, F.: Coupling a single-layer urban canopy model with a simple atmospheric model: Impact on urban heat island simulation for an idealized case, *J Meteorol Soc Jpn*, 82, 67-80, Doi 10.2151/Jmsj.82.67, 2004.

Martilli, A., Clappier, A., and Rotach, M. W.: An urban surface exchange parameterisation for mesoscale models, *Bound-Lay Meteorol*, 104, 261-304, 10.1023/a:1016099921195, 2002.

2. In the 3-D radiation parameterization scheme, solar radiative fluxes can be categorized into five components (i.e. direct flux, diffuse flux, and so on) according to photon path. I am wondering whether it is possible to partition the total flux into individual components at roof, wall, and road, which are variables that can be used to calculate the canopy temperature and overall energy exchange between urban surface and atmosphere.

Response: We thank the reviewer for this valuable comment. For each model grid, the 3-D radiation parameterization used in this study can partition total fluxes into five components (i.e., the direct, diffuse, direct-reflected, diffuse-reflected, and coupled fluxes) according to photon path. However, it is difficult to partition total fluxes into components at roof, wall, and road since the 3-D radiation parameterization does not resolve complex building geometrical parameters. If the roof or road occupies a model grid, then it's possible to get different components of the fluxes for roof or road; otherwise the partitioning will be very difficult. We have described this limitation in the revised manuscript (Page 14 Line 23-26 of the revised manuscript).



# Impact of buildings on surface solar radiation over urban Beijing

B. Zhao<sup>1</sup>, K. N. Liou<sup>1</sup>, Y. Gu<sup>1</sup>, C. He<sup>1</sup>, W. L. Lee<sup>2</sup>, X. Chang<sup>3</sup>, Q. B. Li<sup>1</sup>, S. X. Wang<sup>3, 4</sup>, H. R. Tseng<sup>1</sup>, L. R. Leung<sup>5</sup>, J. M. Hao<sup>3, 4</sup>

[1] Joint Institute for Regional Earth System Science and Engineering and Department of Atmospheric and Oceanic Sciences, University of California, Los Angeles, CA 90095, USA

[2] Research Center for Environmental Changes, Academia Sinica, Taipei, Taiwan

[3] State Key Joint Laboratory of Environment Simulation and Pollution Control, School of Environment, Tsinghua University, Beijing 100084, China

[4] State Environmental Protection Key Laboratory of Sources and Control of Air Pollution Complex, Beijing 100084, China

[5] Pacific Northwest National Laboratory, Richland, WA 99352, USA

Correspondence to: B. Zhao [zhaob1206@gmail.com]

## Abstract.

The rugged surface of an urban area due to varying buildings can interact with solar beams and affect both the magnitude and spatiotemporal distribution of surface solar fluxes. Here we systematically examine the impact of buildings on downward surface solar fluxes over urban Beijing by using a 3-D radiation parameterization that accounts for 3-D building structures versus the conventional plane-parallel scheme. We find that the resulting downward surface solar flux deviations between the 3-D and the plane-parallel schemes are generally  $\pm 1$ – $10 \text{ W m}^{-2}$  at 800-m grid resolution and within  $\pm 1 \text{ W m}^{-2}$  at 4-km resolution. Pairs of positive-negative flux deviations on different sides of buildings are resolved at 800-m resolution, while they offset each other at 4-km resolution. Flux deviations from the unobstructed horizontal surface at 4-km resolution are positive around noon but negative in the early morning and late afternoon. The corresponding deviations at 800-m resolution, in contrast, show diurnal variations that are strongly dependent on the location of the grids relative to the buildings. Both the magnitude and spatiotemporal variations of flux deviations are largely dominated by the direct flux. Furthermore, we find that flux deviations can potentially be an order of magnitude larger by using a finer grid resolution. Atmospheric aerosols can reduce the



magnitude of downward surface solar flux deviations by 10–65%, while the surface albedo generally has a rather moderate impact on flux deviations. The results imply that the effect of buildings on downward surface solar fluxes may not be critically significant in mesoscale atmospheric models with a grid resolution of 4 km or coarser. However, the effect can play a crucial role in meso-urban atmospheric models as well as microscale urban dispersion models with resolutions of 1 m – 1 km.

## 1 Introduction

The spatial orientation and inhomogeneous features of the earth's surface interact with direct and diffuse solar beams in an intricate manner (Liou et al., 2013). In particular, the complex and rugged surface of an urban area due to varying buildings can interact with solar beams and affect both the magnitude and spatiotemporal distribution of surface solar fluxes. The distribution of solar fluxes can significantly modulate surface heating and moistening, evapotranspiration, land-atmosphere interaction, boundary layer, and air pollutant dispersion (Lee et al., 2011; Gu et al., 2012). It is very difficult to accurately quantify the surface solar flux distribution in view of the complexity of spatial orientation and surface optical properties, especially over urban areas.

Several approaches with varying degrees of sophistication have been developed to evaluate solar fluxes at rugged surface (Dozier and Frew, 1990; Dubayah et al., 1990; Chen et al., 2006; Essery and Marks, 2007; Lai et al., 2010). Among these approaches, the 3-D Monte Carlo photon tracing approach gives the most physically-representative radiative transfer calculations for an environment with complex 3-D topography. Chen et al. (2006) and Liou et al. (2007) developed a Monte Carlo program and found that the domain-average downward surface solar fluxes with rugged topography deviate from the unobstructed horizontal surface by 10–50 W m<sup>-2</sup> over the Tibetan Plateau and can be as large as 600 W m<sup>-2</sup> locally over shaded areas. The 3-D Monte Carlo approach has also been used to evaluate interactions between solar beams and other irregular surfaces, such as wind-blown sea surfaces and plant canopies (Preisendorfer and Mobley, 1986; Iwabuchi and Kobayashi, 2008; Mayer et al., 2010). However, a drawback of the 3-D Monte Carlo photon tracing approach is the enormous computational burden. To overcome this drawback, Lee et al. (2011, 2013) developed a parameterization of downward solar fluxes associated with topographic information based on 3-D Monte Carlo simulations. The parameterization was subsequently implemented in

regional and global weather and climate models (Liou et al., 2013; Lee et al., 2015; Gu et al., 2012) in which the effects of 3-D mountainous topography on sensible and latent heat fluxes, surface hydrology, and cloud properties have been investigated and evaluated.

With the objective to improve the urban representation in land-surface schemes that has been used in numerical models, a number of urban energy balance models (or urban canopy models) have been developed, as reviewed by Grimmond et al. (2010, 2011). Some of these models have considered a building's shading effect and the reflectance of solar beams by building walls (Kusaka et al., 2001; Kusaka and Kimura, 2004; Kondo et al., 2005; Oleson et al., 2008). However, these models have at least two drawbacks. First, the 3-D radiative transfer was calculated based on simplified, evenly spaced buildings, rather than "real" buildings. Second, the diffuse, diffuse-reflected, and coupled fluxes (e.g., multiple reflections) were often oversimplified, resulting in noticeable errors due to the distinct features of the different flux components. A systematic evaluation and physical understanding of the 3-D building effect on surface solar radiation over urban areas is imperative.

In this study, we investigate the impact of buildings on downward surface solar fluxes over urban Beijing, the capital and one of the largest megacities in China. The evaluation is conducted using the 3-D radiation parameterization developed by Lee et al. (2013) coupled with the Fu-Liou-Gu (FLG) plane-parallel radiative transfer scheme (Fu and Liou, 1992; Gu et al., 2003; Gu et al., 2006). In Section 2, we describe the parameterization of 3-D topography effect on downward solar fluxes and its application over urban Beijing. In Section 3, we investigate the magnitude and spatiotemporal variation of deviations in downward surface solar fluxes induced by buildings and evaluate the effect of key factors by means of sensitivity simulations. Conclusions and implications are given in Section 4.

## **2 Methodology and data source**

### **2.1 Parameterization of the 3-D topography effect on downward surface solar fluxes**

In order to evaluate the impact of buildings on downward surface solar radiation, we apply the 3-D radiation parameterization over rugged surface developed by Lee et al. (2013). Below are key points of the parameterization. Note that we focus exclusively on "downward" solar fluxes in this study.

Solar radiative fluxes can be categorized into five components according to photon path: (1) direct flux ( $F_{dir}$ ) is composed of photons hitting the ground directly from the sun without encountering scattering or reflection; (2) diffuse flux ( $F_{dif}$ ) contains photons experiencing single or multiple scattering by air molecules, but does not encounter surface reflection; (3) direct-reflected flux ( $F_{rdir}$ ) is comprised of unscattered photons reflected by nearby terrain; (4) diffuse-reflected flux ( $F_{rdif}$ ) means that photon is first scattered by air molecules and then reflected by nearby terrain; and (5) coupled flux ( $F_{coup}$ ) represents photons that after being reflected by the surface, encounter scattering and/or one or more additional surface reflections.

Conventional plane-parallel radiative transfer schemes have already been developed to calculate solar fluxes on a horizontal surface, so the purpose of the 3-D radiation parameterization is to produce relative deviations of these five flux components from those of an unobstructed horizontal surface. On the basis of 3-D Monte Carlo photon tracing simulations, Lee et al. (2011, 2013) utilized a multiple linear regression technique to establish the relationship between deviations in solar fluxes (response variables) and subgrid scale topographic information (independent variables). The Shuttle Radar Topography Mission (SRTM) topography data (Jarvis et al., 2008) at a resolution of 3 arc-second (about 90 m) were used to perform 3-D Monte Carlo simulations for many  $10 \times 10 \text{ km}^2$  rugged domains in the Sierra Nevada Mountain area, which were subsequently used to develop regression parameterization. Although the parameterization was developed in the Sierra Nevada area, it is applicable to other regions because it is topographic parameter-dependent rather than location-dependent. The regression equations for flux deviations in clear-sky condition can be expressed by

$$\begin{pmatrix} F'_{dir} \\ F'_{dif} \\ F'_{rdir} \\ F'_{rdif} \\ F'_{coup} \end{pmatrix} = \begin{pmatrix} a_1 \\ a_2 \\ a_3 \\ a_4 \\ a_5 \end{pmatrix} + \begin{pmatrix} b_{11} & b_{12} & 0 & 0 \\ b_{21} & b_{22} & 0 & b_{24} \\ 0 & b_{32} & b_{33} & 0 \\ 0 & b_{42} & b_{43} & 0 \\ b_{51} & b_{52} & b_{53} & 0 \end{pmatrix} \begin{pmatrix} \langle \tilde{\mu}_i \rangle \\ \langle \tilde{V}_d \rangle \\ \langle \tilde{C}_t \rangle \\ \sigma(h) \end{pmatrix} \quad (1)$$

where  $F'_i$  is the relative deviation of each flux component,  $i = dir, dif, rdir, rdif$ , and  $coup$ .  $a_i$  is the interception,  $b_{ij}$  is the regression coefficient for a specific independent variable.  $\tilde{\mu}_i$  is

the cosine of the solar zenith angle normalized by the cosine of the slope,  $\tilde{V}_d$  is the sky view factor normalized by the cosine of the slope,  $\tilde{C}_t$  is the terrain configuration factor normalized by the cosine of the slope,  $\sigma(h)$  is the standard deviation of elevation, and angle brackets denote the spatial mean of the variable within a  $10 \times 10 \text{ km}^2$  domain. Lee et al. (2013) demonstrated that the flux components predicted by these regression equations agree well with those directly calculated from Monte Carlo simulations.

## 2.2 Application of the 3-D radiation parameterization to urban Beijing

We apply the parameterization described above to Beijing, a megacity with numerous buildings, many of which are skyscrapers. Two domains with different sizes and resolutions are used (Fig. 1). Domain 1 covers urban and suburban Beijing at a grid resolution of 4 km, which is a commonly used resolution in mesoscale atmospheric models. The Xishan mountain is located in the northwestern part of the domain, serving as a comparison of the 3-D topography effect over mountainous and urban areas. The rest of the domain is characterized by plains with typical urban landscape (e.g., buildings and roads). Domain 2 covers the urban center of Beijing at 800-m resolution, corresponding to the typical resolution of meso-urban models.

Following Lee et al. (2013), we use topography data at a resolution of 3 arc-second (about 90 m) from the SRTM, which provides the elevation of each 90-m pixel (see right panel of Figure 1). The SRTM data mimic buildings as numerous  $90 \times 90 \text{ m}^2$  cuboids. They define the overall heights, widths, and intervals of large buildings, but can not resolve detailed geometry of buildings. Using the SRTM data, we first calculate topographical parameters (described in Section 2.1) for each 90-m pixel following the method described in Lee et al. (2011), followed by evaluating the average topographical parameters for each 4-km or 800-m grid in simulation domains. The SRTM data is for the year 2000. We note that urban development in Beijing has expanded greatly since 2000, far beyond what is represented in the SRTM data. This study aims to assess the potential magnitude of the effect of buildings on solar fluxes; the SRTM data meet the need considering that there were already numerous buildings in Beijing in 2000.

The 3-D radiation parameterization was originally developed for  $10 \times 10 \text{ km}^2$  grids. Lee et al. (2011, 2013) demonstrated its compatibility across various resolutions. Theoretically it is applicable to a grid resolution as fine as 800 m since an  $800 \times 800 \text{ m}^2$  grid encompasses a large number of 90-m pixels. Here we further demonstrate the compatibility associated with

resolutions by comparing flux deviations in each  $4\times 4\text{ km}^2$  grid calculated directly from the 3-D parameterization and those from the summation of all  $800\times 800\text{ m}^2$  grids. We find the biases between the two are within  $\pm 0.025\text{ W m}^{-2}$ , indicating a reasonable compatibility between different grid resolutions. The calculation method and subsequent results are described in detail in the Supplementary Material.

The 3-D radiation parameterization is used in conjunction with the FLG plane-parallel radiation scheme (Fu and Liou, 1992; Gu et al., 2003; Gu et al., 2006; Gu et al., 2010), which calculates solar fluxes on flat surfaces. The FLG scheme combines the delta-four-stream approximation for solar flux calculations with the delta-two/four-stream approximation for infrared flux calculations to assure both accuracy and efficiency. The solar ( $0\text{--}5\mu\text{m}$ ) and infrared ( $5\text{--}50\mu\text{m}$ ) spectra are divided into 6 and 12 bands, respectively, within which the correlated k-distribution method is used to sort gaseous absorption lines. The single-scattering properties of 18 aerosol types are parameterized by employing the Optical Properties of Aerosols and Clouds (OPAC) database.

The meteorological and chemical variables (i.e., air temperature, surface temperature, pressure, humidity, surface albedo, ozone concentrations, and aerosol optical depth) used in the FLG scheme are derived from a simulation of the Weather Research and Forecasting model (WRF, version 3.3)/Community Multi-scale Air Quality model (CMAQ, version 5.0.2). For the WRF/CMAQ simulation, we apply one-way, triple nesting domains with resolutions of 36 km, 12 km, and 4 km, respectively (Fig. S1). We use a high-resolution anthropogenic emission inventory developed by Tsinghua University for the Beijing-Tianjin-Hebei region (i.e., regions within the innermost domain) and a regional anthropogenic emission inventory for other regions in China (Zhao et al., 2013a, b; Wang et al., 2014). The WRF/CMAQ simulation used the Pleim-Xiu land surface model, in which the building effect on solar radiation is not accounted for (Pleim and Xiu, 1995). The conversion of vertically resolved aerosol mass concentrations to aerosol optical depth follows Heald (2010) and Martin and Heald (2010). The simulated meteorological parameters and concentrations of fine particles ( $\text{PM}_{2.5}$ ) and their chemical components are in reasonable agreement with observations (Table S2, Fig. S2). The configuration of WRF/CMAQ and its evaluation against observations are described in detail in the Supplementary Material. The meteorological and chemical variables of Domain 1 (4-km resolution) are taken from the WRF/CMAQ simulation directly, while the

variables in Domain 2 (800-m resolution) are assumed to be the same as their corresponding values at the 4 km grids.

The 3-D radiative transfer calculations are for January 1<sup>st</sup>, April 1<sup>st</sup>, July 1<sup>st</sup>, and October 1<sup>st</sup>, 2012, representing four seasons. Within each day, the calculation is done every hour starting from 0:00, Beijing Time (BT). To avoid the fluctuation of atmospheric profiles, we conduct the WRF/CMAQ simulations for four months (January, April, July, and October) and use monthly average meteorological and chemical variables for each of the 24 hours in the 3-D radiative transfer calculations. For example, for the simulation of January 1<sup>st</sup> 0:00 BT, we use the average temperature at 0:00 BT of each day in January.

We conduct radiative transfer computation primarily for clear-sky condition without aerosols, for which the 3-D radiation parameterization was developed. We also incorporate aerosols for a sensitivity scenario (see Section 3.3.1). In the presence of aerosols, regression equations for  $F'_{dir}$  and  $F'_{rdif}$  can be directly applied because these two components do not encounter scattering. As for  $F'_{dif}$ ,  $F'_{rdif}$ , and  $F'_{coup}$ , the parameterization provides a first-order estimate (Lee et al., 2013; Lee et al., 2011). Considering that the direct flux usually dominates over other components (Chen et al., 2006; Lee et al., 2011), the parameterization is likely applicable in an environment with a large aerosol loading.

### 3 Results and discussion

#### 3.1 Deviations in solar fluxes from horizontal surface

We calculate surface solar fluxes at rugged city surface by employing the 3-D radiation parameterization coupled with the FLG plane-parallel scheme. Surface solar flux deviations between the 3-D radiation parameterization and plane-parallel scheme represent the effect of buildings. Figure 2 (top three rows) shows hourly flux deviations at selected times (7:00, 12:00, and 17:00 BT) on April 1<sup>st</sup> in clear-sky condition without aerosols. Figure 3 depicts daily average flux deviations for four simulation days (January 1<sup>st</sup>, April 1<sup>st</sup>, July 1<sup>st</sup>, and October 1<sup>st</sup>). For Domain 1 (4-km resolution), a striking feature is that deviations over urban areas are remarkably smaller than those over mountainous areas. Both hourly and daily average deviations over urban areas are generally within  $\pm 1 \text{ W m}^{-2}$ . In contrast, hourly/daily average deviations over mountainous areas are on the order of  $\pm 10\text{--}70 \text{ W m}^{-2}$ , except for July when daily average deviations are generally within  $10 \text{ W m}^{-2}$ . The maximum local deviations can be up to  $\pm 100 \text{ W m}^{-2}$ . In Domain 2 (800-m resolution), both the magnitude and the spatial

pattern of deviations differ greatly from Domain 1. Flux deviations usually range between  $\pm 1$ – $10 \text{ W m}^{-2}$ . The magnitude of flux deviations has a significant seasonal variation associated with the position of the sun in different seasons. For example, daily average flux deviations are within  $\pm 10 \text{ W m}^{-2}$ ,  $\pm 6 \text{ W m}^{-2}$ , and  $\pm 1 \text{ W m}^{-2}$  in January, April/October, and July, respectively. Smaller daily average deviations in July are attributable to the smaller shading effect at the north-south direction as the sun is close to its zenith at noon. In addition, the fine structure of positive-negative pairs on southern-northern or eastern-western sides of buildings is resolved in Domain 2. This phenomenon is especially pronounced when we compare flux deviations at 7:00 BT and 17:00 BT. Many grids show opposite-sign flux deviations at these two times, implying that they are located on the opposite side of buildings. The spatial pattern comprising of positive-negative pairs is somewhat similar to that of mountainous areas in Domain 1. By comparing Domain 1 and Domain 2, we conclude that flux deviations from the flat surface over urban areas are quite sensitive to grid resolution. The magnitude of deviations is small at a coarse resolution such as 4 km, because of the offset of positive and negative deviations.

We further analyze the diurnal variation of flux deviations from the horizontal surface, as shown in Fig. 4. To facilitate the analysis, we select a typical mountainous area (defined as rectangle A in Fig. 1) and a typical urban area (defined as rectangle B in Fig. 1) in Domain 1, as well as a typical urban area (defined as rectangle C in Fig. 1) in Domain 2. Flux deviations in the typical urban area defined in Domain 1 (Fig. 4b) are positive during 6–7 hours around noon with peaks occurring at noon, while they are negative in the early morning and late afternoon. This diurnal pattern persists on all simulation days. At noon, buildings generally receive more solar energy than a flat surface due to a larger surface area facing the sun, whereas negative deviations in the early morning and late afternoon are primarily induced by larger shading areas. The diurnal pattern over the typical urban area defined in Domain 2 (Fig. 4c) substantially differs from the preceding pattern such that flux deviations are positive in the morning and negative in the afternoon. Figure 1 shows that the typical urban area defined in Domain 2 (i.e., rectangle C) is mostly located in the eastern side of the buildings rather than in the western side. In this case, the eastern side faces the sun in the morning, receiving more solar fluxes than its horizontal surface counterpart. In the afternoon, the eastern side is shaded by the buildings to substantially block solar beam. We note that the diurnal variation of grids in Domain 2 is a strong function of their relative locations to the buildings. For example, the



diurnal pattern is exactly opposite for a grid containing more buildings' western side. Furthermore, it is noticeable that the diurnal pattern of the typical urban area defined in Domain 2 highly resembles that of the typical mountainous area defined in Domain 1 (Fig. 4a), which is located on the eastern side of the Xishan mountain. This reveals the similarity between buildings and mountains in terms of their impacts on surface radiation, though they are associated with different spatial scales – 4 km or more for mountains (Liou et al., 2013; Lee et al., 2013), and 800 m or less for buildings.

### **3.2 Contribution of individual flux components to flux deviations**

We quantify the contribution of individual flux components to surface solar flux deviations between 3-D and plane-parallel in order to gain a deeper understanding of the effect of buildings on solar flux distributions. Figure 5 shows the contribution of individual components to flux deviations on April 1<sup>st</sup> in the three typical areas defined in the last section, while Fig. S3 depicts the corresponding contributions on four simulation days (January 1<sup>st</sup>, April 1<sup>st</sup>, July 1<sup>st</sup>, and October 1<sup>st</sup>) in the typical urban area defined in Domain 1. For the other two typical areas, only April 1<sup>st</sup> is shown because the other simulation days present very similar patterns. As described in Section 2.1, solar fluxes are physically categorized into five components, including direct flux, diffuse flux, direct-reflected flux, diffuse-reflected flux, and coupled flux. In Fig. 5, diffuse and coupled fluxes are merged together, considering that the coupled flux is usually negligible and that these two components are treated together in the plane-parallel scheme. A striking pattern is that the direct flux largely dominates deviations from the unobstructed horizontal surface over both urban and mountainous areas. The diurnal variation of direct flux is very similar to that of the total flux, which has been illustrated in detail in the last section. In general, deviations in diffuse flux (plus coupled flux) are negative over both urban and mountainous areas since sky view factors are less than 1.0 in street canyons or valleys. Their magnitude is generally between  $-0.03 \text{ W m}^{-2}$  and  $-0.10 \text{ W m}^{-2}$  in typical urban areas in Domain 1 (Fig. 5b, Fig. S3) and between  $-0.10 \text{ W m}^{-2}$  and  $-0.25 \text{ W m}^{-2}$  in typical urban areas in Domain 2 (Fig. 5c), both peaking at noon. Deviations in direct-reflected and diffuse-reflected fluxes are always positive because these two components do not exist on unobstructed horizontal surfaces. The magnitude of direct-reflected flux ranges between  $0.01\text{--}0.20 \text{ W m}^{-2}$  in typical urban areas (both Domain 1 and Domain 2), with peaks occurring at summer noon. Figure S3 shows that deviations in the direct-reflected flux can

exceed those of the direct flux for a few hours around summer noon. The magnitude of the diffuse-reflected flux is always negligible compared with the components described above.

### 3.3 Sensitivity analysis

#### 3.3.1 Effect of aerosols on flux deviations

In preceding discussions, we focused on the effect of buildings in clear-sky condition without aerosols. Atmospheric aerosols can potentially alter the transfer of solar radiation. As described in Section 2.2, although the 3-D radiation parameterization was developed in clear-sky condition without aerosols, regression equations for  $F'_{dir}$  and  $F'_{rdif}$  can be directly applied to aerosol contaminated environment, while those for  $F'_{dif}$ ,  $F'_{rdif}$ , and  $F'_{coup}$  can provide a first-order estimate. Figure 2 shows hourly flux deviations between 3-D and plane-parallel at selected times (7:00, 12:00, and 17:00 BT) on April 1<sup>st</sup> with and without aerosols. The results on the other simulation days (January 1<sup>st</sup>, July 1<sup>st</sup>, and October 1<sup>st</sup>) are quite similar, and thus are not shown. In general, the inclusion of aerosols reduces the magnitude of surface flux deviations without changing the spatial pattern. This can be explained by the attenuation of total solar fluxes by aerosols across the domain. Over the urban center (Domain 2), aerosols reduce the magnitude of daily average deviations by about 15–30%. The reduction ratios are significantly higher in the early morning and late afternoon (40–65%) than at noon (10–25%), mainly due to higher aerosol optical depths in the early morning/late afternoon. In this study, interactions between buildings and aerosols are not considered in the simulation. For example, photons reflected by buildings can further be scattered/absorbed by aerosols, and vice versa. Given that diffuse-reflected and coupled fluxes are much smaller than direct flux, the resulting errors should be minor. The 3-D Monte Carlo photon tracing program is needed in order to achieve a more accurate evaluation of the effect of aerosols on flux deviations.

#### 3.3.2 Sensitivity of flux deviations to spatial resolutions

As demonstrated in Section 3.1, the magnitude of flux deviations from the flat surface is quite sensitive to spatial resolutions. Over urban areas, hourly deviations are  $\pm 1$ – $10 \text{ W m}^{-2}$  at 800-m resolution and within  $\pm 1 \text{ W m}^{-2}$  at 4-km resolution. The smaller values in coarser grids can be explained by the compensation effect of positive and negative deviations on the opposite side of buildings. Judging from the right panel of Fig. 1, an  $800 \times 800 \text{ m}^2$  grid still covers quite a few buildings, which motivates us to explore the potential effect of buildings at even finer resolutions. As a test case, we present a rough estimate of flux deviations at a 3 arc-second

(about 90 m) resolution (shown in Fig. 6) by applying the 3-D radiation parameterization to 3 arc-second topography data derived from SRTM. Theoretically, the parameterization may not be applicable to a spatial resolution less than about 1 km with good accuracy (Lee et al., 2013). The reason is that the radiation parameterization is developed based on grid-average topographic parameters, so it is valid only if a model grid comprises a number of topographic pixels (Lee et al., 2011, 2013). Nevertheless, it suffices to provide an initial estimate for flux deviations, though results must be interpreted with care. Of course, a more accurate estimation should be made using the Monte Carlo method in future studies. Figure 6 shows that hourly deviations in 90 m grids are generally between  $\pm 5\text{--}50 \text{ W m}^{-2}$ , and the maximum local deviations can reach about  $\pm 100 \text{ W m}^{-2}$ . This is notably higher than flux deviations at 800-m resolution. These results highlight the potential importance of 3-D building effects on the microscale modeling with resolutions of 1–100 m (e.g., urban dispersion models), which requires further studies.

### 3.3.3 Sensitivity of flux deviations to the surface albedo

The surface albedo used in the 3-D radiation parameterization was directly derived from WRF/CMAQ simulation results, which ranges between 0.15–0.20 and represents the typical surface albedo of urban areas. However, there is a wide variety of roofing materials with distinct albedos (Prado and Ferreira, 2005). One geoengineering proposal to ameliorate the effect of urban heat island was to use reflective roofing material or to paint existing roofs white (Jacobson and Ten Hoeve, 2012). There are also increasing numbers of buildings with glass surfaces. To evaluate the potential effect of amplified surface albedo on flux deviations from the horizontal surface, we design three sensitivity cases in which domain-wide surface albedo was uniformly increased to 0.35, 0.50, and 0.65. Figure 7 shows simulated surface solar flux deviations in a typical urban area in Domain 1 (defined as rectangle B in Fig. 1) as a function of surface albedo. We focus on urban areas in Domain 1 (4-km resolution) because it is the region where the largest relative contribution of the reflected flux is identified (see Fig. 5), implying a potentially large sensitivity to surface albedo. Figure 7 shows a moderate impact of surface albedo on flux deviations during the day. The largest sensitivity occurs at summer noon, at which a large albedo of 0.65 can amplify flux deviations from  $0.1\text{--}0.4 \text{ W m}^{-2}$  to about  $0.6 \text{ W m}^{-2}$ . Compared with the case of a 4-km resolution, the change in surface albedo results in a much smaller relative change in flux deviations at 800-m resolution,

because the relative contribution of the reflected flux is smaller at 800-m resolution (see Fig. 5).

### 3.4 Implications for atmospheric studies

The present results have important implication for future studies. Deviations in surface solar fluxes are within  $1 \text{ W m}^{-2}$  at a 4 km or coarser resolution due to the offset of positive and negative flux deviations, therefore the effect of buildings may not be critically significant in mesoscale atmospheric models. Nevertheless, the effect can not be neglected if there is a substantially inhomogeneous subgrid-scale distribution of plants, accumulated snow, and building/road materials, etc.; in this case, subgrid-scale flux deviations may result in biased evapotranspiration, snowmelting, and heat fluxes, etc. For meso-urban models with a typical resolution of about 1 km (e.g., urbanized MM5 model, uMM5; Taha et al., 2008), the 3-D building effects become quite significant (about  $\pm 1\text{--}10 \text{ W m}^{-2}$ ). The parameterization used in this study can be readily incorporated in these models to account for 3-D building effects. As for computational fluid dynamics models (e.g., FLUENT) and urban dispersion models (e.g., Atmospheric Dispersion Modelling System, ADMS) with resolutions of 1–100 m, this study implies that flux deviations induced by buildings might be up to  $\pm 100 \text{ W m}^{-2}$ . The large flux deviations can significantly alter local energy balance, and thus affects the spatial distribution of temperature and small-scale flows around buildings and/or through street canyons. Therefore, the 3-D building effects on solar fluxes can play a crucial role in numerical simulation of urban meteorology and air pollutant dispersion. The present 3-D radiation parameterization may not be applicable to 1–100 m resolutions. As such, a more physically-based approach directly using an appropriate 3-D Monte Carlo photon tracing program will be needed to account for 3-D building effects more precisely. Also, topography data such as the recently released SRTM datasets at a resolution of 1 arc-second (about 30 m) may also be useful for the study of 3-D building effects.

## 4 Conclusions

In this study, we systematically evaluated the impact of buildings on surface solar fluxes over urban Beijing using the 3-D radiation parameterization developed in our previous study in connection with the FLG radiative transfer scheme. The evaluation was conducted in two simulation domains with grid resolutions of 4 km and 800 m, representing typical resolutions for mesoscale and meso-urban models, respectively.

Over urban Beijing, deviations in surface solar fluxes between the 3-D radiation parameterization and the plane-parallel scheme are generally  $\pm 1\text{--}10 \text{ W m}^{-2}$  at 800-m resolution and within  $\pm 1 \text{ W m}^{-2}$  at 4-km resolution. Pairs of positive-negative flux deviations on different sides of buildings are resolved at 800-m resolution, while they offset each other at 4-km resolution. Deviations in surface solar fluxes over urban areas are considerably smaller than those over mountainous areas using preceding grid resolutions.

Flux deviations over urban areas are positive around noon but negative in the early morning and late afternoon at 4-km resolution. The corresponding deviations at 800-m resolution, in contrast, show diurnal variations that are strongly dependent on the grids' relative locations to buildings. Both the magnitude and spatiotemporal variations of flux deviations are largely dominated by the direct flux.

With a series of sensitivity simulations, we show that atmospheric aerosols reduce the magnitude of surface flux deviations by 10–65% without changing the spatial pattern. Simulated deviations in surface fluxes are very sensitive to spatial resolution. They can potentially reach up to  $\pm 100 \text{ W m}^{-2}$  at a high resolution of about 90 m. The surface albedo has a moderate impact on flux deviations during the day, while the impact can be substantial at summer noon.

This study implies that the effect of buildings on surface solar fluxes may not be critically important in mesoscale atmospheric models ( $\geq 4\text{-km}$  resolution). However, the effect can play a crucial role in meso-urban atmospheric models as well as microscale urban dispersion models with resolutions of 1 m – 1 km.

Besides the 3-D radiation parameterization, the urban canopy models (Chen et al. 2011; Grimmond et al., 2010; Kusaka and Kimura, 2004; Martilli et al., 2002) have been frequently used in urban climate simulations to consider the building effect on solar radiation. These two models investigate the radiative effect of buildings with different methods. Below we provide a brief discussion of the differences between these two models, and their advantages and limitations. We recommend future studies be done to systematically compare these two models, and to improve current simulation of building effect on solar radiation.

The present 3-D radiation parameterization was developed on the basis of a 3-D Monte Carlo photon tracing approach. We parameterize the downward surface solar fluxes using the grid-average topographic information to reproduce the results in order to reduce the computational burden of 3-D Monte Carlo photon tracing calculations. In urban canopy

models, the radiative transfer equation was established by employing simplified, evenly spaced buildings. Then, the average building geometry parameters (e.g., building height, building width, street width, etc.) are calculated for each model grid and subsequently used in radiative transfer calculation (Chen et al. 2011; Grimmond et al., 2010; Kusaka and Kimura, 2004; Martilli et al., 2002).

The present 3-D radiation parameterization and the commonly used urban canopy models both have their advantages and limitations. The 3-D radiation parameterization directly relates surface solar fluxes to “real” (rather than simplified) topographic data, resulting in the realistic spatiotemporal distribution of solar fluxes. In addition, the 3-D radiation parameterization treats individual flux components (i.e., the direct, diffuse, direct-reflected, diffuse-reflected, and coupled fluxes) separately taking into account the distinct feature of different flux components. However, the diffuse, diffuse-reflected, and coupled fluxes are usually oversimplified in urban canopy models (e.g. isotropic radiation is assumed).

The 3-D radiation parameterization also has several limitations. First, the urban topography data used in the 3-D radiation simulation cannot resolve the detailed geometry of buildings, which could introduce uncertainty in evaluating the building effect on solar fluxes. The grid resolutions used in our 3-D radiation simulation (4 km and 800 m) are considerably larger than most buildings. We found that positive and negative flux deviations on different sides of buildings often offset each other within a model grid. For this reason, the detailed geometry of buildings produces relatively minor effects on simulated solar fluxes. The effects could be much larger if we would use a grid resolution comparable to the dimension of most buildings. Future studies should be done to quantify the impact of detailed building geometry on surface solar fluxes. Second, while urban canopy models often partition total fluxes at roof, wall, and road to facilitate computations of the energy exchange at building domain, it is difficult to do similar partitioning in the 3-D radiation parameterization since complex building geometrical parameters are not resolved in the 3-D radiation parameterization.

**Acknowledgments.** This research was supported by the NSF under grant AGS-0946315 and AGS-1523296. LRL was supported by Department of Energy Office of Science Biological and Environmental Research through the Regional and Global Climate Modeling

program. PNNL is operated for DOE by Battelle Memorial Institute under contract DE-AC05-76RL01830.

## References

- Chen, F., Kusaka, H., Bornstein, R., Ching, J., Grimmond, C., Grossman-Clarke, S., Loridan, T., Manning, K. W., Martilli, A., Shiguang, M., Sailor, D., Salamanca, F. P., Taha, H., Tewari, M., Xuemei, W., Wyszogrodzki, A. A., and Chaolin, Z.: The integrated wrf/urban modelling system: Development, evaluation, and applications to urban environmental problems, *Int J Climatol*, 31, 273-288, 10.1002/joc.2158, 2011.
- Chen, Y., Hall, A., and Liou, K. N.: Application of three-dimensional solar radiative transfer to mountains, *J Geophys Res-Atmos*, 111, D21111, DOI 10.1029/2006jd007163, 2006.
- Dozier, J., and Frew, J.: Rapid calculation of terrain parameters for radiation modeling from digital elevation data, *Ieee T Geosci Remote*, 28, 963-969, Doi 10.1109/36.58986, 1990.
- Dubayah, R., Dozier, J., and Davis, F. W.: Topographic distribution of clear-sky radiation over the konza prairie, kansas, *Water Resour Res*, 26, 679-690, Doi 10.1029/89wr03107, 1990.
- Essery, R., and Marks, D.: Scaling and parametrization of clear-sky solar radiation over complex topography, *J Geophys Res-Atmos*, 112, D10122, DOI 10.1029/2006jd007650, 2007.
- Fu, Q., and Liou, K. N.: On the correlated k-distribution method for radiative-transfer in nonhomogeneous atmospheres, *J Atmos Sci*, 49, 2139-2156, Doi 10.1175/1520-0469(1992)049<2139:Otcdfm>2.0.Co;2, 1992.
- Grimmond, C. S. B., Blackett, M., Best, M. J., Barlow, J., Baik, J. J., Belcher, S. E., Bohnenstengel, S. I., Calmet, I., Chen, F., Dandou, A., Fortuniak, K., Gouvea, M. L., Hamdi, R., Hendry, M., Kawai, T., Kawamoto, Y., Kondo, H., Krayenhoff, E. S., Lee, S. H., Loridan, T., Martilli, A., Masson, V., Miao, S., Oleson, K., Pigeon, G., Porson, A., Ryu, Y. H., Salamanca, F., Shashua-Bar, L., Steeneveld, G. J., Tombrou, M., Voogt, J., Young, D., and Zhang, N.: The international urban energy balance models comparison project: First results from phase 1, *J Appl Meteorol Clim*, 49, 1268-1292, 10.1175/2010JAMC2354.1, 2010.
- Grimmond, C. S. B., Blackett, M., Best, M. J., Baik, J. J., Belcher, S. E., Beringer, J., Bohnenstengel, S. I., Calmet, I., Chen, F., Coutts, A., Dandou, A., Fortuniak, K., Gouvea, M. L., Hamdi, R., Hendry, M., Kanda, M., Kawai, T., Kawamoto, Y., Kondo, H., Krayenhoff, E. S., Lee, S. H., Loridan, T., Martilli, A., Masson, V., Miao, S., Oleson, K., Ooka, R., Pigeon, G., Porson, A., Ryu, Y. H., Salamanca, F., Steeneveld, G. J., Tombrou, M., Voogt, J. A., Young, D. T., and Zhang, N.: Initial results from phase 2 of the international urban energy balance model comparison, *Int J Climatol*, 31, 244-272, 10.1002/joc.2227, 2011.
- Gu, Y., Farrara, J., Liou, K. N., and Mechoso, C. R.: Parameterization of cloud-radiation processes in the ucla general circulation model, *J Climate*, 16, 3357-3370, Doi 10.1175/1520-0442(2003)016<3357:Pocpit>2.0.Co;2, 2003.
- Gu, Y., Liou, K. N., Xue, Y., Mechoso, C. R., Li, W., and Luo, Y.: Climatic effects of different aerosol types in china simulated by the ucla general circulation model, *J Geophys Res-Atmos*, 111, D15201, DOI 10.1029/2005jd006312, 2006.



Gu, Y., Liou, K. N., Chen, W., and Liou, H.: Direct climate effect of black carbon in china and its impact on dust storms JOURNAL OF GEOPHYSICAL RESEARCH: ATMOSPHERES, 115, D00K14, DOI 10.1029/2009JD013427, 2010.

Gu, Y., Liou, K. N., Lee, W. L., and Leung, L. R.: Simulating 3-d radiative transfer effects over the sierra nevada mountains using wrf, Atmos Chem Phys, 12, 9965-9976, 10.5194/acp-12-9965-2012, 2012.

Heald, C. L.: Geos-chem aerosol optics, available at [http://www.Atmos.Colostate.Edu/~heald/docs/geos\\_chem\\_optics\\_description.Pdf](http://www.Atmos.Colostate.Edu/~heald/docs/geos_chem_optics_description.Pdf), 2010.

Iwabuchi, H., and Kobayashi, H.: Modeling of radiative transfer in cloudy atmospheres and plant canopies using monte carlo methods. Frcgc technical report 8, 2008.

Jacobson, M. Z., and Ten Hoeve, J. E.: Effects of urban surfaces and white roofs on global and regional climate, J Climate, 25, 1028-1044, 10.1175/Jcli-D-11-00032.1, 2012.

Jarvis, A., Reuter, H. I., Nelson, A., and Guevara, E.: Hole-filled seamless srtm data v4, available at <http://srtm.Csi.Cgiar.Org>, International Centre for Tropical Agriculture, 2008.

Kondo, H., Genchi, Y., Kikegawa, Y., Ohashi, Y., Yoshikado, H., and Komiyama, H.: Development of a multi-layer urban canopy model for the analysis of energy consumption in a big city: Structure of the urban canopy model and its basic performance, Bound-Lay Meteorol, 116, 395-421, 10.1007/s10546-005-0905-5, 2005.

Kusaka, H., Kondo, H., Kikegawa, Y., and Kimura, F.: A simple single-layer urban canopy model for atmospheric models: Comparison with multi-layer and slab models, Bound-Lay Meteorol, 101, 329-358, Doi 10.1023/A:1019207923078, 2001.

Kusaka, H., and Kimura, F.: Coupling a single-layer urban canopy model with a simple atmospheric model: Impact on urban heat island simulation for an idealized case, J Meteorol Soc Jpn, 82, 67-80, Doi 10.2151/Jmsj.82.67, 2004.

Lai, Y. J., Chou, M. D., and Lin, P. H.: Parameterization of topographic effect on surface solar radiation, J Geophys Res-Atmos, 115, D01104, DOI 10.1029/2009jd012305, 2010.

Lee, W. L., Liou, K. N., and Hall, A.: Parameterization of solar fluxes over mountain surfaces for application to climate models, J Geophys Res-Atmos, 116, D01101, DOI 10.1029/2010jd014722, 2011.

Lee, W. L., Liou, K. N., and Wang, C. C.: Impact of 3-d topography on surface radiation budget over the tibetan plateau, Theor Appl Climatol, 113, 95-103, 10.1007/s00704-012-0767-y, 2013.

Lee, W. L., Gu, Y., Liou, K. N., Leung, L. R., and Hsu, H. H.: A global model simulation for 3-d radiative transfer impact on surface hydrology over the sierra nevada and rocky mountains, Atmos Chem Phys, 15, 5405-5413, 10.5194/acp-15-5405-2015, 2015.

Liou, K. N., Lee, W. L., and Hall, A.: Radiative transfer in mountains: Application to the tibetan plateau, Geophys Res Lett, 34, L23809, DOI 10.1029/2007gl031762, 2007.

Liou, K. N., Gu, Y., Leung, L. R., Lee, W. L., and Fovell, R. G.: A wrf simulation of the impact of 3-d radiative transfer on surface hydrology over the rocky mountains and sierra nevada, Atmos Chem Phys, 13, 11709-11721, 10.5194/acp-13-11709-2013, 2013.

Martilli, A., Clappier, A., and Rotach, M. W.: An urban surface exchange parameterisation for mesoscale models, Bound-Lay Meteorol, 104, 261-304, 10.1023/a:1016099921195, 2002.

Martin, R., and Heald, C. L.: Aerosol optical properties update for geos-chem v8-03-01, available at [http://wiki.Seas.Harvard.Edu/geos-chem/index.Php/aerosol\\_optical\\_properties](http://wiki.Seas.Harvard.Edu/geos-chem/index.Php/aerosol_optical_properties), 2010.

Mayer, B., Hoch, S. W., and Whiteman, C. D.: Validating the mystic three-dimensional radiative transfer model with observations from the complex topography of arizona's meteor crater, Atmos Chem Phys, 10, 8685-8696, 10.5194/acp-10-8685-2010, 2010.

- 1 Oleson, K. W., Bonan, G. B., Feddema, J., Vertenstein, M., and Grimmond, C. S. B.: An  
2 urban parameterization for a global climate model. Part i: Formulation and evaluation for  
3 two cities, *J Appl Meteorol Clim*, 47, 1038-1060, 10.1175/2007JAMC1597.1, 2008.
- 4 Pleim, J. E., and Xiu, A.: Development and testing of a surface flux and planetary boundary  
5 layer model for application in mesoscale models, *J Appl Meteorol*, 34, 16-32, 1995.
- 6 Prado, R. T. A., and Ferreira, F. L.: Measurement of albedo and analysis of its influence the  
7 surface temperature of building roof materials, *Energ Buildings*, 37, 295-300,  
8 10.1016/j.enbuild.2004.03.009, 2005.
- 9 Preisendorfer, R. W., and Mobley, C. D.: Albedos and glitter patterns of a wind-roughened  
10 sea-surface, *J Phys Oceanogr*, 16, 1293-1316, Doi 10.1175/1520-  
11 0485(1986)016<1293:Aagpoa>2.0.Co;2, 1986.
- 12 Taha, H.: Episodic performance and sensitivity of the urbanized mm5 (umm5) to  
13 perturbations in surface properties in houston texas, *Bound-Lay Meteorol*, 127, 193-218,  
14 10.1007/s10546-007-9258-6, 2008.
- 15 Wang, S. X., Zhao, B., Cai, S. Y., Klimont, Z., Nielsen, C. P., Morikawa, T., Woo, J. H., Kim,  
16 Y., Fu, X., Xu, J. Y., Hao, J. M., and He, K. B.: Emission trends and mitigation options for  
17 air pollutants in east asia, *Atmos Chem Phys*, 14, 6571-6603, DOI 10.5194/acp-14-6571-  
18 2014, 2014.
- 19 Zhao, B., Wang, S. X., Wang, J. D., Fu, J. S., Liu, T. H., Xu, J. Y., Fu, X., and Hao, J. M.:  
20 Impact of national nox and so2 control policies on particulate matter pollution in china,  
21 *Atmos Environ*, 77, 453-463, DOI 10.1016/j.atmosenv.2013.05.012, 2013a.
- 22 Zhao, B., Wang, S. X., Liu, H., Xu, J. Y., Fu, K., Klimont, Z., Hao, J. M., He, K. B., Cofala,  
23 J., and Amann, M.: NOx emissions in china: Historical trends and future perspectives,  
24 *Atmos Chem Phys*, 13, 9869-9897, DOI 10.5194/acp-13-9869-2013, 2013b.

# 1 Tables and figures

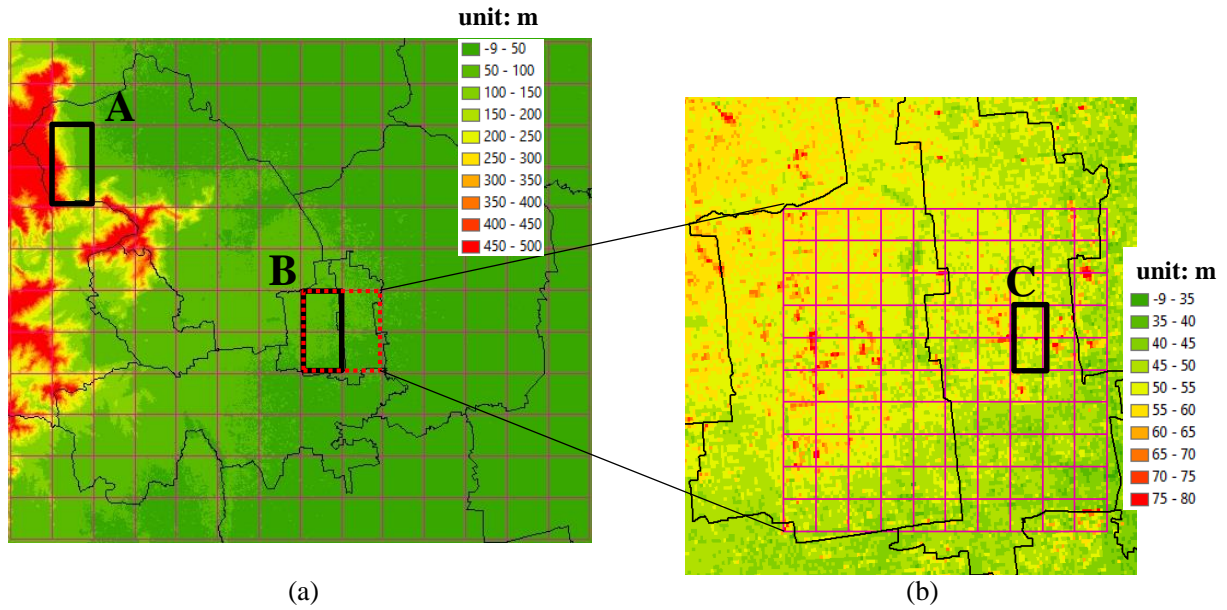


Figure 1. Modelling domains used in 3-D radiative transfer calculation: (a) Domain 1 covering urban and suburban Beijing at a grid resolution of 4 km; (b) Domain 2 covering the urban centre of Beijing at a grid resolution of 800 m. The colours represent altitudes at a resolution of 3 arc-second (about 90 m) derived from SRTM. The black thin lines represent boundaries of districts. The three black bold rectangles (defined as A, B, and C, respectively) represent typical grids used to analyse diurnal variation and to quantify the contribution of flux components. The red dashed rectangle represents grids in Domain 1 that correspond to Domain 2.

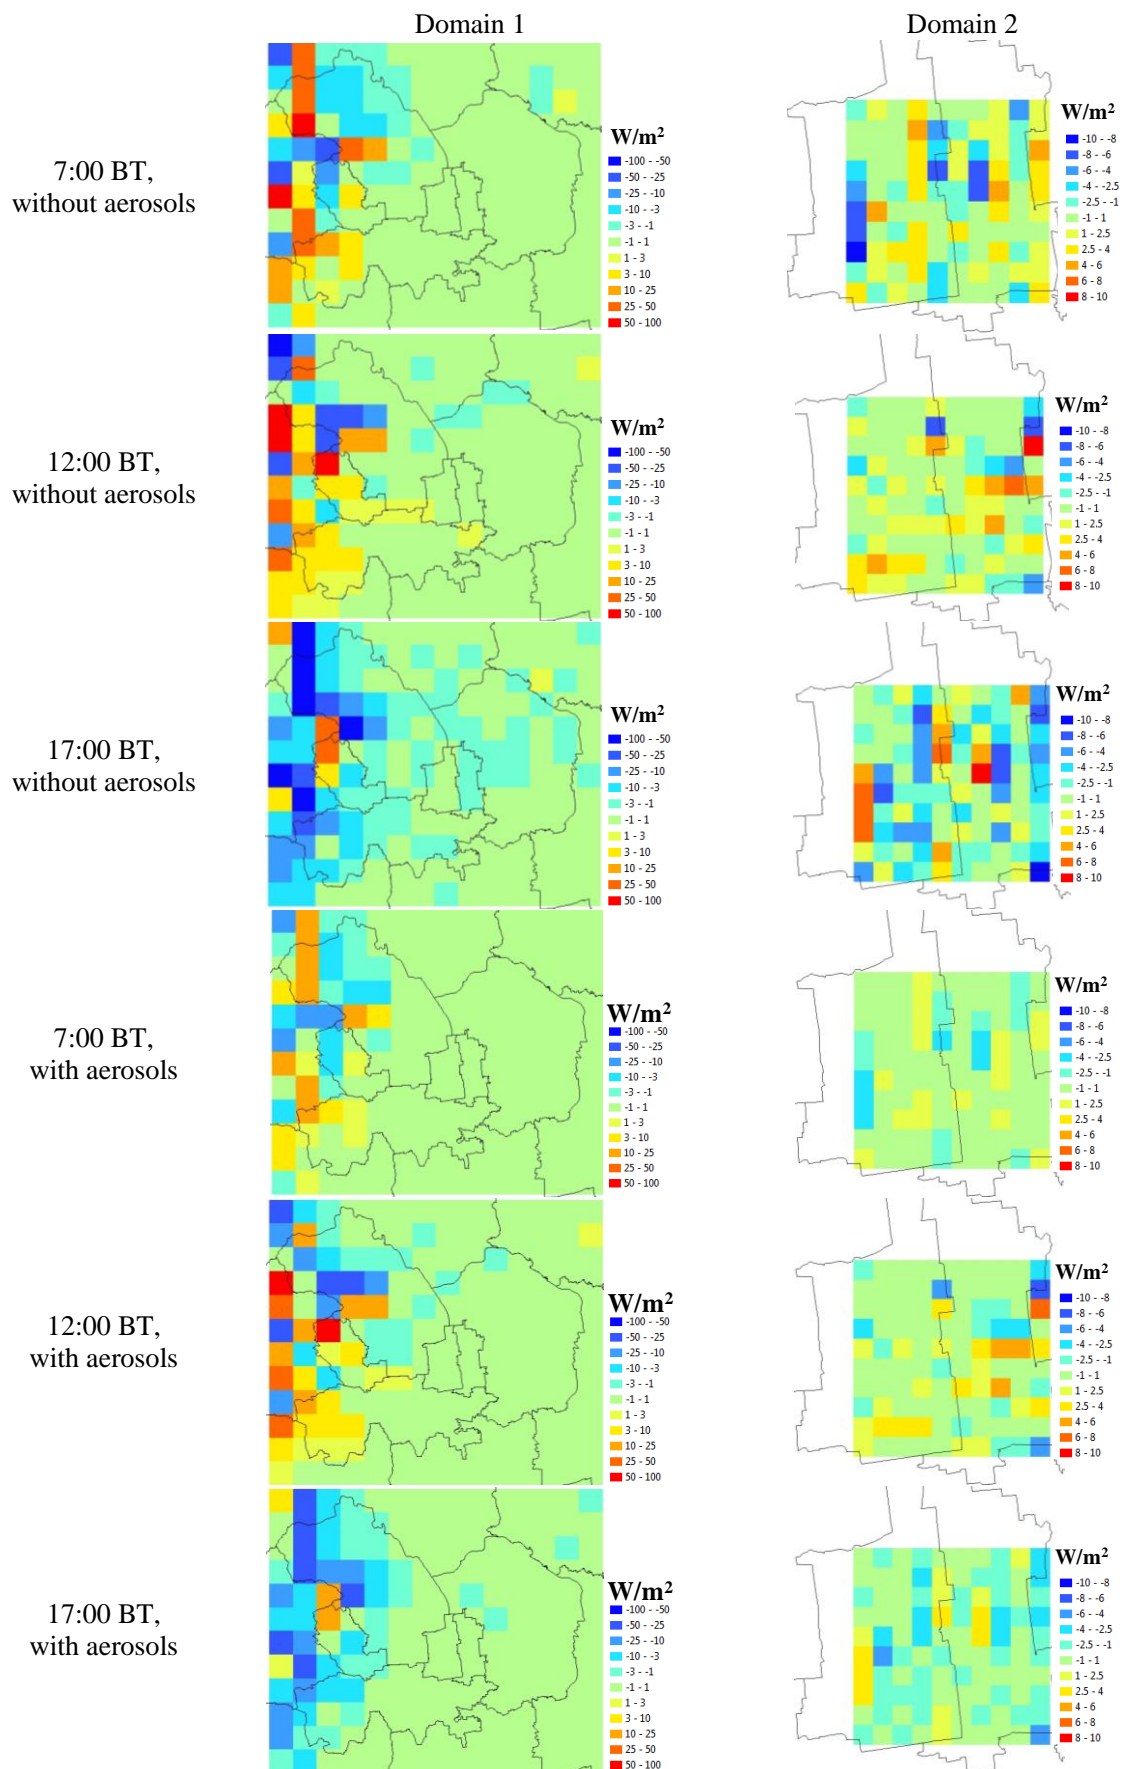


Figure 2. Surface solar flux deviations between the 3-D radiation parameterization and the plane-parallel scheme at selected times (7:00, 12:00, and 17:00 BT) on April 1<sup>st</sup> in conditions with and without aerosols.



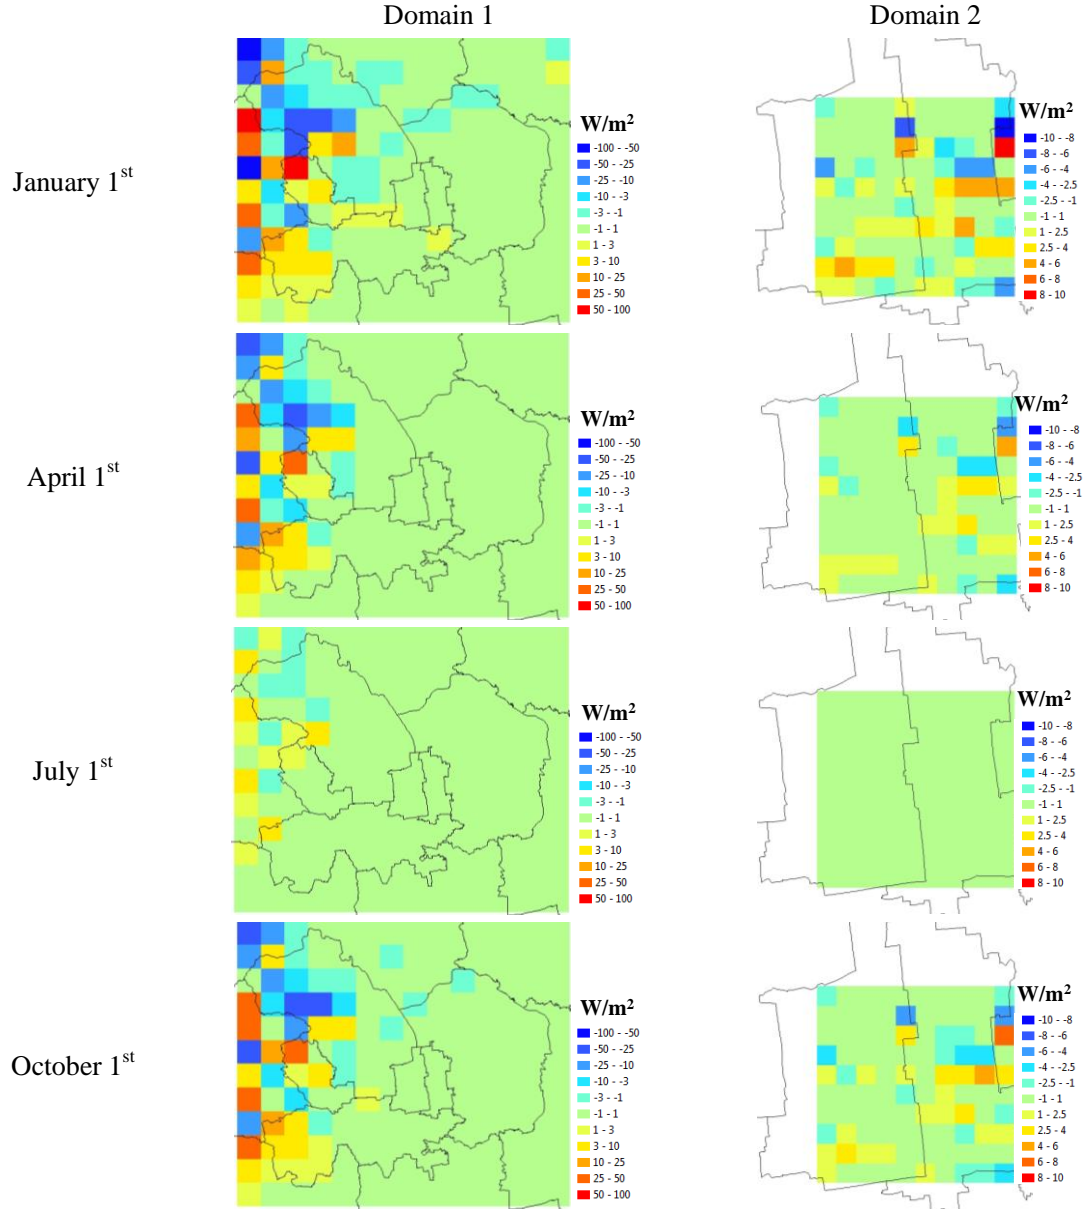


Figure 3. Daily average surface solar flux deviations between the 3-D radiation parameterization and the plane-parallel scheme in clear-sky condition without aerosols on January 1<sup>st</sup>, April 1<sup>st</sup>, July 1<sup>st</sup>, and October 1<sup>st</sup>, 2012.

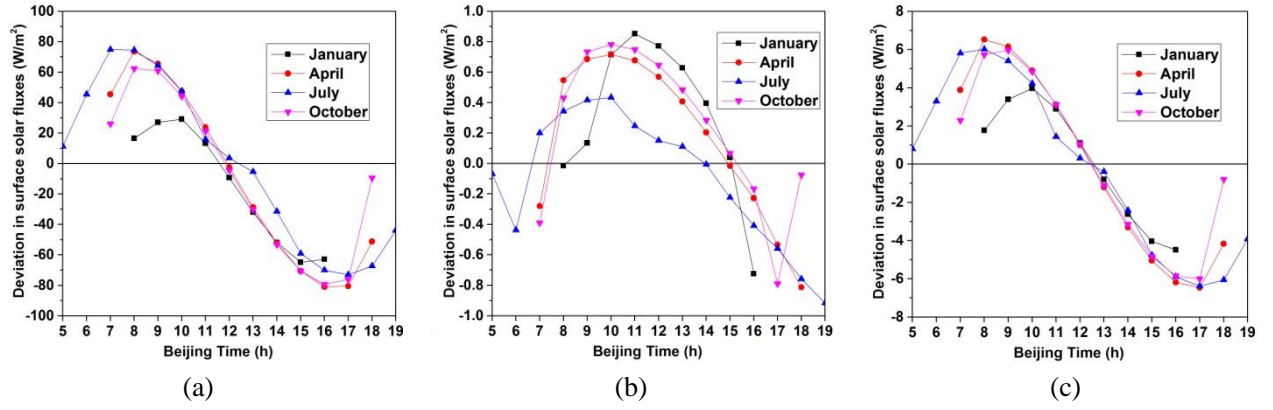

1 Figure 4. Diurnal variation of surface solar flux deviations between the 3-D radiation  
2 parameterization and the plane-parallel scheme in clear-sky condition without aerosols in  
3 typical grids marked by black bold rectangles in Fig. 1: (a) a typical mountainous area,  
4 defined as rectangle A; (b) a typical urban area in Domain 1, defined as rectangle B; (c) a  
5 typical urban area in Domain 2, defined as rectangle C.

6

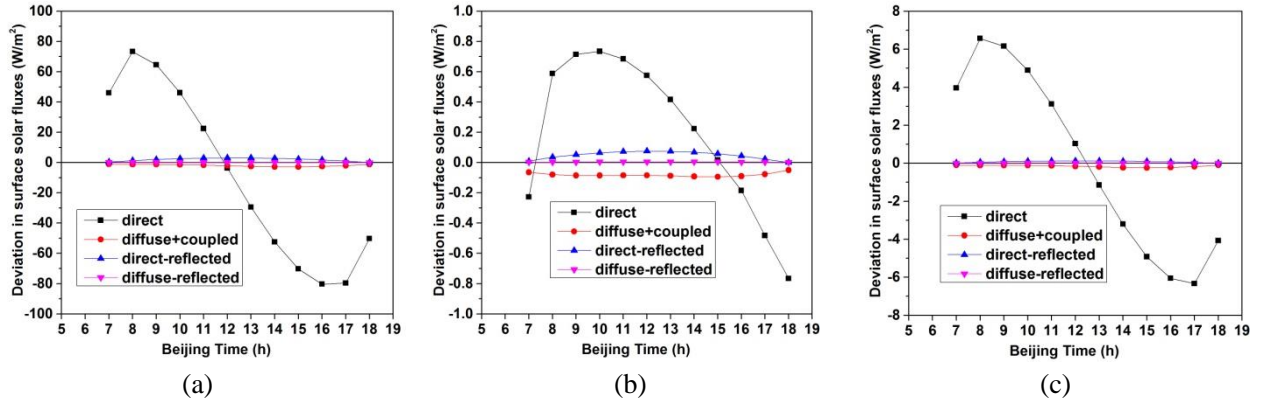

1 Figure 5. Contributions of individual components to surface solar flux deviations between the  
 2 3-D radiation parameterization and the plane-parallel scheme in clear-sky condition without  
 3 aerosols in typical grids on April 1<sup>st</sup>. Panel (a), (b), and (c) are for the same grids as Fig. 4(a),  
 4 Fig. 4(b), and Fig. 4(c).

5



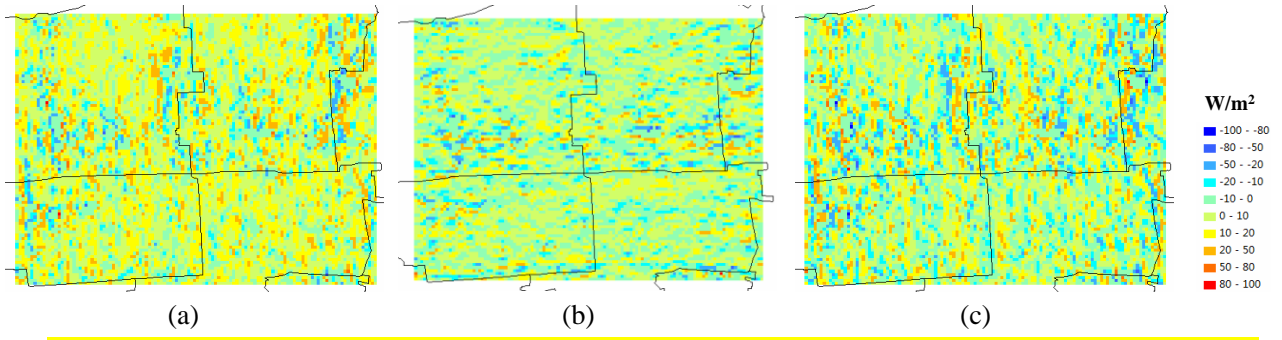


Figure 6. Surface solar flux deviations between the 3-D radiation parameterization and the plane-parallel scheme on April 1<sup>st</sup> at a grid resolution of 3 arc-second (about 90 m). (a) 7:00 BT; (b) 12:00 BT; (c) 17:00 BT. The size of the simulation domain is the same as Domain 2 defined in Fig. 1. An elevation map at a 90-m resolution for the simulation domain is also shown in the right panel of Fig. 1.

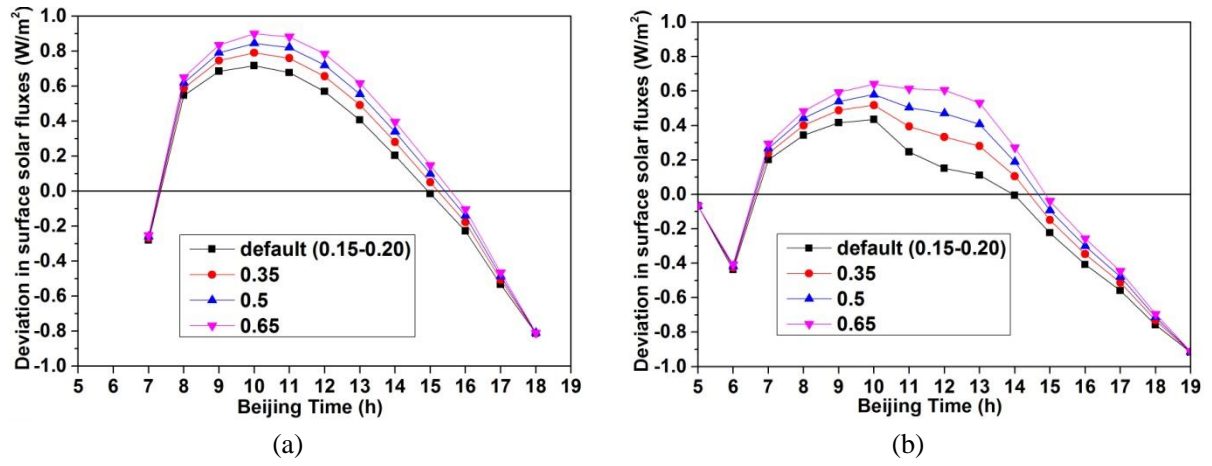


Figure 7. Sensitivity of surface solar flux deviations between the 3-D radiation parameterization and the plane-parallel scheme to the surface albedo in a typical urban area in Domain 1 (defined as rectangle B in Fig. 1) on (a) April 1<sup>st</sup>, (b) July 1<sup>st</sup>.