

We would like to thank the reviewer for taking the time to evaluate our manuscript and provide comments that have improved the manuscript. In the response below, the reviewer's questions are reproduced in blue and our replies are shown in black.

Referee 1:

General comments:

While the manuscript is qualitatively important in that it points out a previously unconsidered potential source of error in other studies involving hydroperoxides in metal chambers, in order for this to be quantitatively useful, it would be helpful to have some estimate of uncertainty. For example, correcting the product distributions of previous studies of isoprene photolysis or effectively designing new studies to avoid interferences in metal chambers will require estimates not just of the decomposition rate that best fit the measurements in the present study, but of the range of possible decomposition rates consistent with the measurements. Most useful, perhaps, would be upper and/or lower limits on the model parameters - e.g. collision efficiency and OH concentration - that might be extended to other studies. There are many elements where uncertainty enters into the results reported herein - modeled OH yields from ozonolysis, conversion efficiency of hydroperoxides on surfaces, measurement of compounds- and although some are treated individually in the manuscript (with Figures 2 and 6 showing how changing OH and conversion efficiency affect the model output), a more comprehensive treatment of the aggregated uncertainty in the conclusions would make the results more broadly applicable, and aid in extending the findings to other studies. Along those lines, connecting these results to other studies and other systems will be key. Are there previous studies - particularly photooxidation product studies - in which metal surfaces have been used before, such that previously reported results may be called in to question or require adjustment based on the findings detailed herein? If so, some mention of those cases in the conclusion and implication sections would be warranted. Additionally, are there related systems that involve hydroperoxides to which this work might apply?

It is hard to quantitatively translate this study to other studies as the surface effect can vary depending on, e.g., the experimental setup and the history of the previous experiments conducted in the same setup (number and manner of cleaning cycles between new sets of experiments, etc.). More information on uncertainties affecting this study has been provided in the comments below.

Even though the impact of the observed effect cannot be quantitatively transferred to other experiments, it is clear that metal surfaces are prone to this type of reactions. Metal surfaces not only affect peroxides but also affect observation of acids, and these are the main reason why photooxidation studies, especially under low NO_x conditions, are most commonly carried out in PTFE chambers instead of metal chambers. However to fully understand the extent of decomposition rate and products of ISOPOOH on chamber walls or other compounds, it would be necessary to introduce the compound in question directly into the

chamber before the start of the experiment to fully characterise its behaviour in the chamber.

Content comments:

Page 5, line 27: How does this OH production rate compare with other estimates, and what effect does that have on the model?

Different approaches to determine OH concentration were tried to estimate the actual OH concentration:

- 1) Using H_2SO_4 and SO_2 concentrations as proxies for the OH concentration proved to be impossible due to artificial injection of H_2SO_4 and SO_2 from the injection of CCN from liquid sulfuric acid.
- 2) Calculating the OH concentration from the reacted Isoprene proved difficult due to the adiabatic expansions performed during this set of experiments which required constant changes of the chamber conditions (flows, temperature, pressure, RH), which were not necessarily well documented.
- 3) The OH yield given by the MCM v3.3 is a little higher (~33 %) compared to the literature OH yield of 26 %. The OH yield increases with increasing pressure (Malkin et al., 2010, Newland et al., 2015), the pressure during the CLOUD experiments was 5 – 200 mbar higher than the highest pressure observed in Malkin et al.

The yield provided by the MCM without additional adjustments provided the best agreement between model and measurement. Therefore it was used during this study.

Similarly, it might be useful to perform some sensitivity studies, changing your modeled yields of not just OH but MVK and MACR from isoprene + O_3 (and isoprene + OH) and seeing how much that affects the results.

Modifying the yields of the reaction from isoprene + O_3 for MVK and MACR as well as the production of MVKOOA and MACROOA changes the product distribution as follows:

- Increasing the MACR yield from 30 % to 40 % and the MVK yield from 20 % to 50 % would be required to match model simulations to measurements. These modified yields are inconsistent with numerous laboratory experiments (Nguyen et al., 2016, Galloway et al., 2011 and references therein). While MACR would still be in the range of observed yields, even though at the upper limit, MVK would be more than 2 times higher than any observed yields. The impact on MVK is much more pronounced than the impact on MACR which is reasonable considering that 1,2-ISOPROOH is more abundantly formed than 4,3-ISOPROOH.
- Varying the yields for the O_3 + isoprene reaction does not resolve the issue of the formation of unobserved ISOPROOH. ISOPROOH concentration can only be matched to the measurements by either shutting down the isoprene + OH pathway or inclusion of wall decomposition reactions. Shutting down the isoprene + OH pathway is however unrealistic and inconsistent with known chemistry (26 %, Malkin et al., 2010, Newland et al., 2015).

It appears from a following paragraph (page 6, lines 7-13) and from Figure 2 that you performed some such studies; from those studies, can you conclude that the OH production rate used in the model was reasonable, or can you put any level of uncertainty on it?

There are three sources of uncertainty for the OH concentration in the experiment since OH could not be measured directly:

- 4) Photolysis of ozone. This is negligible as UV radiation was too weak and, in fact, turned off for most of the experiment.
- 5) Uncertainty of isoprene and ozone concentrations. Both were directly measured and isoprene was regularly calibrated at the same conditions as the chamber experiments (uncertainty < 5%).
- 6) Uncertainty of OH production in the MCM:

OH concentrations are more likely to be underestimated than overestimated, but the uncertainty is hard to quantify. Even an underestimation by a factor of 2 doesn't resolve the issue of the discrepancy between model and measurement of MVK and MACR nor does it resolve the issue of the unobserved ISOPOOH. On the contrary, while increasing OH reduces the discrepancy between model and measurements for MVK and MACR, it significantly increases the discrepancy between modelled ISOPOOH (increase with increasing OH) and the fact that barely any ISOPOOH was observed above the limit of detection. Therefore, the OH production rate as given by the MCM seems reasonable and in any case, it is not possible to reconcile the model under-prediction of MVK/MACR and model over-prediction of ISOPOOH by changing OH; figure2 demonstrates this, i.e., changes in OH affect both MVK/MACR and ISOPOOH in the same manner and thus they are not able to reconcile the measurement/model discrepancy.

Fundamentally, a change in reaction pathway, rather than a change in OH concentration is required, to explain the observations.

Page 5, line 30: What does this [OH] number refer to? The modeled range of concentration present in the chamber when using the 26% yield number?

[OH] is the concentration of OH in molecules cm^{-3} from the MCM model simulation for experimental conditions and with the model only constrained to observed isoprene and ozone concentration.

Changed to:

The MCM model gives a range of $0.5 - 1 \times 10^5$ molecules cm^{-3} for the OH concentration, [OH], under the different experimental conditions and no further modelling constraints. These OH concentrations allow a reproduction of the general trend of the major oxidation products in the measurement.

Page 7, line 5: The conversion efficiency per collision is another element in which it would be nice to look at the sensitivity of your results to the assumptions made. Figure 6 shows some

of the model results if you loosen the assumption that conversion efficiency is not quantitative, but how do these values fit within the measurement uncertainty of MVK and MACR?

The uncertainty for the MVK measurements is on the order of 5%. The uncertainty for the MACR measurements is a little higher (~15%) due to the lack of a direct calibration.

Figure 2 has been updated to include the measurement uncertainties of MVK and MACR (red areas) as well as measured ISOPDOH:

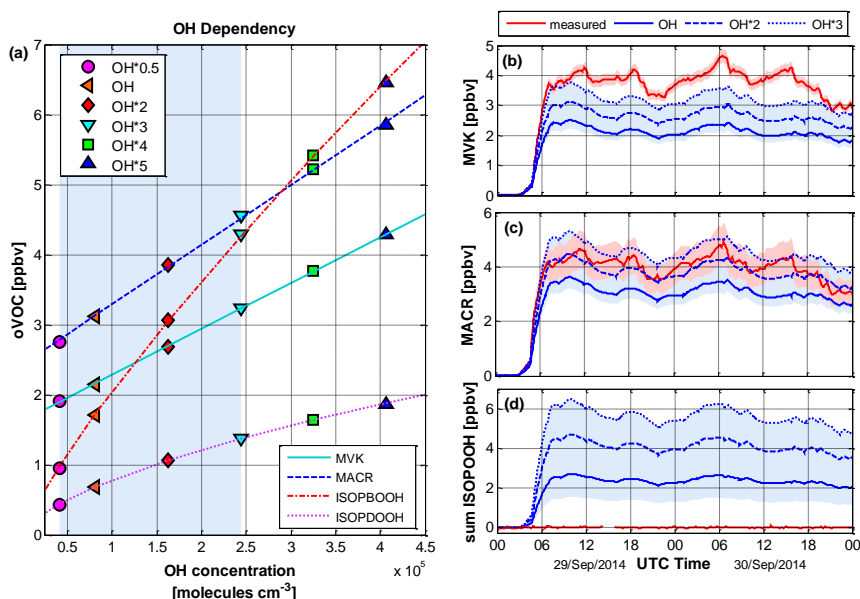


Figure 2: a) OH dependence of the concentration of the main oxidation products at 263 K (Run2), b) changes in MVK prediction depending on OH concentration in comparison to measured data, c) changes in MVK prediction depending on OH concentration in comparison to measured data, d) changes in ISOPDOH prediction depending on OH concentration. The shaded blue area corresponds to the range of OH concentrations and the red shaded area corresponds to the uncertainty in the respective measurements of MVK and MACR.

The uncertainties in the quantification of MVK and MACR don't change the overall picture. While the uncertainty of the MVK measurement is of no effect, the uncertainty of the MACR measurement leads to a better agreement between model and measurement in the case of the inclusion of wall reactions. Without wall reactions, the discrepancy between model simulation and measurements cannot be explained by OH uncertainty or measurement uncertainty of the oxidation products.

Inclusion of the measurement uncertainties for MVK and MACR gives the following picture:


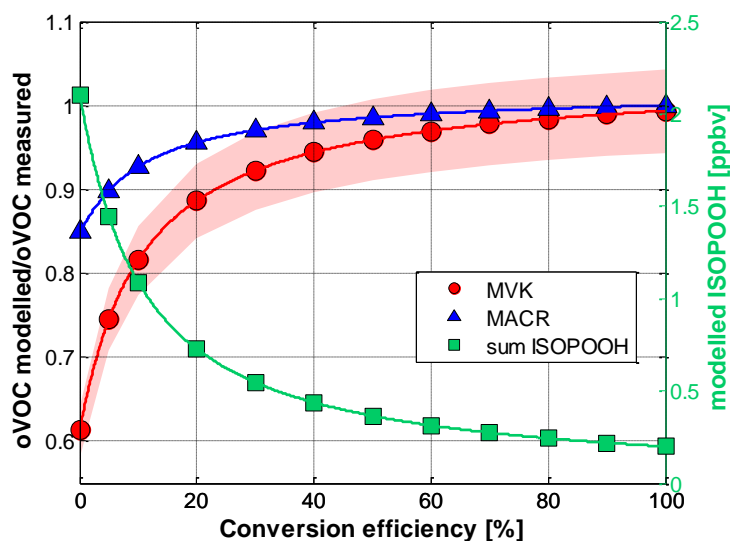


Figure 6: Influence of conversion efficiency on the agreement of modelled VOC and measured VOC concentrations ranging from a conversion efficiency of 0 % (no wall reaction) to an efficiency of 100 % (complete decomposition on wall collision). The shaded areas correspond to the uncertainty in the measurements of MVK.

The uncertainty for MVK is of little effect regarding the overall results (see above). Even at around 40 % collision efficiency modelled and measured concentrations are in good agreement. The influence for MACR is more pronounced, as expected. If MACR concentrations were in fact lower on the lower range of the shaded area (higher MACR concentrations) an agreement higher than 85 % between model and measurement would be impossible. If they were on the higher side (lower MACR concentrations) an overestimation of the modelled concentrations would occur.

How well does the modeled ISOPOOH match measurements?

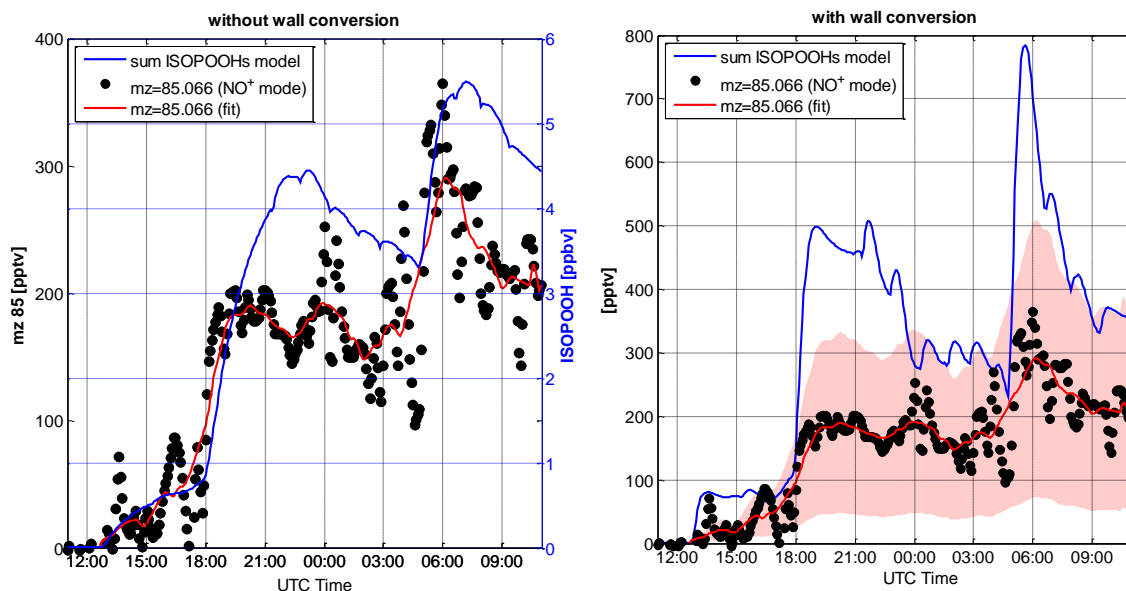

Comparing modelled ISOPOOH with measurements the discrepancy can be reduced from a factor of approx. 20 down to a factor of 2-3 upon inclusion of wall conversion reactions. The remaining discrepancy between model and measurements might be due to the

measurement uncertainties in this regime close to the LOD and a lack of direct calibration during the CLOUD campaign (red area corresponds to a measurement uncertainty of 75%).

Using these values and the measurement uncertainty, can you estimate a range in which the conversion efficiency is likely to fall (or, perhaps more importantly, a lower limit)?

Looking at fig. 6 a conversion efficiency of as low as 20 % at a wall collision rate of $1.1 \cdot 10^{-3} \text{ s}^{-1}$ is sufficient to convert a significant amount (about two third) of ISOPOOH to MVK and MACR.

Page 7, line 30 changed to:

Figure 6 shows the effect of the conversion efficiency per wall collision on model measurement comparison. Even reducing the collision efficiency at a constant wall collision rate to less than 40 % gives a very good agreement of model and measurements within 10 % discrepancy and the measurement uncertainties while at the same time reducing the concentration of ISOPOOH significantly (factor 4). A conversion efficiency of as low as 20 % at a wall collision rate of $1.1 \cdot 10^{-3} \text{ s}^{-1}$ is sufficient to convert a significant amount (about two third) of ISOPOOH to MVK and MACR.

Page 7, line 8-10: Do you have a reference for the formation of unsaturated C5-diols from ISOPOOH?

The formation of C5-diols has been observed in laboratory studies in our group. The results will be published separately (Mentler et al., 2017). Unfortunately the C5-diol formation is not quantifiable using either H_3O^+ or NO^+ as primary reagent ions, which were used during the CLOUD 9 campaign, since they are not specific enough to rule out interferences.

In general, it would be nice to see the model-measurement discrepancy in ISOPOOH mixing ratios appear more in the results - say, in additional panels in Figure 3, or panel D of Figure 2. The formation of C5-diols may cause further discrepancy between measurements and models, but if so, that discrepancy should be quantifiable; if it points to an additional loss process, how does that compare to the processes shown in Figure 5?

Measured ISOPOOH is now included in an updated version of fig. 2 (see above). The measured concentrations were not included in the first version of the figure because the signal is below the LOD and no ISOPOOH could be observed during this experiment. ISOPOOH was only observed during the experimental run which is shown in Figure 1.

The generalized sink terms as presented in figure 5 should not be affected by the inclusion of C5-Diols. The importance of wall decomposition compared to any other process will remain the same. What will change would be the product distribution from the decomposition process. So far the model assumes the isomer specific decomposition to MVK, MACR and formaldehyde only. We will refer to the manuscript by Mentler et al. for further reference.

Page 7, line 15: Do you have a reference for the claim that uncharacterized wall production of formaldehyde is common in chamber experiments? If it is common enough to have been quantified in the past, is it possible to estimate whether that source could account for the missing fraction you observe?

Several chamber cleanliness studies have been performed at the CLOUD chamber before the start of a new measurement campaign. Even in clean chambers a formation of small volatile organic compounds, especially formaldehyde can be observed. This emission of VOCs increases significantly upon addition of ozone to pure air (see Schnitzhofer et al, 2014). If this is the case for clean stainless steel surfaces, it is fair to assume that it will be an even more pronounced effect on stainless steel surfaces with an organic coating.

Similar to the question of conversion efficiency, this is hard to quantify as formation depends strongly on the surface area of the chamber and nature of the organic components on the chamber wall. The wall production is expected to change with the experimental setup and/or with a different composition of organic species. Furthermore the duration of the experiment needs to be taken into account. The history of previous experiments will also influence the composition of the organic layer on the chamber walls. Without knowing the exact nature of these organics, it is hard to determine the exact amount of wall production.

Page 7, line 15 changed to:

The discrepancy between model and measurement in the case of formaldehyde is reduced. In the case of HCHO there is still a source equal to 5 ppbv (40 % discrepancy compared to measurement) which is unaccounted for. Apart from instrumental uncertainties, this could be due to uncharacterised wall production, not uncommon for formaldehyde in chamber experiments, which is described for the CLOUD chamber in Schnitzhofer et al. (2014), or other surface catalytic reactions which have not been identified.

Page 7 line 32 - page 8 line 1: Do you expect there are conditions under which the residence time on surfaces would be too short for the reaction to occur efficiently, or under which the limiting factor in ISOPROOH decomposition would be something other than the collision rate?

Considering the differences in the chamber exchange rate ($9.9 \cdot 10^{-5} \text{ s}^{-1}$) and the wall collision rate ($1.1 \cdot 10^{-3} \text{ s}^{-1}$), even if the reaction wouldn't occur upon the first collision, there would be ample time for an efficient reaction to occur upon a later collision.

A saturation effect of the wall surfaces is unlikely to occur in the CLOUD experiments or generally experiments on this scale since only small concentrations are exposed to a high surface area.

Variation of the decomposition efficiency is shown in fig 6. Even comparatively low conversion efficiencies still lead to a strong decomposition of ISOPROOH. The same is true for

the reaction time. Here, under these experimental conditions, a variation leads to no effect as long as it is faster than the chamber exchange rate.

The influence of wall decompositions decreases upon increase of OH concentration. But even after an increase of OH by approx. two orders of magnitude it remains the most important sink of ISOPROOH in this experimental setup.

Minor copyediting comments:

Page 1, line 27: "affection" should perhaps be "affecting" Done

Page 2, line 29: "ISOPROOH decomposes isomer specific to smaller carbonyls" is unclear.

Changed to:

The different ISOPROOH isomers decompose isomer specific to smaller carbonyls: 1,2-ISOPROOH forms MVK and formaldehyde and 4,3-ISOPROOH forms MACR and formaldehyde.

Page 3, line 11: "26 m electro polished stainless-steel " should read "26 m³ electropolished stainless steel" Done

Page 3, line 28: "being" is not needed Done

Page 3, line 31: parentheses not needed for this citation Done

Page 5, line 14: "rates" should be "rate" (or "plays" should be "play") Done

Page 6, line 5: What do you mean by "makes up for"? Was there a 1.2-2 ppbv (50%) discrepancy in the modeled and observed MVK that is now accounted for? Or do you mean the total difference between measured and modeled MVK is 1.2-2 ppbv? And is that 50% of the modeled or measured total? Also, missing a "-" between 0.6 and 1.2.

Changed to:

The difference between model and measurements are 1.2-2 ppbv (50 %), 0.6-1.2 ppbv (25 %) and 6-10 ppbv (50 %) respectively.

Page 7, line 3: "occurs" should perhaps be "are" Done

Page 7, line 14: what exactly does the 40% refer to? Is 5 ppbv equal to 40% of the average total formaldehyde signal?

Changed to:

The discrepancy between model and measurement in the case of formaldehyde is reduced. In the case of HCHO there is still a source equal to 5 ppbv (40 % discrepancy compared to measurement) which is unaccounted for.

Page 8, line 1: "ISOPROOHs" should be "ISOPROOH's" Done

Page 8, line 3: tense disagreement between "was" and "undergoes" Done

References:

- Galloway, M. M., Huisman, A. J., Yee, L. D., Chan, A. W. H., Loza, C. L., Seinfeld, J. H., and Keutsch, F. N.: Yields of oxidized volatile organic compounds during the OH radical initiated oxidation of isoprene, methyl vinyl ketone, and methacrolein under high-NO_x conditions, *Atmos. Chem. Phys.*, **11**, 10779-10790, doi:10.5194/acp-11-10779-2011, 2011.
- Malkin, T. L., Goddard, A., Heard, D. E., and Seakins, P. W.: Measurements of OH and HO₂ yields from the gas phase ozonolysis of isoprene, *Atmos. Chem. Phys.*, **10**, 1441–1459, doi:10.5194/acp-10-1441-2010, 2010.
- Newland, M. J., Rickard, A. R., Vereecken, L., Muñoz, A., Ródenas, M., and Bloss, W. J.: Atmospheric isoprene ozonolysis: impacts of stabilised Criegee intermediate reactions with SO₂, and dimethyl sulfide, *Atmos. Chem. Phys.*, **15**, 9521-9536, doi:10.5194/acp-15-9521-2015, 2015.
- Nguyen, T. B., Tyndall, G. S., Crounse, J. D., Teng, A. P., Bates, K. H., Schwantes, R. H., Coggon, M. M., Zhang, L., Feiner, P., Milller, D. O., Skog, K. M., Rivera-Rios, J. C., Dorris, M., Olson, K. F., Koss, A., Wild, R. J., Brown, S. S., Goldstein, A. H., Gouw, J. A. de, Brune, W. H., Keutsch, F. N., Seinfeld, J. H., and Wennberg, P. O.: Atmospheric fates of Criegee intermediates in the ozonolysis of isoprene, *Physical chemistry chemical physics PCCP*, **18**, 10241–10254, doi:10.1039/C6CP00053C, 2016.
- Schnitzhofer, R., Metzger, A., Breitenlechner, M., Jud, W., Heinritzi, M., Menezes, L.-P. de, Duplissy, J., Guida, R., Haider, S., Kirkby, J., Mathot, S., Minginette, P., Onnela, A., Walther, H., Wasem, A., and Hansel, A.: Characterisation of organic contaminants in the CLOUD chamber at CERN, *Atmos. Meas. Tech.*, **7**, 2159–2168, doi:10.5194/amt-7-2159-2014, 2014.

Technical Note: Conversion of Isoprene Hydroxy Hydroperoxides (ISOPOOH) on Metal Environmental Simulation Chamber Walls

Anne-Kathrin Bernhammer^{1,2}, Martin Breitenlechner^{1,*}, Frank N. Keutsch³ and Armin Hansel^{1,2}

¹Institute for Ion and Applied Physics, University of Innsbruck, 6020 Innsbruck, Austria

²IONICON Analytik GmbH, 6020 Innsbruck, Austria

³John A. Paulson School of Engineering and Applied Sciences and Department of Chemistry and Chemical Biology, Harvard University, Cambridge, MA, USA

* now at: John A. Paulson School of Engineering and Applied Sciences and Department of Chemistry and Chemical Biology, Harvard University, Cambridge, MA, USA

Correspondence to: Armin Hansel (Armin.Hansel@uibk.ac.at)

Abstract

Sources and sinks of isoprene oxidation products from low NO_x isoprene chemistry have been studied at the CERN CLOUD (Cosmics Leaving Outdoor Droplets) chamber with a custom-built selective reagent ion time of flight mass spectrometer (SRI-ToF-MS), which allows quantitative measurement of isoprene hydroxy hydroperoxides (ISOPOOH).

The measured concentrations of the main oxidation products were compared to chemical box model simulations based on the Leeds Master Chemical Mechanism (MCM) v3.3. The modelled ISOPOOH concentrations are by a factor of 20 higher than the observed and methyl vinyl ketone (MVK) and methacrolein (MACR) concentrations are by a factor of up to 2 lower compared to observations, despite the artifact-free detection method.

Addition of catalytic conversion of 1,2-ISOPOOH and 4,3-ISOPOOH to MVK and MACR on the stainless steel surface of the chamber to the chemical mechanism resolves the discrepancy between model predictions and observation. This suggests that isoprene chemistry in a metal chamber under low NO_x conditions cannot be described by a pure gas phase model alone. Biases in the measurement of ISOPOOH, MVK and MACR can not only be caused intra-instrumentally but also by the general experimental setup.

The work described here extends the role of heterogeneous reactions affecting gas phase composition and properties from instrumental surfaces, described previously, to general experimental setups. The role of such conversion reactions on real environmental surfaces is yet to be explored.

1 Introduction

Isoprene is the predominant non-methane biogenic volatile organic compound (BVOC) emitted into the atmosphere (Guenther et al., 2006). Due to its high emissions, its chemistry plays an important role in the oxidative processes within the atmosphere which are driven by catalytic cycles of hydrogen oxides (HO_x) and nitrogen oxides (NO_x), and which are directly coupled to the formation of secondary organic aerosol (SOA).

Isoprene shows a high reactivity towards the atmospheric oxidants OH and NO₃ and a much lower reactivity towards O₃. Its globally dominant sink is the reaction with the OH radical (Archibald et al.,

2010) since ozonolysis is a comparatively slow process and reaction with NO_3 is only relevant at night and during the early evening, when isoprene emissions are lower than during the day (Stroud, 2002; Warneke, 2004). Reaction with OH not only produces a variety of small carbonyls and hydroxycarbonyls but also, as main first generation products, hydroxyperoxides that retain the C_5 carbon backbone. The oxidation pathway which forms the latter is initiated by addition of OH to the isoprene double bond, followed by the reaction of the resulting allylic radical with molecular oxygen (O_2). This leads to the formation of α -hydroxyperoxy radicals (ISOPO_2) whose subsequent reactions are highly NO_x dependent. Under pristine ($\text{NO}_x < 100$ pptv) and HO_2 dominant conditions most ISOPO_2 radicals react to isoprene hydroxy hydroperoxides (ISOPOOH) and their subsequent oxidation products isoprene epoxydiols (IEPOX) (Crouse et al., 2013; Crouse et al., 2011; Paulot et al., 2009; St. Clair et al., 2016). In urban, NO_x dominated, regions ISOPO_2 reacts with NO to alkoxy radicals, ISOPO , which decompose to form higher volatility products like MVK and MACR and formaldehyde (HCHO), which are also the main products from reaction of isoprene with O_3 .

The first generation oxidation products from the HO_x and NO_x dominated pathways differ greatly in terms of chemical and physical properties and hence play different roles in the atmosphere. The vapour pressure of ISOPOOH is about three orders of magnitude lower than that of MVK and MACR and that of IEPOX is even lower, which increases the importance of their partitioning to surfaces and the condensed phase (Rivera-Rios et al., 2014). ISOPOOH and IEPOX have been shown to play an important role in SOA formation and reactive uptake (Bates et al., 2014; Gaston et al., 2014; Krechmer et al., 2015; Nguyen et al., 2014a).

A correct assessment of low NO_x isoprene chemistry is of great importance but the measurement of ISOPOOH has proven to be difficult by means of readily available commercial VOC instrumentation. Most state of the art instruments like commercial proton transfer reaction (time-of-flight) mass spectrometer (PTR-(ToF)-MS) instruments and also gas chromatograph-mass spectrometer (GC-MS) instruments have biases/artifacts when measuring ISOPOOH and IEPOX . The different ISOPOOH s decompose isomer specific to smaller carbonyls: 1,2- ISOPOOH forms MVK and formaldehyde and 4,3- ISOPOOH forms MACR and formaldehyde. Decomposition efficiency can vary strongly depending on instrumental settings such as temperature and contact time and type of surface materials, especially transition metal surfaces (Liu et al., 2013; Nguyen et al., 2014b; Rivera-Rios et al., 2014). The intra-instrumental decompositions may lead to a misrepresentation of ambient concentrations.

Recent laboratory studies of 1,2- ISOPOOH , 4,3- ISOPOOH and β - IEPOX standards with a new custom-built SRI-ToF-MS show significantly reduced catalytic decomposition reactions due to a short residence time and the replacement of the metal drift rings with conductive PEEK which allows the discrimination between MVK/MACR and the ISOPOOH isomers (Mentler et al., 2016).

Here we present measurements with the customised SRI-ToF-MS during low NO_x isoprene oxidation experiments aimed at studying low- NO_x SOA formation during the CLOUD 9 campaign (autumn 2014) and compare these with a chemical box model based on the Leeds Master Chemical Mechanism.

2 Experimental

2.1 The CLOUD Chamber

The experiments were carried out at the CLOUD chamber at CERN during the CLOUD 9 campaign (autumn 2014). The chamber consists of a 26 m^3 electropolished stainless steel cylinder in which a full range of tropospheric conditions can be reproduced. The chamber is described in detail elsewhere

(Duplissy et al., 2016; Kirkby et al., 2011). Inflow of pure air, generated from evaporation of cryogenic nitrogen (N₂) and oxygen (O₂) at a ratio of 79:21, was set to match the instrumental sample flows of 150 standard litres per minute (slpm). Temperature, chamber pressure and relative humidity (RH) were continuously monitored, as well as the trace gases O₃, NO₂, NO_x and SO₂. Isoprene (100 ppm in N₂, CARBAGAS CH) and ozone were continuously injected into the chamber. Organic trace gases were measured with a custom-built selective reagent ionisation time-of-flight mass spectrometer (SRI-ToF-MS). Typical experimental conditions are listed in table 1.

2.2 SRI-ToF-MS

The custom-built SRI-ToF-MS (Breitenlechner and Hansel, 2016) was optimised by replacing the metal drift rings of the high flow drift tube (here: 800 mL min⁻¹ compared to 10-30 mL min⁻¹ in a standard instrument) with conductive PEEK (polyether ether ketone) drift rings. These changes were essential to minimize decomposition reaction of ISOPOOH which are observed in standard PTR-ToF-MS instruments (Rivera-Rios et al., 2014). The operation as an SRI instrument offers the high mass resolution of a PTR-ToF-MS (Graus et al., 2010) combined with the capability to separate functional isomers. To achieve this separation, the SRI-ToF-MS utilises the different chemical ionisation pathways of switchable primary reagent ions (here: H₃O⁺ and NO⁺). This allows the identification of possible interferences, e.g., due to fragmentation onto the same mass to charge ratio in H₃O⁺ reagent ion mode (Karl et al., 2012). In H₃O⁺ reagent ion mode, both MVK and MACR undergo proton transfer and are detected as C₄H₇O⁺ ($m/z = 71.050$ Th), whereas in NO⁺ reagent ion mode, ketones prefer the formation of clusters while aldehydes mostly undergo hydride ion transfer (Španěl et al., 1997). Therefore MVK is detected as C₄H₆O•NO⁺ ($m/z = 100.040$ Th) and MACR as C₄H₅O⁺ ($m/z = 69.034$ Th) (Jud et al., 2016).

The instrument was connected to the chamber via a 3/8" stainless-steel sampling port with a flow rate of 10 slpm as described by Schnitzhofer et al., 2014. Air was subsampled from this flow via a PEEK capillary (ID = 0.76 mm) at a flow rate of 1.1 slpm from the centre of the tube in order to minimize wall contact of the sampled gas. The SRI-ToF-MS operated at a drift tube, capillary and inlet temperature of 40 °C to avoid thermal decomposition of ISOPOOH, a drift tube pressure of 2.3 mbar and a drift voltage of 550 V or 350 V. These conditions resulted in an E/N = 116 Td or E/N = 74 Td (E , electric field strength; N , number density of air in the drift tube; unit, Townsend, Td; 1 Td = 10⁻¹⁷ V cm²) in H₃O⁺ mode or NO⁺ mode respectively.

The SRI-ToF-MS was characterised by regular calibration measurements. For this purpose, a standard gas mixture (Apel-Riemer Environmental, Inc., Broomfield (CO), USA; accuracy ± 5%) containing various pure and oxygenated hydrocarbons covering the whole mass range of the instrument (up to $m/z = 205$ Th) was dynamically diluted in zero air. Instrumental background was determined using zero air, which was generated by means of a Pt/Pd catalyst at 300°C from excess chamber air, to allow instrumental background and calibration measurements at the same conditions as chamber measurements.

High resolution spectra were collected at a time resolution of 5 seconds and averaged over 5 minutes. The high resolution mass spectra data was analysed using the "PTR-ToF DataAnalyzer v4.40" software package (Müller et al., 2013).

2.3 LCU Measurements

A liquid calibration unit (LCU, IONICON Analytik) was used for calibration and characterisation of the behaviour of 1,2-ISOPOOH, 4,3-ISOPOOH and *trans*-β-IEPOX standards with H₃O⁺ and NO⁺ as primary reagent ions inside the SRI-ToF-MS in laboratory studies at the University of Innsbruck.

These laboratory studies are beyond the scope of this paper and will be described elsewhere in detail (Mentler et al., 2016).

2.4 Chemical Box Model

The MCM based chemical box model “University of Washington Chemical Model” (UWCMv2.2, (Wolfe et al., 2012; Wolfe and Thornton, 2011)) was used for model simulations. The reactions were extracted from the MCM v3.3 (Saunders et al., 2003; Jenkin et al., 1997; Jenkin et al., 2015).

Model runs were initialised using the conditions of each experiment and constrained to isoprene, ozone, NO₂ and SO₂ concentrations, chamber temperature, relative humidity and actinic flux. The chamber pressure was assumed to be constant and pressure changes due to the adiabatic expansion during the campaign were excluded from the constraints. This is due to the fact that said changes occur too fast (200 mbar over a few minutes) for the model to produce physically reasonable results.

3 Results and Discussion

3.1 ISOPOOH measurements using the SRI-ToF-MS

The deployed advanced SRI-ToF-MS allows a near artifact-free measurement of ISOPOOH with a specific fragmentation pattern (Mentler et al., 2016). In contrast to standard instruments only about 13 % of the ISOPOOH isomers, 1,2-ISOPOOH and 4,3-ISOPOOH, are detected as their respective conversion products MVK and MACR. About 87 % remain unconverted and are detected as ISOPOOH fragment ions. Both ISOPOOH isomers show a specific fragmentation pattern following ionisation, which can be used for identification. The signal at $m/z = 85.066$ Th (C₅H₉O⁺) in NO⁺ reagent ion mode, which is a prominent signal for both isomers, was used for identification and quantification of the total ISOPOOH concentration in the experiment with a sensitivity $\varepsilon = 2$ ncps ppbv⁻¹.

The goal of this CLOUD experiment was the investigation of SOA formation from dark ozonolysis of isoprene. Despite the lack of photolytically produced OH, oxidation of isoprene with OH plays an important role as a result of OH production from isoprene ozonolysis and due to the high reactivity of isoprene with the OH radical. Even though the experiments were conducted under low-NO conditions, only extremely low ISOPOOH mixing ratios could be observed in the experiments. To understand why little ISOPOOH was observed and gain insight into the mechanistic reasons for this, measurements were compared to chemical box model simulations.

3.2 Model Simulations

3.2.1 Effect of OH Concentration on Discrepancy of Measurement and MCM predicted Product Concentrations

The chemical loss rate of ISOPOOH, ca. $5 \cdot 10^{-6} \text{ s}^{-1}$, only plays a minor role in comparison to residence time in the chamber (see table 2 for lifetimes of ISOPOOH) due to the low OH concentrations. The exchange rate of the chamber, $9.9 \cdot 10^{-5} \text{ s}^{-1}$, is the main sink for all volatile organic compounds as well as low volatile organic compounds, if wall losses are ignored. Typical wall loss rates of condensable vapours such as sulfuric acid are about a factor 20 higher, on the order of $1.7 \cdot 10^{-3} \text{ s}^{-1}$ (Almeida et al., 2013).

The chamber exchange rate is well known and depends only on the well-defined chamber inflow and outflow (2.8 h at 150 slpm). If the residence time is the dominant sink term, the concentration of

reaction products only depend on their production rate and the chamber exchange rate. Product formation rates from ozonolysis of isoprene are also well known from the ozone and isoprene measurements. This leaves the concentration of the OH radical, which controls production of ISOPOOH, as the main uncertainty of the box model simulation due to a lack of direct OH measurements. Using sulfuric acid and SO₂ to derive OH concentrations, as done in previous CLOUD experiments, which relies on the sulfuric acid production rate, was not possible in this study due to a direct source of sulfuric acid and SO₂ from injection of cloud condensation nuclei (CCN) consisting of liquid sulfuric acid. Therefore OH concentrations had to be estimated via model simulations which use the OH production rate from isoprene ozonolysis with a molar yield of 26 % (Malkin et al., 2010).

OH concentrations in the study were significantly lower than in the atmosphere since the experiments were carried out almost entirely in the dark, making isoprene ozonolysis the main source of the OH radicals.

The MCM model gives a range of $0.5 - 1 \cdot 10^5$ molecules cm⁻³ for the OH concentration, [OH], under the different experimental conditions and no further modelling constraints. These OH concentrations allow a reproduction of the general trend of the major oxidation products in the measurement. However, the model predicted ISOPOOH volume mixing ratios of several ppbv (Fig. 1, Fig. 2d), whereas $m/z = 85.066$ Th, corresponding to ISOPOOH with a limit of detection better than 100 pptv, was only observed at very high isoprene concentrations ([Isoprene] > 150 ppbv) at a temperature of 273 K and the observed concentrations were very low. Comparison of the sum of the modelled ISOPOOH and observations thus shows a dramatically higher concentration (factor 20) of ISOPOOH in the model simulation. Comparison of MVK, MACR (Fig. 2b, 2c) and formaldehyde measurements with the MCM shows significantly lower concentration of these compounds in the model simulations (Fig. 3, panel a-c) than observed. The difference between model and measurements are 1.2-2 ppbv (50 %), 0.6-1.2 ppbv (25 %) and 6-10 ppbv (50 %) respectively.

To assess the impact of uncertainties in the model OH concentration, the production of the main oxidation products from reaction with OH and ozonolysis was studied as a function of OH concentration (Fig. 2) under experimental conditions. All compounds show a high dependence on OH concentrations. However, it was impossible to resolve the discrepancy between model and measured first generation oxidation products by varying the concentration of OH radicals. While increasing OH by a factor of 3 leads to a good agreement of model and measurement for MACR, the simulation still shows lower concentrations for MVK (Fig. 2b, 2c). Further increase leads to an agreement in the case of MVK but to considerable higher concentrations of MACR compared to the measurement.

Additionally ISOPOOH concentrations increase significantly upon increase of OH concentration (Fig. 2d). This is in contrast to observations, which showed extremely low ISOPOOH concentrations. It is highly unlikely that the instrument would not detect an ISOPOOH signal at $m/z = 85.066$ Th at these concentrations that are significantly above the detection limit, nor any of the other characteristic ISOPOOH fragments, at the highest used OH model concentrations. These model runs highlight a problem in the mechanism, as high model OH concentrations are needed to improve agreement with MVK, MACR and formaldehyde, which however increases the model-measurement discrepancy for ISOPOOH.

3.2.2 Inclusion of Wall Reactions in the MCM Model

If ISOPOOH is significantly higher in the MCM based simulations but not destroyed inside the analytical instrument, as shown in laboratory studies, there has to be a sink for ISOPOOH in the experiment that is not included in the MCM but efficiently depletes the ISOPOOH reservoir.

Decomposition of ISOPOOH to MVK, MACR and formaldehyde on metal surfaces inside metal tubing of analytical instruments is known from previous studies (Rivera-Rios et al., 2014).



Therefore the stainless steel surface of the CLOUD chamber cannot be neglected for these reactions. Thus reactions 1-2 that convert 1,2-ISOPOOH to MVK and formaldehyde and 4,3-ISOPOOH to MACR and formaldehyde were added to the MCM mechanism. Decomposition of other hydroperoxides is assumed to proceed in an analogous manner. All model simulations that follow use OH concentrations as predicted by the model, which are one order of magnitude lower than typical average atmospheric concentrations (see table 1) and range from $0.5 - 1 \cdot 10^5$ molecules cm^{-3} .

Figure 3, panels d-f show the change of the modelled product concentration upon implementation of surface catalysed decomposition reactions of hydroxy hydroperoxides to smaller carbonyls on the walls of the chamber, which are known to take place upon contact with stainless steel. The decomposition reactions of ISOPOOH are isomer specific. The collision rate of ISOPOOH with the chamber walls is estimated to be $1.1 \cdot 10^{-3} \text{ s}^{-1}$, in analogy to the previously determined loss rate of condensable vapours in CLOUD (Almeida et al., 2013) and 100 % conversion efficiency per collision is assumed. Inclusion of these catalytic surface reactions resolves the discrepancy between model and measurement for MVK and MACR within the instrumental uncertainties. This is found for all concentrations and temperatures. The wall conversion is still effective at temperatures below 0°C . The discrepancy of a factor of 20 for isoprene hydroperoxides is not only caused by heterogeneous decomposition of ISOPOOH to MVK and MACR but also an additional unquantified formation of unsaturated C5-diols (Mentler et al., 2017). The latter are formed in surface reactions but were not included in this study since the different reagent ion modes (H_3O^+ and NO^+) did not allow for a conclusive identification due to interferences or signals below the limit of detection for these compounds.

The discrepancy between model and measurement in the case of formaldehyde is reduced. In the case of HCHO there is still a source equal to 5 ppbv (40 %) which is unaccounted for. Apart from instrumental uncertainties, this could be due to uncharacterised wall production, not uncommon for formaldehyde in chamber experiments, which has been shown for the CLOUD chamber in Schnitzhofer et al (2014) even for a freshly cleaned chamber, or other surface catalytic reactions which have not been identified.

3.3 Production, Loss and Chemical Pathway

Inclusion of the non gas-phase heterogeneous wall reaction changes the relative importance of the reaction pathways for the main products. The production sources of MVK and MACR are shown in Fig. 4. The main production path for MVK shifts from ozonolysis to an equal contribution of ozonolysis and heterogeneous production from 1,2-ISOPOOH. Ozonolysis remains the most important pathway for MACR but heterogeneous production from 4,3-ISOPOOH becomes the second most important and significant formation source. Even at low OH radical concentrations, the influence of the heterogeneous conversion of hydroperoxides on gas phase concentrations of carbonyls cannot be neglected.

Figure 5 shows the relative contribution of the specific sinks to the total loss of the respective ISOPOOH isomers during an experiment set at 263 K. Without wall reactions, loss occurs mainly due to the gas exchange of the chamber which determines the residence time. Upon implementation of

wall conversion reactions, the loss to the chamber walls becomes the most important sink. Average lifetimes for each sink are given in table 2. At low OH concentration ($< 1 \cdot 10^{-5}$ molecules cm^{-3}) reaction with OH is negligible compared to residence time or wall loss. **As long as the wall loss occurs faster than other loss processes**, 90 % of ISOPOOH will be irreversibly lost to the chamber walls and converted to MVK and MACR. Figure 6 shows the effect of the conversion efficiency per wall collision on model measurement comparison. **Figure 6 shows the effect of the conversion efficiency per wall collision on model measurement comparison. Even reducing the collision efficiency at a constant wall collision rate to less than 40 % gives a very good agreement of model and measurements within 10 % discrepancy and the measurement uncertainties while at the same time reducing the concentration of ISOPOOH significantly (factor 4). A conversion efficiency of as low as 20 % at a wall collision rate of $1.1 \cdot 10^{-3} \text{ s}^{-1}$ is sufficient to convert a significant amount (about two third) of ISOPOOH to MVK and MACR.**

But collision efficiency is not the only factor in providing an opportunity for the catalytic decomposition to take place. The residence time on surfaces, most likely in the liquid layer due to ISOPOOH's high hydrophilicity, is very long, and provides ample opportunity for the reaction to occur. The experiments were carried out at two different temperatures: -10°C and 10°C and different RH (60-95 %). During all experiments ISOPOOH, independent of temperature and RH, is irreversibly lost to the chamber surfaces and undergoes a decomposition reaction to form MVK, MACR and formaldehyde.

This study shows that heterogeneous reaction of ISOPOOH on the stainless steel chamber walls, likely via homolytic peroxy bond cleavage on contact with stainless steel surfaces as shown in Scheme 1, is consistent with the observed MVK, MACR and ISOPOOH concentrations. It has previously been shown that the reaction takes place on metal surfaces within GC-MS and standard PTR-ToF-MS instruments and on contact with heated metal surfaces (Nguyen et al., 2014b; Rivera-Rios et al., 2014) but also, as this study shows, on metal surfaces at temperatures below ambient. The heterogeneous reaction also explains suppression of IEPOX formation, which in turn likely limits the formation of organic SOA and reactive uptake from isoprene oxidation in metal environmental simulation chambers.

4 Conclusion and Atmospheric Implications

This study shows that heterogeneous surface catalysed decomposition reactions of hydroxy hydroperoxides have a great impact on the gas phase composition in terms of the studied oxidation products such as carbonyls under low NO_x conditions when reactive peroxides are prevailingly formed. This is especially the case in stainless steel environmental simulation chambers.

In teflon chambers only a small if any conversion of ISOPOOH produced from low NO_x isoprene oxidation can be observed (Rivera-Rios et al., 2014; St. Clair et al., 2016) . In stainless steel chambers on the other hand, as shown in this study, very effective decomposition of ISOPOOH leads to volatile C4 carbonyls and suppresses formation of the secondary products IEPOX and isoprene dihydroxy dihydroperoxides that play an important role in SOA formation, uptake and growth. These processes cannot be explained by pure gas phase models. Implementation of additional heterogeneous surface reactions to the chemical mechanism is necessary to improve the agreement between model predictions and observations.

The decomposition may also be expected to occur for hydroxyl hydroperoxides that originate from different precursors. If a decomposition reaction takes place and the resulting products have different reactivity and physical properties, especially volatility and hydrophilicity, particle formation and

growth and properties may be misrepresented. Depending on the scientific question, catalytic surface reactions could lead to a misrepresentation of chemical processes in chamber studies in comparison to ambient measurements. This is especially important when single specific compounds are of fundamental significance rather than broader classes of compounds with comparable properties or if intermediates play an important role in the process of interest. In contrast, if processes of interest only occur via first generation products the conversion of secondary products on walls is irrelevant. This distinction is often unknown and, therefore, it is essential to fully characterise and understand wall production and losses.

Surface reactions may not only play an important role in chamber experiments but also in the real atmosphere where plants, soil and aerosols may provide a large surface area for such reactions. These surfaces can potentially serve as electron donors and catalyse decomposition reactions in a similar manner as stainless steel environmental simulation chamber walls. Very recent experimental results show that the decomposition of ISOPOOH indeed occurs on plant surfaces (Canaval et al., 2016) converting ISOPOOH to MVK and MACR and C5-diols. The fate of these compounds in relation to plant-surface atmosphere interactions is much more complex than in an environmental simulation chamber, where volatile decomposition products are released into the gas phase. It has already been shown that MACR is substantially taken up by tomato plants (Muramoto et al., 2015), while the fate of MVK yet remains uncertain. To understand and correctly interpret the ratio of ISOPOOH to MVK/MACR in the atmosphere, these processes have to be fully understood. Therefore it is important to create experiments in the future that allow a better reproduction of real atmospheric conditions in terms of sinks and sources e.g. teflon chambers with real plants not only for the study of primary BVOC emissions but also to investigate the impact of plant surface reactions in altering gas phase composition of oxygenated volatile organic compounds

Acknowledgements

We would like to thank CERN for supporting CLOUD with important technical and financial resources, and for providing a particle beam from the CERN Proton Synchrotron. This research has received funding from the EC Seventh Framework Programme (Marie Curie Initial Training Network “CLOUD-ITN” no. 215072, MC-ITN “CLOUD-TRAIN” no. 316662, and ERC-Advanced “ATMNUCLE” grant no. 227463), the German Federal Ministry of Education and Research (project nos. 01LK0902A and 01LK1222A), the Swiss National Science Foundation (project nos. 200020_135307 and 206620_130527), the Academy of Finland (Center of Excellence project no. 1118615), the Academy of Finland (135054, 133872, 251427, 139656, 139995, 137749, 141217, 141451), the Finnish Funding Agency for Technology and Innovation, the Nessling Foundation, the Austrian Science Fund (FWF; project no. P19546 and L593), the Portuguese Foundation for Science and Technology (project no. CERN/FP/116387/2010), the Swedish Research Council, Vetenskapsradet (grant 2011-5120), the Presidium of the Russian Academy of Sciences and Russian Foundation for Basic Research (grants 08-02-91006-CERN and 12-02-91522-CERN), and the US National Science Foundation (grants AGS1136479, AGS 1628530, AGS1628491, AGS 1247421, AGS 1321987 and CHE1012293). We would like to thank Jean Rivera (Harvard University) for providing ISOPOOH standards and helpful discussion.

References

Almeida, J., Schobesberger, S., Kürten, A., Ortega, I. K., Kupiainen-Määttä, O., Praplan, A. P., Adamov, A., Amorim, A., Bianchi, F., Breitenlechner, M., David, A., Dommen, J., Donahue, N.

- M., Downard, A., Dunne, E., Duplissy, J., Ehrhart, S., Flagan, R. C., Franchin, A., Guida, R., Hakala, J., Hansel, A., Heinritzi, M., Henschel, H., Jokinen, T., Junninen, H., Kajos, M., Kangasluoma, J., Keskinen, H., Kupc, A., Kurtén, T., Kvashin, A. N., Laaksonen, A., Lehtipalo, K., Leiminger, M., Leppä, J., Loukonen, V., Makhmutov, V., Mathot, S., McGrath, M. J., Nieminen, T., Olenius, T., Onnela, A., Petäjä, T., Riccobono, F., Riipinen, I., Rissanen, M., Rondo, L., Ruuskanen, T., Santos, F. D., Sarnela, N., Schallhart, S., Schnitzhofer, R., Seinfeld, J. H., Simon, M., Sipilä, M., Stozhkov, Y., Stratmann, F., Tomé, A., Tröstl, J., Tsagkogeorgas, G., Vaattovaara, P., Viisanen, Y., Virtanen, A., Vrtala, A., Wagner, P. E., Weingartner, E., Wex, H., Williamson, C., Wimmer, D., Ye, P., Yli-Juuti, T., Carslaw, K. S., Kulmala, M., Curtius, J., Baltensperger, U., Worsnop, D. R., Vehkamäki, H., and Kirkby, J.: Molecular understanding of sulphuric acid–amine particle nucleation in the atmosphere, *Nature*, 502, 359–363, doi:10.1038/nature12663, 2013.
- Archibald, A. T., Cooke, M. C., Utembe, S. R., Shallcross, D. E., Derwent, R. G., and Jenkin, M. E.: Impacts of mechanistic changes on HOx formation and recycling in the oxidation of isoprene, *Atmos. Chem. Phys.*, 10, 8097–8118, doi:10.5194/acp-10-8097-2010, 2010.
- Bates, K. H., Crouse, J. D., St. Clair, J. M., Bennett, N. B., Nguyen, T. B., Seinfeld, J. H., Stoltz, B. M., and Wennberg, P. O.: Gas Phase Production and Loss of Isoprene Epoxydiols, *J. Phys. Chem. A*, 118, 1237–1246, doi:10.1021/jp4107958, 2014.
- Breitenlechner, M. and Hansel, A., 2017 (*in preparation*).
- Canaval, E. et al., 2017 (*in preparation*).
- Crouse, J. D., Nielsen, L. B., Jørgensen, S., Kjaergaard, H. G., and Wennberg, P. O.: Autoxidation of Organic Compounds in the Atmosphere, *J. Phys. Chem. Lett.*, 4, 3513–3520, doi:10.1021/jz4019207, 2013.
- Crouse, J. D., Paulot, F., Kjaergaard, H. G., and Wennberg, P. O.: Peroxy radical isomerization in the oxidation of isoprene, *Phys. Chem. Chem. Phys.*, 13, 13607, doi:10.1039/c1cp21330j, 2011.
- Duplissy, J., Merikanto, J., Franchin, A., Tsagkogeorgas, G., Kangasluoma, J., Wimmer, D., Vuollekoski, H., Schobesberger, S., Lehtipalo, K., Flagan, R. C., Brus, D., Donahue, N. M., Vehkamäki, H., Almeida, J., Amorim, A., Barmet, P., Bianchi, F., Breitenlechner, M., Dunne, E. M., Guida, R., Henschel, H., Junninen, H., Kirkby, J., Kürten, A., Kupc, A., Määttänen, A., Makhmutov, V., Mathot, S., Nieminen, T., Onnela, A., Praplan, A. P., Riccobono, F., Rondo, L., Steiner, G., Tome, A., Walther, H., Baltensperger, U., Carslaw, K. S., Dommen, J., Hansel, A., Petäjä, T., Sipilä, M., Stratmann, F., Vrtala, A., Wagner, P. E., Worsnop, D. R., Curtius, J., and Kulmala, M.: Effect of ions on sulfuric acid–water binary particle formation: 2. Experimental data and comparison with QC-normalized classical nucleation theory, *J. Geophys. Res. Atmos.*, 121, 1752–1775, doi:10.1002/2015JD023539, 2016.
- Gaston, C. J., Riedel, T. P., Zhang, Z., Gold, A., Surratt, J. D., and Thornton, J. A.: Reactive Uptake of an Isoprene-Derived Epoxydiol to Submicron Aerosol Particles, *Environ. Sci. Technol.*, 48, 11178–11186, doi:10.1021/es5034266, 2014.
- Graus, M., Müller, M., and Hansel, A.: High resolution PTR-TOF: Quantification and formula confirmation of VOC in real time, *J Am Soc Mass Spectrom*, 21, 1037–1044, doi:10.1016/j.jasms.2010.02.006, 2010.
- Guenther, A., Karl, T., Harley, P., Wiedinmyer, C., Palmer, P. I., and Geron, C.: Estimates of global terrestrial isoprene emissions using MEGAN (Model of Emissions of Gases and Aerosols from Nature), *Atmos. Chem. Phys. Discuss.*, 6, 107–173, doi:10.5194/acpd-6-107-2006, 2006.
- Jenkin, M. E., Saunders, S. M., and Pilling, M. J.: The tropospheric degradation of volatile organic compounds: A protocol for mechanism development, *Atmospheric Environment*, 31, 81–104, doi:10.1016/S1352-2310(96)00105-7, 1997.
- Jenkin, M. E., Young, J. C., and Rickard, A. R.: The MCM v3.3 degradation scheme for isoprene, *Atmos. Chem. Phys. Discuss.*, 15, 9709–9766, doi:10.5194/acpd-15-9709-2015, 2015.

- Jud, W., Fischer, L., Canaval, E., Wohlfahrt, G., Tissier, A., and Hansel, A.: Plant surface reactions: An opportunistic ozone defence mechanism impacting atmospheric chemistry, *Atmos. Chem. Phys.*, 16, 277–292, doi:10.5194/acp-16-277-2016, 2016.
- Karl, T., Hansel, A., Cappellin, L., Kaser, L., Herdinger-Blatt, I., and Jud, W.: Selective measurements of isoprene and 2-methyl-3-buten-2-ol based on NO⁺ ionization mass spectrometry, *Atmos. Chem. Phys.*, 12, 11877–11884, doi:10.5194/acp-12-11877-2012, 2012.
- Kirkby, J., Curtius, J., Almeida, J., Dunne, E., Duplissy, J., Ehrhart, S., Franchin, A., Gagné, S., Ickes, L., Kürten, A., Kupc, A., Metzger, A., Riccobono, F., Rondo, L., Schobesberger, S., Tsagkogeorgas, G., Wimmer, D., Amorim, A., Bianchi, F., Breitenlechner, M., David, A., Dommen, J., Downard, A., Ehn, M., Flagan, R. C., Haider, S., Hansel, A., Hauser, D., Jud, W., Junninen, H., Kreissl, F., Kvashin, A., Laaksonen, A., Lehtipalo, K., Lima, J., Lovejoy, E. R., Makhmutov, V., Mathot, S., Mikkilä, J., Minginette, P., Mogo, S., Nieminen, T., Onnela, A., Pereira, P., Petäjä, T., Schnitzhofer, R., Seinfeld, J. H., Sipilä, M., Stozhkov, Y., Stratmann, F., Tomé, A., Vanhanen, J., Viisanen, Y., Virtala, A., Wagner, P. E., Walther, H., Weingartner, E., Wex, H., Winkler, P. M., Carslaw, K. S., Worsnop, D. R., Baltensperger, U., and Kulmala, M.: Role of sulphuric acid, ammonia and galactic cosmic rays in atmospheric aerosol nucleation, *Nature*, 476, 429–433, doi:10.1038/nature10343, 2011.
- Krechmer, J. E., Coggon, M. M., Massoli, P., Nguyen, T. B., Crouse, J. D., Hu, W., Day, D. A., Tyndall, G. S., Henze, D. K., Rivera-Rios, J. C., Nowak, J. B., Kimmel, J. R., Mauldin, R. L., Stark, H., Jayne, J. T., Sipilä, M., Junninen, H., St. Clair, J. M., Zhang, X., Feiner, P. A., Zhang, L., Miller, D. O., Brune, W. H., Keutsch, F. N., Wennberg, P. O., Seinfeld, J. H., Worsnop, D. R., Jimenez, J. L., and Canagaratna, M. R.: Formation of Low Volatility Organic Compounds and Secondary Organic Aerosol from Isoprene Hydroxyhydroperoxide Low-NO Oxidation, *Environ. Sci. Technol.*, 49, 10330–10339, doi:10.1021/acs.est.5b02031, 2015.
- Liu, Y. J., Herdinger-Blatt, I., McKinney, K. A., and Martin, S. T.: Production of methyl vinyl ketone and methacrolein via the hydroperoxyl pathway of isoprene oxidation, *Atmos. Chem. Phys.*, 13, 5715–5730, doi:10.5194/acp-13-5715-2013, 2013.
- Malkin, T. L., Goddard, A., Heard, D. E., and Seakins, P. W.: Measurements of OH and HO₂ yields from the gas phase ozonolysis of isoprene, *Atmos. Chem. Phys.*, 10, 1441–1459, doi:10.5194/acp-10-1441-2010, 2010.
- Mentler, B. et al., 2017 (*in preparation*).
- Müller, M., Mikoviny, T., Jud, W., D'Anna, B., and Wisthaler, A.: A new software tool for the analysis of high resolution PTR-TOF mass spectra, *Chemometrics and Intelligent Laboratory Systems*, 127, 158–165, doi:10.1016/j.chemolab.2013.06.011, 2013.
- Muramoto, S., Matsubara, Y., Mwenda, C. M., Koeduka, T., Sakami, T., Tani, A., and Matsui, K.: Glutathionylation and Reduction of Methacrolein in Tomato Plants Account for Its Absorption from the Vapor Phase, *Plant physiology*, 169, 1744–1754, doi:10.1104/pp.15.01045, 2015.
- Nguyen, T. B., Coggon, M. M., Bates, K. H., Zhang, X., Schwantes, R. H., Schilling, K. A., Loza, C. L., Flagan, R. C., Wennberg, P. O., and Seinfeld, J. H.: Organic aerosol formation from the reactive uptake of isoprene epoxydiols (IEPOX) onto non-acidified inorganic seeds, *Atmos. Chem. Phys.*, 14, 3497–3510, doi:10.5194/acp-14-3497-2014, 2014a.
- Nguyen, T. B., Crouse, J. D., Schwantes, R. H., Teng, A. P., Bates, K. H., Zhang, X., St. Clair, J. M., Brune, W. H., Tyndall, G. S., Keutsch, F. N., Seinfeld, J. H., and Wennberg, P. O.: Overview of the Focused Isoprene eXperiment at the California Institute of Technology (FIXCIT): Mechanistic chamber studies on the oxidation of biogenic compounds, *Atmos. Chem. Phys.*, 14, 13531–13549, doi:10.5194/acp-14-13531-2014, 2014b.
- Paulot, F., Crouse, J. D., Kjaergaard, H. G., Kurten, A., St. Clair, J. M., Seinfeld, J. H., and Wennberg, P. O.: Unexpected Epoxide Formation in the Gas-Phase Photooxidation of Isoprene, *Science*, 325, 730–733, doi:10.1126/science.1172910, 2009.

- Rivera-Rios, J. C., Nguyen, T. B., Crouse, J. D., Jud, W., St. Clair, J. M., Mikoviny, T., Gilman, J. B., Lerner, B. M., Kaiser, J. B., Gouw, J. de, Wisthaler, A., Hansel, A., Wennberg, P. O., Seinfeld, J. H., and Keutsch, F. N.: Conversion of hydroperoxides to carbonyls in field and laboratory instrumentation: Observational bias in diagnosing pristine versus anthropogenically controlled atmospheric chemistry, *Geophys. Res. Lett.*, 41, 8645–8651, doi:10.1002/2014GL061919, 2014.
- Saunders, S. M., Jenkin, M. E., Derwent, R. G., and Pilling, M. J.: Protocol for the development of the Master Chemical Mechanism, MCM v3 (Part A): Tropospheric degradation of non-aromatic volatile organic compounds, *Atmos. Chem. Phys.*, 3, 161–180, doi:10.5194/acp-3-161-2003, 2003.
- Schnitzhofer, R., Metzger, A., Breitenlechner, M., Jud, W., Heinritzi, M., Menezes, L.-P. de, Duplissy, J., Guida, R., Haider, S., Kirkby, J., Mathot, S., Minginette, P., Onnela, A., Walther, H., Wasem, A., and Hansel, A.: Characterisation of organic contaminants in the CLOUD chamber at CERN, *Atmos. Meas. Tech.*, 7, 2159–2168, doi:10.5194/amt-7-2159-2014, 2014.
- Španěl, P., Ji, Y., and Smith, D.: SIFT studies of the reactions of H₃O⁺, NO⁺ and O₂⁺ with a series of aldehydes and ketones, *International Journal of Mass Spectrometry and Ion Processes*, 165-166, 25–37, doi:10.1016/S0168-1176(97)00166-3, 1997.
- St. Clair, J. M., Rivera-Rios, J. C., Crouse, J. D., Knap, H. C., Bates, K. H., Teng, A. P., Jørgensen, S., Kjaergaard, H. G., Keutsch, F. N., and Wennberg, P. O.: Kinetics and Products of the Reaction of the First-Generation Isoprene Hydroxy Hydroperoxide (ISOPOOH) with OH, *J. Phys. Chem. A*, 120, 1441–1451, doi:10.1021/acs.jpca.5b06532, 2016.
- Stroud, C. A.: Nighttime isoprene trends at an urban forested site during the 1999 Southern Oxidant Study, *J. Geophys. Res.*, 107, doi:10.1029/2001JD000959, 2002.
- Warneke, C.: Comparison of daytime and nighttime oxidation of biogenic and anthropogenic VOCs along the New England coast in summer during New England Air Quality Study 2002, *J. Geophys. Res.*, 109, doi:10.1029/2003JD004424, 2004.
- Wolfe, G. M., Crouse, J. D., Parrish, J. D., St. Clair, J. M., Beaver, M. R., Paulot, F., Yoon, T. P., Wennberg, P. O., and Keutsch, F. N.: Photolysis, OH reactivity and ozone reactivity of a proxy for isoprene-derived hydroperoxyenals (HPALDs), *Phys. Chem. Chem. Phys.*, 14, 7276, doi:10.1039/c2cp40388a, 2012.
- Wolfe, G. M. and Thornton, J. A.: The Chemistry of Atmosphere-Forest Exchange (CAFE) Model – Part 1: Model description and characterization, *Atmos. Chem. Phys.*, 11, 77–101, doi:10.5194/acp-11-77-2011, 2011.

Table 1: Average experimental conditions


# Run	Temperature [K]	RH ^a [%]	Isoprene ^a [ppbv]	Ozone ^a [ppbv]	OH [molecules cm ⁻³]	NO _x ^b [ppbv]	SO ₂ [ppbv]
1	283	93	40-250	~100	~1*10 ⁵	<0.25	<0.5
2	263	80	60	~100	~0.75*10 ⁵	<0.25	<0.5
3	283	90	100	~95	~0.9*10 ⁵	<0.25	<0.5
4	263	70	100	~120	~0.5*10 ⁵	<0.25	<0.5

^aaverage values, ^bmainly NO₂

Table 2: Lifetimes of the dominant ISOPOOH isomers

Compound	$\tau_{\text{Dilution}}^{\text{a}}$	$\tau_{\text{OH}}^{\text{b}}$	$\tau_{\text{wall loss}}^{\text{c}}$
1,2-ISOPOOH	2.8 h	55.6 h	15 min
4,3-ISOPOOH	2.8 h	24.2 h	15 min

^aat a flow of 150 slpm, ^bat $[\text{OH}] = 1 \cdot 10^5$ molecules cm^{-3} , ^cestimate

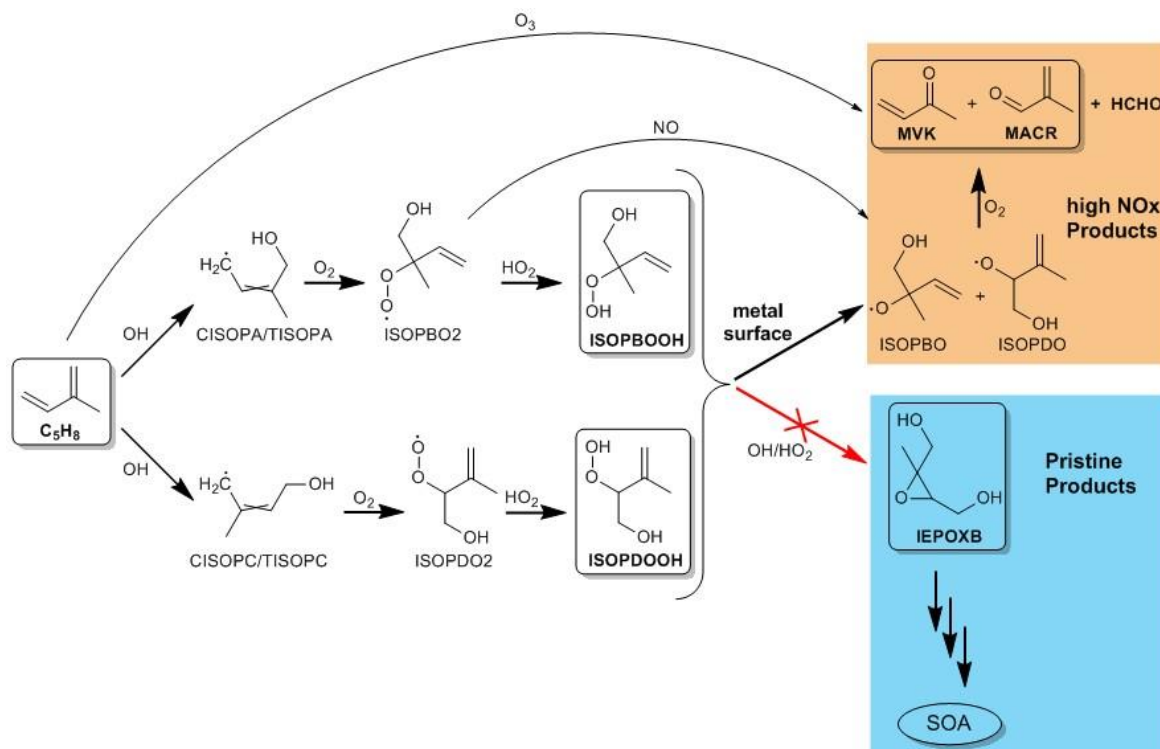

Scheme 1: HO₂ dominated chemical pathway of the isoprene oxidation with OH based on the MCM v3.3. Isoprene oxidation in the presence of metal surfaces leads primarily to the same main oxidation products (MVK/MACR) as the high NO_x pathway and catalytic surface reactions suppress the HO₂ pathway before the formation of β-IEPOX. MVK and MACR are also the main oxidation products of isoprene ozonolysis.

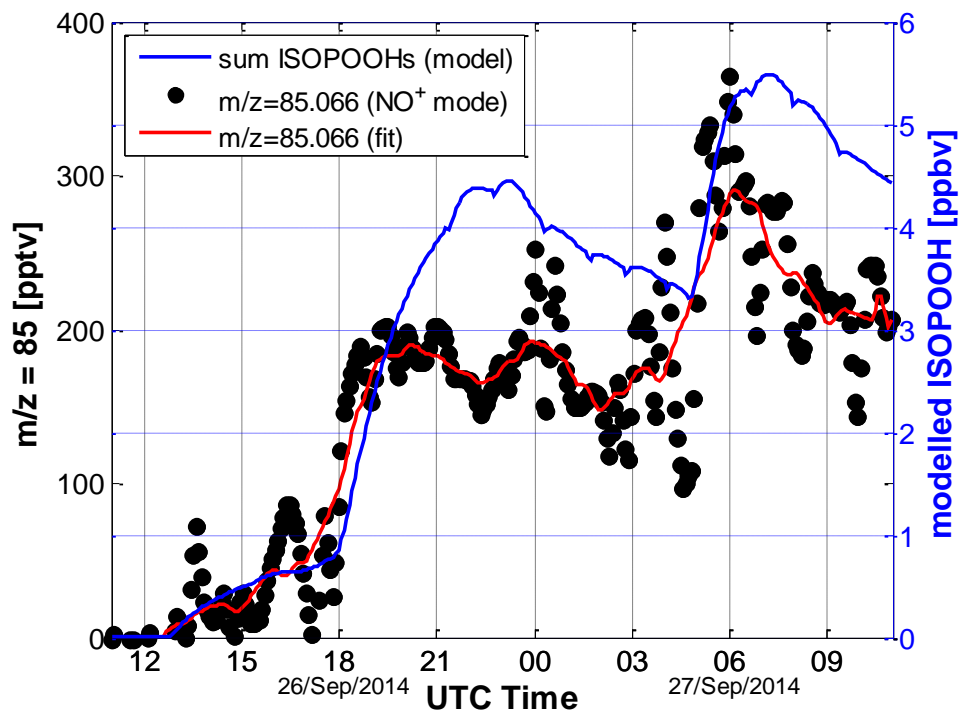


Figure 1: Comparison of main ISOPOOH fragment in NO^+ reagent ion mode ($\text{C}_5\text{H}_9\text{O}^+$, $m/z = 85.066$) and MCM predictions at 1×10^5 molecules cm^{-3} OH and up to 250 ppbv isoprene. The signal for the fragment follows the predicted trend but is about a factor of 20 lower than the expected ISOPOOH concentration in the model.

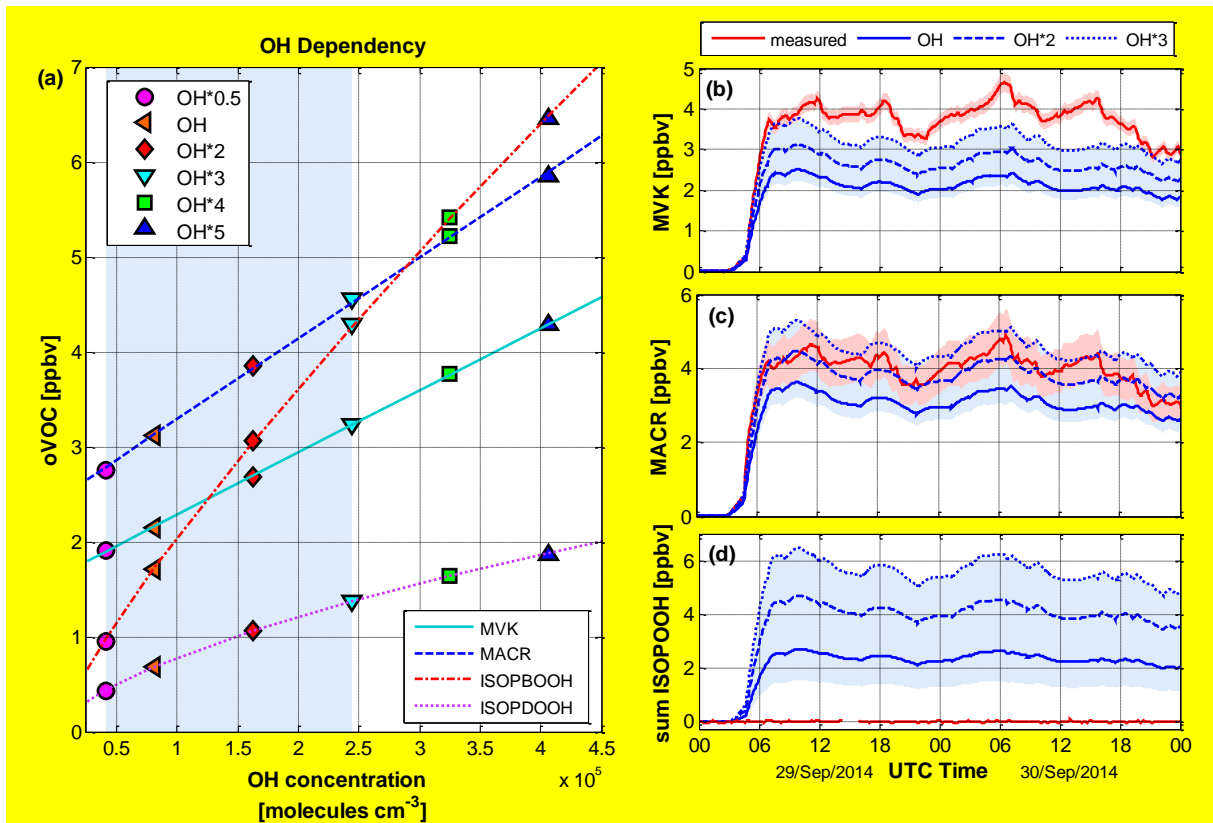


Figure 2: a) OH dependence of the concentration of the main oxidation products at 263 K (Run2), b) changes in MVK prediction depending on OH concentration in comparison to measured data, c) changes in MVK prediction depending on OH concentration in comparison to measured data, d) changes in ISOPOOH prediction depending on OH concentration. The shaded blue area corresponds to the range of OH concentrations and the red shaded area corresponds to the uncertainty in the respective measurements of MVK and MACR.

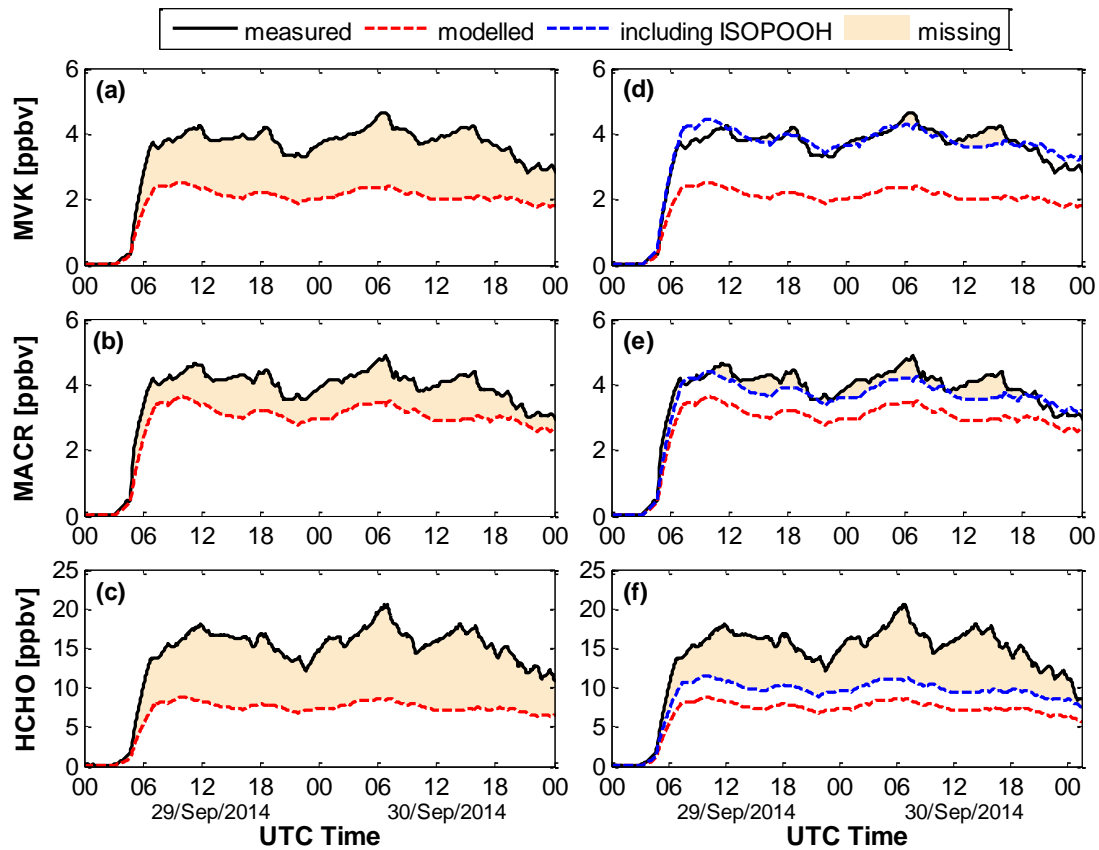


Figure 3: Measured MVK, MACR and formaldehyde concentrations compared to model predictions. Panels a), b) and c) show MVK, MACR and HCHO in comparison to the model predictions. Modelled concentrations are by a factor of up to 2 lower. Panels d), e) and f) show the comparison to the model prediction after the inclusion of the respective ISOPOOH isomer decomposition. Inclusion of ISOPOOH conversion resolves the discrepancy for MVK and MACR. Dashed lines correspond to model simulations.

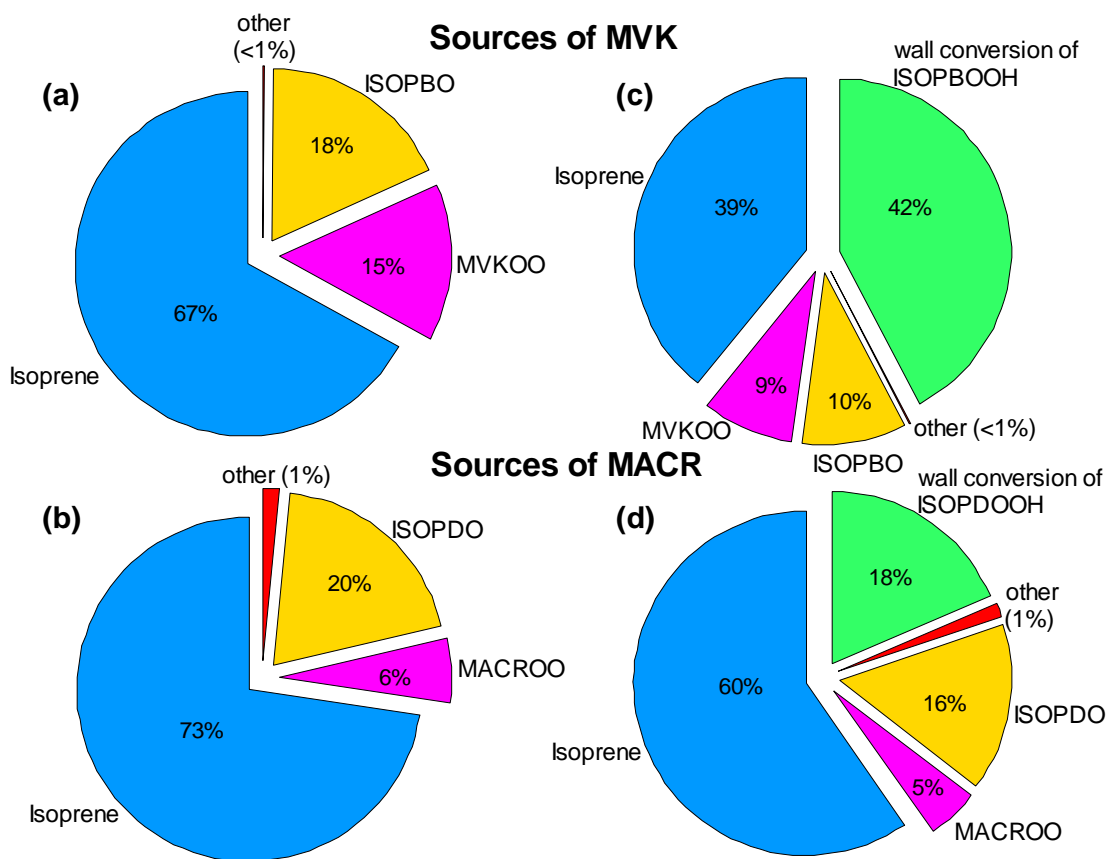


Figure 4: Sources of MVK and MACR according to the relative importance of their precursors without (a,b) and with (c,d) additional wall conversion of ISOPDOOH. Inclusion of the wall conversion of ISOPDOOH to the model simulations changes the importance of the respective formation pathways. See table S1 for explanation of source terms.

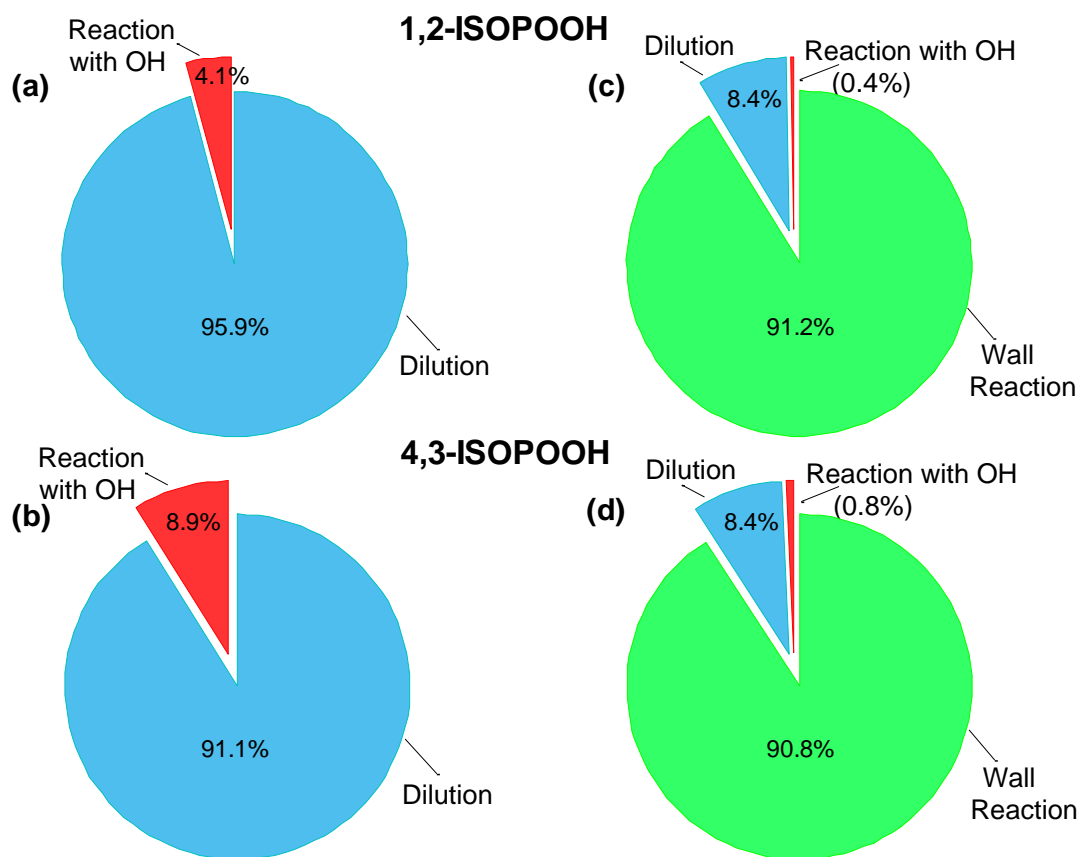


Figure 5: Relative contribution of 1,2-ISOPOOH and 4,3-ISOPOOH sinks without (a,b) and with (c,d) additional wall reactions at an estimated wall loss rate of $1.1 \cdot 10^{-3} \text{ s}^{-1}$. Loss due to reaction with OH is a negligible in comparison to wall loss and dilution at these low OH concentrations. More than 90 % of both isomers are being lost to the chamber walls.

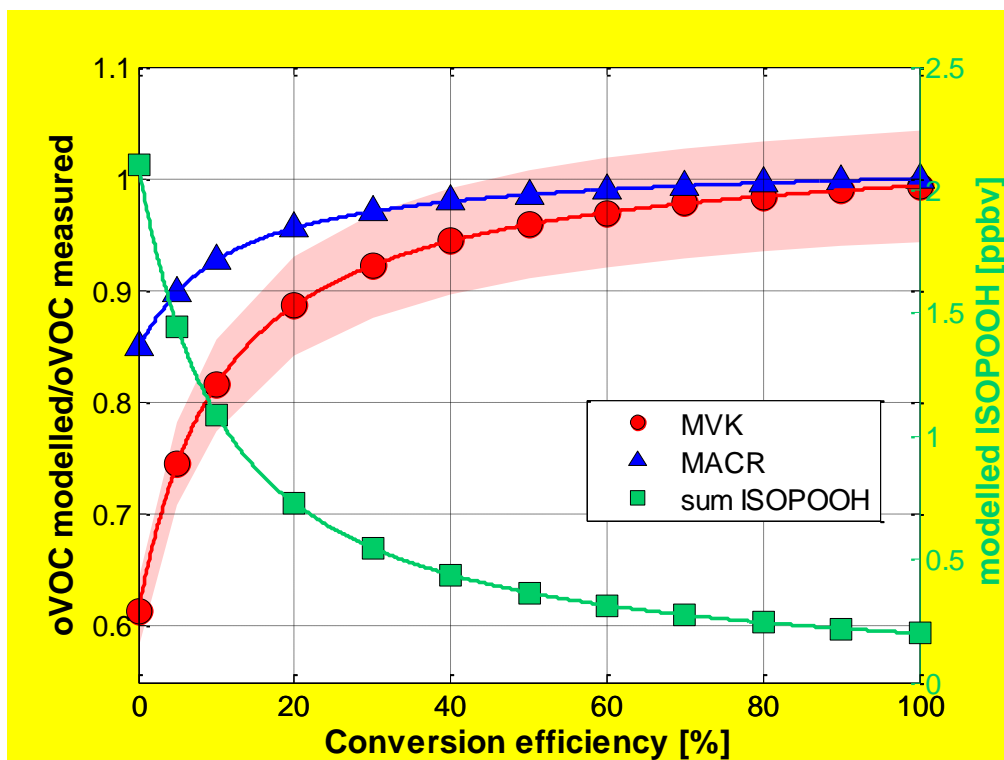


Figure 6: Influence of conversion efficiency on the agreement of modelled VOC and measured VOC concentrations ranging from a conversion efficiency of 0 % (no wall reaction) to an efficiency of 100 % (complete decomposition on wall collision). The shaded areas correspond to the uncertainty in the measurements of MVK.