1 Updated atmospheric speciated mercury emissions from

2 iron and steel production in China during 2000-2015

3 Qingru Wu^{1,2}, Wei Gao^{1,2}, Shuxiao Wang^{1,2*}, Jiming Hao^{1,2}

- 4 ¹School of Environment, and State Key Joint Laboratory of Environment Simulation and
- 5 Pollution Control, Tsinghua University, Beijing 100084, China
- 6 ²State Environmental Protection Key Laboratory of Sources and Control of Air Pollution
- 7 Complex, Beijing 100084, China
- 8 Correspondence to: S. X. Wang (<u>shxwang@tsinghua.edu.cn</u>)

9 Abstract

10 Iron and steel production (ISP) is one of the significant atmospheric Hg emission sources 11 in China. Atmospheric mercury (Hg) emissions from ISP during 2000-2015 were estimated by 12 using a technology-based emission factor method. To support the application of this method, 13 databases of Hg concentrations in raw materials, technology development trends, and Hg 14 removal efficiencies of air pollution control devices (APCDs) were constructed through 15 national sampling and literature review. Hg input to ISP increased from 21.6 t in 2000 to 94.5 16 t in 2015. In the various types of raw materials, coking coal and iron concentrates contributed 17 35%-46% and 25%-32% of the total Hg input. Atmospheric Hg emissions from ISP increased 18 from 11.5 t in 2000 to 32.7 t in 2015 with the peak of 35.6 t in 2013. Pollution control 19 promoted the increase of average Hg removal efficiency, from 47% in 2000 to 65% in 2015. 20 During the study period, sinter/pellet plant and blast furnace were the largest two emission 21 processes. However, emissions from roasting plant and coke oven cannot be ignored, which 22 accounted for 22%-34% of ISP's emissions. Overall Hg speciation shifted from 50/44/6 (gaseous elemental Hg (Hg⁰) / gaseous oxidized Hg (Hg^{II}) / particulate-bound Hg (Hg_n)) in 23 24 2000 to 40/59/1 in 2015, which indicated higher proportion of Hg deposition around the 25 emission points. Future emissions of ISP were expected to decrease based on the 26 comprehensive consideration crude steel production, steel scrap utilization, energy saving, 27 and pollution control measures.

1 Introduction

China is the largest iron and steel production (ISP) country in the world. Crude steel production has increased from 127 Mt in 2000 to 804 Mt in 2015 (CISIA, 2001-2016). Rapid economic development has led to large emissions of air pollutants including mercury (Hg) emissions of ISP (Liu et al., 2016; Wang K. et al., 2016; Wang et al., 2014). To reduce Hg pollution, it is important to quantify atmospheric Hg emissions from ISP.

35 According to existing national inventories, atmospheric Hg emissions from ISP 36 increased from 4.9 t in 1999 to 25.5 t in 2010 (AMAP/UNEP, 2008; Streets et al., 2005; Wu et 37 al., 2006; Zhang et al., 2015a). In these studies, Hg emissions were determined as the product 38 of crude steel production and unique emission factor of 0.04 g/t steel produced which did not 39 consider the emissions from roasting plant and coke oven (two processes of ISP). However, 40 field experiments in China's ISP indicated that these two processes are significant for Hg emissions. Emissions from coke oven accounted for 17%-49% of the total Hg emissions of 41 42 ISP (Wang F. Y. et al., 2016). Thus, these two processes are potentially important in shaping 43 the trends of ISP Hg emissions. Later long-term emission inventories revised the unique 44 emission factor with dynamic factors by adopting transformed normal distribution function 45 (Tian et al., 2015; Wang K. et al., 2016; Wu et al., 2016). Such method was based on the 46 assumption that the emission factor was gradually improved according to the simulation curve 47 and attempted to simulate the impact of technology improvement and pollution control on 48 emission factor variation. However, the emission factors actually did not link with technology 49 and APCDs directly. Thus, the simulated emission factors may be quite different from actual 50 situation during a certain period (e.g. ten years) when technology and APCDs experienced 51 dramatic change (Wu et al., 2016), especially under the background of tightening requirement 52 of environmental protection in China in the past decades (MEP, 2011; NEA, 2014; SC, 2013). 53 Recent global Hg assessment report applied a technology-based emission factor method to 54 estimate the emissions of global ISP including China's (AMAP/UNEP, 2013). However, most 55 of the parameters were from developed countries, which may impact the accuracy of 56 emissions from developing countries such as China. In addition, emissions from roasting 57 plants and arc steel making process (using scrap to produce steel) were not calculated in the

58 report.

59 The dominant parameters of a technology-based emission factor included Hg removal 60 efficiencies of APCDs and Hg concentrations in raw materials (Wu et al., 2016; Wu et al., 61 2012; Zhang et al., 2015a). As to Hg removal efficiencies of APCDs, we hypothesized that the 62 use of data from recent field experiments on atmospheric Hg emission characteristics in 63 China's ISP will provide a foundation for the technology-based emission factor model (Wu et 64 al., 2016; Wu et al., 2012; Zhang et al., 2015a). However, current studies cannot support the 65 construction of Hg concentration databases for raw materials. Various raw materials were 66 used in ISP, covering iron concentrates, iron block, alloy materials, steel scrap, coal, and 67 additives (mainly limestone and dolomite). Field experiments in three China's steel smelters indicated that the concentrations of iron concentrates were in the range of 23-66 ng/g (Wang 68 69 F.Y. et al., 2016; Zhang et al., 2015b). However, the Hg concentration data from limited 70 samples may lead to large uncertainty of the national inventory. Many studies have reported 71 Hg concentrations in coal (Swaine, 1992; Tian et al., 2010; USGS, 2004; Zhang et al., 2012). 72 But the specific requirement of low-sulfide coal (less than 1.2%) in ISP may lead to different 73 Hg concentrations in the consumed coal (Tao and Wang, 1994), since low-sulfide coal was 74 generally companied by low-Hg (Zhang, 2012). Rare studies have reported Hg concentrations 75 in steel scrap and dolomite. Therefore, constructing Hg concentration databases of raw 76 materials was the base to apply a technology-based emission factor model for China's ISP.

In this study, a technology-based emission factor model was constructed to estimate atmospheric Hg emissions from China's ISP. To fulfill this aim, raw materials consumed in steel smelters have been sampled and Hg concentrations have been analyzed to construct the Hg concentration databases. Up-to-date Hg removal efficiencies from field experiments and the development trends of production technology and APCDs have been summarized to support the application of emission factor model.

83 **2 Methodology**

84 2.1 Technology-based emission factor model for ISP

85

Generally speaking, ISP method included long process steel making method and short

process steel making method. The long process steel making method included roasting plant, coke oven, sinter/pellet plant, blast furnace, and oxygen steel making (**Fig. 1**). The short process steel making method produced crude steel mainly from steel scrap in arc steel making process directly.

90

$$E_{i}(t) = E_{i,l}(t) + E_{i,s}(t)$$

= $E_{i,l,r}(t) + E_{i,l,c}(t) + E_{i,l,p}(t) + E_{i,l,b}(t) + E_{i,l,o}(t)$
+ $E_{i,s,a}(t)$ (E1)

where, *E* was atmospheric Hg emissions from ISP, t; *i* was province; *t* referred to studied
year; *l* and *s* referred to long and short process steel making method; *r*, *c*, *p*, *b*, *o*, *a* referred to
roasting plant, coke oven, sinter/pellet plant, blast furnace, oxygen steel making, and arc steel
making.

For each process *x*, the technology-based emission factor and speciated Hg emissionscan be calculated as follows.

$$EF_{i,x,k}(t) = \sum_{j} C_{i,x,j} \times M_{i,x,j}(t) \times S_i(t)^{-1} \times \gamma_x \times \sum_{m} \theta_m(t) \times \delta_{k,m} \times (1-\eta_m) \times 1000^{-1}$$
(E2)

$$E_{i,x,k}(t) = EF_{i,x,k}(t) \times S_i(t)$$
(E3)

97 where, EF was emission factor, g/t; x was studied process; k was speciated Hg; j was the 98 type of consumed raw material; C was Hg concentration in the consumed raw material, ng/g 99 (see section 2.2.1); M was the consumption of raw material, Mt (see section 2.2.2); S was the 100 production of crude steel, Mt (see section 2.2.2). γ was Hg release rate, which meant the 101 percentage of Hg released to flue gas from raw material, %. Hg release rate were collected 102 from field experiment studies (Table S1). That was 98% for roasting plant, 80% for coke 103 oven, 85% for sinter/pellet plant, 98% for blast furnace, 80% for oxygen steel making furnace, 104 and 95% for arc steel making furnace. m referred to the type of APCD combination (see 105 section 2.2.3); δ was the proportion of different Hg speciation (see section 2.2.3), %; θ was 106 the application rate of different APCD combinations (see section 2.2.3), %; η was Hg removal 107 efficiency (see section 2.2.3), %.

108 **2.2 Parameters for model**

109 2.2.1 Hg concentrations in raw materials

110 For the long process steel making method, the dominant raw materials included iron 111 concentrates, iron block, coal, limestone, dolomite, alloy, and steel scrap (Fig. 1). In the 112 roasting plant, limestone and dolomite were roasted together or separately to make quick lime 113 and caustic dolomite. In the coke oven, washed coal was used to produce coke. In the 114 sinter/pellet plant, iron-containing materials (mainly iron concentrates), quick lime, caustic 115 dolomite, and produced coke (mainly coke breeze) were mixed to produce sintered/pellet 116 block, which were used as raw materials with coal and produced coke in the blast furnace. 117 The produced pig iron from blast furnace and additional scraps were used to produce steel in 118 the oxygen steel making processes. For the short process steel making method, arc steel 119 making process was applied to produce steel by mainly using scraps as raw materials. In each 120 process, Hg input due to the use of intermediated products (e.g., quick lime, caustic dolomite, 121 and coke) was calculated by using mass balance method (Wu et al., 2012).

122 National sampling and Hg concentration analysis were conducted to construct the Hg 123 concentration databases for the consumed raw materials. The sampling, preparation and 124 analysis methods were described in detail in our previous studies (Wu et al., 2012; Zhang et 125 al., 2012). Lumex 915M + pyro attachment (with a detection limit of 0.5 ng/g) was applied to 126 analyze Hg concentration by using U.S. EPA Method 7473 (US EPA, 1998). Number of 127 samples and Hg concentrations in dominant raw materials by province were shown in Table 1. 128 National Hg concentrations (median value) in the consumed iron ores were 20 (0.6-387) ng/g, 129 which were lower than the median value of 30 (0.6-600) ng/g used in the global assessment 130 report (AMAP/UNEP, 2013). Overall Hg concentrations in the consumed coking coal (82 131 ng/g) and pulverized coal injection (PCI) coal (73 ng/g) were lower than the 170 (8-2248) 132 ng/g (Zhang, 2012) used in China's coal combustion sectors but higher than the 55 (50-60) 133 ng/g of global assessment report. Hg concentrations in the limestone were 18 (0.9-2753) ng/g. 134 Although the median value was lower than value of 30 (20-50) ng/g applied in the global 135 assessment report, the variation range was much wider according to our analysis. Hg 136 concentrations (median value) in the dolomite and iron block were 9 ng/g and 19 ng/g. In

137 oxygen and arc steel making processes, the main iron-containing materials were steel scrap, 138 alloy scrap, and pig iron. Hg concentrations (median value) in steel scrap and alloy scrap were 139 48 and 2 ng/g while the concentrations in pig iron were less than detection limit. For province 140 with samples no less than 15, the distribution characteristics of Hg concentrations of the 141 samples were generated by using the batch fit function of Crystalball software. Otherwise, Hg 142 concentrations were assumed to fit normal distribution.

143 2.2.2 Provincial consumptions of raw materials

144 Provincial consumptions of raw materials in 2015 were shown in Table S2. National 145 limestone consumptions were converted from quick lime consumptions (Ma, 2011) by using 146 the factor of 1.95 t limestone to produce 1 t quick lime (CISIA, 2001-2016) (Table S3). 147 National dolomite consumptions were derived from China steel statistics report (Ma, 1995) 148 according to the production trends of crude steel. The limestone and dolomite can be 149 consumed in the roasting and sinter/pellet plant. In the sinter/pellet plants, additives 150 (including limestone and dolomite) consumptions were approximately 153.9 kg/t sinter 151 produced or 10.5 kg/t pellet produced (CISIA, 2001-2016). We assumed that 88% of the 152 additives were limestone and 12% were dolomite according to field experiments (Wang F. Y. 153 et al., 2016). The rest of limestone and dolomite were consumed in the roasting plants. 154 Provincial consumptions of limestone and dolomite were distributed according to the 155 proportions of provincial pig iron productions in national production (Table S2). Provincial pig iron productions were collected directly from yearbooks (CISIA, 2001-2016). 156

157 Provincial coking coal consumptions were converted from provincial coke consumptions (CISIA, 2001-2016). Generally, there were two main types of coke production methods, 158 159 including machining coke production method and indigenous coke production method. Coal 160 consumptions were 1.35 t to produce 1 t of machining coke or 1.65 t to produce 1 t of 161 indigenous coke (UNEP, 2013; Wang, 1991). The produced cokes were used as raw materials 162 in both sinter/pellet plant and blast furnace. Provincial coke consumptions in blast furnace 163 were converted according coke ratio of 363-388 kg coke per t pig iron produced (CISIA, 164 2001-2016). The rest of cokes were assumed to be consumed in sinter/pellet plant.

165 National iron concentrate consumptions were converted from sinter/pellet productions.

Approximately 0.91-0.92 t and 0.96-0.97 t of iron concentrates were needed to produce 1 t sinter and 1 t pellet, respectively (CISIA, 2001-2016). National sinter and pellet productions were obtained directly from yearbooks (CISIA, 2001-2016) and provincial data were converted according to provincial pig iron productions.

National PCI coal consumptions in blast furnace were collected from national energy statistical yearbook (NESA, 2001-2016) and the provincial data were converted according to provincial pig iron productions. The iron block consumption in blast furnace were converted from pig iron production by using the factor of 156 kg iron block per t pig iron produced (CISIA, 2001-2016).

The steel scrap was consumed in both oxygen and arc steel making process. Consumptions of steel scrap in oxygen and arc steel making process were approximately 59.4 and 361.9 kg/t crude steel produced. Alloy consumptions to produce per t crude steel were 16-17 kg in oxygen steel making process and 140-156 kg in arc oxygen making process. Oxygen and arc steel productions were collected directly from yearbooks (CISIA, 2001-2016). Based on these ratios, provincial steel scrap and alloy consumptions were converted from provincial crude steel productions.

182 2.2.3 Application rate, Hg removal efficiency, and Hg speciation

183 In the roasting plant, blast furnace, and steel making process, dust collectors such as 184 venturi, cyclone (CYC), wet scrubber (WS), electrostatic precipitator (ESP), and fabric filter 185 (FF) were used for flue gas dedusting. In coke oven process, washed coal were consumed and 186 the flue gas was cleaned with dust collectors or with additional washing scrubbers. For flue 187 gas from sinter/pellet plant, they were generally cleaned with dust collectors. Additional flue 188 gas desulfurization towers (FGD) were gradually applied after 2010. It should be noted that 189 the flue gas after dust collectors were generally collected as coal gas in gasometer. However, 190 rare APCDs were applied during the coal gas usage process. Thus, we assumed that all Hg in 191 the coal gas was emitted to air. The application rates of different APCD combinations by 192 process during 2005-2010 were collected from previous studies (Wang et al., 2014; Zhao et 193 al., 2013). The data of 2000-2004 and 2011-2015 were mainly derived from yearbooks 194 (CISIA, 2001-2016; NBS, 2001-2016) (Table S4). Hg removal efficiencies and speciation

195 profiles of APCDs (**Table S4**) were collected from field experiments and literature on 196 emission studies (Gao, 2016; Wang F. Y. et al., 2016; Zhang et al., 2015b). The distribution 197 characteristics of Hg removal efficiencies were assumed to fit normal distribution 198 characteristics.

199 **2.3 Uncertainty analysis**

Monte Carlo simulation was introduced to estimate the uncertainty of emissions. Detailed description of the simulation processes has been reported in our previous studies (Hui et al., 2016; Wu et al., 2016; Zhang et al., 2015a). In this study, the (P50-P10)/P50 and (P90-P50)/P50 values were still regarded as lower and upper limits of uncertainties with 80% confidence degree, where P10, P50, and P90 meant that the probabilities of actual results lower than corresponding values were 10%, 50%, and 90%, respectively.

206

3 Results and Discussion

207 **3.1 Hg input trends**

208 Hg input to ISP increased from 21.6 t in 2000 to 94.5 t in 2015 (Fig. 2). The peak of Hg 209 input was in 2014 when the crude steel production reached the highest value (Table S3). 210 During 2000-2014, the average annual growth rate (AAGR) of Hg input was 11% while Hg 211 input reduced by 3% from 2014 to 2015. In the various types of raw materials, coking coal 212 and iron concentrates contributed the largest amount of Hg input, accounting for 35%-46% 213 and 25%-32% of the total, respectively. Hg input due to the use of coking coal increased from 214 9.9 t in 2000 to 33.5 t in 2015. Hg input with iron concentrates increased at AAGR of 12% 215 from 2000 and reached 29.2 t in 2015. The PCI coal brought approximately 6%-9% of Hg to 216 ISP. Hg in the additives (including limestone and dolomite) contributed 12%-18% of total Hg 217 input. Hg in the iron block was in the range of 0.6-3.6 t. Hg input due to the use of steel scrap 218 and alloy was 4.1 t in 2015, accounting for 4% of national total. However, steel scrap and 219 alloy contributed 7% of total crude steel production in 2015 (CISIA, 2016).

220 **3.2 Hg emission trends**

221 3.2.1 Hg emission trends by process

222 Atmospheric Hg emissions from ISP increased from 11.5 t in 2000 to 32.7 t in 2015 (Fig. 223 **3**). The peak of emissions was in 2013 when the emissions reached 35.6 t. In 2015, emissions 224 from long process steel making method and short process steel making were 32.2 t and 0.5 t, 225 accounting for 98.3% and 1.7% of national total, respectively. Thus, emissions from long 226 process steel making were still the dominant emission process of China's ISP. Among the 227 processes, emissions from sinter/pellet plant accounted for 42%-49% of annual total. Its 228 emissions increased from 4.8 t in 2000 at the AAGR of 10.1% and reached 15.9 t in 2015. 229 Blast furnace was also significant Hg emission process. Its emissions increased from 1.9 t in 230 2000 to 7.9 t in 2015 at AAGR of 10.0%. AAGR for roasting plant and coke oven was 8.3% and 1.2%. In 2015, both emissions from roasting plant and coke oven were 3.5 t, respectively. 231 232 The slower AAGR of Hg emissions (7.2%) than that of crude steel production (13%)233 reflected the impact on Hg emission reduction due to energy saving and environmental 234 protection in ISP. On one hand, Hg input to produce unitary crude steel decreased from 0.17 235 to 0.12 g/t, which mainly benefited from the improvement of coke production efficiency and 236 energy utilization efficiency of sinter/pellet plant and blast furnace. Since 2004, indigenous 237 coke production method with high coal consumption has been gradually replaced with 238 machine coke production method. The coke ratio in sinter/pellet plant has been reduced from 239 approximately 388 kg/t pig iron produced in 2000 to 363 kg/t in 2015 (CISIA, 2001-2016). 240 On the other hand, the improvement of APCDs increased the overall Hg removal efficiency 241 from 47% in 2000 to 65% in 2015 (Fig. 3). APCDs for coke oven have shown the largest Hg 242 removal efficiencies (64%-87%) while pollution control in sinter/pellet plant contributed most

to the rapid Hg reduction speed during 2000-2015. The replacement of CYC and WS with
ESP and FF in sinter/pellet plant improved Hg removal efficiency from 21% in 2000 to 44%
in 2010. The application of FGD in addition to dust collectors was the main driver of Hg
reduction in sinter/pellet process during 2011-2015. Hg removal efficiency in sinter/pellet
plant was 53% in 2015.

248 3.2.2 Hg emission trends by province

249 Provincial Hg emissions in 2000, 2005, 2010, and 2015 were shown in Table 2. In 2000, 250 Shanxi, Shanghai, Henan, Hebei, and Shandong were the top five largest emitters with 251 emissions larger than 1 t. Emissions from these five provinces contributed to 58% of national 252 Hg emissions. Following these five provinces were Liaoning, Beijing, Gansu, Jiangsu, and 253 Jiangxi. Summation of the emissions from all the above ten provinces were 9.0 t, accounting 254 for 78% of national emissions in 2000. At the provincial level, we noted significant 255 differences of Hg emission trends during the past 16 years. The AAGR of provincial Hg 256 emissions varied from -40% to 26%. Negative AAGR existed in Beijing and Shanghai 257 provinces, the two most economically developed regions in China. Hg abatement in these two 258 regions was mainly caused by the reduction of crude steel production, which was transferred 259 to nearby provinces such as Hebei, Zhejiang, Jiangsu, and Shandong. Thus, Hg emissions in 260 these nearby provinces all presented high AAGR of more than 10%. In 2015, the largest five 261 Hg emission provinces were changed to Hebei, Shandong, Henan, Jiangsu, and Shanxi 262 provinces. Emissions from these provinces reached 21.5 t, accounting for 68% of national emissions. Liaoning, Jiangxi, Inner Mongolia, Gansu, and Shanghai were also in the list of the 263 264 top ten largest emitters.

265 3.2.3 Hg emission trends by species

266 Overall Hg speciation profile of ISP experienced great change during the study period, from 50/44/6 (gaseous elemental Hg (Hg⁰)/gaseous oxidized Hg (Hg^{II})/particulate-bound Hg 267 (Hg_p)) in 2000 to 40/59/1 in 2015 (Fig. 4). The proportion of Hg^{II} increased 15%, whereas 268 both Hg⁰ and Hg_p proportion showed decreasing trend. Such shift indicated higher deposition 269 proportion of Hg around the emission points since Hg^{II} has larger deposition velocity and 270 271 higher water-solubility. For the long process steel making, Hg speciation profile shifted from 272 49/44/7 in 2000 to 39/60/1. The speciation shift in roasting plants was mainly impacted by the replacement of WS and CYC with FF, which increased the emitted Hg^{II} proportion from 38% 273 274 to 75%. The replacement of indigenous coke production method with machine coke production method mainly contributed to Hg^{II} proportion increase from 42% to 52% at first. 275 276 However, the gradual installation of WS in addition to cooler for air pollution control of

machine coke production method further washed Hg^{II} and reduced Hg^{II} proportion to 49% in 277 2015. Hg^{II} proportion in the exhaust gas of sinter/pellet plant has increased by 20%. The 278 increase of Hg^{II} proportion in sinter/pellet plant was mainly impacted by the substitute of WS 279 with ESP, FF, ESP+WFGD, or ESP+DFGD+FF which generally emitted gas with higher Hg^{II} 280 proportion (Table S4). Increase of Hg^{II} emission proportion in blast furnace was due to higher 281 Hg^{II} emission proportion after FF than venturi. In the oxygen steel making process, Hg 282 speciation profile almost unchanged. For the short process steel making, Hg⁰ was the 283 dominant speciation during the whole study period and the proportion of Hg⁰ increased from 284 66% in 2000 to 79% in 2015. 285

286 **3.3 Uncertainty analysis**

287 In 2015, overall uncertainty of atmospheric Hg emissions from ISP was in the range of 288 (-29%, 77%) (Fig. 5). Previous studies in ISP indicated the emission uncertainties of this 289 source were (-80%.100%) in the study of Zhang et al. (2015) and (-100%, 100%) in the study 290 of Streets et al. (2005) and Wu et al. (2006). The improvement of emission estimation of this 291 study was contributed by better knowledge on the Hg concentrations of raw materials and Hg 292 removal efficiencies of APCDs. In all ISP processes, the largest uncertainties existed in 293 emissions from roasting plant (-59%, 130%) and sinter/pellet process (-45%, 126%). These 294 mainly due to larger distribution range of Hg concentrations in limestone and iron ore as well 295 as Hg removal efficiencies of APCDs. The uncertainties of Hg emissions from other processes 296 were much lower, (-49%, 48%) for coke oven, (-23%, 46%) for blast furnace, (-41%, 27%) 297 for oxygen steel making, and (-60%, 54%) for arc steel making.

298

3.4 Comparison and implications

Due to the complicated ISP processes and limitations of data availability, the process combinations considered in different inventories were divided into four types (**Fig. 6**) (AMAP/UNEP, 2008, 2013; Wang K. et al., 2016; Wu et al., 2016; Wu et al., 2006; Zhang et al., 2015a). The first type included sinter plant and blast furnace, which were the basic assumption in the emission inventories of Wu et al. (2003), Zhang L. et al. (2015), and AMAP/UNEP (2005). In these studies, unique emission factor of 0.0400 g/t was applied 305 (Table S5) and their emissions were similar in the same inventory year. Our emissions for this 306 process combination were almost the same as above estimations around 2005. However, the 307 gap grew with time when FGD was gradually applied in sinter/pellet plant. Therefore, 308 emission factor for this type of combination was reduced from 0.0527 g/t in 2000 to 0.0296 309 g/t in 2015 (**Table S5**). The second type also consisted of steel making in addition to the first 310 type. Our estimation was much higher than the study of Wang K. et al. (2016) because the 311 emission factors applied in Wang K.'s study were mainly derived from European technical 312 report (EMEP/CORINAIR, 2001; EMEP/EEA, 2013). However, the technology applied in 313 Europe may be better than China's situation. For example, the emission factor of 0.00019 g/t 314 applied for blast furnace with FF was used as best emission factor in Wang K.'s study (2016). 315 However, the combination of WS and venturi scrubber was the dominant APCD type for 316 China's blast furnace (Zhao et al., 2013), Hg removal efficiency of which was lower than that 317 of FF. The third type of process combination also included coke oven as part of ISP in 318 addition to the second type. Lower Hg emissions estimated by AMAP/UNEP (2013) were due 319 to their lower Hg concentration in coal. In addition, although different processes were 320 considered in the global report, unique APCD profile was applied for different process. The 321 application proportion of ESP+FGD reached 55%. However, FGD were mainly installed in 322 sinter/pellet plant but rarely applied in other processes. Thus, the emissions estimated by the 323 global report were lower than our estimation. The forth type also considered the emissions 324 from roasting process where emissions accounted for 9%-11% of total emissions.

325 The comparison of emissions from different types of process combination in this study 326 indicated the significance of including emissions from roasting plant and coke oven in the ISP 327 emission inventories. The proportion of emissions from these two processes accounted for 328 22%-34% of ISP's emissions during the whole study period. In addition, these two processes 329 were important in shaping the trends of ISP Hg emissions. For example, Hg emissions of all 330 processes showed an increase during 2007-2008 (Red line in Fig. 6). However, if these two 331 processes were not considered, we will observe a decreasing trend (Green and orange line in 332 Fig.6). Moreover, given the impact of APCDs on the emission estimation, inventories in ISP 333 should also apply distrinct APCD profiles for different processes so as to reduce the

334 uncertainty of inventories.

335 Future Hg emission for ISP was forecasted to decrease based on comprehensive 336 consideration of dominant parameters (e.g., steel production, air pollution control measures) 337 in the technology-based method and the emission trends from China's ISP during 2000-2015. 338 On one aspect, the annual growth rate of crude steel production reduced from 14.2% of 339 2000-2014 to 1.24% of 2015-2016. Thus, China's ISP has passed the quick growth period. 340 During 2014-2016, the crude steel production was around 810 Mt. It was expected the peak of 341 crude steel production was in the range of 669-1092 Mt (Zhong, 2013) and the crude steel production in 2020 will ranged in 750-800 Mt (MIIT, 2016). Therefore, the peak of crude 342 343 steel production may have arrived or be coming. And slow decreasing crude steel production 344 was expected after the peak according to the development trends of mineral resources 345 consumption rule in developed countries. In addition, with the coming of high-yield-period of 346 steel scrap production (Guo and Wei, 2010), the application proportion of short process steel 347 making method is expected to increase, which will indirectly reduce the requirement of steel 348 production from long process steel making method. The replacement of steel production 349 method will also be one driver of Hg emission reduction considering lower Hg emission 350 factors of short process. Moreover, energy consumptions are required to be reduced by more 351 than 10% during the 2016-2020 (MIIT, 2016) and energy savings will be a long-term strategic in China. The improvement of energy efficiency in the main processes will reduce energy 352 353 consumption (Li et al., 2015) and further lead to the reduction of Hg input. On the other 354 aspect, emissions of pollutants (eg., SO₂, NOx, and PM) are required to be reduced by at least 355 15% for ISP before 2020 in China (MIIT, 2016). To fulfill this goal, corresponding emission 356 standards have been issued (Wu, 2013), which will accelerate the applications of improved 357 APCDs. During 2010-2015, the increase of SO₂ emission limits from 1500 mg/m³ to 200 358 mg/m^3 promoted the large-scale application of desulfurization devices in the sinter/pellet plant 359 of ISP. After 2015, ISP will move forward to NO_x control by using related technologies such as selective catalytic reduction (SC, 2013), the synergic Hg removal efficiencies of which 360 361 have been proved in other industries (Wang et al., 2010). If we assumed that the crude steel 362 production reached a conservative value of 1000 Mt and that advanced dust collectors (ESP or

FF), desulfurization towers, and denitration technologies were fully applied in ISP, 363 364 atmospheric Hg emissions in ISP will be reduced to 27 t in 2020. Thus, a decreasing trend 365 will be expected from 2015 to 2020. Such conclusion is opposite with the study using 366 transformed normal distribution method (Wu et al., 2016). In this study, the transformed 367 normal distribution function was applied to estimate atmospheric Hg emissions from ISP. By 368 using such semi-quantitative method, the emission factor in 2020 (0.0402 g/t for long process 369 and 0.0211 g/t for short process) was almost the same as that in 2015 (0.0403 g/t for long 370 process and 0.0212 g/t for short process). Thus, atmospheric Hg emissions in 2020 will 371 almost depend on crude steel production and the emissions in 2020 will reach 40 t at the 372 conservative situation. Therefore, the technology-based emission factor method will provide 373 more objective forecast of future emissions.

374

4 Conclusion

375 In this study, atmospheric Hg emissions from ISP during 2000-2015 were estimated by 376 using technology-based emission factor method with up-to-date parameters. The input of Hg 377 as impurity of raw materials of ISP increased from 21.6 t in 2000 to 94.5 t in 2015. In the 378 various types of raw materials, coking coal and iron concentrates contributed to the largest 379 amount of Hg input, 35%-46% and 25%-31% of national total, respectively. Atmospheric Hg 380 emissions from ISP increased from 11.5 t in 2000 to the peak of 35.6 t in 2013, and then reduced to 32.7 t in 2015. Overall Hg speciation shift from 50/44/6 (Hg⁰/Hg^{II}/Hg_P) in 2000 to 381 382 40/59/1 in 2015. In the coming years, emissions from ISP are expected to decrease due to the 383 projection of Hg input reduction and improvement of APCDs.

384 In 2015, emissions from long process steel making method and short process steel 385 making were 32.2 t and 0.5 t, accounting for 98.3% and 1.7% of national total, respectively. 386 Sinter/pellet plant and blast furnace were the largest two emission processes, accounted for 49% 387 and 24% of national emissions, respectively. However, emissions from roasting and coke 388 oven should cause attention because their emissions accounted for 22% of national emissions. 389 The largest five Hg emission provinces were Hebei, Shandong, Henan, Jiangsu, and Shanxi 390 provinces. Emissions from these provinces reached 21.5 t, accounting for 68% of national 391 emissions.

392 In this study, we applied the technology-based emission factor method for better 393 quantification of Hg into ISP and atmospheric Hg emissions from different processes of ISP. 394 Compared with previous studies, the uncertainty of atmospheric Hg emissions from ISP has 395 largely reduced with better understanding of Hg flow in ISP. This method has provided more 396 objective estimation of current emissions and forecast of future emissions. However, with the 397 continuously change of APCD combinations, extensive and dedicated field experiments are 398 still required to generate suitable database of Hg removal efficiencies for the improved 399 APCDs in the future.

400 Acknowledgment. This study was supported by the Major State Basic Research Development

401 Program of China (973 Program) (2013CB430001), Natural Science Foundation of China

402 (21607090), and China Postdoctoral Science Foundation (2016T90103, 2016M601053)

404 **References**

- 405 Arctic Monitoring and Assessment Programme and United Nations Environment Programme
 406 (AMAP/UNEP): Technical background report to the global atmospheric mercury
 407 assessment, AMAP/UNEP, Geneva, Switzerland, 2008.
- 408 Arctic Monitoring and Assessment Programme and United Nations Environment Programme
 409 (AMAP/UNEP): Technical background report for the global mercury assessment,
 410 AMAP/UNEP, Geneva, Switzerland, 2013.
- 411 China Iron and Steel Industry Association (CISIA): China Steel yearbook, CISIA, Beijing,
 412 China, 2001-2016.
- 413 European Monitoring and Evaluation Programme/Core Inventory of Air Emissions Project
 414 (EMEP/CORINAIR): Emission inventory guidebook, EMEP/CORINAIR, Copenhagen,
 415 Denmark, 2001.
- 416 European Monitoring and Evaluation Programme/European Economic Area (EMEP/EEA):
 417 Air pollutant emission inventory guidebook 2013, EMEP/EEA, Copenhagen, Danmark,
 418 2013.
- Gao, W.: Study on atmospheric mercury emission characteristics for iron and steel producing
 process in China, Tsinghua University, School of Environment, Beijing, China, 2016.
- 421 Guo, T., and Wei, L.: Development direction of the recycling industry of secondary zinc
 422 resources, China Nonfer. Metal., 4, 2010.
- Hui, M. L., Wu, Q. R., Wang, S. X., Liang, S., Zhang, L., Wang, F. Y., Lenzen, M., Wang, Y.
 F., Xu, L. X., Lin, Z. T., Yang, H., Lin, Y., Larssen, T., Xu, M., and Hao, J. M.: Mercury
 Flows in China and global drivers, Environ. Sci. Technol., 51, 222-231, 2016.
- Li, X. C., Gao, X., and Jiang, X. D.: Analysis on potential of energy conservation of Chinese
 steel industry in the 13th five-year period, The tenth annual conference of China steel
 and the sixth annual academic conference of Baogang, Shanghai, Beijing, 2015-10-21,
 2015.
- Liu, H., Fu, M. L., Jin, X. X., Shang, Y., Shindell, D., Faluvegi, G., Shindell, C., and He, K.
 B.: Health and climate impacts of ocean-going vessels in East Asia, Nature climate
 change, 6, 1037-1041, 2016.
- 433 Ma, H. L.: China steel statistics, Development and Planning Division of Ministry of
 434 Metallurgical, Beijing, China, 1995.
- 435 Ma, J.: Review and projection of technology development of lime used in China's steel
 436 industry, China steel, 6, 17-20, 2011.
- 437 Ministry of Environmental Protection (MEP): "Twelfth Five-year" plan for the comprehensive
 438 prevention and control of heavy metal pollution, MEP, Beijing, China, 2011.
- 439 Ministry of industry and information Technology (MIIT): Adjustment and upgrading plan of
 440 iron and steel industry (2016-2020), MIIT, Beijing, China, 2016.
- 441 National Statistical Bureau of China (NBS): China Environmental Statistics Yearbook, NBS,
 442 Beijing, China, 2001-2016.
- 443 National Energy Administration (NEA): Action plan of coal clean utilization, NEA, Beijing,
 444 China, 2014.
- 445 National Energy Statistical Agency of China (NESA): China Energy Statistical Yearbook,
 446 NESA, Beijing, China, 2001-2016.

- 447 State Council of the People's Republic of China (SC): Action plan of national air pollution
 448 prevention and control, SC, Beijing, China, 2013.
- Streets, D. G., Hao, J. M., Wu, Y., Jiang, J. K., Chan, M., Tian, H. Z., and Feng, X. B.:
 Anthropogenic mercury emissions in China, Atmos. Environ., 39, 7789-7806, 2005.
- 451 Swaine, D. J.: Environmental aspects of trace-elements in coal, Environ. Geochem. Health, 14,
 452 2-2, 1992.
- Tao, S. R., and Wang, Y. J.: Imapct on the economic benefits of metallurgy industry from
 coke coal quality, Coal Proce. Compre. Utiliz., 4, 1994.
- Tian, H. Z., Wang, Y., Xue, Z. G., Cheng, K., Qu, Y. P., Chai, F. H., and Hao, J. M.: Trend and
 characteristics of atmospheric emissions of Hg, As, and Se from coal combustion in
 China, 1980-2007, Atmos. Chem. Phys., 10, 11905-11919, 2010.
- Tian, H. Z., Zhu, C. Y., Gao, J. J., Cheng, K., Hao, J. M., Wang, K., Hua, S. B., Wang, Y., and
 Zhou, J. R.: Quantitative assessment of atmospheric emissions of toxic heavy metals
 from anthropogenic sources in China: historical trend, spatial distribution, uncertainties,
 and control policies, Atmos. Chem. Phys., 15, 10127-10147, 2015.
- 462 United Nations Environment Programme (UNEP): Toolkit for identification and
 463 quantification of mercury releases. Guideline for inventory level 2, version 1.3., 2013.
- 464 United States Environmental Portection Agency (US EPA): Method 7473: Hg in solids and
 465 solutions by thermal decomposition amalgamation and atomic absorption
 466 spectrophotometry, US EPA, Washinton D. C., United States, 1998.
- 467 United States Geological Survey (USGS): Mercury content in coal mines in China, Reston,
 468 Virginia, United States, 2004.
- Wang, F. Y., Wang, S. X., Zhang, L., Yang, H., Gao, W., Wu, Q. R., and Hao, J. M.: Mercury
 mass flow in iron and steel production process and its implications for mercury emission
 control, J. Environ. Sci., 43, 293-301, 2016.
- Wang, K., Tian, H. Z., Hua, S. B., Zhu, C. Y., Gao, J. J., Xue, Y. F., Hao, J. M., Wang, Y., and
 Zhou, J. R.: A comprehensive emission inventory of multiple air pollutants from iron and
 steel industry in China: Temporal trends and spatial variation characteristics, Sci. Total
 Environ., 559, 7-14, 2016.
- Wang, S. X., Zhang, L., Li, G. H., Wu, Y., Hao, J. M., Pirrone, N., Sprovieri, F., and Ancora,
 M. P.: Mercury emission and speciation of coal-fired power plants in China, Atmos.
 Chem. Phys., 10, 1183-1192, 2010.
- Wang, S. X., Zhao, B., Cai, S. Y., Klimont, Z., Nielsen, C. P., Morikawa, T., Woo, J. H., Kim,
 Y., Fu, X., Xu, J. Y., Hao, J. M., and He, K. B.: Emission trends and mitigation options
 for air pollutants in East Asia, Atmos. Chem. Phys., 14, 6571-6603, 2014.
- 482 Wang, Y. F.: Analysis on the harm of indigenous coking, Coal Eco. Res., 1, 1991.
- Wu, Q. R., Wang, S. X., Zhang, L., Song, J. X., Yang, H., and Meng, Y.: Update of mercury
 emissions from China's primary zinc, lead and copper smelters, 2000-2010, Atmos.
 Chem. Phys., 12, 11153-11163, 2012.
- Wu, Q. R., Wang, S. X., Li, G. L., Liang, S., Lin, C.-J., Wang, Y. F., Cai, S. Y., Liu, K. Y., and
 Hao, J. M.: Temporal trend and spatial distribution of speciated atmospheric mercury
 emissions in China during 1978–2014, Environ. Sci. Technol., 50, 13428-13435, 2016.
- Wu, S. H.: Interpretation about "Emission Standards of Iron and Steel Industrial Pollutants",
 Indus. Safety Environ. Pro., 29, 2, 2013.

- Wu, Y., Wang, S. X., Streets, D. G., Hao, J. M., Chan, M., and Jiang, J. K.: Trends in
 anthropogenic mercury emissions in China from 1995 to 2003, Environ. Sci. Technol., 40,
 5312-5318, 2006.
- Zhang, L.: Emission characteristics and synergistic control strategies of atmospheric mercury
 from coal combustion in China, Ph.D. Dissertation, Tsinghua University, School of
 Environment, Beijing, China, 2012.
- Zhang, L., Wang, S. X., Meng, Y., and Hao, J. M.: Influence of mercury and chlorine content
 of coal on mercury emissions from coal-fired power plants in China, Environ. Sci.
 Technol., 46, 6385-6392, 2012.
- Zhang, L., Wang, S. X., Wang, L., Wu, Y., Duan, L., Wu, Q. R., Wang, F. Y., Yang, M., Yang,
 H., Hao, J. M., and Liu, X.: Updated emission inventories for speciated atmospheric
 mercury from anthropogenic sources in China, Environ. Sci. Technol., 49, 3185-3194,
 2015a.
- Zhang, Y. H., Zhang, C., Wang, D. Y., Luo, C., Yang, X., and Xu, F.: Characteristic of
 mercury emissions and mass balance of the typical iron and steel industry, Environ. Sci.,
 36, 8, 2015b.
- Zhao, B., Wang, S. X., Liu, H., Xu, J. Y., Fu, K., Klimont, Z., Hao, J. M., He, K. B., Cofala, J.,
 and Amann, M.: NOx emissions in China: historical trends and future perspectives,
 Atmos. Chem. Phys., 13, 9869-9897, 2013.
- 510 Zhong, X. G.: Research on historical development and market forecast of China 's crude steel
 511 production, Indus. Econo., 32-33, 2013.

513 Tables

514 Table 1. Hg concentration in the raw materials

	Iron o	ore			Limes	tone			Dolon	nite			Cokin	g coal			PCI co	bal		
Province ¹	AM^2	MV^2	SD^2	NS^2	AM	MV	SD	NS	AM	MV	SD	NS	AM	MV	SD	NS	AM	MV	SD	NS
	ng/g	ng/g	ng/g		ng/g	ng/g	ng/g		ng/g	ng/g	ng/g		ng/g	ng/g	ng/g		ng/g	ng/g	ng/g	
Tianjin	41	44	8	3	9	9		1	5	5	2	4					75	66	31	5
Hebei	37	24	40	79	374	117	631	27	7	8	5	5	78	66	39	71	79	85	70	38
Shanxi	30	24	28	25	9	7	8	6					77	71	27	22	114	106	19	3
Shanghai	44	44	50	4	20	20		1	39	39	2	2	125	152	71	5	12	12	0	2
Jiangsu					103	68	113	18												
Zhejiang					52	37	35	22												
Anhui	21	20	12	14	11	11	4	12	32	32	2	3	88	58	53	8	98	22	104	7
Fujian	19	14	11	15	11	11	5	4	9	8	5	4	105	100	51	13	255	239	51	7
Jiangxi	57	46	88	18					10	9	4	3	120	93	59	4	185	198	66	7
Shandong	125	128	73	20					24	24	1	2	72	69	21	12				
Henan	32	24	29	18	692	759	629	13												
Hubei					16	14	8	6					92	83	54	39	131	116	91	21
Hunan	33	19	34	77	102	87	62	4	3	3	1	2								
Guangdon	g				48	44	26	15												
Guangxi					8	8	2	4					210	188	112	27	96	98	30	6
Chongqing	5												85	79	48	20	65	65	12	4
Sichuan	37	2	44	7	10	9	4	12												
Guizhou					11	10	11	42												
Yunnan	10	10	7	6	17	20	7	6					51	52	7	8	58	56	6	3

Gansu	107	107	3	3	3	3		1					166	174	21	5	60	60	5	2
Xinjiang	6	5	4	17									82	82	46	22	31	24	19	15
National	38	20	48	306	153	18	402	204	14	9	12	25	99	82	68	256	99	73	83	120


- 515 Note: 1. Provinces without data were not listed in this table;
- 516 2. AM: Average mean; MV: Median value; SD: Standard deviation ; NS: Number of samples;

517 -.

Province ¹	Atmospheric Hg emissions (kg)									
	2000	2005	2010	2015	AAGR					
Beijing	432.0	316.1	132.9	0.0	-40%					
Tianjin	260.0	482.0	863.4	688.9	7%					
Hebei	1202.0	4016.0	6672.3	7129.3	13%					
Shanxi	1587.3	2214.2	2075.2	1792.3	1%					
Inner	287.5	477.8	667.7	753.8	7%					
Liaoning	845.8	1171.1	1679.3	1563.4	4%					
Jilin	109.5	190.9	282.8	267.9	6%					
Heilongjiang	71.4	171.4	307.3	180.2	6%					
Shanghai	1532.6	1155.7	1021.2	703.6	-5%					
Jiangsu	304.5	1149.5	1891.4	2519.4	15%					
Zhejiang	75.9	139.8	356.2	362.0	11%					
Anhui	252.5	399.4	572.6	586.6	6%					
Fujian	67.9	150.2	243.8	309.2	11%					
Jiangxi	292.1	701.4	1054.0	984.8	8%					
Shandong	1122.5	3965.4	6017.7	6051.1	12%					
Henan	1259.8	2172.9	3495.3	4049.9	8%					
Hubei	268.0	363.7	467.6	376.7	2%					
Hunan	239.2	512.1	713.7	627.2	7%					
Guangdong	131.7	286.6	339.7	395.9	8%					
Guangxi	82.4	236.8	423.6	538.9	13%					
Hainan	0.1	0.5	0.0	3.1	26%					
Chongqing	106.2	121.7	168.4	142.3	2%					
Sichuan	224.6	353.7	400.2	377.5	4%					
Guizhou	100.9	235.4	204.1	187.4	4%					
Yunnan	99.0	299.4	382.9	283.0	7%					
Shaanxi	75.8	222.7	395.9	689.5	16%					
Gansu	372.5	528.5	612.8	708.1	4%					
Qinghai	12.2	10.6	64.5	24.8	5%					
Ningxia	10.0	28.9	72.6	139.8	19%					
Xinjiang	50.1	97.0	286.8	294.6	13%					
Total	11476	22171	31866	32732	7%					

518 Table 2. Provincial Hg emissions during 2000-2015

519 Note: 1. Provinces without data were not listed in this table.

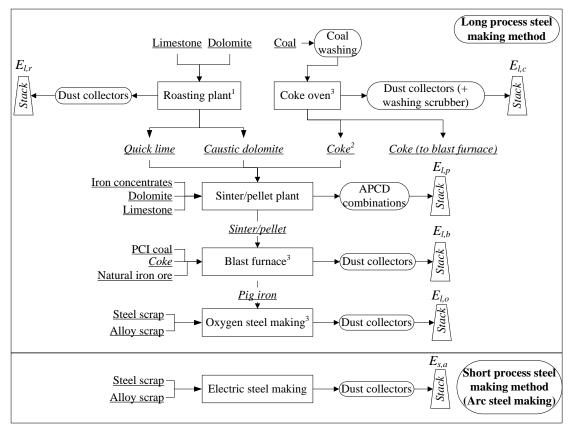

Note: 1. Some plants roasted limestone and dolomite separately.

2. Mainly coke breeze. Some plants also use coal powder as fuel.

3. The flue gas after dust collectors are collected in gasometer before use.

521

522 **Fig. 1**. Flow chart of ISP processes

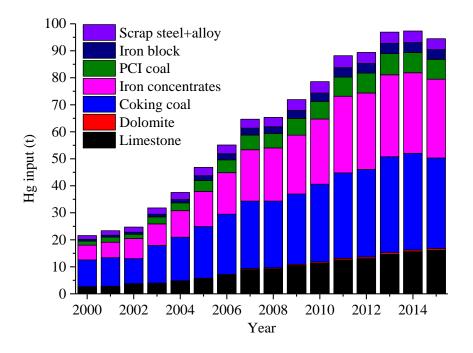


Fig. 2. Hg input trends by material

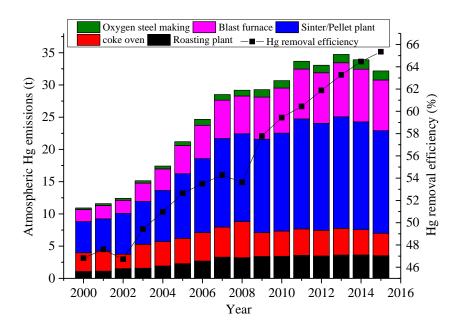


Fig. 3. Hg emission trends by process and Hg remvoal efficiency

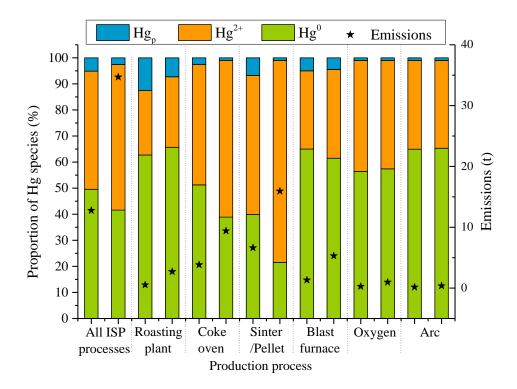


Fig. 4. Proportion of different Hg species (For each process, the left and right column
represents the data in 2000 and 2015, respectively)





Fig. 5. Unertainty analysis

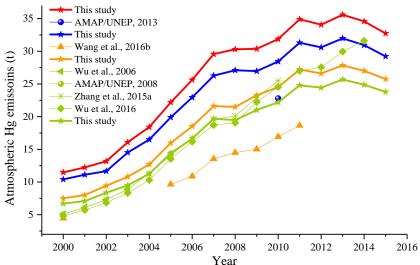

Year Red symbol: Sinter plant+blast furnace+roasting plant+coke oven+steel making Blue symbol: Sinter plant+blast furnace+coke oven+steel making Orange symbol: Sinter plant+blast furnace+steel making Green symbol: Sinter plant+blast furnace

533 Fig. 6. Atmospheric Hg emissions of ISP in different studies