

1 The impact of measures to reduce ambient air PM₁₀ 2 concentrations originating from road dust, evaluated for a 3 street canyon in Helsinki

4 Ana Stojiljkovic¹, Mari Kauhaniemi², Jaakko Kukkonen², Kaarle Kupiainen¹, Ari Karppinen²,
5 Bruce Rolstad Denby³, Anu Kousa⁴, Jarkko V. Niemi⁴, Matthias Ketzel⁵
6

7 ¹Finnish Environment Institute (SYKE), Helsinki, P.O.Box 140, FI-00251, Helsinki, Finland

8 ²Finnish Meteorological Institute, Helsinki, P.O. Box 503, FI-00101, Helsinki

9 ³Norwegian Meteorological Institute, P.O. Box 43, Blindern, NO-0313 Oslo, Norway

10 ⁴Helsinki Region Environmental Services Authority, P.O.Box 100, FI-00066, Helsinki, Finland

11 ⁵Department of Environmental Science, Aarhus University, P.O. Box 358, DK-4000, Roskilde, Denmark

12 *Correspondence to:* Ana Stojiljkovic (ana.stojiljkovic@ymparisto.fi)

13 **Abstract.** We have evaluated numerically how effective selected potential measures would be for reducing
14 impact of road dust on ambient air particulate matter (PM₁₀). The selected measures included reduction of the
15 use of studded tyres in light-duty vehicles and reduction of the use of salt or sand for traction control. We have
16 evaluated these measures for a street canyon located in central Helsinki for four years (2007-2009 and 2014). Air
17 quality measurements were conducted in the street canyon for two years, 2009 and 2014. Two road dust
18 emission models, NORTRIP and FORE, were applied in combination with the street canyon dispersion model
19 OSPM to compute the street increments of PM₁₀ (i.e. fraction of PM₁₀ concentration originated from traffic
20 emissions at the street level) within the street canyon. The predicted concentrations were compared with the air
21 quality measurements. Both road dust emission models reproduced fairly well seasonal variability of the PM₁₀
22 concentrations, but under-predicted the annual mean values. It was found that the largest reductions of
23 concentrations could potentially be achieved by reducing the fraction of vehicles that use studded tyres. For
24 instance, a 30 % decrease in the number of vehicles using studded tyres would result in an average decrease of
25 the non-exhaust street increment of PM₁₀ from 10 to 22 %, depending on the model used and the year
26 considered. Modelled contributions of traction sand and salt to the annual mean non-exhaust street increment of
27 PM₁₀ ranged from 4% to 20% for the traction sand, and from 0.1 % to 4 % for the traction salt. The results
28 presented here can be used to support development of optimal strategies for reducing the high springtime
29 particulate matter concentrations originated from the road dust.

30 1 Introduction

31 During the last couple of decades, strict regulations and technological innovations have led to a significant
32 decrease of exhaust particulate emissions from road traffic. However, at the same time the decreases of non-
33 exhaust traffic emissions have been much more moderate or even negligible, partly caused by the fact that these
34 emissions have remained mostly unregulated (e.g., Kukkonen et al., 2018). Estimated relative contribution of
35 non-exhaust emissions to the emissions of PM₁₀ from road transport increased from 30 % in 2000 to 60 % in
36 2016 (EEA, 2018).

1 The non-exhaust emissions of respirable particles, PM₁₀, include particles formed due to the wear of road
2 surface, brakes and tyres, and the suspension of particles that have been accumulated on the road surface and are
3 commonly referred to as road dust. The latter category is originated from (i) the wear of the road surface and the
4 tyres, (ii) traction control materials (sand and salt) and (iii) a range of other miscellaneous sources, such as the
5 deposited material from, e.g., road and building construction sites or surrounding environment, and the
6 deposition of materials to the surface from ambient air.

7 In northern European countries, the non-exhaust emissions have been one of the most important causes of high
8 ambient air PM₁₀ concentrations for several decades (e.g., Kukkonen et al., 1999, 2018; Kauhaniemi et al.,
9 2014). These have also resulted in exceedances of the daily PM₁₀ limit values set by the European Union (no
10 more than 35 occurrences of daily mean values exceeding 50 µg m⁻³), especially during spring. In brief, the
11 mechanisms leading to such exceedances are (i) the accumulation of road dust on the road surfaces in winter, (ii)
12 the melting of snow and ice in spring, and (iii) the release of substantial amounts of suspended dust to the
13 atmosphere from the road surfaces during dry periods.

14 In the Nordic countries, it is necessary to use traction control measures (winter tyres, traction sanding and
15 salting) during the colder seasons to ensure traffic safety in snowy and icy weather.

16 The road wear associated with the use of studded winter tyres has been found to be the most significant source of
17 road dust (Kupiainen, 2007; Denby et al., 2013a; Kupiainen et al., 2016) that contributes to the high PM₁₀
18 concentrations. The use of traction sanding and salting contribute to a lesser degree to the amount of suspended
19 street dust; however, also these contributions may be significant (Denby et al., 2013a; Kupiainen et al., 2016).

20 Salt is commonly the preferred of the two traction control materials, but sanding has to be used in specific
21 weather conditions. These include in particular the conditions, for which the ambient temperatures are below -5
22 °C. Salting would then result in the freezing of the salt-water solution, and would not contribute to improving the
23 friction between the tyres and the street surface. The traction sand can directly contribute to the suspendable road
24 dust, if it contains particulate material that has specific grain sizes. There are also other processes, by which
25 traction sand can contribute: (i) via crushing of larger sand grains into smaller particles due to the passage of
26 tyre, and (ii) via abrasion of road surface by the contact of crushed stone and sand, and the tyres of passing
27 vehicles. The latter is commonly called the sandpaper effect (Kupiainen, 2007). According to Denby et al.
28 (2016), approximately 0.5 % of the total salt distributed on the roads can be released to the air as PM₁₀. As
29 approximately 200 000 tons of salt is spread out every year on the roads and streets in Finland, road salt can be a
30 significant source of the elevated PM₁₀ concentrations.

31 For the design of successful mitigation strategies for road dust, it would be valuable to assess contributions of
32 different sources to the PM₁₀ concentrations. Then it would also be possible to evaluate the efficiency and
33 impacts of potential abatement measures. Various modelling tools have been developed to facilitate such
34 analyses.

35 The aim of this study is to evaluate the effectiveness of selected potential measures for reducing the emissions
36 and concentrations of PM₁₀ originated from road dust. These measures include the reduction of the use of
37 studded tyres and the minimization of traction control material use. We have evaluated the effects of these
38 measures for a street canyon location in central Helsinki, for four years (2007-2009 and 2014). We have also
39 compared the predictions of the modelling system with the measured concentrations in the street canyon for two
40 years, 2009 and 2014. The non-exhaust PM₁₀ emissions associated with vehicular traffic were computed using

1 the road dust emission models NORTRIP (Denby et al., 2013a, 2013b) and FORE (Kauhaniemi et al., 2011).
2 Both emission estimates were then implemented in the OSPM street canyon dispersion model (Berkowicz, 2000)
3 to simulate the concentrations of PM_{10} at the street level.

4 **2 Materials and methods**

5 **2.1 Measurements**

6 **2.1.1 Study site description**

7 The study was carried out for a segment of a major street called Hämeentie, located in central Helsinki. The
8 street segment is extending from south-west to north-east (at an angle of 56 degrees clockwise from the north).
9 The building block that surrounds the air quality measurement site extends over a distance of 91 m. The air
10 quality measurement site was at distances of 56 m and 35 m from the nearest junctions to the north-east and to
11 the south-west, respectively. The average height of the surrounding buildings in the studied segment of the street
12 is 26 m. The location of the study site in the city, and the applied meteorological and air quality stations are
13 presented in Fig 1a. The location of buildings and park areas in the immediate vicinity of this street segment is
14 presented in Fig. 1b. There is an open area and a small park to the north-east of the measurement site at distances
15 of approximately 60 and 200 m, respectively. There are several high trees in those areas that were estimated to
16 be approximately 10 m high. The street canyon is 32 m wide and it contains four lanes, two to both directions.

17 **2.1.2 Traffic data and the use of studded tyres**

18 The traffic volume data and, weekly and monthly variations of the traffic volume were based on the estimations
19 made by the Helsinki City Planning Department. The measured annual average weekday traffic volume is
20 available for 2015 for Hämeentie, and for 2007, 2008, 2009, and 2014 for a street that is a continuation street of
21 Hämeentie, located 600 m south-west from the site, called Pitkäsilta. Annual average weekday traffic volume
22 measured at Hämeentie in 2015 was adopted for year 2014. For other considered years, we have used measured
23 traffic volumes at Pitkäsilta, scaled by the ratio of annual average weekday traffic volumes at Hämeentie in 2015
24 and at Pitkäsilta in 2014.

25 The average hourly weekday daytime vehicle speeds are based on the values measured during the monitoring
26 campaigns in Hämeentie in 2007, 2009 and 2011. Measured values for 2007 and 2011 were adopted for years
27 2008 and 2014, respectively. The vehicle speeds for the night-time hours and weekend days were evaluated
28 using the measured diurnal and weekly cycles of vehicle speeds in Runeberginkatu (located 2 km southwest
29 from Hämeentie) in 2004. The traffic data for Hämeentie for years 2007-2009 and 2014 are summarized in Table
30 1. The average speeds of vehicles are clearly below the speed limit value (40 km h^{-1}), due to several junctions
31 and frequently occurring traffic congestion. This street is one of the major routes for public transport to the
32 centre of the city; the proportion of heavy-duty vehicles is therefore high, ranging annually from 29 to 30 %.

33 The use of winter tyres (studded or non-studded) is mandatory from December to February (inclusive) by
34 legislation in Finland. The studded tyres are allowed from November until the last day of March, or until
35 Monday one week after Easter, if it falls on a later date. However, studded tyres can be used also outside of this
36 period, if required by the weather conditions. Studded tyres are used only on light-duty vehicles. The maximum
37 annual share of light-duty vehicles using studded tyres during the study period was 80 %. For year 2014, the

1 transition from summer to winter tyres is based on the weekly counting of the vehicles with studded tyres in
2 Helsinki (REDUST, 2014). For other considered years (2007-2009), such detailed information was not available,
3 and the winter tyre season was therefore set to last from 23 October until 30 April. The transition between winter
4 and summer tyres is assumed to be linear over a one-month period at the beginning and at the end of the winter
5 tyre season.

6 **2.1.3 Meteorological data**

7 The meteorological data were obtained from two weather stations located at Kaisaniemi and Kumpula (Fig.1a) at
8 distances of 1.0 and 2.4 km from the Hämeentie site, respectively. The data includes ambient temperature,
9 relative humidity, precipitation, wind speed, wind direction, total cloud cover and global radiation. The monthly
10 mean temperature and total precipitation values for the study period are presented in Fig. 2. In terms of the
11 meteorological conditions relevant for the suspension emissions and dispersion conditions, all the years
12 addressed in this study can be considered to be typical for this climate zone.

13 Using meteorological data at two urban stations could result in reduced representatives of the
14 micrometeorological processes. Particularly, small-scale rain showers could be detected at the urban
15 meteorological stations, but not at the study site, or the other way around.

16 **2.1.4 Road maintenance data**

17 The total number of relevant road maintenance activities is presented in Table 2 for different years during the
18 study period. The salting and sanding events are the most and the second most frequent ones, respectively. Street
19 cleaning is commonly done only once per year. The approximate seasonal timing of these activities is presented
20 in Fig. 3. The complete data for the period from October to December was available only for year 2008. Most of
21 the traction control measures (i.e., sanding and salting) have been done in winter and early spring, from January
22 to March. Dust binding has been done mostly in spring, during March and April.

23 The information on the timing of road maintenance activities was available within an accuracy of six hours. The
24 estimated dry masses of sand, traction salt (NaCl) and dust binding salt (CaCl₂) per application were 100 g m⁻²,
25 10 g m⁻² and 6 g m⁻², respectively.

26 **2.1.5 Air quality measurements**

27 Kerbside air quality measurements were conducted in Hämeentie in 2009 and 2014. Urban background air
28 quality measurements were made at the station of Kallio, which is located at a distance of 700 m north-west from
29 the Hämeentie site.

30 **2.2 Models**

31 **2.2.1 The models for evaluating the suspension emissions**

32 The non-exhaust PM₁₀ emissions for 2007-2009 and 2014 were computed using the NORTRIP and FORE
33 models. A brief overview of the models' structure and their application in this study is presented in this section.
34 The reader is referred to Denby et al. (2013a, 2013b) (NORTRIP) and Kauhaniemi et al. (2011, 2014) (FORE)
35 for comprehensive description of the models and parameter definitions.

36

1 **The road dust emission model NORTRIP**

2 The NORTRIP model (NON-exhaust Road TRaffic Induced Particle emissions) is described in Denby et al.
3 (2013a, 2013b) and comprises two sub-models that describe the road dust and surface moisture mass balance.
4 Coupled they are used to predict emission of the road dust, which results from the direct emissions of vehicle
5 related wear (road, brakes and tyre) and suspension of wear products, salt and sand accumulated on the road
6 surface.

7 The road dust emission calculation is based on the total wear rates and the size distributions of the different wear
8 sources. The basis road wear rate for studded tyres is determined using the Swedish road wear model (Jacobson
9 and Wågberg, 2007) and can be adjusted for different road surface types. The basis brake and tyre wear rates and
10 size distributions used in this study are taken from Boulter (2005). The suspension of road dust induced by
11 passing vehicles is accounted for in the NORTRIP model using a suspension factor. The suspension factor in
12 NORTRIP was initially derived by optimising the model against ambient air measurements that clearly show the
13 decay in PM emissions at the end of the studded tyre season and is described in Denby et al. (2013a).
14 Application of the model to many datasets since then does not indicate the need for significant changes to this
15 suspension factor.

16 Table 3 shows parameters relevant for calculation of emissions from wear and suspension for light-duty vehicles
17 that are valid for vehicle speeds of 70 km h⁻¹ for wear, and 50 km h⁻¹ for PM₁₀ fraction and suspension. These
18 speeds are significantly higher than speeds encountered in this study, and the values are presented for reference
19 only. The road wear and suspension are considered to be linearly dependent on vehicle speed. The wear and
20 suspension rates for the heavy-duty vehicles are assumed to be 5 and 10 times larger than those for light-duty
21 vehicles, respectively.

22 The surface moisture, as calculated by the surface moisture model, determines the suspension and retention of
23 the road dust and salt. The surface moisture is a product of precipitation, condensation and wetting whereas the
24 removal of surface moisture happens through drainage, evaporation and spray. Additionally, drainage and spray
25 will contribute to removal of dust and salt from the road surface. The energy balance model is used to predict
26 condensation and evaporation from the road surface.

27 The NORTRIP model input data includes information on street configurations, traffic data (traffic volume and
28 composition, vehicle speed and tyre type), meteorological data (solid and liquid precipitation, wind speed,
29 temperature, radiation, cloud cover, and humidity) and road maintenance activity data.

30 Road maintenance activities included in the NORTRIP model are traction salting and sanding, dust binding,
31 cleaning and ploughing. Traction sand directly contributes to the suspendable road dust mass, depending on its
32 particle size distribution. Size distribution measurements of traction sand used in the Helsinki Metropolitan Area
33 showed that 0.4-2.5% of the sanding material is in the suspendable fraction (defined as the size fraction < 200
34 µm) (Kulovuori et al., 2019). In this study, the amount of suspendable material in sand was set to be equal to
35 2%. Salt contributes directly to the dust loading, when not in solution, and impacts on the predicted surface
36 conditions via surface vapour pressure depression that reduces evaporation (Denby et al., 2013b). In the model,
37 cleaning and ploughing reduce the amount of road dust and salt on the road surface with a predefined efficiency.
38 The effect of street cleaning will depend on the method used and initial amount of road dust available on the
39 street surface (e.g. REDUST, 2014). In this study, assumed removal efficiency for cleaning and ploughing are set
40 to be 1% and 0.1% for the non-suspendable and suspendable fraction of the road dust, respectively.

1 The output of the model consists of hourly time series for the emissions from wear sources and from salt and
2 sand in the size fraction of PM₁₀.

3

4 **The road dust emission model FORE**

5 The FORE model (Forecasting Of Road dust Emissions) has been developed to evaluate the particulate matter
6 emissions from road and street surfaces. It is based on the particle suspension emission model developed by
7 Omstedt et al. (2005). The model considers emissions formed by the wear of road surface and from traction sand
8 and the suspension of road dust particles into the atmosphere. The model version does not address the emissions
9 caused by the wear of vehicle components (e.g. brake and tyre wear).

10 The use of the model requires as input hourly meteorological data (i.e., total precipitation, temperature, dew
11 point temperature, relative humidity, wind speed, radiation and cloud cover), the roughness length, the share of
12 studded tyres, and the dates of the street sanding.

13 The model uses empirical reference emission factors, which have different values depending on the time of the
14 year, the size fraction of particles (PM₁₀ or PM_{2.5}), and the traffic environment (urban or highway). The reference
15 emission factor will be higher for the time of the year when sanding and studded tyres are commonly used
16 (referred to as 'sanding period') compared to the rest of the year (referred to as 'non-sanding period').

17 We have adopted the reference emission factors evaluated for Stockholm estimated and further explained by
18 Omstedt et al. (2005); i.e., 1200 and 200 µg veh⁻¹ m⁻¹, for sanding (Oct-May) and non-sanding (Jun-Sep) period,
19 respectively. The climatic conditions, studded tyre shares and the procedures of using traction sand are fairly
20 similar in Stockholm and Helsinki, although the difference in used amounts of sand and salt can be significant.

21 The dust layer, which will be accumulated on the street surface during wet conditions, depends on the traction
22 sanding and the road wear. In the FORE model, equal contributions are assumed for the dust layers on the street,
23 originating from the road wear and from the traction sand. The dust layer is reduced by the suspension of
24 particles due to the air flow and by runoff due to precipitation.

25 The suspension of road dust particles in the air is controlled by road surface moisture that is based on modelling
26 of precipitation, runoff, and evaporation. The effect of terrain on wind is defined by roughness length which is
27 needed for the evaluation of the evaporation (Omstedt et al. 2005). In the present case, the roughness length was
28 derived from the average building height (26 m) in the studied street section. This resulted in the roughness
29 length value of 2.6 m.

30 The model does not allow for the dependencies of emissions on vehicle speed and fleet composition. In the
31 FORE model, we have used as input the studded tyre share of the whole traffic fleet of Hämeentie, including
32 both light-duty and heavy-duty vehicles. As studded tyres are only used in light-duty vehicles at the study site,
33 corresponding share of studded tyres in the total traffic fleet is relatively lower. For instance, assuming that 80%,
34 50%, 30% or 0% of the light-duty vehicles uses studded tyres, the studded tyre share of the whole traffic fleet is
35 approximately 57%, 35%, 21% and 0%, respectively.

36 **2.2.2 Evaluation of the vehicular exhaust emissions**

37 The exhaust emission factors were obtained from the LIPASTO emission modelling system (Mäkelä, 2015). The
38 LIPASTO emission factors are defined separately for five vehicle categories (personal cars, vans, buses, lorries
39 without a trailer, and lorries with a trailer). The dependencies of emission factors on the vehicle speeds were not

1 explicitly taken into account; however, they allow for urban driving conditions, i.e., traffic cycles that contain
2 frequent accelerations, decelerations and idling. The vehicular exhaust emission factors for particulate matter
3 used in this study are presented in Table 4. As expected, the emission factors were the largest for lorries
4 equipped with a trailer. The emission factors are an order of magnitude larger for heavy-duty vehicles and vans,
5 compared with the personal cars.

6 **2.2.3 The street canyon dispersion model OSPM**

7 The street canyon dispersion model OSPM is based on a combination of a Gaussian plume model and an
8 empirical box model. For a detailed description of this model, the reader is referred to Berkowicz (2000). A brief
9 overview of the model structure and its application in this study is presented here.

10 The OSPM model requires as input data information on the street configuration, hourly time series of the traffic
11 data, the exhaust- and non-exhaust emissions, the meteorological parameters (wind speed and direction), and the
12 urban background concentrations.

13 The input information on the street configuration includes the geometry of the studied street segment; introduced
14 in Section 2.1.1. The ratio of canyon height (26 m) and width (32 m) gives an aspect ratio of 0.8. Thus, the
15 studied street is considered as a wide street canyon. The aspect ratio of studied street is close to an ideal value in
16 view of the performance of the OSPM model; the model was developed for street canyons with an aspect ratio
17 close to unity.

18 We have also taken into account the geometries of nine street crossings and two parks that are outside of the
19 studied street segment. These so-called exceptions on canyon walls need to be considered, although they are
20 outside of the studied street segment, as they are situated less than 200 m from the receptor points. Otherwise,
21 the OSPM model will assume that the row of buildings continues over a very large distance (Berkowicz et al.,
22 2003). The geometries of street crossings and parks are considered in the model for various wind sectors and so-
23 called building height exceptions.

24 Trees add the porosity of a street canyon, and thus have an influence on dispersion and deposition conditions.
25 However, the OSPM model does not consider any obstacles in the street canyon.

26 The completeness of the meteorological and background concentration data used as input for the OSPM
27 calculations was excellent. Average data coverage for wind speed and direction, and background concentrations
28 was 98%.

29 Traffic induced turbulence depends in the model on traffic flow and composition (light and heavy vehicles), as
30 well as on the traffic speed. The hourly average traffic volume and speed data were used as input separately for
31 light-duty vehicles (i.e., passenger cars and vans) and heavy-duty vehicles (i.e., busses and lorries).

32 **3. Results and discussion**

33 Two road dust emission models, NORTRIP and FORE, were applied to compute the vehicular non-exhaust PM_{10}
34 emissions that were, together with the exhaust emissions, then used as input in the OSPM street canyon
35 dispersion model to simulate street level PM_{10} concentrations.

36 We have (i) compared predictions of the models to the measured PM_{10} concentrations (Section 3.1.), (ii)
37 evaluated key uncertainties in the road dust and dispersion modelling for the study site (Section 3.2.), and (iii)

1 simulated the effects of changes in studded tyre share and the impacts of traction sanding and salting on ambient
2 air PM₁₀ concentrations (Section 3.3).

3 For the comparison with the measured concentrations we have focused on the street increments of PM₁₀. The
4 measured and predicted street increments were obtained by subtracting the measured urban background
5 concentrations from the measured and predicted concentrations in the street canyon, respectively. Effects of
6 measures intended to reduce road dust emissions were subsequently estimated for the non-exhaust part of the
7 street increments, as a relative difference compared to reference case. Non-exhaust street increment is a fraction
8 of the modelled street increment PM₁₀ concentration that originates from the non-exhaust traffic induced particle
9 emissions. The results are presented as annual and seasonal mean values. Seasons are defined as follows: winter
10 (1 January to 14 March), spring (15 March to 31 May), summer (1 Jun to 30 September) and autumn (1 October
11 to 31 December).

12 **3.1. Comparison of predicted and measured PM₁₀ concentrations**

13 The kerbside air quality measurements in Hämeentie were performed in 2009 and 2014. The total observed
14 annual mean concentrations of PM₁₀ were 24 µg m⁻³ and 23 µg m⁻³ in 2009 and 2014, respectively, and were
15 slightly above the WHO guidelines (annual mean PM₁₀ concentration should not exceed 20 µg m⁻³). The EU
16 daily limit value (50 µg m⁻³) was exceeded on 16 days in 2009, and on 21 days in 2014 (Malkki et al. 2010;
17 Malkki and Loukkola 2015). Although the number of exceedances was below the allowed number of 35 days,
18 elevated PM₁₀ concentrations caused by the road dust in spring can cause adverse health impacts and reduce the
19 comfort of living. The urban background contribution to the concentrations measured at the street level in
20 Hämeentie was substantial, i.e., 64%, averaged over the two years with available data (2009 and 2014).

21 The time series of modelled and observed daily mean street increment concentrations of PM₁₀ for years 2009 and
22 2014 are presented in Fig. 4. The annual and seasonal mean values are presented in Table 5. In 2009, the
23 observed seasonal variation was more pronounced, compared with the corresponding results for 2014, as shown
24 both by the results in Fig. 4 and Table 5. The observed street increment in spring was clearly the highest for both
25 years, compared with that in the other seasons.

26 In 2009, a snow layer was formed on the street in the second half of January, and lasted until the end of March.
27 The month of April was warmer than average and with less precipitation. The observed daily mean PM₁₀
28 concentrations started to increase in the latter part of March and prevailed on a relatively high level until the end
29 of April. Night frosts postponed the street cleaning that commonly starts in March, to the beginning of April.
30 This contributed, together with the lack of precipitation, to the existence of a prolonged road dust season.

31 On the other hand, the winter of 2014 was milder than average. The snow cover lasted only for a short time
32 between January and February, and the thermal spring started early. The observed PM₁₀ concentrations were on
33 average substantially lower during spring, compared with those in 2009, caused by both early spring cleaning
34 procedures and fortunately timed precipitation events.

35 Both models can be considered to have reproduced the seasonal variability fairly well, but they under-predict the
36 annual mean values. The street increments of PM₁₀ predicted by the FORE model are higher than the observed
37 values in winter and lower in spring, for both years. The NORTRIP model systematically under-predicts the
38 measured concentrations. The NORTRIP model reproduced observed variation of the daily mean street
39 increment concentrations reasonably well with the coefficients of determination R² of 0.51 and 0.32 for 2009 and

1 2014, respectively. The corresponding correlations for the FORE model were slightly lower ($R^2 = 0.25$ and 0.20
2 for 2009 and 2014). The correlation of the hourly mean street increment concentrations, compared with the
3 corresponding values for the daily means, was substantially lower in case of the NORTRIP computations ($R^2 =$
4 0.38 and 0.25 for 2009 and 2014, respectively). This was probably due to the higher uncertainties in evaluating
5 the hourly variation of the street surface conditions. In case of the FORE model ($R^2 = 0.26$ and 0.20 , for 2009
6 and 2014, respectively), the daily and hourly correlations were very similar to each other. Additional results of
7 the statistical analyses for the daily mean street increments of PM_{10} are presented in Appendix A.

8 **3.2 Evaluation of the uncertainties of the modelling**

9 There are significant uncertainties in the modelling of the road dust and dispersion modelling associated to the
10 numerous model input values and parameters used for the model computations. Additionally, uncertainties that
11 can affect the accuracy of the whole modelling system are potentially missing road dust sources or source
12 categories. Such sources could be the migration of dust from adjoining streets, the off-road sources (such as
13 sidewalks and parking lots) and the traction sand used by trams.

14 We have analysed and numerically evaluated selected key uncertainties related to the application of the two road
15 dust emission models, and to the street canyon modelling for the Hämeentie site.

16 **3.2.1 Uncertainties of the NORTRIP model**

17 Denby et al. (2013b) previously studied extensively the sensitivity of the NORTRIP model to a wide range of
18 input parameters and demonstrated ability of the model to reproduce the mean concentrations of PM_{10} within a
19 range of $\pm 35\%$ of observations for a number of data sets. However, the results of the present study were outside
20 of the above mentioned range of uncertainties.

21 The results presented in Section 3.1. show that the NORTRIP model systematically under-predict observed PM_{10}
22 concentrations for Hämeentie. Road wear particles created by the studded tyres dominate in the road dust
23 emissions. In the NORTRIP model, the wear rate caused by studded tyres depends on the properties of asphalt
24 road surface (such as stone sizes and wear resistance) and vehicle speed. In this study, we have used wear rates
25 derived for the reference road surface type (ABS16 with porphyry from Älvdalen) in the Swedish road wear
26 model (Jacobson and Wågberg, 2007) which is one of the most wear resistant road surfaces used in Sweden. The
27 wear rates in the Swedish road wear model are based on laboratory and field experiments and provide an average
28 under both prevailing dry and wet conditions. However, influence of surface moisture that increases the wear is
29 not directly considered in the model calculations. Denby et al. 2013a estimated the typical wear rates to be from
30 2 to $5 \text{ g km}^{-1} \text{ veh}^{-1}$ and acknowledged significantly variation of these values depending on the material used with
31 increased wear rates for roads with the poor quality surfaces. Hämeentie is paved with the stone matrix asphalt
32 but further detailed information about road surface parameters was not available, which is a source of uncertainty
33 in evaluating the studded tyre wear rates.

34 We found that numerically doubling the studded tyre wear rate would increase the mean street increment
35 concentrations of the PM_{10} computed with the NORTRIP model by 34%. This would therefore result in model
36 predictions that would be in better agreement with the measurements. However, increasing wear rate will not
37 affect significantly coefficient of determination (R^2) because this parameter is a measure of correlation between
38 modelled and measured values not measure of bias of mean values.

1 The studded tyre wear rate is also assumed to be linearly dependent on vehicle speed (Denby et al., 2013a). In all
2 previous calculations using the NORTRIP model (Denby et al., 2013b), the vehicle speeds have been larger than
3 40 km h^{-1} . The dependency on vehicle speed may be non-linear for the lower traffic speeds encountered in this
4 study ($< 30 \text{ km h}^{-1}$) due to congestion. The NORTRIP model also does not account for the influences of
5 congested driving conditions, in which acceleration and deceleration will likely result in an enhanced road wear.
6 In summary, it is possible that an underestimation of the studded tyre wear rate in congested low vehicle speed
7 conditions, for this particular road surface, could contribute to the under-predictions by the NORTRIP model.

8 **3.2.2 Uncertainties of the FORE model**

9 The key parameter in the FORE model is the reference emission factor, which sets a baseline value for the
10 predicted suspension emissions. In this study, we have used the reference emission factors estimated by Omstedt
11 et al. (2005) based on the measurements in Hornsgatan in Stockholm. Although the climatic conditions were
12 similar during the Hornsgatan measurement campaign and the present study, the different traffic conditions
13 could in principle have caused differences that will be reflected in the values of the baseline emissions.

14 We have therefore estimated numerically, how using the physically largest feasible values of the reference
15 emission values would increase the predictions of the FORE model. The base case PM_{10} reference emission
16 factors for the sanding and non-sanding periods in Omstedt et al. (2005) were 1200 and $200 \mu\text{g veh}^{-1} \text{ m}^{-1}$,
17 respectively. The assumed numerical cases used the higher PM_{10} reference emission factors for the sanding and
18 non-sanding periods, i.e., 1500 and 300 , and 3200 and 400 , respectively. For the assumed numerical cases, the
19 annual mean street increment concentrations of PM_{10} would increase from 23% to 118% .

20 The FORE model does not address the influences of salting, street cleaning and dust binding. The suspension
21 emissions are also, for simplicity, modelled for the whole vehicle fleet. This approach does not take into account
22 the details of the vehicle speeds and the composition of the vehicle fleet.

23 In summary, an under prediction of the baseline emissions could have contributed to the under-prediction of
24 suspended PM_{10} concentrations found in this study. Neglecting the effects of salting, street cleaning and dust
25 binding could cause a reduced correlation of the measured and predicted concentration values.

26 **3.2.3 Uncertainties of the OSPM model**

27 The OSPM model contains the so-called roof parameter (fRoof), which is used to relate the measured or
28 modelled wind speed at a meteorological mast with the wind speed at roof level. The value of this parameter
29 depends on building and roughness situations around the meteorological station. In this study, we have used the
30 roof parameter value of 0.4 , which is based on the model-measurement studies conducted in Copenhagen by
31 Ketzal et al (2012).

32 However, some other studies have suggested a higher value of 0.6 (OSPM FAQ, 28.03.2017). The numerical
33 computations showed that using the higher value of the fRoof parameter would not improve agreement between
34 model predictions and measurements for Håmeentie site. The mean street increment PM_{10} concentration over the
35 two years (2009 and 2014) was approximately 26% lower, using this higher value of the roof parameter,
36 compared to that with fRoof value of 0.4 .

1 3.3 Impact of the reductions in studded tyre use and road maintenance measures

2 We have assessed numerically the impact of changes in selected traction control measures on the non-exhaust
 3 street increments of PM_{10} . The selected numerical cases are presented in Table 6. In the so-called reference case,
 4 we have assumed that all reported road maintenance activities have been done, and the maximum share of the
 5 light-duty vehicles using studded tyres is equal to the observed value. The maximum observed share of vehicles
 6 using studded tyres (80%) was numerically reduced to 50% (ST 50%), 30% (ST 30%) and 0% (no ST). We also
 7 assumed that all recorded sanding and salting events would not have been done in 'no Sand' and 'no Salt' case,
 8 respectively. Both road dust emission models (NORTRIP and FORE) were applied to assess the impacts of the
 9 reduced fraction of studded tyres and the impact of traction sanding. The impact of traction salt was studied only
 10 using the NORTRIP model.

11 The computed changes in the modelled non-exhaust increments of PM_{10} , relative to the reference case are
 12 presented in Fig. 5. The largest reductions of concentrations can be achieved by reducing the use of studded tyres
 13 in favour of the non-studded winter tyres. For the most extreme case with no studded tyres in traffic, the average
 14 decreases in the non-exhaust street increments of PM_{10} over four year period were 39% and 40% for the
 15 NORTRIP and FORE model, respectively. In case where the reference maximum studded tyre share was reduced
 16 by 30%, average decreases in modelled annual non-exhaust street increments of PM_{10} were 16% (NORTRIP) or
 17 17% (FORE). Varying effect of the same studded tyre reduction between different years can be attributed to the
 18 changing meteorological conditions that influence suspension emission and road dust removal processes as well
 19 as the dispersion conditions.

20 The impact of studded tyre reductions can be further enhanced by improving the quality of road surfaces. Larger
 21 aggregate sizes that are made from rocks more resistant to wear in the asphalt roads, or the use of alternative
 22 road surfaces can reduce PM_{10} emissions (Gustafsson et al. 2009; Gustafsson and Johansson 2012).

23 The number of reported sanding events in Hämeentie was 9 in 2007 and 18 in 2009 and 2014 (Table 2). In year
 24 2008, all traction control was done by salting. All sanding events occurred during January and February. Salting
 25 was extensively used between January and March during the study period with 17 to 49 salting events per year.
 26 The results for the 'no Sand' and 'no Salt' cases give an indication of the overall contribution of implemented
 27 sanding and salting to the non-exhaust street increments of PM_{10} in Hämeentie. Without taking into account
 28 reported sanding events, both road dust emission models predict similar changes in the modelled street increment
 29 concentrations averaged over the four years; however, with different seasonal variation. The modelled
 30 contribution of sanding to the annual mean non-exhaust street increment of PM_{10} ranges from 4 to 20%,
 31 depending on the year and the model considered. The NORTRIP model predicts highest impact of sanding in
 32 spring months and indicates that sanding influence extends throughout summer. The impact of sanding predicted
 33 by the FORE model is limited to winter, spring, and autumn owing to model's concept regarding the sanding
 34 implementation.

35 The traction salt is efficiently removed from the street surfaces by drainage and vehicle spray processes, which
 36 are affected by precipitation (Denby et al., 2016). In dry conditions, traction salt can significantly contribute to
 37 the PM_{10} concentrations. The predicted change in annual mean non-exhaust street increments of PM_{10} after
 38 exclusion of reported salting events ranges from -0.1% to -4%.

39 The results demonstrate that traction sanding and salting are potentially significant sources of the road dust.
 40 However, immediate restrictions in their use could jeopardize traffic fluency and safety. Optimizing spatially and

1 temporally the use of traction control materials can reduce the impacts of road dust on the PM₁₀ concentrations.
2 The impact of traction sand on suspended road dust will depend on the frequency of the sanding operations, and
3 the amount and quality of sanding material. The use of sanding material with high resistance to fragmentation
4 and with removed fine particulate fractions will reduce the contribution of sanding to the suspendable road dust
5 (Tervahattu et al., 2006). From an air quality perspective, substituting sand for less dust forming materials, such
6 as salt, would be beneficial. However, this may not be always possible, due to the prevailing weather conditions,
7 and also in areas, which need to be protected from the negative environmental effects of the conventional
8 traction salt, sodium chloride (NaCl). Alternatives to sodium chloride, such as other chlorine based salts and
9 organic salts, have been tested for use in sensitive groundwater areas in Finland (e.g. Hellstén et al., 2001, 2002);
10 however, their widespread use has not been introduced.

11 **4 Conclusions**

12 We have conducted numerical computations regarding the effectiveness of potential measures to reduce impact
13 of road dust on ambient air PM₁₀ concentrations. The selected measures included reduction of the use of studded
14 tyres in light-duty vehicles and reduction of the use of traction sanding and salting. The effects of these measures
15 were analysed for a street canyon in central Helsinki. Two road dust emission models, NORTRIP and FORE,
16 were used in combination with the street canyon dispersion model OSPM. We have compared predictions of the
17 modelling system with the available street canyon measurements for a period of two years and evaluated
18 variability and uncertainties associated with various modelling approaches. Impact of selected traction control
19 measures was estimated for the non-exhaust street increments of PM₁₀.

20 The NORTRIP model is a process based model that describes wear processes, traffic induced suspension of
21 accumulated road dust and impact of road maintenance activities (salting, sanding, dust binding, cleaning and
22 ploughing) on both dust load and road surface moisture. It includes dependences on vehicle speed, tyre type,
23 vehicle category (light and heavy-duty vehicles) and road surface properties that enable a comprehensive
24 evaluation of the road dust abatement measures. However, the model requires extensive input data that may not
25 be available (such as, e.g. road maintenance data and the properties of the road surface). This may present a
26 challenge in application of the NORTRIP model. On the other hand, the FORE model requires relatively much
27 less input data. However, it relies on the reference emission factors, which need to be computed based on local
28 air quality measurements. The FORE model considers two road dust sources, viz. road wear and traction sand.
29 The model takes into account neither the dependence of emissions on vehicle speed and traffic fleet composition,
30 nor the influence of traction salting and dust control measures (i.e., dust binding and street cleaning). These
31 factors limit the application of the FORE model for evaluation of a wider range of measures to reduce road dust.

32 Both road dust emission models reproduced the seasonal variability of the concentrations of PM₁₀ fairly well, but
33 under-predicted the annual mean values. The street increments of PM₁₀ predicted by the FORE model tended to
34 be higher than the observed values in winter and lower in spring, whereas the NORTRIP model systematically
35 somewhat under-predicted the measured concentrations. The daily mean street increment concentrations
36 predicted by NORTRIP correlated reasonably well with the measured values; the correlation was better than the
37 corresponding one for the FORE model. An underestimation of the studded tyre wear rate in congested low
38 vehicle speed conditions, which are common for the Hämeentie site, could contribute to the under-predictions by

1 the NORTRIP model. In case of the FORE model, the main uncertainties were the underestimation of the
2 baseline emission factor and neglecting the effect of salting, street cleaning and dust binding.

3 There are substantial differences in the structure and mathematical treatments of various processes in the
4 NORTRIP and FORE models. Despite the differences, these models predicted a very similar distribution of
5 changes in the PM₁₀ concentrations for the studied cases.

6 The results demonstrate that changes in the current traction control measures can significantly reduce the impact
7 of road dust on ambient air PM₁₀ concentrations. The largest reductions in PM₁₀ concentrations can be achieved
8 by reducing studded tyre use in favour of the non-studded winter tyres. For instance, in case where the reference
9 maximum studded tyre share was reduced by 50 %, average decrease in the non-exhaust street increment of
10 PM₁₀ was from 16 % to 34 %, depending on the model used and the year considered. However, the effectiveness
11 of the studded tyre reductions is also dependent on other factors, such as the quality of the road surfaces, vehicle
12 speed and vehicle driving cycles. In addition, both the fluency and safety of vehicular traffic and the
13 implementation of street maintenance measures are substantial economic issues. The reduction of the use of
14 studded tyres would be beneficial also due to the reduced costs for the repairing of road surfaces.

15 Modelled contribution of traction sanding to the annual mean non-exhaust street increment of PM₁₀ during the
16 study period ranged from 4 % to 20 %. The impact of traction salting was estimated using only the NORTRIP
17 model. Completely removing street salting reduced the non-exhaust street increment of PM₁₀ from 1% to 4% on
18 annual level.

19 Based on the results, optimizing the use of traction control materials can reduce impact of road dust on PM₁₀
20 concentrations. For example, substituting sanding for a less dust forming materials such as salt, whenever
21 possible, would reduce the amount of road dust, but this measure would not completely eliminate road dust
22 emissions. Additionally, the contribution of sanding can further be reduced by choosing the sand materials that
23 are wear resistant and do not contain the finer grain fractions.

24 We have demonstrated that there is a substantial potential for reducing the impact of road dust on ambient air
25 PM₁₀ concentrations, by changing the traction control measures of both vehicles (studded tyre use) and street and
26 road maintenance (sanding and salting). The results presented here can be used to support the development of
27 feasible strategies for reducing the high springtime particulate matter concentrations originated from the road
28 dust.

29
30
31
32
33
34
35
36
37
38

1 **Appendix A: Results of the statistical analyses for the daily mean street increments of PM₁₀ for Hämeentie**
 2 **in 2009 and 2014.**

3 Table A1 presents the statistical values for daily mean street increment PM₁₀ concentrations for 2009 and 2014
 4 calculated on annual and seasonal level. The error of both models is lowest during summer and highest for
 5 winter (FORE) or spring (NORTRIP). The RMSE indicates substantial inaccuracies in daily PM₁₀ street
 6 increment concentrations for both models.

7
 8 Table A1. Statistical values for modelled daily mean street increment of PM₁₀ for the NORTRIP and FORE
 9 models for 2009 and 2014, calculated on annual and seasonal level.

NORTRIP 2009						
Statistical parameter		Winter	Spring	Summer	Autumn	Annual
RMSE	Root mean square error	8.4	15.4	3.1	5.5	8.7
IA	Index of agreement	0.50	0.62	0.72	0.49	0.67
F2	Factor-of-two	54	42	75	69	62
R ²	Coefficient of determination	0.06	0.61	0.56	0.15	0.51
FB	Fractional bias	-0.44	-0.74	-0.41	-0.50	-0.57
AvgCp	Average of predicted data	4.6	9.4	4.4	3.7	5.3
AvgCo	Average of observed data	7.2	20.5	6.7	6.1	9.6
N	Number of data points	71	78	122	89	360
FORE 2009						
Statistical parameter		Winter	Spring	Summer	Autumn	Annual
RMSE	Root mean square error	13.7	13.4	2.7	4.7	9.2
IA	Index of agreement	0.21	0.70	0.78	0.63	0.67
F2	Factor-of-two	42	56	80	69	64
R ²	Coefficient of determination	0.00	0.52	0.43	0.23	0.25
FB	Fractional bias	0.55	-0.49	-0.20	-0.08	-0.13
AvgCp	Average of predicted data	12.7	12.4	5.5	5.6	8.4
AvgCo	Average of observed data	7.2	20.5	6.7	6.1	9.6
N	Number of data points	71	78	122	89	360
NORTRIP 2014						
Statistical parameter		Winter	Spring	Summer	Autumn	Annual
RMSE	Root mean square error	9.6	10.6	4.1	9.7	8.5
IA	Index of agreement	0.47	0.62	0.63	0.47	0.58
F2	Factor-of-two	45	44	62	25	45
R ²	Coefficient of determination	0.29	0.44	0.44	0.10	0.32
FB	Fractional bias	-1.11	-0.76	-0.54	-1.17	-0.83
AvgCp	Average of predicted data	2.2	6.9	4.4	2.2	3.9
AvgCo	Average of observed data	7.7	15.3	7.6	8.5	9.5
N	Number of data points	73	78	122	92	365
FORE 2014						
Statistical parameter		Winter	Spring	Summer	Autumn	Annual
RMSE	Root mean square error	10.5	8.3	3.8	8.7	7.8
IA	Index of agreement	0.42	0.74	0.66	0.48	0.64
F2	Factor-of-two	36	62	68	49	55
R ²	Coefficient of determination	0.02	0.41	0.32	0.15	0.20
FB	Fractional bias	0.16	-0.36	-0.39	-0.80	-0.34

AvgCp	Average of predicted data	9.0	10.7	5.1	3.6	6.7
AvgCo	Average of observed data	7.7	15.3	7.6	8.5	9.5
N	Number of data points	73	78	122	92	365

1

2 *Author contributions.* AS, MK², JK and KK designed this study. AS performed NORTRIP model calculation,
 3 numerical analyses and wrote a first draft of the paper. KH performed FORE and OSPM model calculations. JK
 4 and MK² significantly contributed in revision of the manuscript. AK⁴ and JVN provided supporting air quality
 5 data. KK, BRD, AK² and MK⁵ provided professional comments to improve the manuscript.

6

7 Acknowledgements

8 This study has been a part of the research projects “Non-exhaust road traffic induced particle emissions -
 9 Evaluating the effect of mitigation measures on air quality and exposure (NORTRIP-2)”, funded by the Nordic
 10 Council of Ministers (Project number KOL-1408), “Understanding the link between Air pollution and
 11 Distribution of related Health Impacts and Welfare in the Nordic countries (NordicWelfAir)”, funded by
 12 Nordforsk, (Project #75007) and “Global health risks related to atmospheric composition and weather
 13 (GLORIA)” and “Environmental impact assessment of airborne particulate matter: the effects of abatement and
 14 management strategies (BATMAN)”, funded by the Academy of Finland.

15 References

16 Berkowicz, R.: OSPM-a parameterised street pollution model, *Environmental Monitoring and Assessment*, 65,
 17 323-331, 2000.

18 Berkowicz, R., Olesen, R.H., Jensen, S.S.: User’s Guide to WinOSPM Operational Street Pollution Model Draft
 19 - March 2003, NERI Technical Report, no. &&, Ministry of the Environment, National Environmental Research
 20 Institute, 2003.

21 Boulter, P. G.: A review of emission factors and models for road vehicle non-exhaust particulate matter,
 22 Wokingham, UK, TRL Limited, TRL Report PPR065, [http://uk-](http://uk-air.defra.gov.uk/reports/cat15/0706061624_Report1_Review_of_Emission_Factors.PDF)
 23 [air.defra.gov.uk/reports/cat15/0706061624_Report1_Review_of_Emission_Factors.PDF](http://uk-air.defra.gov.uk/reports/cat15/0706061624_Report1_Review_of_Emission_Factors.PDF), 2005.

24 Denby, B.R., Sundvor, I., Johansson, C., Pirjola, L., Ketzel, M., Norman, M., Kupiainen, K., Gustafsson, M.,
 25 Blomqvist, G., Omstedt, G.: A coupled road dust and surface moisture model to predict non-exhaust road traffic
 26 induced particle emissions (NORTRIP). Part 1: road dust loading and suspension modelling, *Atmospheric*
 27 *Environment*, 77, 283-300, <https://doi.org/10.1016/j.atmosenv.2013.04.069>, 2013a.

28 Denby, B.R., Sundvor, I., Johansson, C., Pirjola, L., Ketzel, M., Norman, M., Kupiainen, K., Gustafsson, M.,
 29 Blomqvist, G., Kauhaniemi, M., Omstedt, G.: A coupled road dust and surface moisture model to predict non-
 30 exhaust road traffic induced particle emissions (NORTRIP). Part 2: Surface moisture and salt impact modelling,
 31 *Atmospheric Environment*, 81, 485-503, <https://doi.org/10.1016/j.atmosenv.2013.09.003>, 2013b.

- 1 Denby, B.R., Ketznel, M., Ellermann, T., Stojiljkovic, A., Kupiainen, K., Niemi, J.V., Norman, M., Johansson,
2 C., Gustafsson, M., Blomqvist, G., Janhäll, S., Sundvor, I.: Road Salt Emissions: A comparison of measurements
3 and modelling using the NORTRIP road dust emission model, *Atmospheric Environment*, 141, 508-522,
4 <https://doi.org/10.1016/j.atmosenv.2016.07.027>, 2016.
- 5 EEA, Emissions of air pollutants from transport: [https://www.eea.europa.eu/data-and-maps/indicators/transport-](https://www.eea.europa.eu/data-and-maps/indicators/transport-emissions-of-air-pollutants-8/transport-emissions-of-air-pollutants-6)
6 [emissions-of-air-pollutants-8/transport-emissions-of-air-pollutants-6](https://www.eea.europa.eu/data-and-maps/indicators/transport-emissions-of-air-pollutants-8/transport-emissions-of-air-pollutants-6), last access: 8 May 2019, 2018.
- 7 Gustafsson, M., Blomqvist, G., Gudmundsson, A., Dahl, A., Jonsson, P., Swietlicki, E.: Factors influencing
8 PM10 emissions from road pavement wear, *Atmospheric Environment*, 43 (31), 4699-4702,
9 <https://doi.org/10.1016/j.atmosenv.2008.04.028>, 2009.
- 10 Gustafsson, M. and Johansson, C.: Road pavements and PM10, Summary of the results of research funded by the
11 Swedish Transport Administration on how the properties of road pavements influence emissions and the
12 properties of wear particles, Trafikverket, Report 2012:241, [https://trafikverket.ineko.se/Files/sv-](https://trafikverket.ineko.se/Files/sv-SE/11167/RelatedFiles/2012_241_Road_pavements_and_PM10.pdf)
13 [SE/11167/RelatedFiles/2012_241_Road_pavements_and_PM10.pdf](https://trafikverket.ineko.se/Files/sv-SE/11167/RelatedFiles/2012_241_Road_pavements_and_PM10.pdf), 2012.
- 14 Hellstén, P. and Nystén, T.: Vaihtoehtoisten liukkaudentorjunta-aineiden kemialliset reaktiot pohjaveteen
15 kulkeutumisessa, Helsinki, Finnish Environmental Institute, *The Finnish Environment*, 515, 77p., in Finnish,
16 summary in English, ISBN 952-11-0996-3 (PB.), ISBN 952-11-0997-1 (PDF), ISSN 1238-7312,
17 <http://hdl.handle.net/10138/40642>, 2001.
- 18 Hellstén, P., Nystén, T., Kokkonen, P., Valve, M., Laaksonen, T., Määttä, T. ja Miettinen, I.: Vaihtoehtoisten
19 liukkaudentorjunta-aineiden kulkeutuminen pohjaveteen. Helsinki, Finnish Environmental Institute, *The Finnish*
20 *Environment*, 552. 63p., in Finnish, summary in English, ISBN 952-11-1126-7 (PB.), ISBN 952-11-1127-5
21 (PDF), ISSN 1238-7312., <http://hdl.handle.net/10138/40453>, 2002.
- 22 HSY and Metropolitan Area Municipalities, Regional Land Cover Dataset: tree data, File service of open data,
23 Helsinki Region Environmental Services Authority (HSY): [https://www.hsy.fi/en/experts/regional-](https://www.hsy.fi/en/experts/regional-data/Pages/default.aspx)
24 [data/Pages/default.aspx](https://www.hsy.fi/en/experts/regional-data/Pages/default.aspx), <https://kartta.hsy.fi/> (in Finnish), last access: 13 May 2019, 2014.
- 25 Jacobson, T. and Wågberg, L. G.: Developing and upgrading of a prediction model of wear caused by studded
26 tyres and an overview of the knowledge of the factors influencing the wear – Version 3.2.03, Linköping, The
27 Swedish National Road and Transport Research Institute, VTI notat 7-2007, in Swedish, summary in English,
28 [http://www.vti.se/en/publications/developing-and-upgrading-of-a-prediction-model-of-wear-caused-by-studded-](http://www.vti.se/en/publications/developing-and-upgrading-of-a-prediction-model-of-wear-caused-by-studded-tyres-and-an-overview-of-the-knowledge-of-the-factors-influencing-the-wear--version-3203/)
29 [tyres-and-an-overview-of-the-knowledge-of-the-factors-influencing-the-wear--version-3203/](http://www.vti.se/en/publications/developing-and-upgrading-of-a-prediction-model-of-wear-caused-by-studded-tyres-and-an-overview-of-the-knowledge-of-the-factors-influencing-the-wear--version-3203/), 2007.
- 30 Kauhaniemi, M., Kukkonen, J. Härkönen J., Nikmo J., Kangas L., Omstedt G., Ketznel M., Kousa A., Haakana
31 M., Karppinen A.: Evaluation of a road dust suspension model for predicting the concentrations of PM10 in a
32 street canyon, *Atmospheric Environment*, 45, 3646-3654, <https://doi.org/10.1016/j.atmosenv.2011.04.055>, 2011.
- 33 Kauhaniemi, M., Stojiljkovic, A., Pirjola, L., Karppinen, A., Härkönen, J., Kupiainen, K., Kangas, L., Aarnio,
34 M.A., Omstedt, G., Denby, B.R. & Kukkonen, J.: Comparison of the predictions of two road dust emission

- 1 models with the measurements of a mobile van, *Atmospheric Chemistry and Physics*, 14, 9155-9169: 15s,
2 <https://doi.org/10.5194/acp-14-9155-2014>, 2014.
- 3 Ketzel, M., Jenssen, S.S., Brandt, J., Ellermann, T., Olesen, H.R., Berkowich, R., Hertel, O.: Evaluation of the
4 Street Pollution Model OSPM for Measurements at 12 Streets Stations Using a Newly Developed and Freely
5 Available Evaluation Tool, *Journal of Civil & Environmental Engineering*, S1:004, doi:10.4172/2165-784X.S1-
6 004, 2012.
- 7 Kukkonen, J., Salmi, T., Saari, H., Konttinen, M. and Kartastenpää, R.: Review of urban air quality in Finland,
8 *Boreal Environment Research*, Vol. 4, No. 1, pp. 55-65, 1999.
- 9 Kukkonen, J., Kangas, L., Kauhaniemi, M., Sofiev, M., Aarnio, M., Jaakkola, J.J.K., Kousa, A., and Karppinen,
10 A.: Modelling of the urban concentrations of PM_{2.5} for a period of 35 years, for the assessment of lifetime
11 exposure and health effects, *Atmospheric Chemistry and Physics*, 18, 8041–8064, [https://doi.org/10.5194/acp-](https://doi.org/10.5194/acp-18-8041-2018)
12 18-8041-2018, 2018.
- 13 Kulovuori, S., Ritola, R., Stojiljkovic, A., Kupiainen, K., Malinen, A.: Katupölyn lähteet, päästövähennyskeinot
14 ja ilmanlaatuvaikutukset – Tuloksia KALPA-tutkimushankkeesta 2015–2018, HSY publications 1/2019, in
15 Finnish, summary in English, [https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/1-2019-katupölyn-](https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/1-2019-katupölyn-lahteet-paastovahennyskeinot-ja-ilmanlaatuvaikutukset-KALPA-2015-2018.pdf)
16 [lahteet-paastovahennyskeinot-ja-ilmanlaatuvaikutukset-KALPA-2015-2018.pdf](https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/1-2019-katupölyn-lahteet-paastovahennyskeinot-ja-ilmanlaatuvaikutukset-KALPA-2015-2018.pdf), 2019.
- 17 Kupiainen, K.: Road dust from pavement wear and traction sanding, *Monographs of Boreal Environment*
18 *Research*, 26, 50 p., <http://hdl.handle.net/10138/39334>, 2007.
- 19 Kupiainen, K., Ritola, R., Stojiljkovic, A., Pirjola, L., Malinen, A., Niemi, J.: Contribution of mineral dust
20 sources to street side ambient and suspension PM₁₀ samples, *Atmospheric Environment*, 147, 178-189,
21 <https://doi.org/10.1016/j.atmosenv.2016.09.059>, 2016.
- 22 Malkki M., Niemi J., Lounasheimo J., Myllynen M., Julkunen A., Loukkola K.: Ilmanlaatu pääkaupunkiseudulla
23 vuonna 2009, HSY publications 2/2010, in Finnish,
24 [https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/2_2010_ilmanlaatu_paakaupunkiseudulla_vuonna](https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/2_2010_ilmanlaatu_paakaupunkiseudulla_vuonna_2009_web.pdf)
25 [2009_web.pdf](https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/2_2010_ilmanlaatu_paakaupunkiseudulla_vuonna_2009_web.pdf), 2010.
- 26 Malkki, M. and Loukkola, K.: Ilmanlaatu pääkaupunkiseudulla vuonna 2014, HSY publications 6/2015, in
27 Finnish, summary in English,
28 [https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/6_2015_Ilmanlaatu_paakaupunkiseudulla_vuonn](https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/6_2015_Ilmanlaatu_paakaupunkiseudulla_vuonna_2014.pdf)
29 [a_2014.pdf](https://www.hsy.fi/sites/Esitteet/EsitteetKatalogi/Julkaisusarja/6_2015_Ilmanlaatu_paakaupunkiseudulla_vuonna_2014.pdf), 2015.
- 30 Mäkelä, K.: LIPASTO. Tieliikenne kunnittaiset päästöt, Road traffic emissions for municipalities, in Finnish,
31 <http://lipasto.vtt.fi/liisa/kunnat.htm>, 30.10.2015, 2015.
- 32 MML, Land scanning data, File service of open data, National Land Survey of Finland:
33 <http://www.maanmittauslaitos.fi/en>, last access: 7 November 2012

- 1 Omstedt, G., Bringfelt, B., Johansson, C.: A model for vehicle-induced non-tailpipe emissions of particles along
2 Swedish roads, *Atmospheric Environment*, 39, 6088-6097, <https://doi.org/10.1016/j.atmosenv.2005.06.037>,
3 2005.
- 4 OSPM FAQ: <http://envs.au.dk/en/knowledge/air/models/ospm/faq/>, last access: 28.03.2017
- 5 REDUST, Demonstration test final report: Main results and conclusions, Deliverable product of the REDUST
6 LIFE+ project Actions 1 and 2, 15.8.2014., [http://www.ymk-projektit.fi/redust/files/2015/02/REDUST-Action-](http://www.ymk-projektit.fi/redust/files/2015/02/REDUST-Action-1-2-final-report.pdf)
7 [1-2-final-report.pdf](http://www.ymk-projektit.fi/redust/files/2015/02/REDUST-Action-1-2-final-report.pdf), 2014.
- 8 Tele Atlas NV: Mapinfo, StreetPro, Pitney Bowes Software Limited, United Kingdom, 2012.
- 9 Tervahattu H., Kupiainen K.J., Räisänen M., Mäkelä T., Hillamo R.: Generation of Urban Road Dust from Anti-
10 Skid and Asphalt Concrete Aggregates, *Journal of Hazardous Materials*, 132, 30-46,
11 <https://doi.org/10.1016/j.jhazmat.2005.11.084>, 2006.

1 Table 1. Summary of traffic data at Hämeentie for four years.

Year	Annual average daily traffic (vehicles day⁻¹)	Share of heavy-duty vehicles (%)	Mean speed (km h⁻¹)
2007	11400	29	27
2008	9700	29	27
2009	10110	29	27
2014	9050	30	25

2

3

4 Table 2. The number of road maintenance measures in Hämeentie for four years. Number of ploughing events
5 was computed using the NORTRIP model.

Year	Sanding events	Traction salting (NaCl)	Dust binding (CaCl₂)	Street cleaning	Ploughing
2007	9	21	1	2	7
2008	0	49	4	1	14
2009	18	40	3	1	19
2014	18	17	10	1	9

6

7

8 Table 3. The wear and suspension rates for the light-duty vehicles and the fraction of wear material in the size
9 range of PM₁₀ used in the NORTRIP model. The reference speed is 70 km h⁻¹ for wear and 50 km h⁻¹ for PM₁₀
10 fraction and suspension.

	Studded tyres	Winter tyres	Summer tyres	PM₁₀ fraction (%)
Road wear (g km ⁻¹ veh ⁻¹)	2.88	0.15	0.15	28
Tyre wear (g km ⁻¹ veh ⁻¹)	0.1	0.1	0.1	10
Brake wear (g km ⁻¹ veh ⁻¹)	0.01	0.01	0.01	80
Road dust suspension rate (veh ⁻¹)	5.0x10 ⁻⁶	5.0 x10 ⁻⁶	5.0 x10 ⁻⁶	-

11

12

13 Table 4. The vehicular exhaust particulate matter emission factors (g km⁻¹ veh⁻¹) for four years, based on the
14 LIPASTO emission modelling system.

Vehicle type	2007	2008	2009	2014
Personal cars	0.03	0.03	0.02	0.01
Vans	0.15	0.14	0.14	0.10
Buses	0.29	0.25	0.21	0.12
Lorries, no trailer	0.19	0.16	0.13	0.09
Lorries with trailer	0.55	0.47	0.35	0.23

15

16

1 Table 5. Annual and seasonal mean observed and modelled street increments of PM₁₀ (µg m⁻³) for Hämeentie in
 2 2009 and 2014.

Year		Winter	Spring	Summer	Autumn	Annual mean
2009	Observed	7.8	20.1	6.9	6.4	10.1
	NORTRIP	5.3	9.4	4.5	3.9	5.7
	FORE	13.4	12.4	5.6	6.0	8.5
2014	Observed	8.2	15.7	7.7	9.0	10.2
	NORTRIP	2.3	7.2	4.5	2.3	4.2
	FORE	9.2	11.2	5.3	3.7	8.0

3


4

5 Table 6. The selected numerical cases with maximal shares of light-duty vehicles using studded tyres and road
 6 maintenance measures for traction control considered by the two road dust emission models. The symbol +
 7 refers to 'included' and – to 'not included'.

Model	Case	Abbreviation	Studded tyre share	Sanding	Salting
NORTRIP	1 Reference	Ref	80 %	+	+
	2 Studded tyre share 50 %	ST 50 %	50 %	+	+
	3 Studded tyre share 30 %	ST 30 %	30 %	+	+
	4 Studded tyre share 0 %	ST 0 %	-	+	+
	5 No sanding	no Sand	80 %	-	+
	6 No salting	no Salt	80 %	+	-
FORE	1 Reference	Ref	80 %	+	-
	2 Studded tyre share 50 %	ST 50 %	50 %	+	-
	3 Studded tyre share 30 %	ST 30 %	30 %	+	-
	4 Studded tyre share 0 %	ST 0 %	-	+	-
	5 No sanding	no Sand	80 %	-	-


8

9

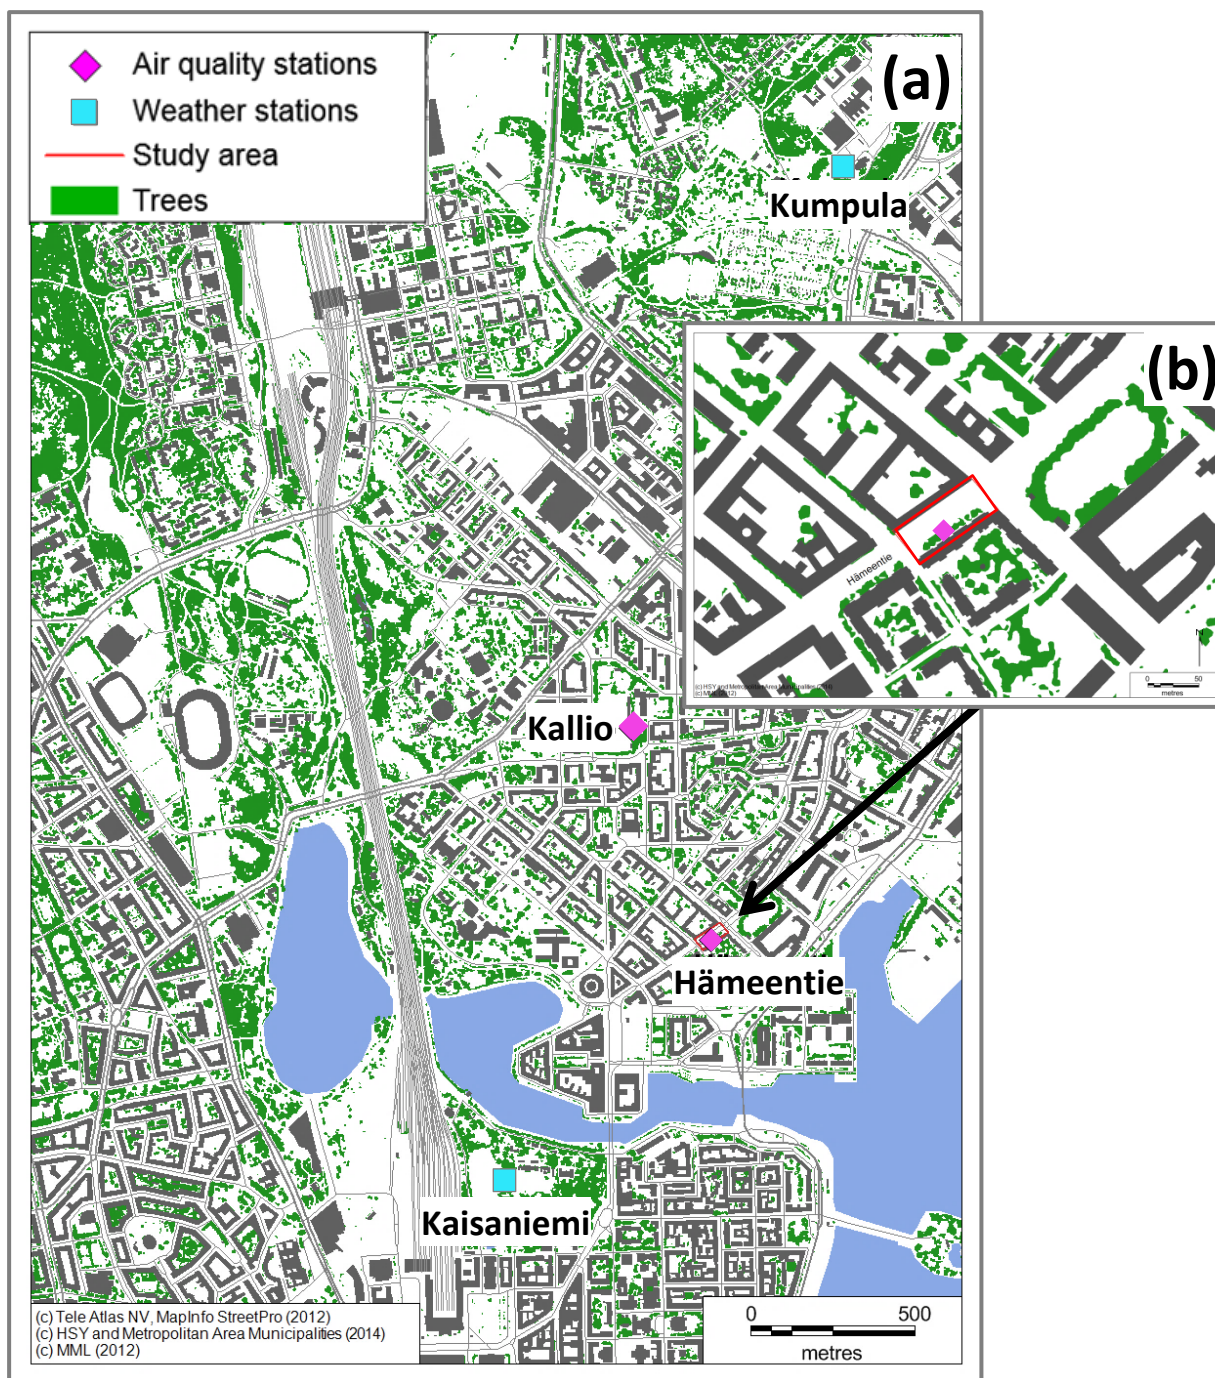

1
 2 Figure 1. a) The locations of studied street segment (red rectangle) at Hämeentie, kerbside (Hämeentie) and
 3 urban background (Kallio) air quality stations (pink diamond), and weather stations (Kumpula and Kaisaniemi)
 4 (blue square) in central Helsinki. Trees have been marked with green circles. b) Close-up view showing building
 5 blocks (marked with grey colour) and trees in the vicinity of the studied street segment.

6
 7
 8

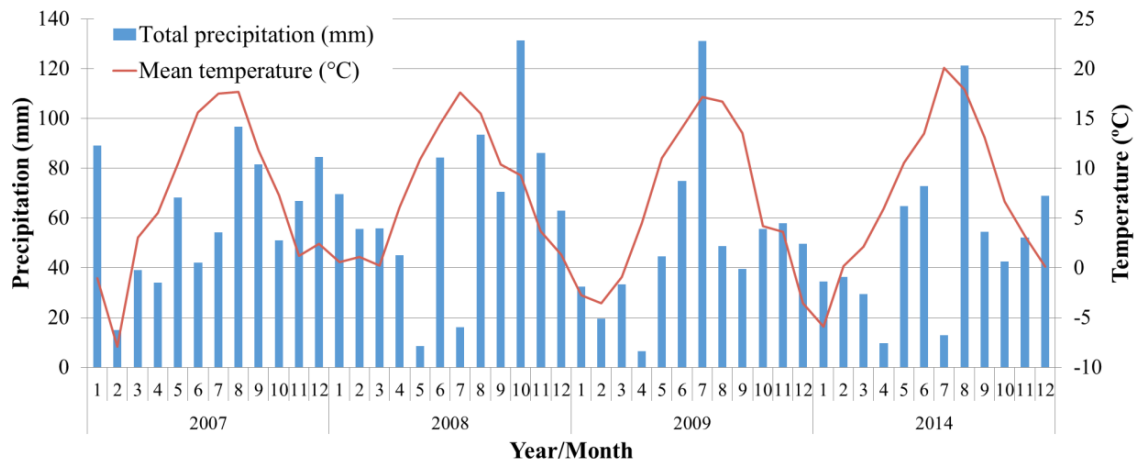


1

2 Figure 2. Monthly mean temperature (°C) and total precipitation (mm) for four years, measured at the
 3 meteorological station of Kaisaniemi.

4

5

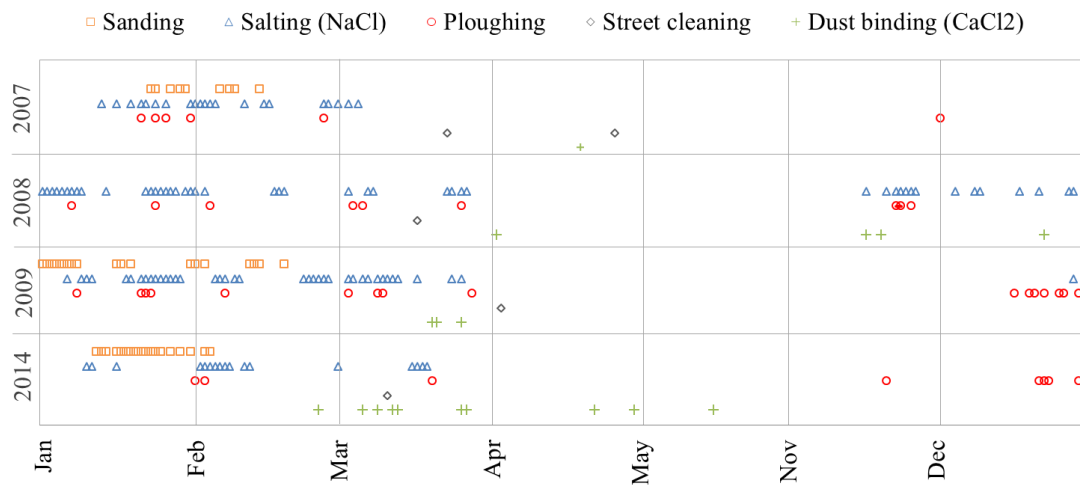

6

7 Figure 3. The approximate timing of the road maintenance measures at Hämeentie for four years. All the relevant
 8 information for the latter part of the year (from October to December) was available only for 2008.

9

10

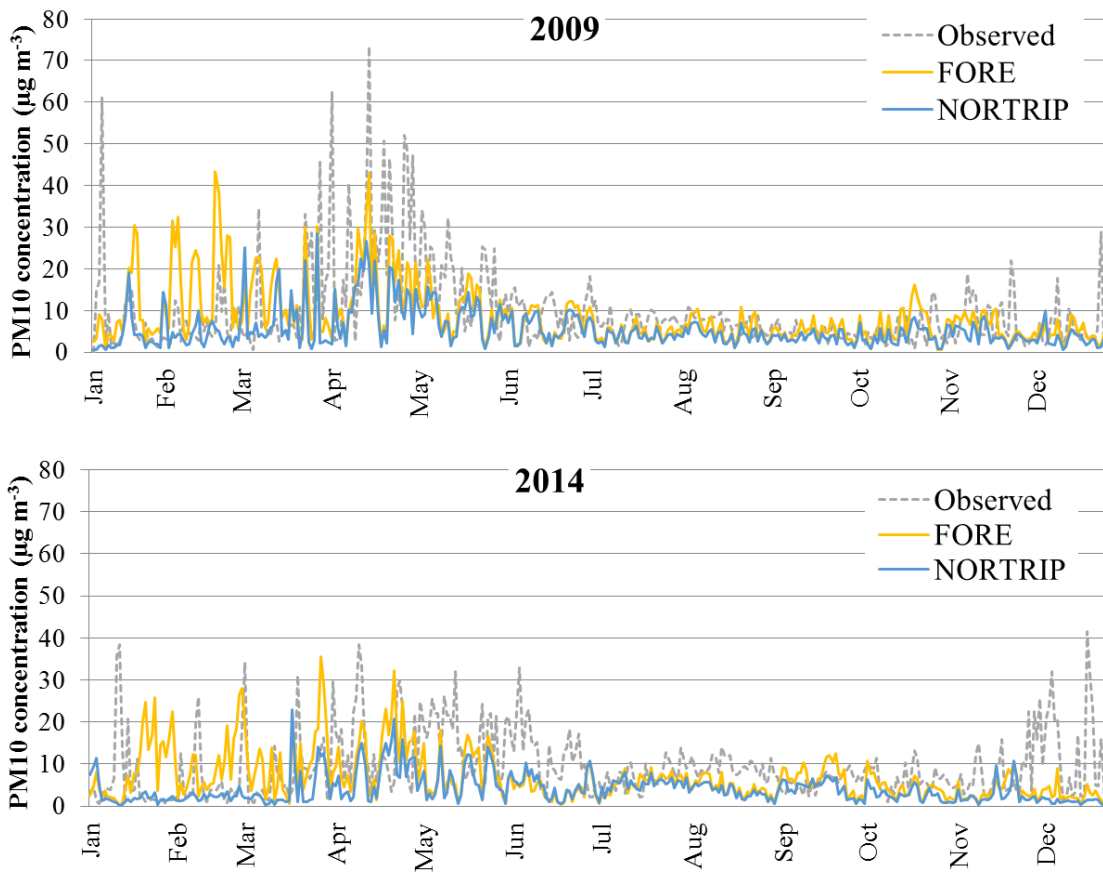


Figure 4. Time series of daily mean observed and modelled street increments of PM₁₀ for Hämeentie for 2009 (upper panel) and 2014 (lower panel).

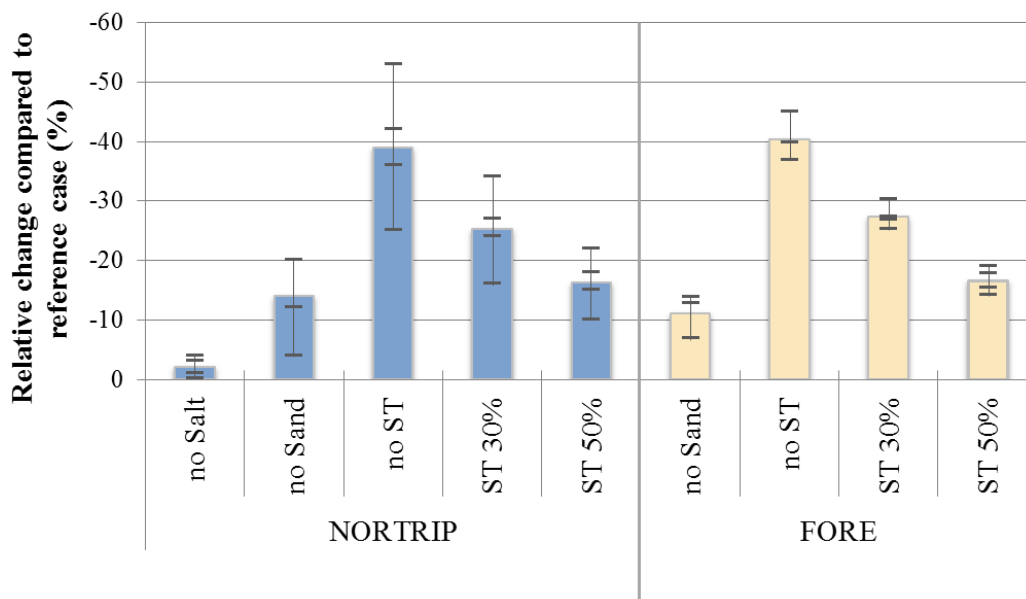


Figure 5. Modelled relative changes in the non-exhaust street increment of PM₁₀ for the cases described in Table 6, averaged over four year period (2007-2009 and 2014). Line markers show values for the individual years.