

Measurement report: Characterization of uncertainties of fluxes and fuel sulfur content from ship emissions at the Baltic Sea

Jari Walden¹, Liisa Pirjola^{2,3}, Tuomas Laurila¹, Juha Hatakka¹, Heidi Pettersson⁴, Tuomas Walden¹, Jukka-Pekka Jalkanen¹, Harri Nordlund², Toivo Truuts⁵, Miika Meretoja⁶, Kimmo K. Kahma⁴

5 ¹Climate Research Program, Finnish Meteorological Institute, Helsinki, Finland

²Department of Automotive and Mechanical Engineering, Metropolia University of Applied Sciences, Vantaa, Finland

³Aerosol Physics Laboratory, Faculty of Engineering and Natural Sciences, Tampere University, Tampere, Finland

⁴Meteorological and Marine Research Program, Finnish Meteorological Institute, Helsinki, Finland

⁵Air Quality Management Department, Estonian Environmental Research Centre, Tallinn, Estonia

10 ⁶City of Turku, Turku, Finland

Correspondence to: Jari Walden (jari.a.walden@gmail.com)

Abstract. Fluxes of gaseous compounds and nanoparticles were studied by micrometeorological methods at Harmaja in the Baltic Sea. The measurement site situated by the ship route to and from the city of Helsinki. The gradient method (GR), was used to measure fluxes of SO₂, NO, NO₂, O₃, CO₂, and N_{tot} (number concentration of nanoparticles). In addition, the flux of CO₂ was also measured by the eddy covariance method (EC). Distortion of the flow field caused by obstacles around the measurement mast was studied by applying a computation fluid dynamic (CFD) model. This was used to establish the corresponding heights in the undisturbed stream, and the wind speed as well as the turbulent parameters at each of the established heights were recalculated for the gradient model. The effect of waves on the boundary layer was taken into consideration, because the Monin–Obukhov theory used to calculate the fluxes is not valid in the presence of swell. Uncertainty budgets for the measurement systems were constructed to judge the reliability of the results. No clear fluxes across the air-sea nor sea-air interface were observed for SO₂, NO, NO₂, NO_x (= NO + NO₂), O₃, and CO₂ by the GR method. A negative flux was observed for N_{tot} with a median value of $-0.23 \times 10^9 \text{ m}^{-2} \text{ s}^{-1}$ with an uncertainty range of 31-41 %. For CO₂, while both positive and negative fluxes were observed, the median value was $-0.0036 \text{ mg m}^{-2} \text{ s}^{-1}$ with uncertainty ranges of 30-60 % for the EC methods. Ship emissions were responsible for deposition of N_{tot} while they had a minor effect on CO₂ deposition. The fuel sulfur content (FSC) of the marine fuel used in ships passing the site was determined from the observed ratio of SO₂ and CO₂ concentrations. A typical value of $0.40 \pm 0.06 \%$, was obtained for FSC, which is in compliance with the contemporary FSC limit value of 1 % in the Baltic Sea Area at the time of measurements. The method to estimate the uncertainty of FSC was found to be accurate enough for use with the latest regulations, 0.1 % (Baltic Sea Area) and 0.5 % (Global Oceans).

1 Introduction

30 The Baltic Sea, due to its nature as a relatively small inland sea with heavy ship traffic and a large population around the sea, is very sensitive to pollutants. Due to the very narrow and shallow strait of Kattegat in Denmark, the exchange of seawater between the North Sea and the Baltic Sea is limited. The load of phosphorus and nitrogen in the Baltic Sea mainly comes through the rivers. The rivers bring in fresh water, maintaining the salinity of the seawater in the Baltic Sea at 1/10 of that of the ocean. In addition, the airborne deposition of pollutants from the emissions of ships, and from industry, are becoming more and more important sources (Hongisto and Joffre, 2005). Ship emissions of most of the air pollutants except CO have decreased during 2006-2018, but greenhouse gas emissions from ships have remained stable throughout the period, regardless of the growth of ship transport reported in tonne kilometres (HELCOM, 2019). Ship emissions enter the sea mostly by indirect deposition of sulfur and nitrogen compounds through chemical conversion in the atmosphere (de Leeuw et al., 2003; Hongisto et al., 2005; Hongisto, 2014), or by direct deposition from the gas phase. In the Baltic Sea few measurement facilities to measure the gas exchange between the sea-air interface by micrometeorological methods has been set up (Smedman et al. 1999, Honkanen et al. 2018). The need for reduction of atmospheric pollutants in the emissions has been taken seriously within the International Maritime Organization (IMO), which launched the MARPOL agreement for reduction of ship emissions, Annex VI (IMO, 1997). The latest revision includes more stringent emission limits for NO_x and SO₂. In spite of these abatement regulations, the ship emissions of IMO registered vehicles and non-IMO registered vehicles show constant or slightly increasing trends for the compounds NO_x, SO₂, and PM_{2.5}, as well as a clearly increasing trend for CO. Once the stringent regulation for fuel sulfur content (FSC) in marine fuel came into power in 2014, the emissions of SO₂ and PM_{2.5} decreased rapidly at regional and global level (Johansson and Jalkanen, 2016; Johansson et al 2020; Seppälä et al. 2020).

The goal of this study was (i) to measure the gas and nanoparticle exchange between the sea-air interface in marine coastal environment close to the ship routes, (ii) to study the transport and dispersion of the ship plume to the footprint area, (iii) to define the FSC from the ship emission plumes and (iv) to characterise the uncertainty sources of the measurement results. The measurements took place at the Baltic Sea at the small island of Harmaja in the vicinity of the city of Helsinki during the summers of 2011 and 2012. The ship routes between the city of Helsinki and the cities of Tallinn, Stockholm and St. Petersburg pass by the measurement site. The exchange of the gaseous NO_x, SO₂, CO₂, O₃, and fine particles across the sea and atmosphere surface layer was studied by micrometeorological methods. The fluxes of these compounds were measured by the gradient method and the eddy covariance method. In addition, concentration of methane was measured. The major sources of the pollutants were ship emissions, but also trans-boundary emissions as well as emissions from the sea and from the city of Helsinki contributed to the observed concentration levels of the pollutants. The FSC of the ships' marine fuel was determined from the measured concentrations of SO₂ and CO₂ (Cooper et al., 2005) to determine the compliance of the fuel used with the regulation. The ships passing the measurement site were identified by using AIS data (Jalkanen et al., 2009). This method has been demonstrated for defining the FSC in studies (Alföldy et al., 2013; Moldanova et al., 2013; Pirjola et al., 2014). Since recently, it has already been used as an indicator method for purposes of routine control by the authorities in some countries

(Mellquist, 2018). The uncertainty of the flux and FSC measurements were estimated based on the performance of the analyzers and measurement probes for meteorological parameters, for FSC the uncertainty of defining the peak areas of emission plumes from the ships was also taken into account.

65

2 Theoretical background

2.1 Micrometeorological methods

The micrometeorological methods are used for measuring gas exchange across the surface layer (Kaimal and Finnigan, 1994); of these the eddy covariance method (EC) and the gradient method (GR) are commonly used. The use of micrometeorological methods requires criterias to fulfil for the atmospheric conditions being similar for both methods. As such stationarity of the flux measurements, the footprint area and the occurrence of swell were considered. The eddy covariance method is a direct flux measurement method, while the gradient method is an indirect measurement method. In the eddy covariance method the flux of a gas compound is measured by using fast sensors (response better than 10 Hz) to measure the fluctuation of wind velocities and the concentration of chemical compounds. The gradient method overcomes the problems of fast analysis of chemical compounds. On the other hand, this method requires that the atmospheric conditions are stationary, and it also needs very accurate measurements of the parameters it uses (Businger, 1986), as well as the assumption of constant layer flux (Dyer and Hicks, 1970). In this study both the GR and the EC methods were used. The gradient method was used for the gas compounds (oxides of nitrogen, ozone, sulfur dioxide and carbon dioxide) as well as for nanoparticles. The eddy covariance method was used to measure the flux of carbon dioxide. In the GR method the wind speed should be measured at different heights, usually with conventional cup anemometers, while in the EC method the fluctuation of the 3-dimensional wind speed is measured by a sonic anemometer. Short descriptions of both methods are given below, with more emphasis laid on the gradient method.

$$F_c = -K_c \frac{\partial c}{\partial z} \quad (1)$$

where F_c is the flux of the scalar quantity c , K_c is the eddy diffusivity of c ; c means here the gas compounds and particles. The gradient $\partial c / \partial z$ describes the mean concentration of c in the vertical direction z . By definition, the flux is opposite to the gradient, which is positive towards the increasing concentration. The eddy diffusivity for a chemical compound c is calculated by applying an assumption $K_c = K_h$, (Businger 1986) i.e. the eddy diffusivity of gas concentration is the same as that for heat. The eddy diffusivity for heat transfer can be expressed as:

$$K_h = k \cdot u_* \cdot z / \phi_h \quad (2)$$

90 where ϕ_h is the dimensionless temperature gradient. Eq. (1) can now be rewritten with the help of Eq. (2) in the form

$$F_c = -\frac{k u_* z}{\phi_h} \frac{\partial c}{\partial z} \quad (3)$$

where k is the von Karman constant (≈ 0.4), u_* is the friction velocity, c is the concentration of the chemical compound, and the dimensionless temperature gradient ϕ_h is defined as

$$\phi_h = \frac{kz \overline{\partial \theta}}{\theta^* \partial z} \quad (4)$$

95 Here θ is the potential temperature (Panofsky and Dutton, 1987) and θ^* ($= -\theta' w' / u_*$) is the scaling parameter for temperature. The dimensionless potential function, Eq. (4), can be written in a way similar to the momentum ϕ_m and for the concentration of a chemical species (gases and particulate matter) ϕ_i , respectively. The line above the symbol means the average of the quantity over time. Eq. (3) can be presented in the form

$$Fc = - \frac{ku_*(c(z_2) - c(z_1))}{\left(\ln\left(\frac{z_2}{z_1}\right) - \psi_c(\zeta_2) + \psi_c(\zeta_1)\right)} \quad (5)$$

100 where $\psi_c(\zeta_2)$ and $\psi_c(\zeta_1)$ are the integral functions of Eq. (4) over the stability parameter ζ at heights z_2 and z_1 . The dimensionless gradient function Eq. (4) can be represented in the semi-empirical form of Businger and Dyer (Businger et al., 1971; Dyer, 1974), which is used here for the calculations. The stability parameter ζ is related to the Monin-Obukhov (M-O) length, L , according to the relation $\zeta = z/L$, where z is the height from the surface. Eq. (5) is valid in neutral ($\zeta = 0$) and unstable ($\zeta < 1$) conditions, but not in stable conditions ($\zeta \gg 1$) (Panofsky and Dutton, 1987).

105 In Eq. (5) the concentration difference at heights z_2 and z_1 is known from the measurements, but the friction velocity, the integral functions (ψ_c), and the stability parameter are unknown. To solve the turbulence parameters, a method proposed by Paulson (Paulson, 1970) was applied.

On the other hand, the sonic anemometer measures the wind velocity with the help of acoustic pulses that propagate along the path between the sound emitter and the receiver. The three-dimensional wind components, i.e. horizontal (u , v) and vertical (110 w), are measured based on the changes in the acoustic signals along the fixed path lengths. The momentum flux F_m measured by the sonic anemometer can be calculated from the expression

$$F_m = \overline{\rho u' w'} = \rho u_*^2 \quad (6)$$

where ρ is the air density, u' and w' are the fluctuations of the wind speed components measured by the sonic anemometer, and u_* is the friction velocity. The friction velocity can be calculated from the surface stress according to

$$115 \quad u_* = \left(\overline{-u' w'}\right)^{1/2} \quad (7)$$

Once the friction velocity is calculated according to Eq. (7), the Monin-Obukhov length can be expressed:

$$L = - \frac{u_*^3 \theta}{kgQ_{*o}} = - \frac{u_*^3 T}{kg \overline{w' T'}} \quad (8)$$

where θ is the potential temperature (in K), g is the acceleration of gravity and Q_{*o} is the heat flux at the surface. The right side of eq. (8) is an approximation where T is the air temperature, $\overline{w' T'}$ is the heat flux measured by sonic anemometer. The

120 friction velocity and the M-O length obtained from the sonic measurements were used to complete the solutions for the the
GR method. The M-O similarity theory states that the mean and turbulence variables in the surface layer are functions of height
near the ground. General conditions for the M-O similarity theory are horizontally homogeneous surface structure, stationary
(or near stationary) condition (e.g. Foken and Wichura, 1996), constant flux layer and that the atmospheric turbulence is
affecting on the vertical profiles of wind speed, potential temperature and humidity. In addition to the conditions above, at
125 marine environment the M-O similarity theory has been found to be valid over slowly moving waves, which sufficiently
resemble solid ground, but it fails in the presence of swell, i.e. waves that move faster than the wind (e.g. Drennan et al., 1999;
Smedman et al., 1999). The effects of swell on the boundary layer are manifold (Högström et al., 2008, 2013, 2015), the most
conspicuous being the absence of a vertical velocity gradient above a certain wavelength-dependent height. From the results
of Kahma et al. (2016) it can be deduced that the absence of wave components that are faster than the wind speed at 10 m
130 height is typically sufficient to ensure that the waves do not invalidate the M-O similarity theory.

Similarly to the momentum flux in Eq. (6) one can express the vertical flux of a gas compound, e.g. CO₂, by

$$F_c = \overline{\rho_a w' c'} \quad (9)$$

where ρ_a is the density of dry air, and c' is the measured molar fraction of CO₂ ($\mu\text{mol mol}^{-1}$). The commonly used infra-red
analyzers measure the concentration of CO₂ in air normally in wet condition unless an air drier is used in the sampling tube.
135 The widely used method to correct the fluctuations of water vapour and heat is the so called WPL method proposed by Webb
et al. (1980), which is applied in this study.

2.2 NO-O₃-NO₂ chemistry

The chemical interconversion of the system NO - O₃ - NO₂ is well-known and described in the literature (Seinfeld and Pandis,
2012). In the atmosphere the reaction system NO - O₃ - NO₂ forms a cycle where the reaction forming NO₂, i.e., the reaction
140 NO + O₃ is the reverse of the reaction for dissociating NO₂ to form NO, which takes place in the presence of sunlight (at
wavelengths < 420 nm).

The chemical cycle in the NO - O₃ - NO₂ system is fast depending on the concentration of the compounds but also on the
available sunlight (day/night time). The time scale (t) for vertical mixing can be estimated from the relation, $t = z/u^*$. With z
as 10 m and the friction velocity between 0.1 to 0.5 m/s, the time scale for vertical mixing is 20 to 100 s. This is of the same
145 order of magnitude as the time scale of the NO - O₃ - NO₂ system. Therefore, the assumption of vertical constant flux according
to M-O theory is not valid. The approximation $K_h = K_c$ is not correct, and therefore the turbulent exchange coefficient K_c (Eq.
(2)) must be modified. This problem has been discussed by several authors (Lenschow and Delany, 1987; Kramm et al., 1991;
Vila-Guerau de Arellano et al., 1993; Duyzer et al., 1995). Lenschow and Delany (1987) constructed an analytical formulation
for the flux profiles of the NO and NO₂ compounds as a function of height. Duyzer et al (1995) developed a correction
150 procedure for the formula of Lenschow and Delany.

2.3 Estimation of the sulfur content in the marine fuel of the ships

The maximum sulfur content in the marine fuel used on the oceans is defined in the Annex VI of the MARPOL agreement (IMO, 2007). The agreement also defines the sea areas where a lower content of sulfur in the marine fuels must be used. These restricted sea areas, called SO_x Emission Control Areas (SECA) need to be approved by the countries in the proposed SECA. In 2012, the EU updated the directive (Directive 1999/32/EU) to include the more stringent demands from MARPOL Annex VI (Directive 2012/33/EU). According to the MARPOL Annex VI the testing of sulfur content shall be in accordance with the ISO standard, which includes a set of key tests, e.g. to identify potential fuel issues where exceedances of emission may occur (ISO 8217:2012). According to ISO 8217 the standard method for the assessment of the sulfur content shall be in accordance with the ISO 8754 (ISO 8754:2003). The main issue here is that the sample for the analysis of the sulfur content needs to be taken from the bunker fuel at the harbour, not during the cruise.

A method that can be used to determine the FSC during the cruise is to measure the ratio of ΔSO_2 to ΔCO_2 from the emissions, either from the stack or from the ambient air. The ΔSO_2 and ΔCO_2 are the integrated peak concentrations of SO₂ and CO₂ when the background concentrations are subtracted i.e. $\Delta C = C_{\text{peak}} - C_{\text{bg}}$. By assuming that all sulfur in the fuel has been oxidized to SO₂, the FSC can be calculated according to e.g. (10) (Pirjola et al. 2014):

$$FSC (\%) = \frac{\frac{\Delta SO_2 (ppb)}{10^3} \cdot M_S}{\Delta CO_2 (ppm) \cdot M_{CO_2}} \cdot EF_{CO_2} \cdot 100 = \frac{\Delta SO_2 (ppb)}{\Delta CO_2 (ppm)} \cdot 0.23 \quad (10)$$

where M_S and M_{CO_2} are the mole masses of S and CO₂, and EF_{CO_2} is the emission factor for CO₂. Here the value of 3.107 kg CO₂ per kg fuel burned was used (Petzold et al., 2008).

Eq. (10) yields lower limits for FSC (Williams et al., 2009) since a small part of the sulfur in the fuel, less than 6 % (Alföldy et al., 2013) or 0.7 % (Moldanova et al., 2013), might be emitted as SO₃ or converted to H₂SO₄ by homogeneous and heterogeneous pathways in the atmosphere.

2.4 Uncertainty estimates

The uncertainty in the measurements is one of the most important issues to solve when analysing the results. The measurements are influenced by a number of error sources that need to be identified and quantified, e.g. the performance characteristics of gas and particle analyzers and the different probes and sensors used for the measurements. Besides the uncertainties associated with the instruments, the EC and GR methods are very sensitive with respect to the topography and the atmospheric conditions. In particular, the stochastic nature of turbulence (Lenschow et al., 1994; Rannik et al., 2006) and the noise present in the measured signals cause random errors (Lenschow and Kristensen, 1985, Rannik et al., 2016), which are difficult to estimate. However, a number of error sources have been identified that have an influence on the results of flux measurement by the EC method (Businger 1986, Rinne et al 2000). The statistical error of an EC estimate is usually quite large.

The uncertainty sources that contribute to the uncertainty of the flux results by the GR method are systematic and random in nature. Calibration of the response of all instruments, correction of the humidity for CO₂ analyzers and cross-calibration due to sampling tubes of the analyzers are systematic errors. All the uncertainty sources (systematic and random) that contribute to the results need to be corrected. Even after correction for all systematic errors, there is always a residual component that needs to be included in the uncertainty budget. The residuals are estimated according to the best knowledge available. The variance of the standard uncertainty can be expressed in the form (JCGM, 2008)

$$u_c^2 = \sum_{i=1}^n \left(\frac{\delta f}{\delta w_i}\right)^2 u_i^2 + 2 \sum_{i=1}^{n-1} \sum_{j=i+1}^n \frac{\delta f}{\delta w_i} \frac{\delta f}{\delta w_j} u_i u_j \rho_{ij}, \quad (11)$$

where the square root of u_c^2 is the combined standard uncertainty. It includes all the uncertainty components u_i (standard uncertainties) of the function f describing the measurement quantity in question for each of the parameters w_i associated with the results of the measurements. The covariance term (the second term on the right-hand side) in Eq. (11) needs to be taken into account when it is about the same order of magnitude as the independent part in Eq. (11). Once the combined standard uncertainty has been determined, the expanded uncertainty U can be calculated according to $U = k \cdot u_c$. Here a factor of $k = 2$ was used representing the 95 % confidence level of a normal distribution. In the case of the gradient method the uncertainty sources contributing to the fluxes associated with the method can be expressed by applying Eq. (2) to Eq. (11). For simplicity the covariance terms in Eq. (11) have been ignored since they are of the second order of magnitude.

The combined standard uncertainty of the flux of a compound c can then be approximated in the form:

$$\frac{u_c(F_c)^2}{F_c^2} = \frac{u(u_*)^2}{u_*^2} + \frac{u(\psi_h)^2}{(\ln(\frac{z_2}{z_1}) - \Delta\psi_h)^2} + \frac{u(\Delta c)^2}{\Delta c^2} + \frac{u(z)^2}{(\ln(\frac{z_2}{z_1}) - \Delta\psi_h)^2} \left(\frac{1}{z_1^2} + \frac{1}{z_2^2}\right) + u(ws)^2. \quad (12)$$

The standard uncertainties are calculated according to Eq. (11) for each of the contributors in Eq. (12): the friction velocity, the integral functions of the Businger-Dyer functions, the concentrations of gases and particles, as well as the measurement heights and the wind speed (ws). The estimated relative uncertainties for each of the contributing sources of uncertainty are presented in Supplementary Table S1.

The combined standard uncertainty of the fuel sulfur content u_c (FSC) is estimated by applying Eq. (10) to Eq. (11), and it can be expressed in the form:

$$\left(\frac{u_c(FSC)}{FSC}\right)^2 = \left(\frac{u(SO_2)}{\Delta SO_2}\right)^2 + \left(\frac{u(SO_{2,bg})}{\Delta SO_{2,bg}}\right)^2 + \left(\frac{u(CO_2)}{\Delta CO_2}\right)^2 + \left(\frac{u(CO_{2,bg})}{\Delta CO_{2,bg}}\right)^2, \quad (13)$$

where $u(SO_2)$ and $u(CO_2)$ are the standard uncertainties of the measured SO₂ and CO₂ concentrations at the peak area concentration, while $u(SO_{2,bg})$ and $u(CO_{2,bg})$ are the standard uncertainties of the background concentrations.

3 Measurements and data analysis

3.1 The measurement site and the meteorological parameters

The first measurement campaign at Harmaja (60°06′18.166″N, 24°58′28.808″E) started on July 13 after installation of the measurement instruments, and it ended on October 12, 2011. The second campaign started on July 7 and ended on August 20, 2012. The isle of Harmaja is a pilot station located in the Gulf of Finland, about four kilometres from the city of Helsinki in Finland. The ship routes both from Tallinn to Helsinki and from Stockholm to Helsinki pass by the isle of Harmaja at distances of 1 km and 100 – 200 m, respectively, as shown in Fig. 1. Fig. 1 also shows the modelled NO_x emissions.

The measurement station (Fig. 2) was set up in an old military fire control tower made of steel and concrete. All the measurement instruments were installed inside the tower, while measurement probes and sampling inlets were installed at different heights in a mast beside the tower. The height of the mast was 9 m, and it was standing on a breakwater 3.5 m above mean sea level (MSL). The measurement probes were installed at different heights to get an extensive view of the meteorological quantities. Cup anemometers by Vaisala (WAA 15 cup anemometers, Vaisala, Finland) measured the wind speed while the turbulence parameters were measured by an ultrasonic anemometer by METEK (Ultrasonic Wind Sensor uSonic-3 Scientific, METEK GmbH, Germany). Pt-100 sensors measured the ambient temperature. The cup anemometers were installed at three different heights, 12.2 m, 10.9 m, and 9.9 m above MSL. The sonic anemometer was installed at the top of the mast at a height of 12.9 m, and the temperature probes were installed at heights of 12.3 m, 11.0 m, and 10.0 m. The sampling intakes for the gaseous compounds were installed at two different heights, 12.58 m and 9.98 m. The inlets for particle measurements were installed at 8.0 m and 10.0 m. Next to this mast the official weather mast of the FMI (Fig. 2) was standing, equipped with a cup anemometer (WAA 15 wind vane, Vaisala, Finland) and a wind direction vane by Vaisala (WAV-15) at a height of 16.6 m. The current sea level was measured as a 30 min average with reference to MSL. The measurement heights of the probes used in the calculations are from the current sea level.

3.2 Instrumentation

The atmospheric concentrations of ozone, oxides of nitrogen and sulfur dioxide were measured simultaneously by conventional gas analyzers intended for ambient air quality measurement. Two identical analyzers of each gas were used to detect the concentration at the two measurement heights (12.58 m and 9.98 m). The sampling tubes at each altitude were made equal in length. PTFE (Polytetrafluoroethene) was used as tube material, since it is an inert material for each of the gaseous pollutants. The measurement method for ozone was the UV-photometric method (EN 14625:2012), and it was performed with APOA-360 analyzers by Horiba, Japan. For nitrogen oxides (NO_x) the chemiluminescence method was used (EN-14211:2012) and the measurements were performed with the AC31M analyzer by Environnement S.A., France. The AC31M analyzer was constructed as a two-channel instrument that measures the concentration of NO and NO₂ simultaneously. For sulfur dioxide the UV-fluorescence method (EN-14212:2012) was used and measured with a TEI 43 CTL analyzer by Thermo Environment. LI-7000 by Licor was used for the EC method to measure the concentration of CO₂ and H₂O. Picarro G2301 by Picarro Inc

measured the concentration of CO₂, CH₄ and H₂O. Results of the LI-7000 and the Picarro G2301 were also used for calculating
240 the CO₂ flux with the GR method.

For particle sampling stainless steel tubes with an outer diameter of 12 mm were used. Particle number concentration and
size distribution were measured by two ELPIs (Electrical Low Pressure Impactor, Dekati Ltd.) (Keskinen et al., 1992); ELPI1
measured at 10.0 m and ELPI2 at 8.0 m height. The measurement principle of both ELPIs was the same: particles were first
charged and then classified into 12 stages according to their aerodynamic diameter, in the size range of 7 nm–10 µm. Both
245 ELPIs were equipped with a filter stage (Marjamäki et al., 2002), and ELPI1 additionally with an extra stage designed to
enhance the particle size resolution for nanoparticles (Yli-Ojanperä et al., 2010). The cut-off diameters were 0.016 (additional
stage, only in ELPI1), 0.030, 0.056, 0.093, 0.156, 0.264, 0.385, 0.617, 0.954, 1.610, 2.410, 4.04 (only in ELPI2) and 9.97 µm.
The mass concentration of particles smaller than 1 µm (PM₁) was calculated by assuming the particles to be spheres with a
density of 1000 kg/m³.

250 The strategy for the air quality measurements in 2012 was different, and it included measuring concentrations of NO, SO₂,
CO₂, O₃, and particles at one height, and CO₂ fluxes by the EC method. The NO_x analyzer was a modified version of a single
channel analyzer, Thermo 42 CTL by Thermo Environment. The modification was made by bypassing the NO₂ converter and
the solenoid valve, increasing the flow rate by choosing an orifice which allowed a flow rate of up to 2 l/min, and by using the
shortest integration time. The purpose of the modification was to make the analyzer faster for detecting the emission peaks of
255 the ships, but for the NO gas only. The SO₂ analyzer was also a modified version from TEI 43 CTL by Thermo Environment.
The purpose of modification was the same as in case of NO_x analyzer: to make it faster for detecting ship emissions. The O₃
and CO₂ analyzers and the particle analyzer (ELPI1) were the same as in the 2011 campaign.

3.3 Calibration of the instruments

The temperature probes (Pt-100) were calibrated at the FMI in the calibration laboratory for meteorological quantities. The
260 wind speed anemometers were serviced (cleaned and the ball bearings changed) in the same laboratory. The gas analyzers
were calibrated in the reference calibration laboratory at the FMI before and after the field campaign. The calibration laboratory
is responsible for the tasks of the national reference laboratory on air quality, and it conducts the calibrations of the air quality
analyzers and calibration facilities in Finland. The laboratory maintains the traceability of the calibration to the SI units, and
it is accredited according to ISO 17025:2005 for all measured gas compounds except CO₂. The dynamic dilution method by
265 accurate gas sources was used for the calibration (Haerri et al. 2017). The calibration concentrations were selected to cover the
expected measurement ranges for each of the gas components.

The analyzers were also calibrated at the measurement site during the campaign using a field calibration unit similar to that
in the laboratory. Both ELPIs were factory calibrated and serviced. Zero setting and HEPA filtration tests were performed
before and after each measurement period. Based on the parallel measurements of the ELPIs on 30.8.2011 and 2.9. 2011
270 correction factors were inferred for ELPI2, separately for each stage (dN/dlogDp), and for the number concentration of particles
smaller than 1 µm (N_{tot}) that was used for the flux calculations (more details in Supplement). All measured N_{tot} data from the

ELPI2 were corrected accordingly. This ensures that the results are correct within the stated uncertainty and are comparable with the other similar measurements.

3.4 Data acquisition systems and data analysis

275 The data acquisition systems consisted of several components. The meteorological measurements were collected and stored by a Milos 500 system (by Vaisala). The ambient air quality gas analyzers were connected to a data collection system EnviDas 2000 (by Envimetria, Israel), the sonic anemometer and the LI-7000 were connected to a fast data acquisition system; Picarro G2301 used the system provided by the manufacturer, and the ELPI software was used for the collection of particle data.

280 The times, in EET (+2 UTC), of the different data acquisition systems were synchronized during each calibration and maintenance event. The final adjustment of all data sets at each of the altitudes was made manually from the time series so that the obvious peaks coincided. Data collection for the EC method was performed at 10 Hz time resolution. In the case of the GR method, data was collected as 15 second and one minute averages, while the total number concentration of particles in the size range of 7-1000 nm (N_{tot}) and PM_{10} were collected at 10 second intervals. The meteorological data from the official weather mast were collected as 10 min averages. A consistent data set was formed as 30 min averages from the synchronized
285 individual data acquisition systems.

The first target for the data analysis was to achieve accurate and good quality continuous time series for the gaseous compounds and particles at each of the measuring heights. Secondly, the turbulence parameters (M-O length, stability parameter, friction velocity) were needed for calculating the transfer coefficients K_m and K_c , the dimensionless gradient, and their integral functions for heat and momentum, and for calculating the fluxes of the chemical compounds and fine particles.
290 The friction velocity and the M-O length, which were calculated from the data obtained by the sonic anemometer, were used as input parameters for the GR method. The benefit of this was to reach better agreement with the flux parameters.

3.5 Measurements on R/V Aranda

In 2012 measurements were also made on the Finnish research vessel Aranda during two days. The ship was kept stationary at a point approximately 2 km SSW from the measuring mast at Harmaja, with no islands between Harmaja and the ship. The
295 bow of the ship was equipped with a sonic (Metek USA-1), an open path LI-7500 and an enclosed path LI-7200 at two heights (10 and 16 m) for the measurement of the CO_2 , H_2O , momentum and heat fluxes. During the measurements the ship's bow was kept within +/- 20 degrees into the wind direction. The sonic measurements were corrected for ship motions with a motion sensor MRU6, according to Drennan et al. (1994). In this study the measurements from the sonic and enclosed path LI-7200 at the height of 16 m were used, and the calculated fluxes were corrected for water vapour fluctuations according to Webb et
300 al. (1980). The partial pressure of CO_2 in the surface water at a depth of 4 m obtained from the ship's flow-through system was measured continuously with an equilibrator and a LI-6262. The measurements were transformed to *in situ* water temperature according to Takahashi et al. (1993). All the LI-CORs were calibrated against 0, 364, and 700 ppm CO_2 gases.

4 Results

4.1 General overview

305 Environmental factors, e.g. the fire control tower, caused challenges with regard to the measurement signals. Though the measurement probes were installed at different heights above the top of the tower the measurement signals were affected by disturbances in the flow field. Therefore a computational fluid dynamic (CFD) program OpenFOAM (version 7) by the OpenFOAM Foundation (OpenFOAM, 2020) was used to determine the amount of distortion and the required correction. OpenFOAM is a C++ based open source software developed mostly, but not exclusively, for CFD. The airflow around the shoreline and the measuring structure was modelled using steady, incompressible, single-phase potential flow. The simulation covered a 80 m long, 40 m wide and 30 m high rectangular box around the measurement area.

Fig. 3a illustrates the calculated wind field isopleths at a wind speed of 9 m/s over the open sea area, and it shows how the flow field is disturbed around the measurement mast. Based on the calculated isopleths we determined for each measurement height the corresponding height over the open sea. The actual heights of wind speed probes are shown at the measurement mast on the right and their projected heights over open sea on the left. The heights at the measurement masts for wind speed measurements were reduced from 16.63 m, 12.88 m, 12.18 m, 10.88 m and 9.88 m, to 15.5 m, 11,1 m, 10.2 m, 8.6 m and 7.2 m, respectively. Similarly, the heights of the sample intakes were reduced from 12.88 m, 12.58 m, 10 m, 9.88 m and 8 m down to 11,1 m, 10.7 m, 7.38 m, 7.2 m and 4.7 m, respectively. The correction for the wind speed was calculated from different simulations varying the wind speed and comparing the calculated results at the measurement mast with the open sea area. These calculations show that a linear relationship for the wind distortion at the measurement mast as compared with the open sea area was good enough to correct the observed wind speed measurement at all heights. The recalculated wind speed profiles (six profiles, cases 1 to 6) at each of the corrected measurement heights are presented as averages over short periods (2 to 3 hours) in the wind sector to the open sea, i.e. $150^\circ \leq wd \leq 270^\circ$. The data were roughly classified into three categories: code 1, the M-O theory is valid (no swell, $c_p < ws$, where c_p and ws are the peak wave and wind speeds, respectively); code 2, the M-O theory is possibly valid (moderate swell, $ws < c_p < 2 \cdot ws$), and code 3, the M-O theory is not valid (dominant swell, $c_p > 2 \cdot ws$). In Fig. 3b the wind speed profiles (cases 1 to 6) are presented in situations where the M-O theory is valid (code 1) and where the M-O theory is not valid (code 3). In Fig. 3c the ambient air temperature profiles are calculated from the same situations as the wind profiles. In Fig. 3d the wind rose at the height of 15.5 m shows the patterns of prevailing wind sectors with wind speed ranges.

330 As an example, Fig. 4a-b depicts the time series of 1-minute-averaged concentrations of the measured gas compounds at 10 m altitude during the first campaign. The sharp peaks in the concentrations of nitrogen monoxide are very striking. In a detailed examination the duration of the emission peaks from the ships were of the order of a few minutes. Where there was a peak in the NO concentration, a negative peak was also detected in the ozone concentration due to the fast reaction producing NO₂. This was observed within seconds after the emission from the ship into the atmosphere. The changes in the concentrations of NO, NO₂ and O₃ were equal, i.e. the change in the concentration of NO took place according to the stoichiometric balance.

The concentration of sulfur dioxide was very low, but clearly distinguishable peaks, with a maximum of 28 ppb, were observed in the data. These peaks originated from the passing ships. The ship peaks were also seen in the CO₂ data, but the short-term variation of the CO₂ concentration might be larger than the contribution from the ship emissions (Fig. 4b). When looking at the particulate concentrations N_{tot} and PM₁ (Fig. 4d), interesting features can be observed. Ship peaks can be clearly distinguished; however, the background levels of N_{tot} and PM₁ were highest on 28 August in the morning when the wind blew from the south, and lowest during the period from noon on 28 August to 10 AM on 30 August, when the wind came from the west over the ocean (Fig. 4c). The 96 h backward trajectory analysis of Flextra by NILU (Stohl et al., 1995) also showed that in the measurement period before the noon of 28 August an air mass carrying anthropogenic pollutants was transported through central Europe and arrived in Helsinki (Fig. 5a). The average background particle concentrations stayed rather constant at ~2.7x10³ #/cm³, whereas the PM₁ increased from ~ 4 µg/m³ to ~ 11 µg/m³ during 12 hours. This indicates that also larger particles were transported. In fact, this is obvious from Fig. 6, which presents the average number size distribution (Fig. 6a) as well as the volume size distribution (Fig. 6b) of background particles in the evening of 27 August, at noon on 28 August just before the clean air mass arrived, and in the afternoon of 28 August. During the next two days (noon 28.8. to noon 30.8.) the air trajectories came from the west, mostly over the Atlantic and the Baltic Sea, carrying clean air to Helsinki. Although the particle number concentration was higher, 3.6x10³ #/cm³, due to the larger number of the smallest particles, they did not have an effect on the volume size distribution.

4.2 Concentration roses

Figure 7 presents the maximum values for the concentrations of each gas compound and the particle number within wind sectors of 10° at both measurement heights. These results are in good agreement with the ones based on the sum of the measured concentrations, thus showing the cumulative contribution from different wind sectors at the measurement point (not shown). For NO_x and SO₂, similar patterns were observed indicating the ship routes in sectors 90° to 120°, 150° to 180°, and 270° to 300°. In addition, there is a clear difference in concentrations between the heights: the higher concentrations were mostly at the highest measurement level. In the case of oxygen compounds (= O₃ and O₃+NO₂) and CH₄ the patterns were more evenly distributed. In the case of CO₂ and N_{tot} there is an indication of the ship routes, but also of the influence of the city of Helsinki.

4.3 Fluxes

Quality control (QC) and quality assurance (QA) procedures are actions that should take into account in order to improve the data quality and to make the data comparable with the similar data from other studies. Although QA and QC procedures have slightly different meanings, in this study, the quality assurance and quality control (QA/QC) procedures are considered together. The following QA/QC procedures and criteria for flux calculations were taken into account.

1. Calibration of the used analyzers for gases and particles (Section 3.3), for the GR and EC methods
2. Criteria for minimum concentration difference between the measurement heights (Fig. S2), for the GR method

3. Correction of the wind flow field around the measurement mast according to the CFD calculations (Section 4.1), for the GR method
4. Restriction to open sea, i.e. wind direction in the range of 150-270 degrees (Fig. 3a), for the GR and EC methods
- 370 5. Analysis of swell to **determine** the validity of M-O-theory with Codes 1-3 (Section 4.1), for the GR method
6. Footprint area was estimated at each of the measurement height and at neutral, stable and non-stable condition (Fig. 8), for the GR and EC methods
7. Stationarity criteria following the criteria of Foken and Wichura (Foken and Wichura 1998), for the for GR and EC methods
- 375 8. The intermittency was applied according to Mahrt et al. (1998), for the EC method
9. WPL correction due to water vapour and heat flux, for the GR and EC methods
10. Cross sensitivity of the compounds on the used analyzers, for the GR and EC methods
11. Preparation of the uncertainty budget for the measurement results, for the GR and EC methods

380 The footprint area i.e. the area along the upwind where the exchange of gases and particles between the air-sea surface are expected to be a source of the measurement results, was calculated according to Högström et al. (2008). The footprint area was calculated at each of the measured height at stable, neutral and unstable conditions. Fig. 8a illustrates the relative intensity of the footprint area in neutral conditions as a function of upwind distance from the measurement mast at instrument heights of 4.7 m, 7.2 m and 10.7 m. **Stable and unstable conditions are presented in Fig. S3.** The cumulative relative contribution (Fig. 8b) indicates that at the lowest height (4.7 m) less than 0.3 % of the observed flux takes place at the distance of 20 m from the mast reaching 90 % at a distance of 3 km. At the height of 10.7 m, the footprint area starts at 40 m from the mast reaching 85 % at distance of 3 km. **The storage fluxes were not considered in this campaign. The site was by the sea where most of the time the turbulent mixing was most likely the main driving force for gas and particle dispersion.**

390 The stationary requirement was calculated by the method proposed by Foken and Wichura (1996) for fluxes of CO₂, momentum, water vapour and heat. Similarly, the effect of flux intermittency was estimated through the index proposed by Mahrt et al (1998).

Cross sensitivity of the compounds (e.g. water vapour) on the response of the used analyzers are included into the uncertainty budget or corrected directly on the results, see in Fig. S1. The influence of NO and NO₂ compounds on the response of the SO₂-analyzer was tested in the laboratory. Known concentrations of NO and NO₂ gases were injected into the SO₂-analyzer to define the response function for both NO and NO₂. The results of the SO₂-analyzer were then corrected accordingly.

400 The uncertainty sources of the measurement results for fluxes by the gradient method are presented in more detail in Supplementary Table S1. To estimate the uncertainty of the momentum flux and CO₂ flux measurements by the EC method we calculated the expected statistical variability using the Co-spectrum. For the momentum flux it was 20 %, and for the CO₂-flux 30 %. This wide uncertainty range is typical in real meteorological situations and explains the scatter of the EC estimates in e.g. Fig. 12. The analysis of uncertainty follows the guideline provided by the Joint Committee for Guides in Metrology

(JCGM, 2008). Based on the analysis, the relative expanded uncertainties for the flux measurements of CO₂ and nanoparticles are presented in Table 1 at stationary meteorological conditions.

The eddy diffusivities K_h and K_m describe the conditions of the turbulent mixing for momentum and heat. The latter describes also the behaviour of the gaseous compounds and particles, as explained in section 2.1. In Fig. 9a, the eddy diffusivities K_h and K_m at the measurement level of the sonic anemometer are presented as a function of stability. From Fig. 9a, b, and d, it is also evident that in this data swell occurs mostly in the far unstable conditions, and only in a few cases in stable conditions, while the situations with no swell occur in this data in near the neutral conditions. Wind speed and friction velocity in Fig. 9c show a clear dependence on the wind direction. A linear relationship between the average wind speed and the friction velocity is seen in the sectors where the wind arrives over an open sea area, whereas non-linear behaviour is seen towards the northern sector (345° to 45°), where there are more obstacles. The gradient function in Fig. 9d for momentum has a significant spread around the Businger - Dyer gradient function in the wind sector from 150° to 270°.

Dispersion of a ship plume is schematically presented in Fig. 10a. The black curves denote the edges of the plume. When the lower curve reaches the sea surface the pollutants would be reflected from the sea surface if there were no pollutant flux to the sea. Near the surface the sum of the incident and reflected concentrations will add up to the same value if the reflection is total, thus forming a new boundary layer where the vertical concentration gradient of the pollutants vanishes. If there is a flux to the sea surface this will result in a vertical gradient of pollutants in this new boundary layer. The fluxes to the sea from the ship can be measured when the plume is over the flux footprint if the measurement instrument is inside the new boundary layer. As an example, Fig. 10b illustrates the momentary plumes at the sea surface for a ship operating to the city of Helsinki and passing Harmaja Island with a speed of 21.5 kn (~11 m s⁻¹). The arrows show how the apparent plume is generated in the (u,v)-coordinate system, and where the pollutants advecting to the footprint area come from. In the example the wind speed was 11 m s⁻¹ and wind direction 216° as in the afternoon and evening of 28 August (Fig. 4c). The momentary plume figures are shown after 15, 23, 30 and 37 min the start, and the plume concentration gradients decrease as the plume moves further. At the footprint area the gradient is really small indicating horizontally homogeneous situation. If additionally, the stationary criteria for heat, water vapour and momentum are valid, the momentary vertical gradients give the momentary flux.

Before the calculation of fluxes of gases and particles by the GR method, it is necessary to evaluate the measured concentration differences between the measurement heights, with their uncertainty limits. The uncertainty of the gas and particle analyzers as a function of concentration is presented in Supplementary Fig. S1, and the concentration differences between the measurement heights in Fig. S2. Based on the analysis, the concentration differences for N_{tot} exceeded clearly the uncertainty limit enabling the calculation of the N_{tot} fluxes by the GR method. In case of raw CO₂, the concentration difference exceeded the uncertainty limit frequently, but only rarely in case with WPL correction, i.e. in dry air. Consequently, the fluxes for CO₂ were too small to be detected by the GR method. On the contrary, the CO₂ fluxes obtained by the EC method did not suffer the same problem (direct flux method) and those fluxes were acceptable except in cases when stationary criteria was not fulfilled. We also made the comparison of GR and EC methods with sensible heat (Fig. S4).

435 Clear correlation between the methods can be observed if the calculation of the sensible heat by the GR method was made
from the sea surface up the measurement height 11 m and to 15 m. However, the temperature difference between the
measurement heights (11 and 15 m) was mostly too small to be detected and no flux could be calculated.

Fig. 11a illustrates the time series for the CO₂ flux by the EC method, and Fig. 11b for the N_{tot} flux by the GR method
along with the uncertainties. Only the fluxes that fulfilled the stationary criteria with no swell in the wind sector of 150-270
440 degrees were taken into account. For most of the time the CO₂ flux was positive (upward) in Fig. 11a, while the flux of N_{tot}
was mostly negative (downward) in Fig. 11b. The WPL-correction to the CO₂ flux by the EC method corrects wet air into
the dry air and for water flux. Due to the damping of temperature fluctuations in the long sample tube the WPL correction
for heat flux was insignificant (Rannik et al. 1997). During the period when the air masses were moving from the Atlantic
(during 28.8 to 31.8), the correction due to water flux was dominating and caused a positive offset to the CO₂ flux (Fig. S5).
445 The observed CO₂ fluxes are also in line with the previous measurements (Honkanen et al. 2018) at the Utö island in the
Baltic Sea.

Assuming that there is no inversion below the ships' chimneys height, profile measurements of the compounds indicate
that the deposition of nanoparticles towards the sea surface is most probably caused by ship emissions (Fig. 11c). More detailed
analysis was made to compare the fluxes of CO₂ and N_{tot} calculated from single ship plumes which lasted from 3 to 7 minutes
450 with the 30 min fluxes. Figs. 11c and 11d show clear peaks both in the case of CO₂ and nanoparticles, but the contribution of
these ship peak fluxes was insignificant compared with the 30 min fluxes (not shown in the figure).

From the campaign in 2012, the CO₂ fluxes by the EC methods as measured at Harmaja and on R/V Aranda are presented
in Fig. 12a. The corrections to CO₂ fluxes measured from humid air samples have been criticized as insufficient (e.g.
Landwehr et al. 2014). The fluxes in this study mainly fulfilled the criteria presented in Miller et al. (2010), Sahlée et al.
455 (2011), Blomquist et al. (2014) and Landwehr et al. (2014). The CO₂ fluxes measured on R/V Aranda might be
underestimated because the flow rate was too small, 10 slpm. No systematic differences were observed when the LI-7200
CO₂ fluxes were compared with the LI-7500 on the ship mast and also with the measurements made at Harmaja.

The WPL correction performed to both of the data in 2011 and 2012 was small in general, see Fig S5. In 2011 the sign
of the flux was changed after correction of WPL during the period between 28.8. and 31.8. Generally, positive CO₂ fluxes
460 are common in winter, and occasionally in summer after the spring algae bloom, since CO₂ is less soluble in the warming
sea water. In the Baltic Sea, however, the blue-green algae bloom extends the biological active season, and the positive fluxes
in coastal regions are mainly caused by frequent upwelling events (e.g. Lehmann and Myrberg, 2008, Norman et al. 2013).
The CO₂ flux by the EC method and the partial pressure of CO₂ in seawater were measured at the same time as the R/V
Aranda measurements in late July 2012; the large difference between the partial pressures in the seawater and in the air
465 indicates the upwelling event (Fig. 12c) causing the positive CO₂ fluxes in Fig. 12a. The scatter plot of the CO₂ fluxes at
Harmaja and on R/V Aranda is presented in Fig. 12b. The large scatter is most probably due to the different locations: the
measurements of pCO₂ (Fig. 12c) suggest that the pCO₂ was not spatially homogenous. The estimated statistical variability
is large and also contributes to the scatter. The sensible heat fluxes (Fig. 12d) were calculated by the EC method in 2012

campaign at Harmaja and at two heights (10 m and 16 m above the sea level) at R/V Aranda showing good agreement with
470 each other.

Unfortunately, direct comparison between the CO₂ fluxes by the EC and GR methods in Harmaja in 2011 as well as in
2012 at R/V Aranda could not be performed due to the fact that the CO₂ fluxes were too small to be detected by the GR
method. Discrepancies between the measurement results by the GR and EC methods have been reported in the literature
(Mycklebus et al. 2008, Muller et al. 2009) for CO₂ and for O₃, but no systematic reason has been found.

475

4.4 Fuel sulphur content

The FSC was determined in the measurement campaigns in both 2011 and 2012. The two campaigns differed from each other
in the measurement strategies, but also in the data collecting frequency, once a minute in 2011 and every 15 s in 2012. In both
cases, the data acquisition system calculated the averages over the data collecting time. It became very clear that the frequency
480 of once a minute was too low in order to see accurate emission peaks in the ship plumes, because the duration of the plume
itself was of the order of a few minutes. This was the reason for shortening the response time of the analyzers by increasing
the flow rate from the nominal flow and shortening the integration time, which then made it possible to increase the data
collecting frequency.

As seen from Supplementary Fig. S6, major factors influencing the accuracy of calculating the emission peak area are the
485 difference of the response time between the SO₂ and CO₂ analyzers, but also the frequency of data collection. The Picarro
G2301 CO₂ analyzer is clearly faster than the UV-Fluorescence SO₂ analyzers, which are designed for air quality
measurements to meet the requirements of EU regulations. Even when improvements were made to the SO₂ analyzer between
the 2011 and 2012 campaigns, the difference in the peak width is clearly seen.

The variation between the 2011 and 2012 campaigns in the calculated FSC from the ships that routinely cruise between
490 Helsinki and Stockholm or Helsinki and Tallinn is used when estimating the uncertainty of the FSC according to Eq. (13). In
Fig. 13 the relative expanded uncertainty for the FSC, U_{FSC} (%), is shown as a function of peak height concentration of SO₂.
Calculation of U_{FSC} (%) was made for FSC = 0.1 %, 0.5 % and 1 % fulfilling the requirement according to the regulation at
the time of the measurements (FSC = 1 %) but also the regulation which came into power in 2014 (Directive, 2012/33/EU) for
SECA areas (FSC = 0.1 %) and for oceans (FSC = 0.5%). The uncertainty of the FSC increases rapidly, being 100 % at a peak
495 concentration of 3 ppb for a FSC of 0.1 %, and 5 ppb for a FSC of 0.5 %. When more accurate measurements are required, the
peak height concentration of SO₂ should be clearly higher than 5 ppb or 10 ppb for the FSC regulation of 0.1 % or 0.5 %,
respectively. Considering that the highest peak concentration observed was 50 ppb which gives the uncertainty of 18 % for
FSC. At the same time the NO peak was 100 ppb giving a response to SO₂ analyzer of 2 ppb or 4 % of the measured SO₂ with
the cross sensitivity of 2 %. According to the present regulation, FSC = 0.1% similarly, the highest peak concentration would
500 be 5 ppb of SO₂ with the uncertainty of 25 %. The NO would still be 100 ppb giving respond of 2 ppb on the SO₂ results being

40 % of the measured SO₂ concentration. Correction of the cross sensitivity for nitrogen compounds on the response of SO₂ analyzer by UV fluorescence technique is vital.

No violation against the regulation was observed for the calculated FSC during the campaigns in 2011 and 2012 (Fig. 14). A typical value for FSC 0.4 % was obtained at an uncertainty of 15 % i.e. 0.40 ± 0.06 %. Also the obtained FSCs were in good agreement with the information given by the ship owners, as well with our earlier results in Pirjola et al. (2014), where emissions from the same ships were studied in winter and summer campaigns in 2010 and 2011. The mobile laboratory Sniffer was standing at the harbour areas in Helsinki and Turku. Besides the FSCs we also estimated the emissions factors for NO, NO_x, SO₂, N_{tot} and PM_{2.5}. For example, the emission factors for NO_x were in the range of 56 to 100 g (kg fuel)⁻¹.

510 **5 Conclusions**

Direct exchange of gaseous compounds and nanoparticles between air and sea interface was studied by micrometeorological methods. The gas compounds SO₂, NO, NO₂, O₃, and CO₂, as well as the number concentration of nanoparticles, N_{tot}, were measured at the Baltic Sea beside the major ship routes to and from the City of Helsinki. Flux measurements in marine environment are challenging due to meteorological conditions and topographical aspects. Filtering of data outside the footprint area and for certain wind sector, occurrence of swell, non-stationarity, and the concentration difference between the measurement heights less than the uncertainty limit reduces the number of available data considerably. In this study, fluxes of 43 % for N_{tot} by the GR method and 28 % for CO₂ by the EC method of all measurement results were acceptable.

It became quite clear that no direct gas exchange across the air-sea interface, negative or positive fluxes, could be measured by the GR method. Mostly because the capability of the used analyzers to measure the gas concentration differences under clean coastal conditions was not sufficient. Even though the CO₂ flux was too small to be detected with the GR method, it could be detected by the EC method. The case was different for nanoparticles where the observed differences of the number concentration were well above the uncertainty limit for the both ELPIs.

Both of the GR and EC methods were capable for measuring the emissions from the ships. Much effort was laid down on studying the transport and dispersion of single ship emissions. Different scenarios depending on the wind speed and wind direction were able to identify: (i) pollutants have reached the footprint area and the measurement mast (ii) the pollutants bypass the footprint area but are seen by the measurement mast. When the mixing of the pollutants occurred well before the footprint area for the measurement mast the measured fluxes were real. When the mixing of the pollutants from the ships was not complete, violation of the M-O theory occurred and the measurement results described dispersion of the pollutants

The measurements for determining the FSC were in good agreement with the information given by the ship owners. The measurement method used to determine the FSC content of marine fuel from the ambient air in connection with the identification data from AIS gives a clear demonstration of whether the regulations are respected.

The uncertainty analysis of the fluxes and the FSC was conducted according to the well-known law of propagation of errors, and following the recipes from the literature (JCGM, 2008). The uncertainty budget, pointing out the sources of

uncertainties and their contribution on the measurement results, may be conservative, but it can be made more accurate on the
535 selecting better measurement technique, capabilities of the analyzers, measurement site and meteorological situations.

To improve the accuracy for determining the FSC based on measurements of the ratio of SO₂ to CO₂ from emission peaks
of ship plumes, development of an instrumentation that can simultaneously measure SO₂ and CO₂ concentration fast enough
and with the same order of response time is highly desirable.

540 *Data availability.* The data is available at DOI:10.5281/zenodo.4439605.

Supplement. The supplement related to this article is available online.

Author contributions. JW and LP designed the concept of the study. JW, LP, TW performed the measurements with the help
545 of TL, JH, TT and MM. HP and KK were responsible for the Aranda measurements and the aspects in the marine boundary
layer. HN carried out the OpenForm simulations, J.-PJ provided the AIS data and NO_x emissions from ships (Fig. 1). JW
wrote the original manuscript, LP, HP, KK, J.-P.J edited. All authors have read and agreed to the published version of the
manuscript.

550 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements. The measurements were carried out during the SNOOP project, financed by the Cental Baltic INTERREG
IV A Programme 2007–2013 and the Centre for Economic Development, Transport and the Environment (ELY) of Southwest
Finland. This project has also received funding from the European Union’s Horizon 2020 research and innovation programme
555 under grant agreement #814893 (SCIPPER project). This work reflects only the authors’ view and INEA is not responsible for
any use that may be made of the information it contains. The authors are very grateful to Mr. Aleksi Malinen at Metropolia
University of Applied Sciences for help in the measurements and to Ms. Kaisa Lusa and Sisko Laurila at the Finnish
Meteorological Institute for help in laboratory calibrations. For revision of the language, the authors are very grateful to Ms.
Leena Kahma. Both anonymous Referees are thanked for their critical and insightful but constructive comments improving
560 considerably the final manuscript.

References

Alföldy, B., Lööv, J. B., Lagler, F., Mellqvist, J., Berg, N., Beecken, J., Weststrate, H., Duyzer, J., Bencs, L., Horemans, B.,
Cavalli, F., Putaud, J.-P., Janssens-Maenhout, G., Csordás, A. P., Van Grieken, R., Borowiak, A., and Hjorth, J.: Measurements
of air pollution emission factors for marine transportation in SECA, Atmos. Meas. Tech., 6, 1777–1791, doi:10.5194/amt-6-
565 1777-2013, 2013

- Businger, J.A.: Evaluation of the Accuracy with Which Dry Deposition Can Be Measured with Current Micrometeorological Techniques, *J. Climate and Appl. Meteorol.*, 25, 1100 - 1124, 1986.
- Businger, J. A., Wyngaard, J. C., Izumi, Y., and Bradley, E.F.: Flux profile relationships in the atmospheric surface layer, *J. Atmos. Sci.*, 28, 181 -189, 1971.
- Cooper, D. A.: HCB, PCB, PCDD and PCDF emissions from ships, *Atmos. Environ.*, 39, 4901–4912, 2005.
- De Leeuw G., Ambelas Skjøth C., Hertel O., Jickells T., Spokes L., Vignati E., Frohn L., Frydendall J., Schulz M., Tamm S., Sørensen L.L., Kunz G.J. Deposition of nitrogen into the North Sea. *Atm, Env.* 37 Supplement No1, S145 – S165, 2003.
- Directive 1999/32/EC. Sulphur content in Marine fuels.
- Directive 2012/33/EU. Sulphur content in Marine fuels.
- Drennan, W., Donelan, M. A., Madsen, N., Katsaros, K. B., Terray, E., Flagg, C. N.: Directional Wave Spectra from a Swath Ship at Sea, *J. Atmos. Ocean. Technol.*, 11, 896-908, DOI: 10.1175/1520-0426(1994)011<1109:DWSFAS>2.0.CO;2, 1994.
- Drennan, W. M., Graber, H. C., Hauser, D., Quentin, C.: On the wave age dependence of wind stress over pure wind seas, *J. Geophys. Res.*, 108, 8062,8075, doi 1029/2000JC000715, 2003.
- Dyer, A. J.: A review of flux-profile relations, *Boundary Layer Meteorol.*, 1, 363 – 371, 1974.
- Dyer, A. J., Hicks, B. B.: Flux-gradient relationships in the constant flux layer. *Quart. J. R. Met. Soc.* 96, 715-721, 1970.
- Duyzer, J. H., Deinum, G., Baak, J.: The interpretation of measurements of surface exchange of nitrogen oxides: correction for chemical reactions, *Phil. Trans. R. Soc. Lond.* 351, 231 – 248, 1995.
- Foken, T, Wichura, B. Tools for quality assessment of surface-based flux measurements. *Agric. Forest Meteorol.* 78, 83 – 105, 1996.
- Haerri, H.-P., Macé, T., Waldén, J., Pascale, C., Niederhauser, B., Wirtz, K., Stovcik, V., Sutour, C., Couette, J., Waldén T.: Dilution and permeation methods for the generation of NO, NO₂ and SO₂ calibration gas mixture, *Meas. Sci. Technol.*, 28, 035801, DOI: 10.1088/1361-6501/aa543d, 2017.
- HELCOM Maritime19/5-2.INF "Emissions from Baltic Sea shipping in 2006 – 2018", by Jalkanen, J.-P. and Johansson L: <https://portal.helcom.fi/meetings/MARITIME%2019-2019-582/MeetingDocuments/5-2%20Emissions%20from%20Baltic%20Sea%20shipping%20in%202006%20-%202018.pdf>, last access 4.4.2020.
- Hongisto, M. and Joffre, S.: Meteorological and climatological factors affecting transport and deposition of nitrogen compounds over the Baltic Sea, *Boreal Env. Res.*, 10, 1–17, 2005.
- Hongisto, M.: Impact of the emissions of international sea traffic on airborne deposition to the Baltic Sea and concentrations at the coastline, *Oceanologia*, 56, 349-372, 2014.
- Honkanen M., Tuovinen J.-P., Laurila T., Mäkelä T., Hatakka J., Kielosto S., Laakso L. Measuring turbulent CO₂ fluxes with closed-path gas analyzer in marine environment. *Atmos. Meas. Tech.* 11, 5335 – 5350, 2018.


- 600 Högström, U., Sahlée, E., Drennan, W. M., Kahma, K. K., Smedman, A.-S., Johansson, C., Pettersson, H., Rutgersson A., Tuomi, L., Zhang, F., Johansson, M.: Momentum fluxes and wind gradients in marine boundary layer – a multi-platform study, *Boreal Env. Res.*, 13, 475-502, 2008.
- Högström, U., Rutgersson, A., Sahlée, E., Smedman, A.-S., Hristor, T., S., Drennan, W. M., Kahma, K. K.; Air-sea interaction features in the Baltic Sea and at a Pacific trade-wind site: an Inter-comparison study, *Boundary-Layer Meteorol*, 147, 139-163, DOI 10.1007/s10546-012-9776-8, 2013.
- 605 Högström, U., Sahlée, E., Smedman, A.-S., Rutgersson, A., Nilsson, E., Kahma, K.K., Drennan, W. M. J., Surface Stress over the Ocean in Swell-Dominated Conditions during Moderate Winds, *J. Atmos. Sci.*, 72, 4777–4795, 2015, DOI: 10.1175/JAS-D-15-0139.1.
- IMO: International Maritime Organisation, Guidelines for the Control and Management of Ships’ Ballast Water to Minimise the Transfer of Harmful Aquatic Organisms and Pathogens, <http://www.imo.org/en/KnowledgeCentre/IndexofIMOResolutions/Assembly/Documents/A.868%2820%29.pdf>, last access 17.9.2020.
- JCGM; Evaluation of measurement data – Guide to the expression of uncertainty in measurement, JCGM, 100, 2008.
- Jalkanen, J.-P., Brink, A., Kalli, J., Pettersson, H., Kukkonen, J., and Stipa, T.: A modelling system for the exhaust emissions of marine traffic and its application in the Baltic Sea area, *Atmos. Chem. Phys.*, 9, 9209-9223, 2009.
- 615 Johansson, L., Jalkanen, J.-P.: Emissions from Baltic Sea Shipping in 2015, <https://helcom.fi/baltic-sea-trends/environment-fact-sheets/maritime-activities/emissions-from-baltic-sea-shipping-in-2015/>, 2016, last access 17.9.2020.
- Johnsson J.E., Gauss M., Schulz M., Jalkanen J.-P., and Hagerli H.: Effects of global ship emissions on European air pollution levels. *Atmos.Chem.Phys.*, 20, 11399 – 11422, 2020.
- 620 Kahma, K. K., Donelan, M. A., Drenman, W. M., Terray, E. A.: Evidence of energy and momentum flux from swell to wind, *J. Phys. Oceanogr*, 46, 2143-2156, <https://doi.org/10.1175/JPO-D-15-0213.1>, 2016.
- Kaimal, J.C., Finnigan J. J.: Atmospheric boundary layer flows: their structure and measurement, Oxford University Press, New York, 1994.
- Keskinen, J., Pietarinen, K., Lehtimäki, M.: Electrical low pressure impactor, *J. Aerosol Sci.*, 23, 353-360, 1992.
- 625 Kramm, G., Müller, H., Fowler, D., Höfken, K.D., Meixner, F.X., Schaller, E.: A modified Profile Method for Determining the Vertical Fluxes of NO, NO₂, Ozone and HNO₃ in the Atmospheric Surface Layer, *Journal of Atmospheric Chemistry*, 13, 265 – 288, 1991.
- Landwehr, S., Miller, S. D., Smith, M. J., Saltzman, E. S., Ward, B.: Analysis of the PKT correction for direct CO₂ flux measurements over the ocean, *Atmos. Chem. Phys.* 14, 3361-3372. doi:10.5194/acp-14-3361-2014, 2014.
- 630 Lehmann, A., Myrberg, K.: Upwelling in the Baltic Sea - a review, *Phys. Chem. Earth, B* 25, 183-189, 2008.
- Lenschow, D. H., Kristensen, L.: Uncorrelated noise in turbulence measurements, *J. Atmos. Ocean. Tech.*, 2, 68–81, 1985.
- Lenschow, D., Delany, A. C.: An analytical Formulation for NO and NO₂ Flux Profiles in the Atmospheric surface Layer, *Journal of Atmospheric Chemistry*, 5, 301 – 309, 1987.

- Lenschow, D. H., Mann, J., Kristensen, L.: How long is long enough when measuring fluxes and other turbulence statistics?,
635 J. Atmos. Ocean. Tech., 18, 661–673, 1994.
- Mahrt, L., Sun, J., Blumen, W., Delany, A.C, Oncley S. Nocturnal Boundary-Layer Regimes. *Boundary-Layer Meteorology*
88, 255 – 278, 1998.
- Marjamaki, M., Ntziachristos, L., Virtanen, A., Ristimäki, J., Keskinen, J., Moisio, M., Palonen, M., Lappi, M.: Electrical
Filter Stage for the ELPI. Society of Automotive Engineers, SAE Technical Paper 2002-01-0055, 2002.
- 640 Mellquist, J., Beecken, J., Conde, V., Ekholm, J.: Surveillance of Sulfur Emissions from Ships in Danish Waters, Final Report
to Danish Environmental Agency, DOI: 10.17196/DEPA.001,2018.
- Miller, S. D., Maradino, C., Saltzman, E. S.: Ship-based measurement of air-sea CO₂ exchange by eddy covariance – J.
645 *Geophys. Res.* 115, D02304, doi:10.1029/2009JD012193, 2010. Moldanová, J., Fridell, E., Winnes, H., Holmin-Fridell, S.,
Boman, J., Jedynska, A., Tishkova, V., Demirdjian, B., Joulie, S., Bladt, H., Ivleva, N. P., and Niessner, R.: Physical and
chemical characterization of PM emissions from two ships operating in European Emission Control Areas, *Atmos. Meas. Tech.*
Discuss., 6, 3931– 3982, doi:10.5194/amtd-6-3931-2013, 2013.
- Muller J. B. A., Coyle M., Fowler D., Gallagher M., Nemitz E. G., Persival C. J. Comparison of ozone fluxes over grassland
by gradient and eddy covariance technique. *Atmos. Sci. let.* 10, 164 – 169, 2009.
- Myklebust M. C., Hippias L. E., Ryel R. J. Comparison of eddy covariance, chamber, and gradient methods of measuring soil
650 CO₂ efflux in an annual semi-arid grass, *Bromus tectorum*. *Agric. For. Meteorol.* 148, 1894 – 1907, 2008.
- Norman, M., Parampil, S. R., Rutgersson, A, Sahlée, E.: Influence of coastal upwelling on the air-sea gas exchange of CO₂ in
a Baltic Sea Basin, *Tellus B*, 65, 21831, <http://dx.doi.org/10.3402/tellusb.v65i0.21831>, 2013.
OpenFOAM: <http://www.openfoam.org>, 2020, last access 7.4.2020.
- Panofsky, H. A., Dutton, J. A.: *Atmospheric turbulence - Models and methods for engineering applications*. John Wiley &
655 Sons, Inc., New York, USA, 397 p, 1987.
- Paulson, C. A.: The Mathematical Representation of Wind Speed and Temperature Profiles in the Unstable Atmospheric
Surface Layer, *J. Appl. Meteor.*, 9, 857-861, 1970.
- Petzold, A., Hasselbach, J., Lauer, P., Baumann, R., Franke, K., Gurk, C., Schlager, H., Weingartner, E.: Experimental studies
on particle emissions from cruising ship, their characteristic properties, transformation and atmospheric lifetime in the marine
660 boundary layer, *Atmos. Chem. Phys.*, 8, 2387–2403, doi:10.5194/acp-8-2387-2008, 2008.
- Pirjola L., Pajunoja A., Walden J., Jalkanen J.-P., Rönkkö T., Kousa A., Koskentalo T.: Mobile measurements of ship
emissions in two harbour areas in Finland, *Atmos. Meas. Tech.*, 7, 149 – 161, 2014.
- Rannik, U., Vesala, T., and Keskinen, R. On the damping of temperature fluctuations in a circular tube relevant to the eddy
covariance measurement technique. *J. Geophys. Res.* 102, 12789 – 12794, 1997.
- 665 Rannik, Ü., Kolari, P., Vesala, T., Hari, P.: Uncertainties in measurement and modelling of net ecosystem exchange of a forest
ecosystem at different time scales, *Agr. Forest Meteorol.*, 138, 244–257, 2006.


- Rinne, J. Tuovinen J.-P., Laurila, T., Hakola, H., Aurela, M., Hyphen, H.: Measurements of hydrocarbon fluxes by a gradient method above a northern boreal forest, *Agricultural and forest meteorology*, 102, 25 – 37, 2000.
- Seinfeld, J. H., Pandis, S. N.; *Atmospheric Chemistry and Physics: From Air Pollution to Climate Change*, Wiley, 2012.
- 670 Sahlée, E., Kahma, K., Pettersson, H., Drennan, W. M.: Damping of humidity fluctuations in a closed-path system.- In *In Gas Transfer at Water Surfaces 6* (Eds. Komori S., McGillis W. and Kurose R.), Kyoto University Press, Kyoto, Japan, 516-523, 2011.
- Seppälä S., Kuula J., Hyvärinen A.-P., Saarikoski S., Rönkö T., Keskinen J., Jalkanen J.-P., Timonen H.: Effects of marine fuel sulfur restrictions on particle number concentrations and size distributions in ship plumes at the Baltic sea. <https://doi.org/10.5194/acp-2020-949>.
- 675 Smedman, A., Högström, U., Bergström, H., Rutgersson, A., Kahma, K. K., Pettersson H.: A case-study of air-sea interaction during swell conditions, *J. Geophys. Res.*, 104, 25833 – 25851, 1999.
- Stohl, A., Wotawa, G., Seibert, P., Kromp-Kolb, H.: Interpolation errors in wind fields as a function of spatial and temporal resolution and their impact on different types of kinematic trajectories, *J. Appl. Meteor.*, 34, 2149-2165, 1995.
- 680 Webb, E.K., Pearman, G. I., Leuning R.: Correction of flux measurements for density effects due to heat and water vapour transfer, *Quart. J. Met. Soc.*, 106, 85 – 100, 1980.
- Vila-Guerau de Arellano, J., Duynkerke, P. G., Builtjes, P. J. H.: The divergence of the turbulent diffusion flux in the surface layer due to chemical reactions: the NO-O₃-NO₂ system, *Tellus*, 45B, 23 – 33, 1993.
- Williams, E. J., Lerner, B. M., Murphy, P. C., Herndon, S. C., Zahniser, M. S.: Emissions of NO_x, SO₂, CO and HCHO from commercial marine shipping during Texas Air Quality Study (TexAQS) 2006, *J. Geophys. Res.*, 114, D21306, doi:10.1029/2009JD012094, 2009.
- WMO 2013. WMO/IAEA Meeting on Carbon Dioxide, Other Greenhouse Gases and Related Tracers Measurement Techniques GGMT-2013, GAW report 213, July 2014.
- Yli-Ojanperä, J., Kannosto, J., Marjamäki, M., Keskinen, J.: Improving the nanoparticle resolution of the ELPI, *Aerosol. Air*
- 690 *Qual. Res.*, 10, 360–366, 2010.

Table 1. Estimated relative expanded uncertainties for the fluxes of gaseous CO₂ and nanoparticles by the GR method, and for CO₂ by the EC method in meteorological situations of stationary (U_{Stat.Met.}). More details of the uncertainty budget are presented in Supplementary Table S1. The uncertainty values are given at the median flux values.





Flux	Method	Flux (median)	U_{Stat.Met.}
F _{CO2}	EC	-0.004 mg m ⁻² s ⁻¹	24.9 %
F _{Ntot}	GR	-229.1 cm ⁻³ m s ⁻¹	30.8 %

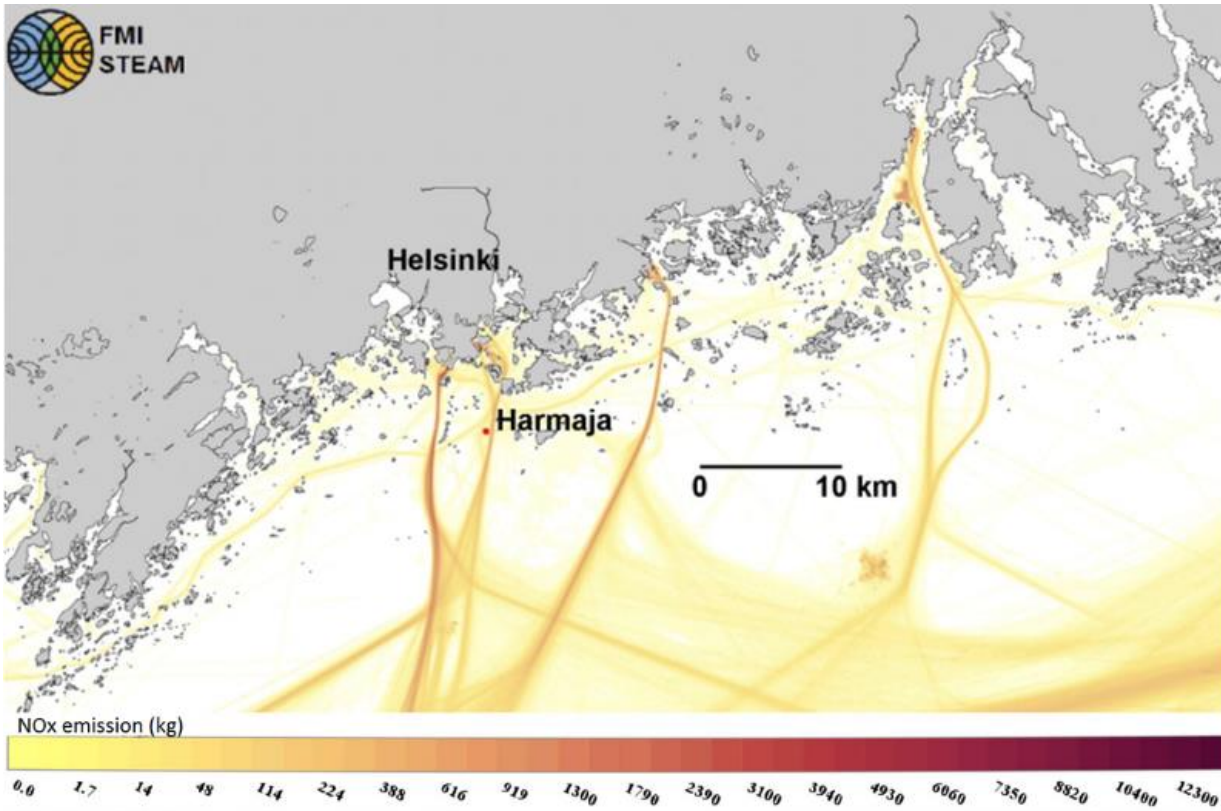

700 Figure 1. International ship routes at the Baltic Sea and the ship routes to the harbors of Helsinki along with the modelled NOx emissions. Land area is marked by grey, sea by white, and NOx emissions in kg by color indicated on the bar. Harmaja Island is marked by a red circle.

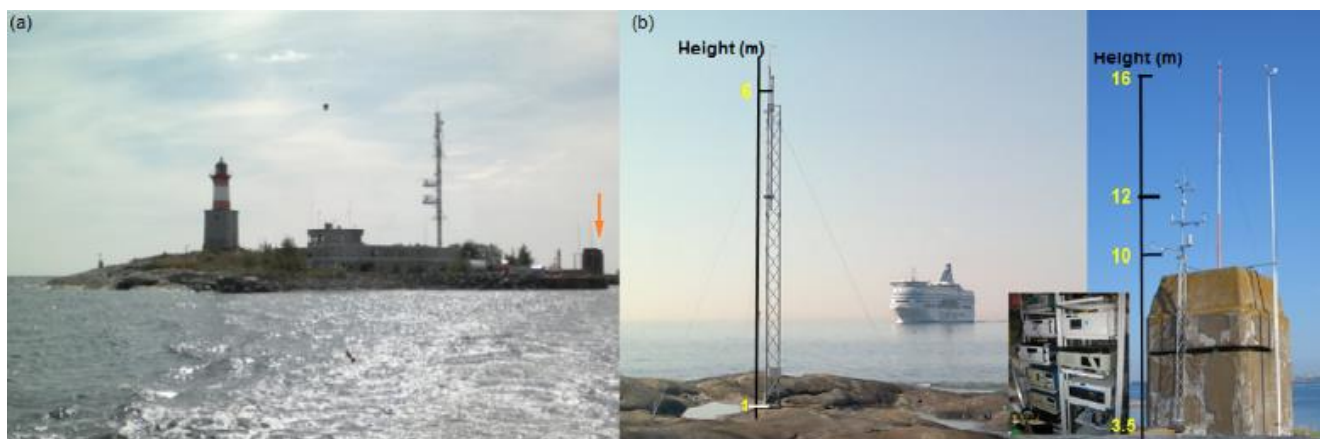


710 Figure 2. a) Harmaja island. **The red arrow** points to the measurement tower. b) Measurement instrumentation was installed in racks inside the fire control tower. The mast on the right includes all the measurement probes (wind and temperature probes and sample intakes) for the gradient and eddy covariance methods during the 2011 campaign, whereas the mast on the left includes the probes and sample inputs for the eddy covariance method and for measuring gas and particle concentration during the 2012 campaign. Both masts faced the open sea. The masts stood approximately 20 m from the shoreline and 3.5 m above MSL in 2011, and 3 m from the shoreline and 1 m above MSL in 2012. The official weather mast of the FMI is located by the side of the tower (right-side mast, 16.6 m).

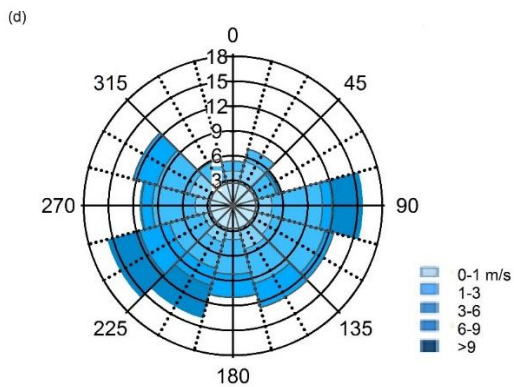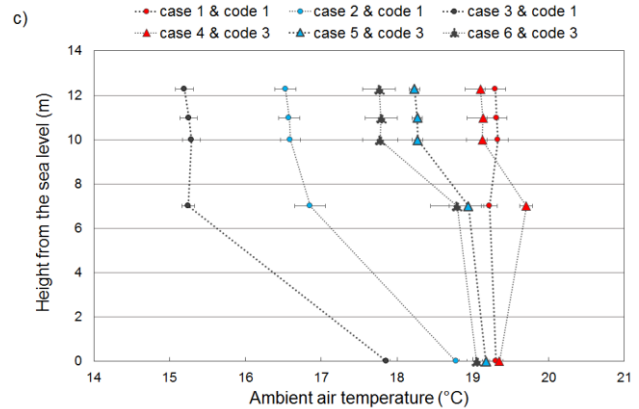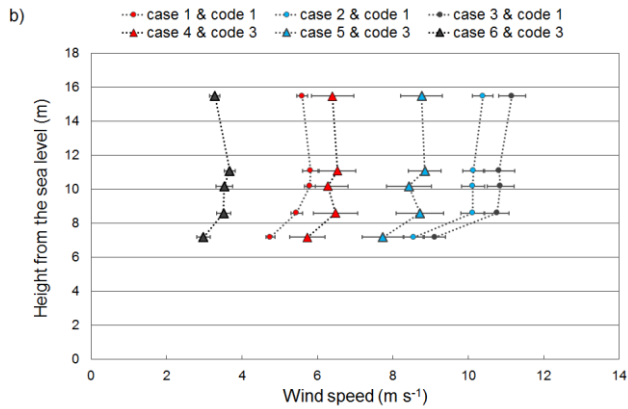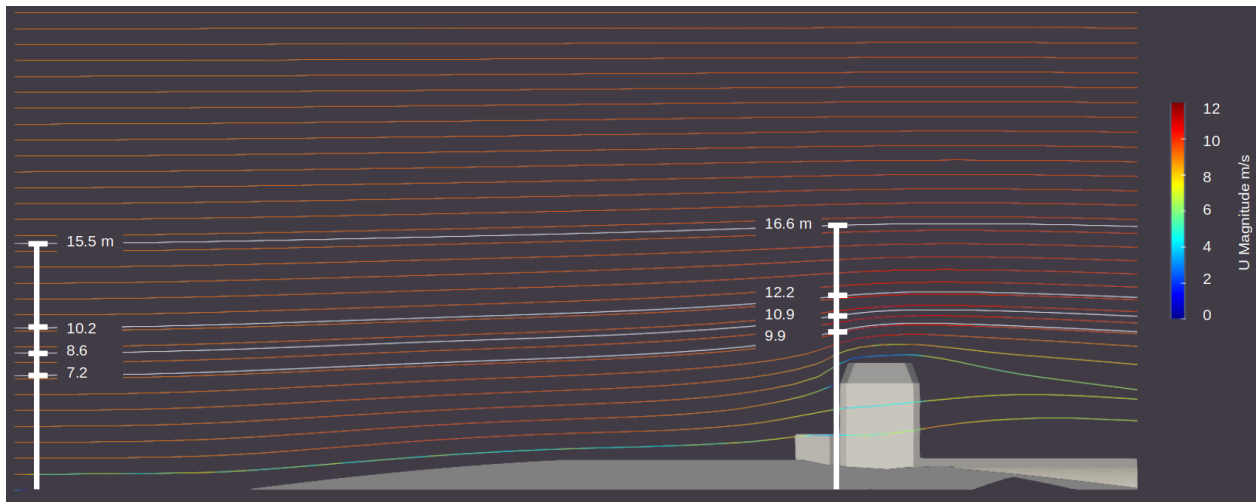

720 Figure 3. a) The actual measurement heights were reduced to corresponding heights over the open sea surface utilizing calculated isopleths from flow dynamics program. The actual wind speed probe heights at the measurement mast are shown on the right and their projected

725 heights over open sea on the left. b) Mean wind speed profiles over 2 to 3 hours are presented at different heights in the wind direction sector from 150° to 270° . The dots represent the situations of no swell (code 1), while the squares represent cases of swell (code 3). The error bars show the standard deviation of the wind speed over the average period at the respective heights. c) Hourly mean temperature profiles are presented from the same situations as the wind profiles in Fig. 3b. The error bars show the standard deviation of the temperature over the average period at the respective heights. d) Wind rose of direction (scale as %) and wind speed (m/s) at different ranges at the measurement height of 16.6 m.

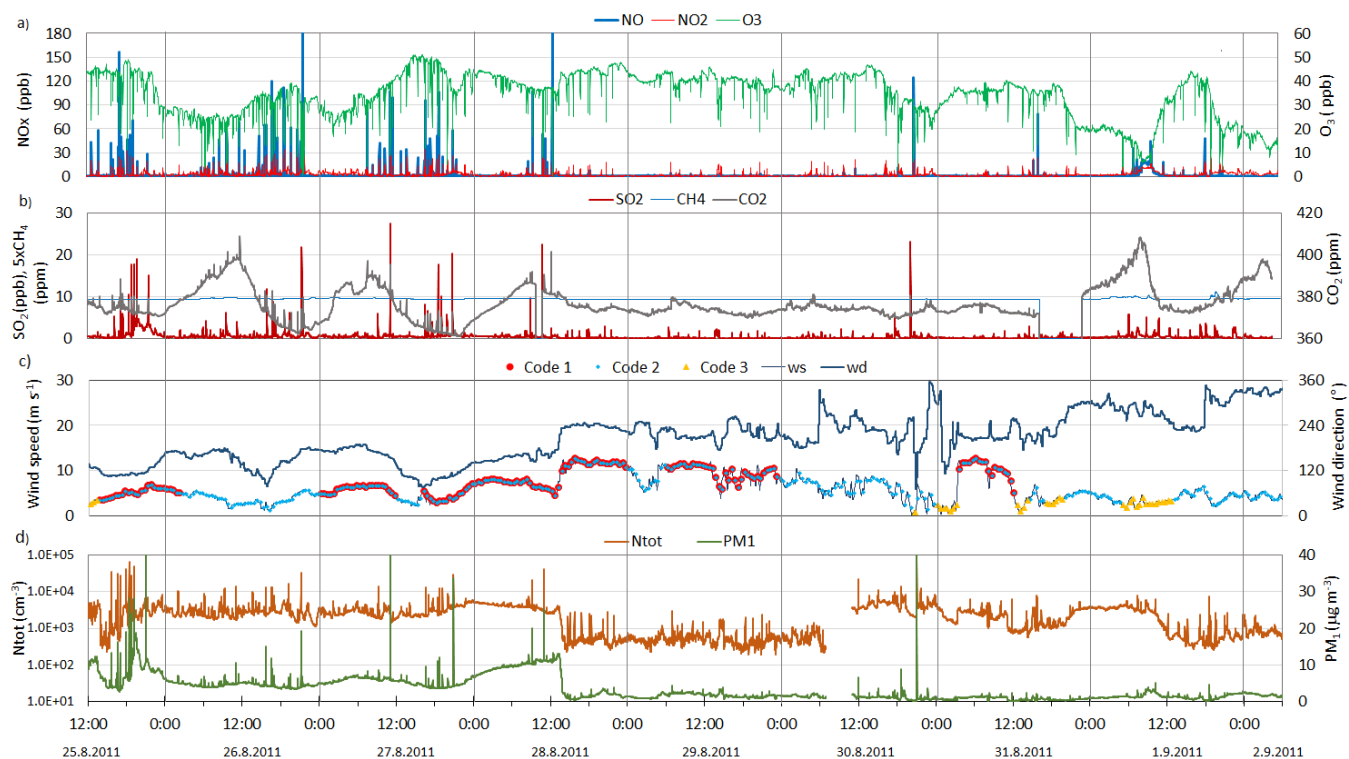

730 Figure 4. Time series of one-minute average concentrations of gaseous (a-b) and particulate matter (d) as well as the wind speed and wind direction (c) during 25.8.-2.9.2011. Also shown in c) are the 30 minutes average wind speed in different situations regarding the M-O theory, i.e. codes 1 to 3.

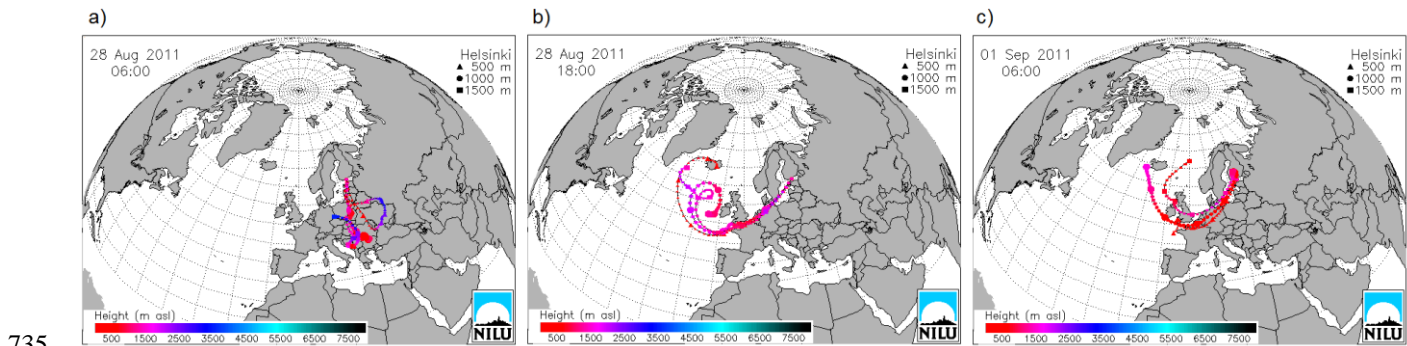


Figure 5. Selected airmass trajectories 28.8. at 6 am (a) and at 6 pm (b), and 1.9. at 6 am (c) during our campaign of 2011. The times are given in UTC, whereas our data sets are given in EET (UTC+2).

740

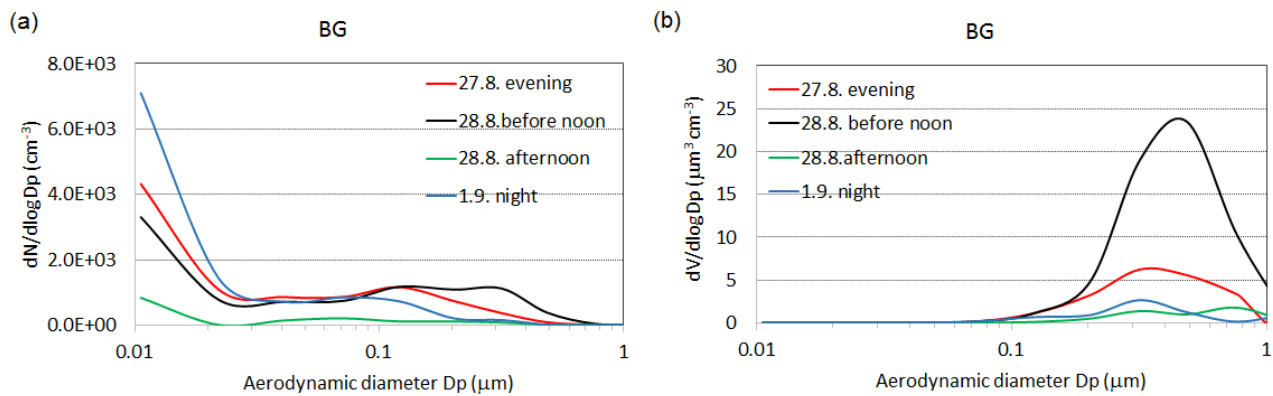


Figure 6. Number (a) and volume (b) size distributions of background particles.


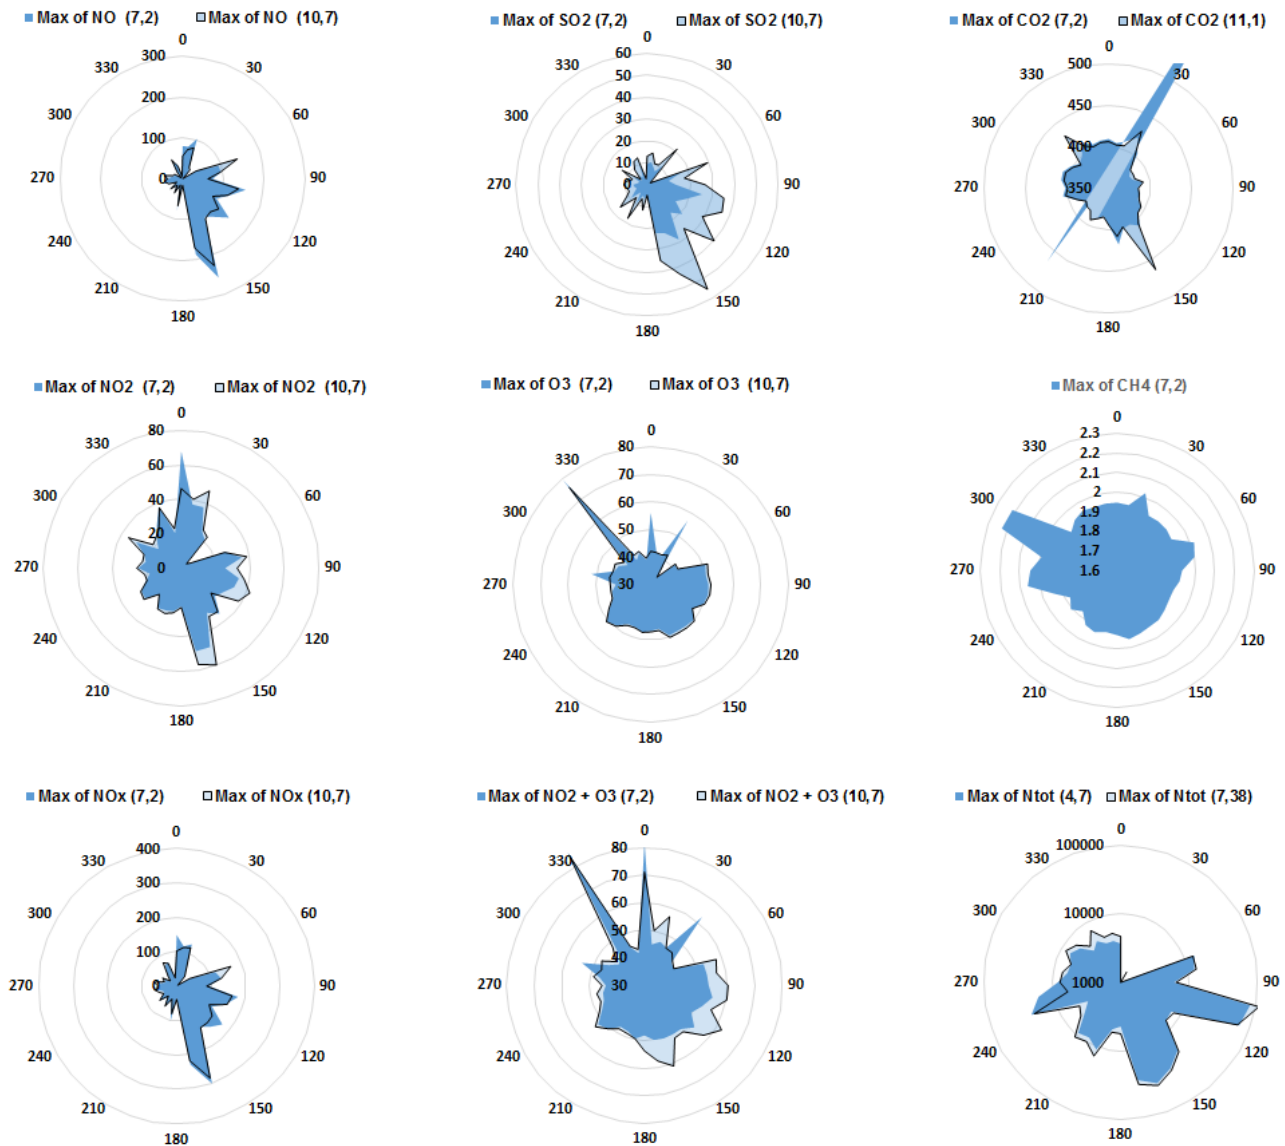


Figure 7. Roses of the maximum gaseous concentrations of nitrogen oxides (NO, NO₂, NO_x) in ppb, oxidants O₃ and NO₂+O₃, as well as SO₂ in ppb, and CH₄ and CO₂ in ppm. Also shown are the roses of particle concentrations N_{tot} in #/cm³. All roses, except for CH₄, were plotted from the two heights; the corrected heights (m) are given in parentheses above the roses. **The direction of the coastline is from 240 to 60 degrees.**





750 **to 60 degrees.**

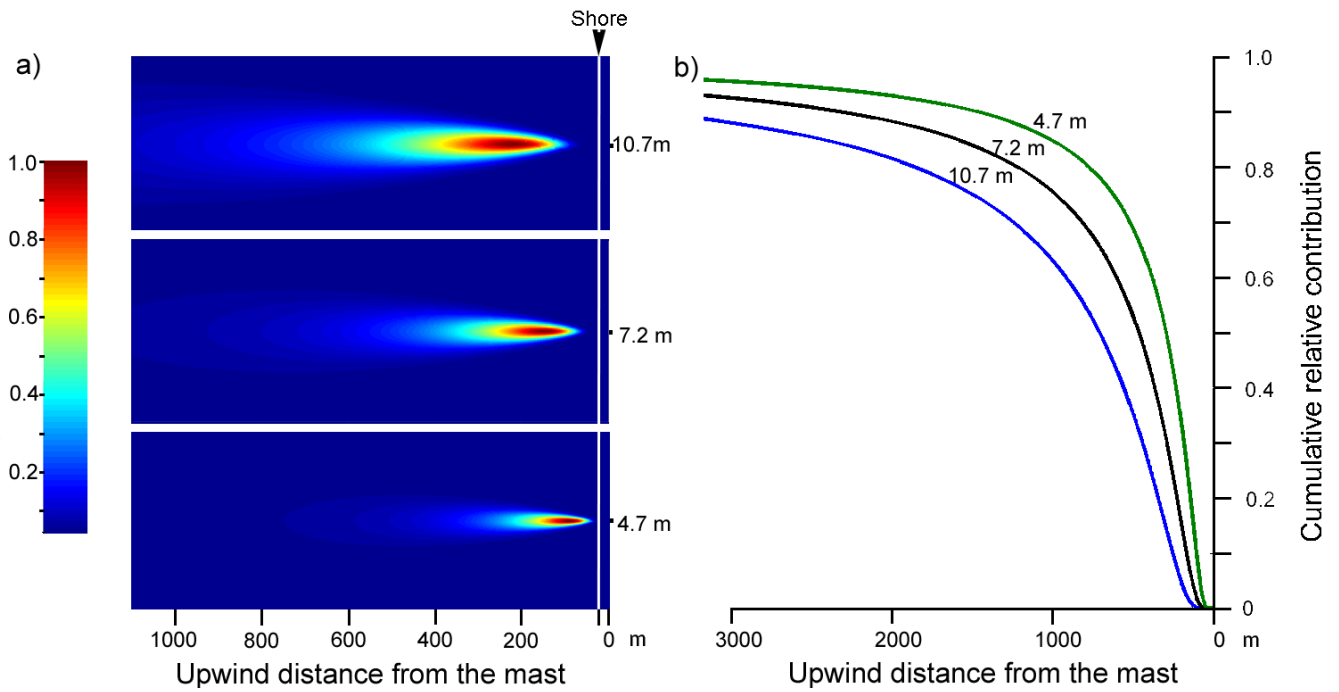

755

Figure 8. a) Flux footprint areas at neutral stability seen by the CO₂ instruments at 10.7 and 7.2 altitudes, and by the ELPIs at 7.2 and 4.7 m altitudes, as recalculated in Fig. 3a. X-axis refers to the upwind distance from the instruments, and the colour bar to the relative intensity of the sea surface area to the flux. Figure b) shows the cumulative relative contribution.

760

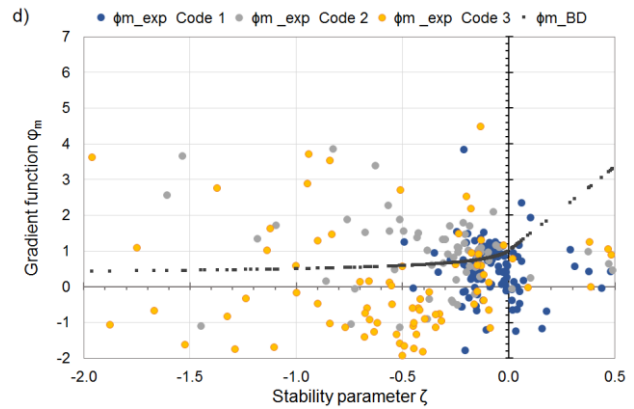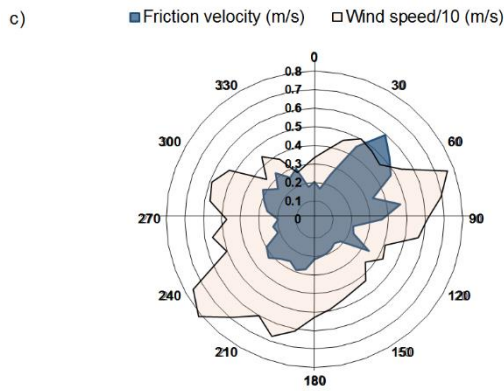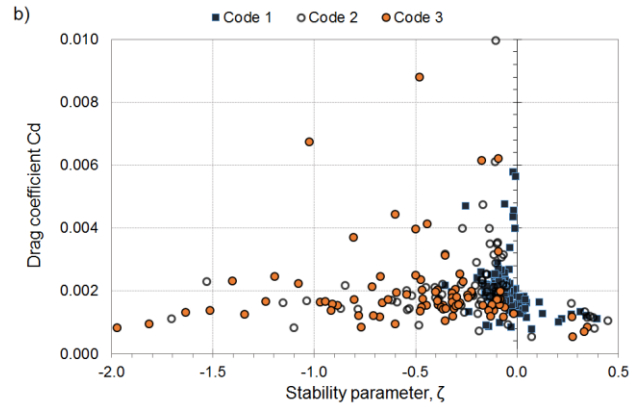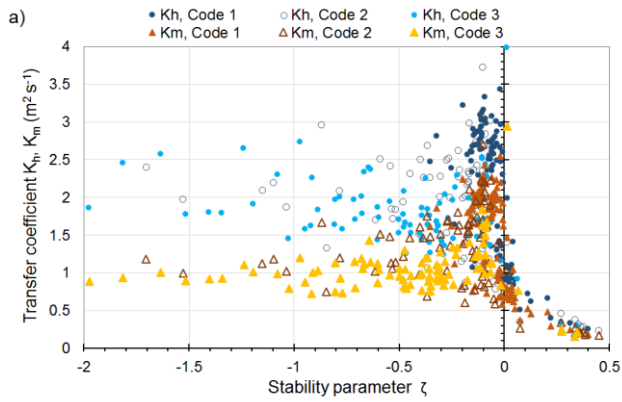

765

Figure 9. a) The eddy diffusivity coefficients K_h (blue) and K_m (brown) as a function of stability at height 12.28 m and with wave codes 1, 2 and 3. b) The friction velocity by sonic anemometer as a function of stability at 11.1 m height with wave codes 1, 2 and 3. c) The rose of friction velocity and wind speed (divided by 10) as averages over the wind sectors of 10° . d) The gradient functions from the experiments (ϕ_{m_exp}) at the 15.5 m altitude and from the Businger - Dyer formula (ϕ_{m_BD}). In a), b), and d) the stationary criteria in wind sector $150-270^\circ$ is based on the momentum flux.

770



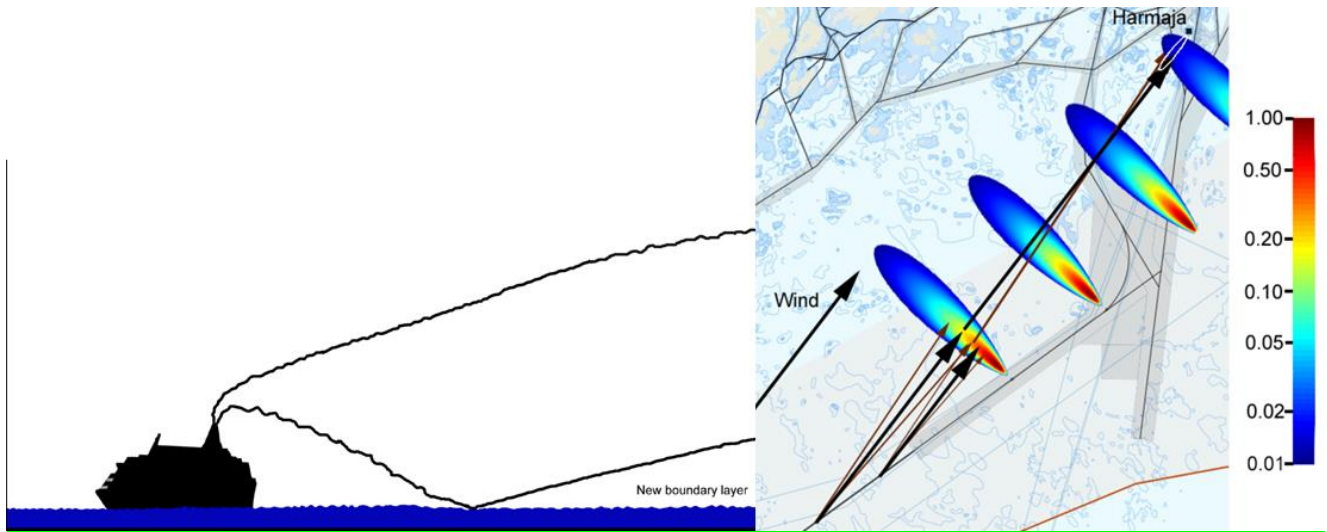


Figure 10. Schematic figure of the vertical profile of ship plume dispersion. If the stack height is around 55 m the plume touches the sea surface at around 450 m distance from the ship. b) The momentary plumes at 15, 23, 30 and 37 min after start (0 min) at the sea surface. Black arrows are the wind speed vectors ($w_s = 11 \text{ m s}^{-1}$), brown arrows show the dispersion of the plume and gray lines the ship routes to Helsinki, one passing Harmaja Island on its right side. Color on logarithmic scale (two decades, highest values dark red) refers to the pollutant concentrations in the chimney. The footprint area, an ellipsoid in white color at Harmaja inside of which 80 % of flux is reached at the height of 10.7 m.

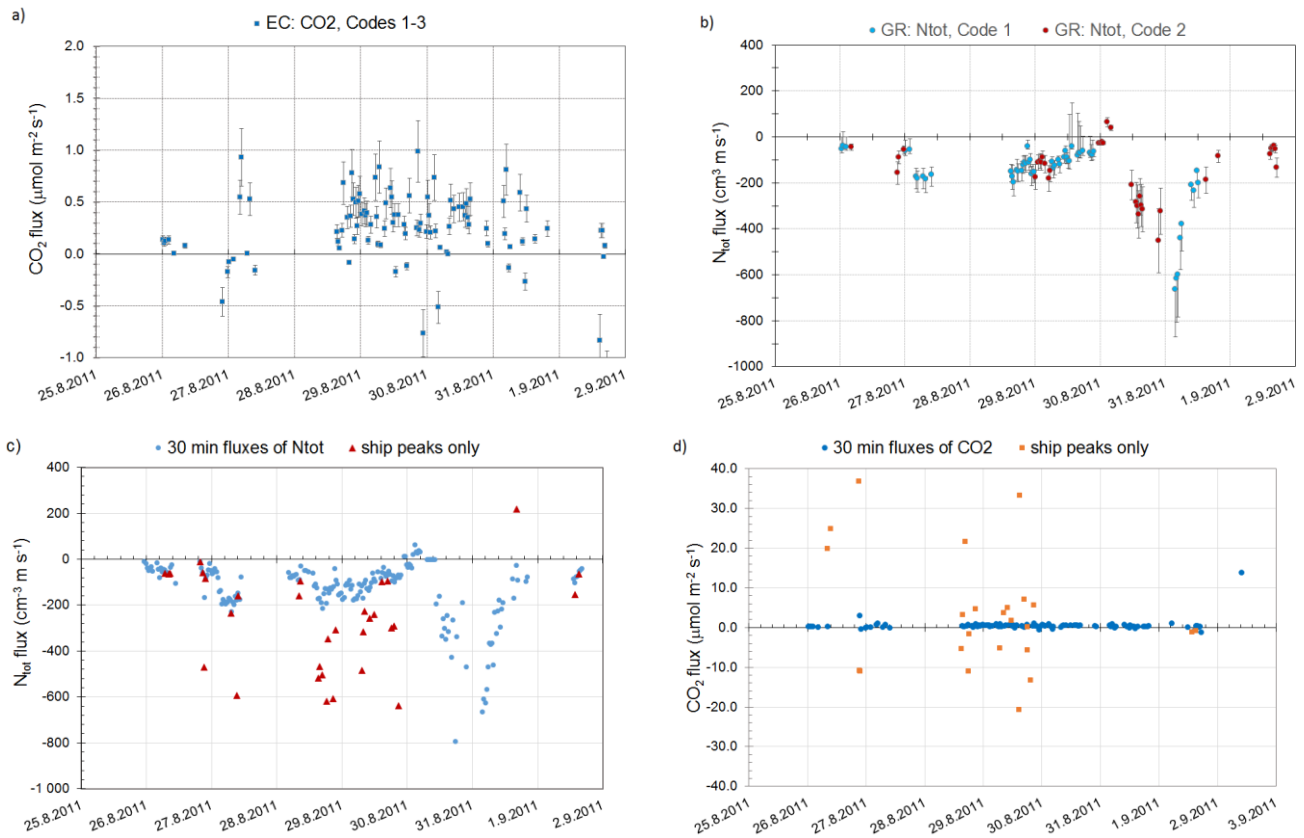

790 Figure 11. Time series of 30 min fluxes for CO_2 ($\mu\text{mol m}^{-2} \text{s}^{-1}$) by the EC methods (a) in all wave conditions (codes 1 to 3), and N_{tot} ($\text{cm}^{-3} \text{m s}^{-1}$) by the GR method (b) with no swell (codes 1-2), along with the uncertainties. The data in (a) and (b) include only events in the wind sector between 150° and 270° and with the stationary criteria based on the momentum flux for N_{tot} and the CO_2 flux for CO_2 . c) Time series of the 30 min fluxes of N_{tot} by the GR method in the wind direction of $150\text{-}270^\circ$. Additionally, the fluxes of ship peaks are shown separately. d) The same as c) but for CO_2 fluxes.

795

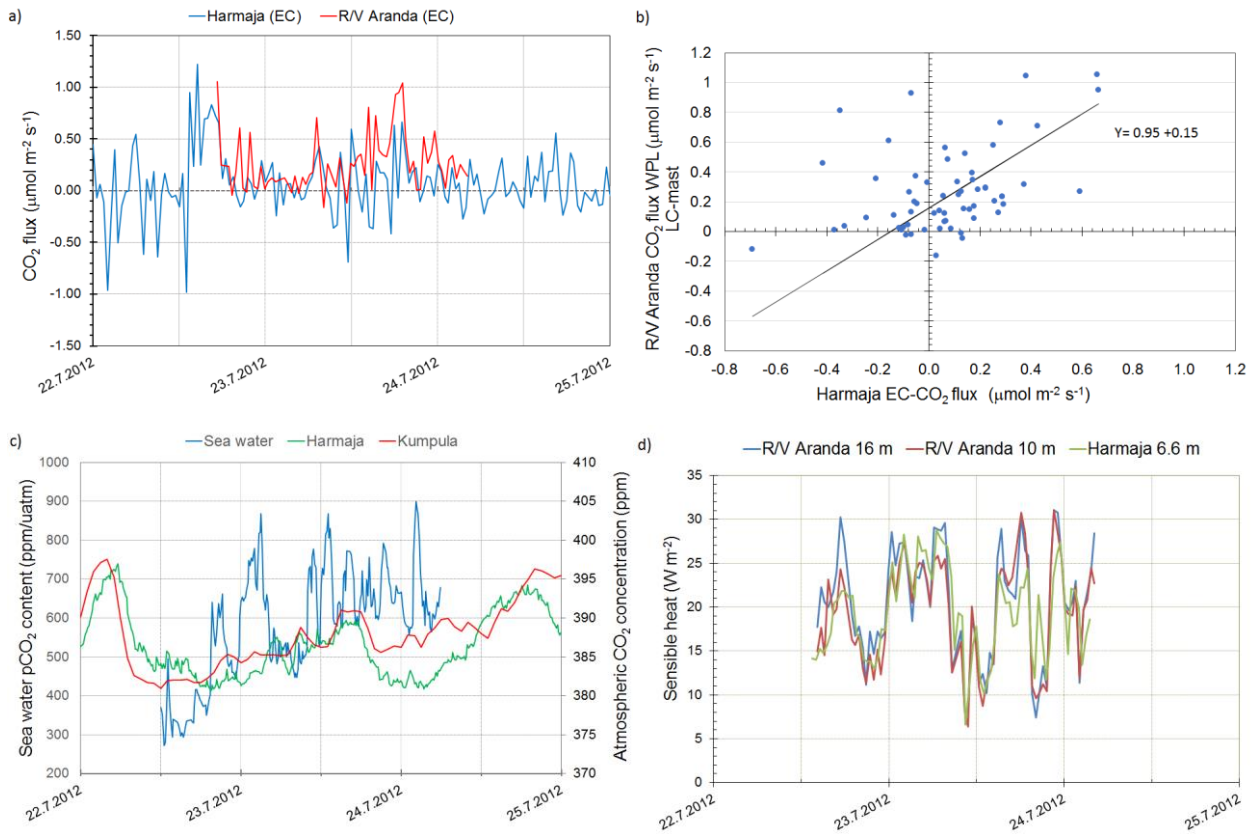

800 Figure 12. a) Time series of CO₂ fluxes by the EC methods in 2012 at Harmaja and at the R/V Aranda in the wind direction of 150-270°. b) Scatter plot of orthogonal regression analysis between EC-CO₂ flux measurements conducted at Harmaja and on R/V Aranda in 2012. Also presented is the orthogonal regression line. c) Partial pressure of CO₂ in the seawater from R/V Aranda, and CO₂ concentrations in the atmosphere at Harmaja and at the urban background monitoring station SMEAR III in Kumpula, Helsinki. d) Time series of sensible heat fluxes measured by the EC method at Aranda at 16 and 10 m altitudes and in Harmaja at 6.6 m altitude.

805

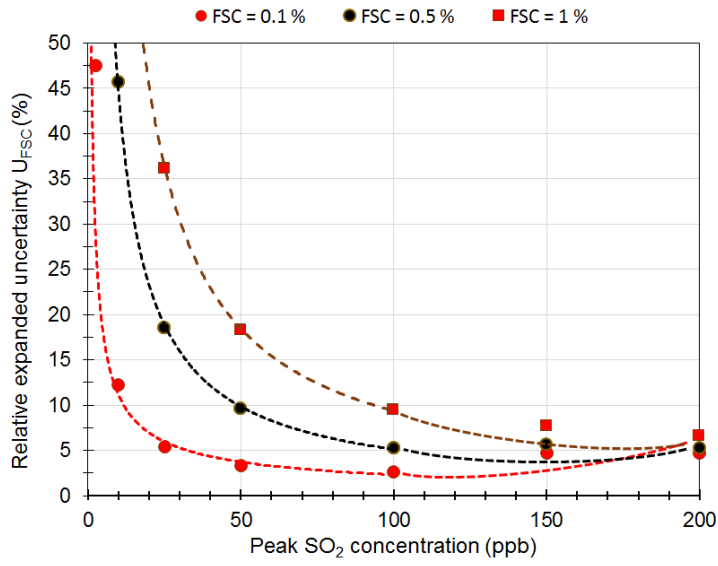


Figure 13. The expanded uncertainty of FSC, U_{FSC} (%), as a function of SO_2 peak height concentration for three FSC limits: 0.1 % (red circle), 0.5 % (black circle) and 1 % (red square).

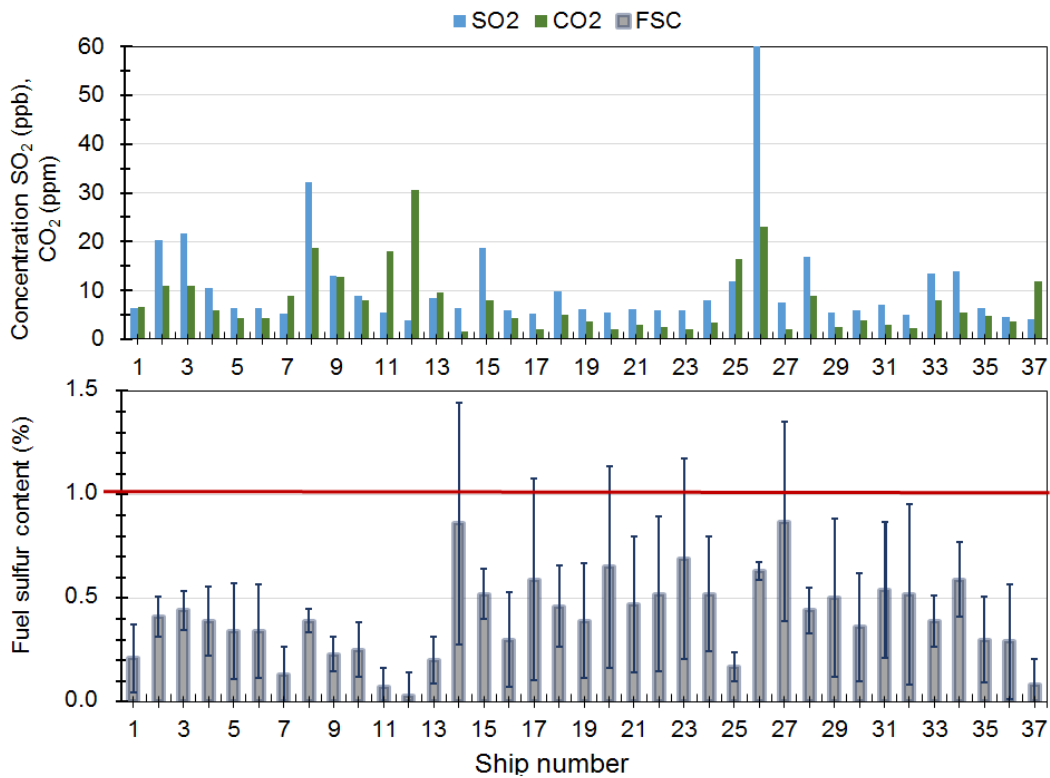


Figure 14. Peak height concentrations of SO₂ and CO₂ from a ship emission plume and calculated FSC with the expanded uncertainty U_{FSC} during a short time period of the 2012 measurements. The red line represents the FSC = 1 % limit following the regulation (Directive 1999/32/EC). All the ships complied with the regulation.