Reviewer #1

I found this article to be very well written, interesting, and has some significant points. I have the following comments and suggestions. They are minor and can lead to future research.

We would like to thank Dr. Heymsfield for the review and supportive comments. The revised manuscript is attached at the end of the response to review.

Introduction. The introduction was extremely comprehensive and useful to researchers

Thank you for the positive assessment.

Page 2, line 16. Relative humidity also has a large influence on the melting of snow and therefore the melting layer.

Yes, we agree. We have amended the sentence as follows:

It has been shown that ML properties are modified by the ambient environment such as relative humidity (RH, Willis and Heymsfield, 1989; Battaglia et al., 2003; Carlin and Ryzhkov, 2019) as well as microphysical processes ...

Page 4, line 14. This relationship is extremely similar to the one we developed from insitu observations of particle size distributions used in concert with direct measurements of the ice water content, in conditions where the particles were mostly unrimed snow, m=6.1x10⁻3D².05.

Thank you for pointing this out. Yes, it is true that the relation derived from aircraft measurements is similar to what we are observing. We have added the following text:

This relation is similar to the one derived from aircraft measurements (Heymsfield et al., 2004).

On Page 3, it says that "The BAECC field campaign was conducted at the University of Helsinki Hyytiälä Station from February to September 2014". On page 6, line 13, it says "for the winters of 2014-2018". On Page 16, line 10, I think I know what you mean but the sentence and field program dates need clarification.

Thank you for pointing this out. We have extended the description in Measurements as follows:

The snowfall measurements started as a part of the BAECC field campaign were continued and data collected during the experiment and additional three winters were used in this study.

Page 6, last paragraph. You could also use our vast in-situ data sets in widely varying conditions to develop similar relationships, in particular when the CVI direct measurements were available, to conduct a similar study. Those data are readily available. Some are collocated with direct measurements of radar reflectivity at multiple radar frequencies (e. g.,

OLYMPEX field program). Figure 1 could readily be repeated using these data for many different types of clouds.

Thank you for the suggestion. This could be a very interesting follow-up study.

Page 10, last paragraph. Can't reflectivity alone be used to look at the fraction of riming of the particles-at least to discriminate rimed from unrimed?

In our opinion, the reflectivity alone is not sufficient. In this study, we use DWR and mean Doppler velocity observations to infer the rime mass fraction.

Page 11, line 5. 5. "is rises" to "increases"

Corrected.

Reviewer #2

1 Summary

This manuscript presents the analysis of vertical radar profiles at different frequencies, conditioned to the amount of riming in the ice phase above the melting layer and to the intensity of precipitation (as rain) at the ground level. This analysis suggests that the precipitation intensity is a strong / main driver of the variability of the vertical profiles of polarimetric signature as seen by radars at X, Ka and W band, as well as by an operational C-band radar.

2 Recommendation

Building on scattering simulations and on a classification technique to identify the (qualitative) degree of riming, the analysis of the vertical profile of polarimetric radar variables collected at 3 frequencies (x, Ka and W) for an ensemble of rain events exhibiting a clear melting layer is relevant to the readership of ACP. I have some concerns (see list of comments below), the main ones being the limited size of the data set used in the end (11.5 hours) and the associated uncertainty on its representativity (in particular in terms of dominant microphysical processes) and the uncertainty associated with the riming classification. Overall, this manuscript could be published in ACP after the questions and concerns listed below have been properly addressed.

We sincerely appreciate the reviewer for your constructive comments and time spent to evaluate this work. Please see below our response to your comments. The revised manuscript is attached at the end of the response to review.

3 General comments

1. In the end, the analysis is based on 11.5 hours of rain... This is not that much, and the representativity of these 11.5 hours should be discussed. Related to this question, one of the main conclusions of this work is that the precipitation intensity is the dominant factor in explaining the features of the ML and the polarimetric profiles. To strengthen this conclusion, could the authors rule out the possibility that in the considered 11.5 h there is a particular dominant process that relates to precipitation intensity and hence "bias" the analysis? In my view this is a possible concern because precipitation intensity (attractive because easier to measure in rain and important for hydrological applications) reflects many processes (riming, analyzed here, but also concentration, vertical wind, etc.) and they are not individually considered in the present study.

We agree with the reviewer. It is a pity that only 11.5 h of stratiform rainfall cases were collected, because the radars were not always vertically pointing during BAECC. This study is aiming to revisit the impact of snow microphysics on the melting layer, as investigated in previous studies (e.g., Fabry and Zawadzki, 1995; Zawadzki et al., 2005; Wolfensberger et al., 2016), based on new multi-frequency radar observations. With the constantly expanding set of multi-frequency radars, more of such observations are becoming available and will definitely help to evaluate and consolidate our conclusions. Nonetheless, we do not expect the data would be significantly biased to a particular event, because they were collected from non-consecutive periods in 24 events.

We have specified the total events in the first paragraph of Results as:

... we have identified 4147 vertical profiles of observations in **24** stratiform rainfall events corresponding to about 11.5 h where the measurement requirements were met.

We have extended the discussion in the last paragraph as:

Due to the periodical changes of radar scanning modes during BAECC, the total stratiform rainfall cases are limited to ~11.5 h. More such observations can be utilized to evaluate and consolidate the presented conclusions.

In my view this is a possible concern because precipitation intensity (attractive because easier to measure in rain and important for hydrological applications) reflects many processes (riming, analyzed here, but also concentration, vertical wind, etc.) and they are not individually considered in the present study.

The goal of this study is to investigate the impact of riming on ML properties and we have shown that this effect depends on precipitation intensity. It was not our intention to study what causes/affects riming or changes in precipitation intensity.

2. Section 3.2 "Diagnosing snowflake rime mass fraction": it is an interesting approach presented here, but the goodness-of-fit of the fitted power laws should be provided in Table 1, as an indicator of how well these power laws do capture (or not...) the variability of the data, in particular because Fig.1 does not suggest a very good fit. In addition, the sanity check presented in Section 4.1 (Fig.3) is not super convincing: there seems to be a lot of overlap...

Thank you for pointing this out. We have added the uncertainty information in Table 1.

These plots are based on the real data and show the difficulty of identifying the riming fraction by using radar observations. To our knowledge there is no better method that can be used for this. Because of the overlap, we are only using highly rimed and unrimed cases, and we don't use in between cases marked by yellow color in Fig. 1.

The sanity check is to show that our results are comparable with (Zawadzki et al., 2005). Although we believe Zawadzki et al. (2005) have presented qualitatively correct results, their model is based on some assumptions. For example, aggregation and breakup are neglected, while the continuing aggregation in melting layer has been detected by aircraft observations (Heymsfield et al., 2015); Then, they assume the density of the melting snowflakes varies linearly with the melted fraction between the initial snowflake density and that of water. This has yet been confirmed. Therefore, we think the presented results show that our classification is reasonable.

3. Figures 4 to 9: the median profiles are plotted, but the reader has no information about the variability of the individual profiles. I strongly encourage the authors to indicate (by thin lines, bars...) the variability around the median profiles, so one can assess if the differences seen between the median profiles are more or less significant.

Thank you for this suggestion. We have included the uncertainty shading in those plots.

4. The analysis is conditioned to unrimed vs rimed snowflakes. In the case of the rimed snowflakes, there is no discussion (I may have missed it...) about the altitude at which riming occurs and that can vary from one event to the other. If so, the vertical profiles of radar variables above the ML could be much more variable than the unrimed cases.

We agree with the reviewer that locating the level of riming would be very helpful in understanding how riming modifies vertical profiles of radar variables. In this paper, radar measurements at the melting layer top are used to perform the classification. Therefore, the vertical profiles of radar variables above the ML are not critical for the classification. We find that the height where radar observations were used in classification was inexplicitly explained. In the revision, we have amended the first sentence in the first paragraph of Section 4.1 as:

At the first step of our data analysis, the classification of unrimed and rimed snow using DWR(X,Ka) - V_X observations **at the ML top**, proposed in the previous section, was evaluated against previous studies.

5. Conclusion 3 should be revisited: the fact that Zdr is decreasing because of aggregation is well established. And the signal in Kdp at 3000 m above the ML may correspond to the particular events considered but may not be a general feature.

Agree. We have amended it as

The decrease of Z_{dr} towards the melting layer is pronounced in heavy precipitation but is insignificant in light precipitation.

- 4 Specific comments
- 1. P.7, I.5-6: the effect of supercooled liquid water droplets on W band is mentioned earlier, but it seems nothing about X and Ka band. This should be clarified (as well as the 1 dB threshold).

Thank you for pointing this out. The attenuation at Ka-band due to supercooled liquid water is much less than at W-band. Kneifel et al. (2015) have shown that the liquid water path of 500 g/m² corresponds to 1 dB attenuation at Ka-band. In our recent study, the attenuation due to supercooled liquid water in a rimed snow event is in the order of 1 dB. Therefore 1 dB is used. We have amended this sentence as

The presence of supercooled liquid water may lead to appreciable attenuation at Kaband which translates to enhanced DWR(X,Ka) after the relative calibration at cloud top. For the liquid water path of 500 g/m^2 , the estimated Ka-band attenuation is in the order of 1 dB (Kneifel et al., 2015). Therefore, cases with DWR(X,Ka) < 1 dB were rejected when identifying unrimed snow.

2. P.8, I.4: over how many profiles in total have those 4147 been selected? To have an idea about the selection.

Those profiles (each profile indicates the averaged observation in 10s as described in Measurements) are in stratiform rainfall as recorded by vertically pointing radars during BAECC. Significantly slanted cases were removed, as described in section 3.1.

3. Figures 2 and 3: I suggest to use transparency to better visualize the possible overlap between rimed and unrimed cases.

Agree. We have amended Figures 2 and 3 as suggested.

4. P.10, title of section 4.2: should it be "Vertical" instead of "Vertically"?

Corrected.

5. P.10, I.24: not so obvious to me, could the authors please elaborate a bit more about the explanation of the later response of phy for unrimed snowflakes?

We believe this is related to differences in PSD. The unrimed snowflakes are larger and their size distribution is probably wider. But, a ML modeling study is needed to explain the exact mechanism behind this observation.

6. figures 4 to 9: why is there a black solid line at the minimum altitude in all the plots? Is it signal or an artifact?

The black solid line was used to indicate the x-axis. We have removed this line and replotted the figures.

7. Figure 5: there is no comment about the fact that below the ML, the DWR(X,Ka) profile is higher for the rimed cases and progressively converges toward the unrimed profile when PR is increasing.

This is a very heuristic comment. We have extended one paragraph to explain this phenomenon.

Interestingly, the DWR(X,Ka) profile below the ML is higher for the rimed cases and progressively converges towards the unrimed profile as PR increases. For light precipitation, the rain drops are small enough to be Rayleigh scatterers at Ka-band, thus the difference of DWR(X,Ka) in rain between unrimed and rimed cases roots from the differences in attenuation. If the supercooled liquid water attenuation of rimed cases is more significant, the corresponding DWR(X,Ka) in rain would be smaller than the unrimed cases. However, the reverse is observed. von Lerber et al. (2015) have shown that the melting layer attenuation of rimed snowflakes is smaller than unrimed ones, which could possibly explain the larger DWR(X,Ka) of rimed cases in rain. With the increase of precipitation intensity, the DWR(X,Ka) of rimed cases in rain decreases towards the unrimed profile. This can be attributed to several factors, such as the enhanced liquid attenuation above the melting layer and the non-Rayleigh scattering of large raindrops at Ka-band. We hesitate to determine the role of non-Rayleigh scattering in rain, since raindrops characterized by different non-Rayleigh scattering size regions can lead to opposite effects on DWR(X,Ka) as shown by Li and Moisseev (2019).

8. P.12, I.7: it is mentioned that the reflectivities at X and Ka bands are matched at cloud top. Would it be more correct to mention precipitation top, as it is not sure to that a radar at X band would always see the cloud top?

Thank you for the suggestion, we have changed the cloud top to the precipitation top.

9. Figure 8: the note about the not-shown $Z_{W,rain}$ is unclear to me. How is the reflectivity profile at W band normalized?

Sorry for the confusion. We have added the description in the caption as follows:

The reflectivity profiles at W-band are shifted by matching the radar reflectivity in rain just below the ML.

10. P.,16, I.2: "intense" rather than "intensive"?

Corrected

Reviewer #3

The research links the snow microphysical processes and melting layers through characterizing the radar signatures of multi-frequency and dual-polarimetric radars. This article is well-organized and documented. There are some comments, concerning the scientific methods and goals, that need further clarification.

We sincerely appreciate the reviewer for your constructive comments and time spent to evaluate this work. Please see below our response to your comments. The revised manuscript is attached at the end of the response to review.


Major comments:

1. The authors focus on how rimed and unrimed processes related to the precipitation intensity. How do the authors eliminate or separate the effect of "aggregation" for the analysis in Sec 4?

It is true that while we have a measure of riming, i.e. rime mass fraction, we don't have a similar quantitative measure describing aggregation. That is why in this study we identify cases of rimed and unrimed snow. Snow growth processes that result in the unrimed snow are vapour deposition and aggregation. At least for the heavier precipitation cases, aggregation plays a more important role. So, for the same precipitation rate, unrimed cases will be more affected by aggregation. This is supported by larger DWR values.

2. The method used for classifying the rimed and unrimed process is based on the observations in the winter cases. Then, the method is applied for cases not only in the wintertime. This is creative. But, I'm curious how much the riming conditions (e.g. the characteristics of supercooled water content) in different seasons will affect the application of the method?

Ideally, we would have observations both on the ground during snowfall and aloft during rain events to see if the ice precipitation properties and riming conditions are different. Unfortunately, we don't have such observations. In this study, we use snowfall observations

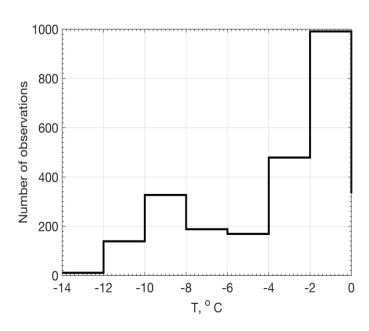

from 2014 to 2018. This dataset covers various conditions governing snow growth. The air temperature during most of the cases is close to 0, see the figure. So, at least in terms of air temperature the conditions are very similar.

Furthermore, as pointed out by Dr. Heymsfield the observed m-D relation is not very different from his aircraft observations. The mass-size relation of unrimed snow in (Heymsfield et al., 2004) corresponds to the FR of 0.13

which is still classified as unrimed snow based on our method.

Additionally, in the recent paper, Tiira and Moisseev (2020) have shown that the vertical profiles of dual-polarization radar variables over our measurement site are rather similar in winter and summer cases.

3. The authors did a very nice literature review in the manuscript to support their findings. However, more discussion is required to present the new findings in this long-term analysis in addition to the previous studies.

Despite some previous studies addressing the impact of snow microphysics on the melting layer, our understanding on this topic is still poor largely due to the observational challenges. This is the first study where advanced multi-frequency radar observations are used to address this topic. This work builds on the recent progress of studying snow microphysics using multi-frequency radars. The presented unrimed / rimed classification is novel. The synthetic analysis of profiles of polarimetric multi-frequency radar observations is also new. Basically, all the findings that are summarized in the conclusions are new. Some of them may confirm that was previously known, but all of them advance our knowledge on the connection between snow microphysics and ML properties.

Minor comments:

1. p.6 What is the temporal resolution of sounding used for calculating rhoair?

The radiosoundings were launched four times per day as described in Section 2.1.

2. Fig. 1 It will be helpful for readers to read the plot if you can move the legend outside of the figure 1a.

Thank you for this suggestion. We have amended Figure 1 as suggested.

3. Fig. 1 The outliers (e.g. in Fig 1c) seems affect the fitting a lot. How much uncertainties does these outliers affect the fitting and results for rimed/unrimed classification?

In the revised manuscript, we have included the RMSE in Table 1.

4. Why is the PR intensity classified into these four PR regions?

As shown in Figure 1, the fits of unrimed and rimed cases vary for different PR regions. Because of this, we needed to separate our analysis according to the precipitation intensity. The regions were selected such that we have enough observations falling within each region, while giving us an idea on how observations depend on precipitation intensity.

5. P.7 and table 1: The definitions of rimed and unrimed condition need to be documented.

Agree. We have extended the caption of Table 1 and included the RMSE in Table 1.

6. Fig. 3 What is the height difference (interval) considered here for the reflectivity enhancement? Is the unit dB/km?

The reflectivity enhancement is defined as the difference between the reflectivity peak in the ML and the reflectivity at the melting layer bottom. Namely, Zpeak – Zrain (Zawadzki et al., 2005).

We have added the explanation in the caption of Figure 3.

7. I'm confused about the purpose of mentioning the known fact of attenuation in Sec 4.2.2. What are the purpose for this discussion?

It seems misleading. We have moved them to Section 2.1.

8. P. 16 "Precipitation intensity has a strong impact on melting layer properties." Please revise this sentence. There is a correlation between these two, but it's odd to make this causation statement.

We have amend this sentence as

The radar-observed melting layer properties show a detectable connection to the precipitation intensity.

9. P.17 In the summary, the authors address the non-Rayleigh scattering effect on the radar signals at different wavelengths, but don't mention how to distinguish the non-Rayleigh effect before. Adding some comments on how the non-Rayleigh affect the radar signals and how to tell these non-Rayleigh effect will help readers to better understand this statement in the summary.

We have amended the discussion about Ka-band radar observations in Section 4.2.2 as follows.

As shown in Fig. 7, the Ka-band reflectivity enhancement in the ML decreases as the precipitation intensifies. This is similar with the observations presented by Fabry and Zawadzki (1995) who found that the reflectivity peak in the ML observed by an X-band radar is less pronounced than that observed by an UHF radar when the reflectivity in rain exceeds 25 dBZ. With the increase of precipitation intensity, the size of snowflakes generally grows. Therefore, there are less hydrometeors satisfying the Rayleigh criteria and the non-Rayleigh scattering becomes more significant. As a result, the reflectivity peak in the ML is not as pronounced as in the scenario of Rayleigh scattering. In addition, the ML attenuation increases as PR intensifies (Li and Moisseev, 2019), which further impedes the increase of reflectivity in the ML. This also explains the lower reflectivity enhancement in the ML for rimed snow when PR > 0.5 mm h^{-1} . As shown in Fig. 5, rimed snowflakes are usually smaller, thus the non-Rayleigh effect and ML attenuation (von Lerber et al., 2014) are not as significant as the larger unrimed ice particles.

Towards the connection between snow microphysics and melting layer: Insights from multi-frequency and dual-polarization radar observations during BAECC

Haoran Li¹, Jussi Tiira¹, Annakaisa von Lerber², and Dmitri Moisseev^{1,2}

¹Institute for Atmospheric and Earth System Research / Physics, Faculty of Science, University of Helsinki, Finland

²Finnish Meteorological Institute, Helsinki, Finland

Correspondence: Haoran Li (haoran.li@helsinki.fi)

Abstract. In stratiform rainfall, the melting layer is often visible in radar observations as an enhanced reflectivity band, the so-called bright band. Despite the ongoing debate on the exact microphysical processes taking place in the melting layer and on how they translate into radar measurements, both model simulations and observations indicate that the radar-measured melting layer properties are influenced by snow microphysical processes that take place above it. There is still, however, a lack of comprehensive observations to link the two. To advance our knowledge of precipitation formation in ice clouds and provide an additional constraint on the retrieval of ice cloud microphysical properties, we have investigated this link. This study is divided into two parts. Firstly, surface-based snowfall measurements are used to devise a method for classifying rimed and unrimed snow from X- and Ka-band Doppler radar observations. In the second part, this classification is used in combination with multifrequency and dual-polarization radar observations to investigate the impact of precipitation intensity, aggregation, riming, and dendritic growth on melting layer properties. The radar-observed melting layer characteristics show strong dependence on precipitation intensity as well as detectable differences between unrimed and rimed snow. This study is based on data collected during the Biogenic Aerosols - Effects on Clouds and Climate (BAECC) experiment, which took place in 2014 in Hyytiälä, Finland.

1 Introduction

Stratiform precipitation is prevalent in mid- to high- latitudes. In such precipitation systems, ice particles nucleated at the cloud top descend and grow on their way down by going through various microphysical processes, e.g., vapor deposition, aggregation and/or riming (Lamb and Verlinde, 2011). In the case of rainfall, these ice particles transform into raindrops in the melting layer (ML). The melting of ice particles is capable of modulating the thermal structure of the ML through the exchange of latent heat with the environment (Stewart et al., 1984; Carlin and Ryzhkov, 2019) and, as a result, can change the dynamics of precipitation (e.g., Heymsfield, 1979; Szeto et al., 1988; Fabry and Zawadzki, 1995). It has been shown that ML properties are modified by the ambient environment (Carlin and Ryzhkov, 2019) as such as relative humidity (RH, Willis and Heymsfield, 1989; Battaglia et al., 2003; Carlin and Ryzhkov, 2019) as well as microphysical processes taking place in the ML (Heymsfield et al., 2015), and by snow microphysical processes occurring above, e.g., aggregation and

riming (Stewart et al., 1984; Klaassen, 1988; Fabry and Zawadzki, 1995; Zawadzki et al., 2005; von Lerber et al., 2014; Kumjian et al., 2016; Xie et al., 2016; Wolfensberger et al., 2016; Trömel et al., 2019). In addition, the microwave attenuation in the ML is sensitive to the parameterization of snow microphysics (von Lerber et al., 2014) and can be significant at mm-wavelength (Matrosov, 2008; Haynes et al., 2009; Li and Moisseev, 2019).

5

To cm-wavelength weather radars, the ML appears as a band of the increased reflectivity, the so-called bright band, while to mm-wavelength radars such appearance is less distinct (e.g., Lhermitte, 1988; Sassen et al., 2005; Kollias and Albrecht, 2005). Properties of the ML and its radar manifestation bright band are influenced by cloud dynamics and microphysics, which can be directly probed by aircraft-mounted in-situ measurements (e.g., Stewart et al., 1984; Willis and Heymsfield, 1989; Heymsfield et al., 2015) despite the inability to conduct continuous long-term operation with such setups. Remote sensing of the ML with radars dates back to the 1940s (Ryde, 1946). Atlas (1957) have found that the strength of the bright band is weakened when melting graupel particles present, which was further confirmed by Klaassen (1988) and Zawadzki et al. (2005). A comprehensive long-term analysis of the ML appearance in vertically pointing X-band radar and UHF wind profiler observations has been performed by Fabry and Zawadzki (1995). They have compiled a record of the main ML features that were later used in modeling studies (e.g., Szyrmer and Zawadzki, 1999; Zawadzki et al., 2005; von Lerber et al., 2014). As the ML bridges snow and rain, the raindrop size distributions below the ML seem to be related to the bright band's reflectivity values (Huggel et al., 1996; Sarma et al., 2016). As presented by Wolfensberger et al. (2016), the thickness of the ML depends on riming, particle fall velocities as well as the bright band intensity. Meanwhile, the downward extension of the bright band, called the saggy bright band, may be linked to riming as suggested by previous studies (Trömel et al., 2014; Kumjian et al., 2016; Ryzhkov et al., 2016; Xie et al., 2016; Erlingis et al., 2018). Recently, Carlin and Ryzhkov (2019) have incorporated the cooling effects of melting snowflakes in the ML model and proposed that the saggy bright band may be explained by a combination of processes instead of a single factor. From the perspective of observation, there seems to be a lack of statistical studies untangling the impacts of snow growth processes on the observed ML properties.

Over the last few years, multi-frequency radar measurements of clouds and precipitation have become more easily attainable, which has led to the proliferation of studies demonstrating the advantages of using these observations for the investigation of snow microphysical processes (e.g., Kneifel et al., 2011, 2015; Leinonen et al., 2012a, 2013, 2018; Tyynelä and Chandrasekar, 2014; Leinonen and Moisseev, 2015; Leinonen and Szyrmer, 2015; Grecu et al., 2018; Chase et al., 2018; Mason et al., 2018, 2019). The potential dependence of dual-wavelength ratios (DWRs) at Ka-W-bands and X-Ka-bands on riming was observed by Kneifel et al. (2015). Dias Neto et al. (2019) have presented the strong aggregation signatures close to the ML using multi-frequency radar observations. This rapid aggregation could manifest itself as a dark band in W-band cloud radar observations, namely the dip of radar reflectivity just above the ML top (Lhermitte, 1988; Sassen et al., 2005, 2007; Heymsfield et al., 2008). Such reflectivity dip just above the ML may even be present in X-band radar measurements of light precipitation (Fabry and Zawadzki, 1995) but has not been well addressed. Mason et al. (2018) have incorporated the Doppler velocity and radar reflectivity observations from vertically-pointing Ka- and W-band radars into an optimal estimation scheme to infer the riming fraction, among other parameters. In addition to multi-frequency radar observations, dual-polarization radar measurements show promise in improving our understanding of ice precipitation processes (e.g., Bechini et al., 2013; Giangrande et al., 2016;

Kumjian et al., 2016; Ryzhkov et al., 2016; Moisseev et al., 2015, 2017; Li et al., 2018; Oue et al., 2018; Vogel and Fabry, 2018; Moisseev et al., 2019; Tiira and Moisseev, 2020). Therefore, the utilization of collocated multi-frequency and dual-polarization radar observations may pave the way for a better understanding of the connection between dry and melting snow microphysics.

During the Biogenic Aerosols Effects on Clouds and Climate (BAECC) experiment (Petäjä et al., 2016), vertically-pointing X-, Ka- and W-band cloud radars were deployed at the University of Helsinki research station in Hyytiälä, Finland. These observations were supplemented by Range-Height Indicator (RHI) scans carried out by the Finnish Meteorological Institute (FMI) C-band dual-polarization radar, providing a set of unique synergistic observations ideally suited to studying the connection between the growth and melting processes of snowflakes.

The paper is organized as follows. Section 2 introduces the instrumentation used in this study, followed by the illustration of detecting the ML and separating unrimed and rimed snow in Sect. 3. A sanity check of the snow classification and the statistical results of multi-frequency and dual-polarization radar observations are provided in Sect. 4. Conclusions are presented in Sect. 5.

2 Measurements

20

25

The BAECC field campaign was conducted at the University of Helsinki Hyytiälä Station from February to September 2014 (Petäjä et al., 2016). This experiment provides comprehensive vertically-pointing multi-frequency radar rainfall observations, which are used in this study. A 2D-video disdrometer (2DVD) was used to measure rain rate and calibrate X-band radar reflectivity. The collocated observations were aided by the FMI C-band dual-polarization weather radar. In addition to the radar setup during BAECC, long-term snow observations were made by a National Aeronautics and Space Administration (NASA) Particle Imaging Package (PIP, Newman et al., 2009; Tiira et al., 2016; von Lerber et al., 2017).

2.1 2DVD and vertically-pointing radars

The ARM 2DVD used in this study is a new generation of the one described in (Kruger and Krajewski, 2002). It relies on two cameras as well as two light sources placed in orthogonal directions and records image projections of raindrops as they fall cross the cameras' field of view. The 2DVD is often used for recording the size distributions, fall velocities and shapes of raindrops. Based on these information, the rain rate and reflectivity at a given radar frequency can be derived.

The X/Ka-band scanning Atmospheric Radiation Measurement (ARM) cloud radar (X/Ka-SACR) and W-band ARM cloud radar (MWACR) have the range gate spacing of 25 m, 25 m and 30 m, respectively (Kollias et al., 2014; Kneifel et al., 2015; Falconi et al., 2018). The original time resolution of 2 s was averaged to 10 s for these radars. The half-power beam widths of X-SACR, Ka-SACR and MWACR are 1.27° , 0.33° and 0.38° , respectively. X- and Ka-SACR are dual-polarization radar systems installed on the same pedestal, recording the co-polar (e.g., ρ_{hv} , Z_{dr}) and cross-polar (e.g., cross-polar correlation coefficient, linear depolarization ratio LDR) measurements, respectively. MWACR had a small antenna pointing error of 0.5° to 1° , which may lead to significant error in the vertical Doppler velocity which, but does not affect reflectivity measurements.

To mitigate the potential attenuation from wet radome and raindrops, the simulated X-band radar reflectivity from 2DVD data was used to match the measured X-band reflectivity at 500 m where the near-field effect is minimized (Sekelsky, 2002; Falconi et al., 2018). As the Ka-band reflectivity can be significantly affected by the attenuation from the ML, rain as well as a wet radome (Li and Moisseev, 2019), the relative calibration was made at precipitation top where the Rayleigh assumption can be applied at Ka- and X-bands. During BAECC, a radiosonde was launched four times per day, out of which the temporally closest one was used as input to the millimeter-wave propagation model (Liebe, 1985) to correct for the gaseous attenuation at all radar frequencies.

2.2 Dual-polarization weather radar

The FMI C-band dual-polarization weather radar located in Ikaalinen, 64 km west from the Hyytiälä station, operates in the simultaneous transmission and receiving mode (Doviak et al., 2000). This radar performs RHI scans over the measurement site every 15 minutes. The range and azimuth resolutions are 500 m and 1° , respectively. The dual-polarization measurements used in this study are Z_{dr} , which was calibrated during light rainfalls (Bringi and Chandrasekar, 2001; Li et al., 2018). For data analysis, the Python ARM Radar Toolkit (Helmus and Collis, 2016) was used.

2.3 NASA Particle Imaging Package

The PIP is an improved version of the Snowflake Video Imager (Newman et al., 2009), which uses a high frame rate camera, operating at 380 frames per second, to record the silhouettes of precipitation particles. The field of view of this camera is 48 × 64 mm with a spatial resolution of 0.01 mm². The focal plane of this camera is 1.3 m. Because the measurement volume is not enclosed, the wind-induced effects on the measurements are minimized (Newman et al., 2009). The data-processing software defines the size of each particle using the disk-equivalent diameter (D_{deq}) which is the diameter of a disk with the same area of a particle shadow. Particle size distribution (PSD) and fall velocity are recorded as a function of D_{deq} in the PIP software. Based on these PIP products, von Lerber et al. (2017) have derived particle mass and fall velocity as a function of the observed maximum particle diameter ($D_{max, ob}$), which is obtained by fitting an ellipsoid model to each particle. Here and hereafter, D represents $D_{max, ob}$. In this study, snow observations for the winter of 2014-2018 The snowfall measurements started as a part of the BAECC field campaign were continued and data collected during the experiment and additional three winters were used in this study. The collected data were processed using the method by von Lerber et al. (2017) von Lerber et al. (2017).

3 Methods

3.1 Detection of ML boundaries

The height where melting starts ranges from the surface to several km above, mainly depending on the temperature profiles. Thus, prior to addressing the general characteristics of ML, it is important to detect ML boundaries. Fabry and Zawadzki (1995) have employed the gradient of reflectivity to determine the ML boundaries using single-polarization X-band radar

measurements. The vertically-pointing X-/Ka-band radars used in this study provide dual-polarization observations, i.e. ρ_{hv} and LDR, respectively. These observations supply additional information to estimate the ML boundaries (Giangrande et al., 2008). However, care should be taken in how this information is used. Wolfensberger et al. (2016) have suggested the use of ρ_{hv} could underestimate the ML top, as the significant drop in ρ_{hv} may not happen until a significant amount of ice has already melted. To mitigate this issue, we determined the upper boundary of ML by finding the local minimum of the X-band reflectivity gradient around the ρ_{hv} -detected ML top, which is similar to (Wolfensberger et al., 2016). The ML-validity of utilizing the radar reflectivity in determining the ML top is further confirmed in our recent study (Li and Moisseev, 2020). The ML bottom was determined in a similar way to derive the radar reflectivity at the melting bottom. Note that cases where precipitation fall streaks are significantly slanted, as shown in (Fabry and Zawadzki, 1995), were excluded.

10 3.2 Diagnosing snowflake rime mass fraction

The rime mass fraction (FR), defined as the ratio of accreted ice mass by riming to the total snowflake mass, has been used to quantify the riming extent in ice microphysical schemes (Morrison and Milbrandt, 2015) and in observational studies (e.g., Moisseev et al., 2017; Li et al., 2018). The rime mass fraction can be defined as

$$FR = 1 - \frac{\int_{D_{\min}}^{D_{\max}} N(D) m_{\text{ur}}(D) dD}{\int_{D_{\min}}^{D_{\max}} N(D) m_{\text{ob}}(D) dD}$$

$$\tag{1}$$

where D_{max} and D_{min} are maximum and minimum particle sizes, respectively, $m_{\text{ob}}(D)$ and $m_{\text{ur}}(D)$ are masses of observed and unrimed snowflakes as a function of D, respectively, and N(D) is the PSD. In this study, FR was computed using ground-based observations of PSD and snowflake masses retrieved from PIP observations as described in (von Lerber et al., 2017). The masses of unrimed ice particles were derived assuming the following. Firstly, unrimed snowflakes were present in PIP observations. Secondly, the ice particles belonging to the lightest 5% are representative of unrimed snowflakes. Following these assumptions, the mass-dimension relation $m_{us}(D) = 0.0053D^{2.05}$ $m_{uv}(D) = 0.0053D^{2.05}$ that is representative of unrimed snowflakes was derived. This relation is similar to the one derived from aircraft measurements (Heymsfield et al., 2004). Further discussion on the definition of $m_{us}(D) = m_{uv}(D)$ is referred to (Moisseev et al., 2017) and (Li et al., 2018).

Mason et al. (2018) have shown that the extent of riming can be retrieved using radar-measured DWR (Matrosov, 1998; Hogan et al., 2000) and mean Doppler velocity (V). If the radar reflectivity is expressed in dB, then the DWR can be written as

$$DWR(\lambda_1, \lambda_2) = Z_{\lambda_1} - Z_{\lambda_2}$$
 (2)

where Z_{λ_1} and Z_{λ_2} are observed radar reflecctivities at the wavelength of λ_1 and λ_2 , respectively. Z_{λ} can be expressed as

$$Z_{\lambda} = 10 \log_{10} \left(\int_{D_{\text{min}}}^{D_{\text{max}}} \frac{\lambda^4}{\pi^5 |K_{\lambda}|^2} N(D) \sigma_{b,\lambda}(D, m_{\text{ob}}(D)) dD \right)$$
(3)

where $|K_{\lambda}|^2$ is the dielectric constant of liquid water, and $\sigma_{b,\lambda}(D,m_{\rm ob}(D))$ is the backscattering coefficient of snow particles at a given wavelength. In X-SACR, Ka-SACR and MWACR data files $|K_{\lambda}|^2$ is set to 0.93, 0.88, and 0.70, respectively. The values of $\sigma_{b,\lambda}$ were taken from the single-scattering databases (Leinonen and Moisseev, 2015; Leinonen and Szyrmer, 2015; Tyynelä and von Lerber, 2019). These three datasets were combined into a single lookup table of ice particle scattering properties defined as a function of maximum diameter and mass. For given D and $m_{\rm ob}$, the backscattering cross section was estimated using linear interpolation in the log-log space. The mean Doppler velocity can be derived in the same way,

$$V_{\lambda} = \frac{\int_{D_{\min}}^{D_{\max}} v(D) N(D) \sigma_{b,\lambda}(D, m_{\text{ob}}(D)) dD}{\int_{D_{\min}}^{D_{\max}} N(D) \sigma_{b,\lambda}(D, m_{\text{ob}}(D)) dD}$$

$$\tag{4}$$

where v(D) is the fall velocity of snowflakes with the same D and can be derived together with m(D) following (von Lerber et al., 2017). To minimize the impact of varying air density (ρ_{air}) , V_{λ} was adjusted to the air condition of 1000 hPa and 0°C (air density $\rho_{\rm air,0}$) with a factor of $(\frac{\rho_{\rm air,0}}{\rho_{\rm air}})^{0.54}$ (Heymsfield et al., 2007). $\rho_{\rm air}$ was derived from the temperature and relative humidity obtained from the temporally closest sounding.

Dias Neto et al. (2019) have shown that the size growth of snowflakes close to the ML is accelerated due to the enhanced aggregation. Therefore, relatively large aggregates are prevalent snow types close to the ML, and are better represented by DWR(X,Ka) than DWR(Ka,W) (see the comparison by Barrett et al., 2019). The use of lower radar frequency (X- and Kabands) avoids estimating the non-neglectable W-band attenuation caused by ML as well as supercooled liquid water (Li and Moisseev, 2019). Therefore, the potential link between FR and simulated Doppler radar measurements at X- and Kabands was accessed, with the utilization of in-situ snowfall observations from BAECC to the winters of 2014-2018.

The dependence of DWR(X, Ka) and V_X on FR can be computed using Eq. (1), (2) and (4). For comparison, the $m_{\rm ob}-D$ and v-D relations of aggregates of unrimed radiating assemblages, side planes, bullets and columns (LH74 unrimed), aggregates of densely rimed radiating assemblages of dendrites (LH74 rimed) and lump graupel (LH74 graupel) presented in (Locatelli and Hobbs, 1974) were used. To compute the DWR(X, Ka) and V_X using the literature relations, we assumed that N(D) can be parameterized as

$$N(D) = N_0 e^{-\Lambda D} \tag{5}$$

here the intercept parameter N_0 cancels out while computing DWR and V_X , so the radar variables depend on Λ , which controls the average size of ice particles in N(D). We have varied Λ^{-1} between 0 and 11 mm to mimic different snowfall conditions, which is similar to what was done in (Leinonen and Szyrmer, 2015). Table 1 summaries the fitted expressions of DWR $(X,Ka) = aV_X^b$ for these three particle types. Since snow microphysics as well as the corresponding radar measurements can significantly change with precipitation intensity (Moisseev et al., 2017), the computed values were separated into four subgroups according to precipitation rate (PR).

Simulations of DWR(X,Ka)- V_X for four groups of precipitation rate are presented in Fig. 1. Most cases with FR \leq 0.2 are centered around the curve of LH74 unrimed, whose velocity-diameter relation is similar with low density snowflakes

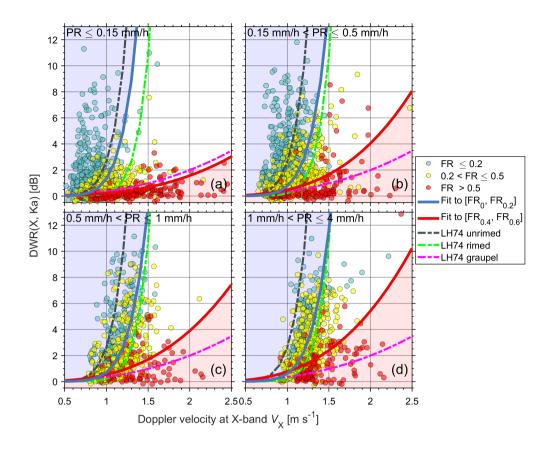


Figure 1. Scatter plot of DWR(X,Ka) vs. V_X (1000 hPa and 0°C) colored with FR. Mass-size and velocity-size relations from (Locatelli and Hobbs, 1974) are adopted for reference (dashed lines). Observed mass-size and velocity-size relations are derived using the approach developed by von Lerber et al. (2017), and the particle back-scattering coefficient $\sigma_{b,\lambda}$ is adopted from (Leinonen and Moisseev, 2015; Leinonen and Szyrmer, 2015). The solid blue and red curves separate unrimed (light blue shading), transitional (no shading) and rimed snow (light red shading) in our classification scheme.

(Tiira et al., 2016). It seems that riming happens more frequently in heavier precipitation. In contrast, much fewer unrimed cases are present in heavier precipitation (Fig. 1 c,d). Heavily rimed snowflakes (FR > 0.5, red dots) are characterized by low DWR(X,Ka) and high V_X , contrasting with the unrimed/lightly rimed cases (blue dots). Specifically, snowflakes with large sizes and low velocities usually are rather slightly rimed (FR \leq 0.2). For the cases where FR exceeds 0.5, most DWR(X,Ka) values are below 3 dB, indicating that heavily rimed particles are usually associated with small snowflakes. Inspired by this distinct feature, we have fitted the DWR(X,Ka) = aV_X^b relations for cases with FR \leq 0.2 and 0.4 \leq FR \leq 0.6 (shown in Table 1), which separate the observations into three types: unrimed, transitional and rimed snow. For the sake of comparison, the power b for unrimed snow was adopted from the fit for LH74 unrimed. In this study, these fitted relations were employed for classifying unrimed and rimed snow. Also, since the derived The presence of supercooled liquid water does not significantly affect X-band reflectivity but may lead to appreciable attenuation at Ka-band which translates to enhanced DWR(X,Ka) ean

Table 1. Fitted parameters for DWR $(X,Ka) = aV_X^b$. Aggregates of unrimed radiating assemblages, side planes, bullets and columns (LH74 unrimed), aggregates of densely rimed radiating assemblages of dendrites (LH74 rimed) and lump graupel (LH74 graupel) in (Locatelli and Hobbs, 1974) are shown for a reference. The last column shows the root mean square error (RMSE) of fitting.

Fitted parameters		a	b	RMSE [dB]
LH74	unrimed	2.6	7.3	1.9
	rimed	0.2	9.8	1.8
	graupel	0.35	2.5	0.8
$PR \leq 0.15 \text{ mm h}^{-1}$	FR ∈ [0 0.2]	1.3	7.3	$\stackrel{ extbf{2}}{\sim}$
	$FR \in [0.4\ 0.6]$	0.2	2.96	$\underbrace{0.5}_{\sim}$
$0.15 \text{ mm h}^{-1} < PR \le 0.5 \text{ mm h}^{-1}$	$FR \in [0\ 0.2]$	0.75	7.3	$\stackrel{2.4}{\sim}$
	$FR \in [0.4 \ 0.6]$	0.47	3.1	<u>1.1</u>
$0.5 \text{ mm h}^{-1} < PR \le 1 \text{ mm h}^{-1}$	$FR \in [0\ 0.2]$	0.69	7.3	$\stackrel{2.2}{\sim}$
	FR ∈ [0.4 0.6]	0.52	2.9	0.85
$1~\text{mm h}^{-1} < PR \leq 4~\text{mm h}^{-1}$	FR ∈ [0 0.2]	0.6	7.3	2.3
	FR ∈ [0.4 0.6]	0.75	2.85	1.2

be affected by supercooled liquid water among other factors, after the relative calibration at precipitation top. For the liquid water path of 500 g m^{-2} , the estimated Ka-band attenuation is in the order of 1 dB (Kneifel et al., 2015). Therefore, cases with DWR(X,Ka) < 1 < 1 dB were rejected when identifying unrimed snow.

4 Results

To study how ML properties depend on the precipitation intensity, snowflake riming fraction and PSD, all rainfall cases observed during the BAECC experiment were analyzed. Given the need for coinciding multi-frequency vertically pointing radar measurements and the radar scans performed during the experiment, we have identified 4147 vertical profiles of observations in 24 stratiform rainfall events corresponding to about 11.5 h where the measurement requirements were met. During the analysis, the mean radar Doppler velocity was scaled to the air density at 1000 hPa and 0°C as previously described. It should be noted that the RHI scans by the FMI C-band weather radar were performed every 15 min. Therefore, the profiles of specific differential phase and differential reflectivity are recorded much less frequently than the vertically-pointing radar observations. The RHI observations are nonetheless presented here in order to link the features observed in this study to the previous reports (Giangrande et al., 2016; Kumjian et al., 2016; Li et al., 2018; Vogel and Fabry, 2018).

4.1 Sanity check of the snow classification

At the first step of our data analysis, the classification of unrimed and rimed snow using DWR(X,Ka) - V_X observations at the ML top, proposed in the previous section, was evaluated against previous studies. As shown in Fig. 2, both DWR(X,Ka) and V_X tend to increase as the precipitation intensifies. Most cases of rimed snow fall in the region where DWR(X,Ka) < 4 dB and V_X is higher than for unrimed snow. The V_X of unrimed snow rarely exceeds 1.5 m/s. Those outliers of rimed snow in Fig. 1 (a) may be attributed to the local vertical air motions, which contaminate the measured mean Doppler velocity. It should be noted that the snow observations in Fig. 1 are limited to PR \leq 4 mm h⁻¹, namely the maximum radar reflectivity at the ML bottom ($Z_{X,rain}$) is around 33 dBZ, as computed by using the localized Z - R relation (Leinonen et al., 2012b).

The reflectivity enhancement in the ML, which is defined as the difference between the $Z_{\rm X}$ maximum in the ML and the $Z_{\rm X}$ at the melting bottom ($Z_{\rm X,rain}$), was also studied. Zawadzki et al. (2005) have analyzed the UHF Doppler wind profiler observations in $V_{\rm UHF,snow}/V_{\rm UHF,rain}$ - reflectivity enhancement space and found that the augmentation of rimed snowflake mass can increase $V_{\rm UHF,snow}/V_{\rm UHF,rain}$ and decrease reflectivity enhancement. As shown in Fig. 3, despite the scattered distribution of reflectivity enhancement, the majority of cases with high $V_{\rm X,snow}/V_{\rm X,rain}$ are dominated by rimed snow while most unrimed cases are below $V_{\rm X,snow}/V_{\rm X,rain} = 0.25$. Such dependence of $V_{\rm X,snow}/V_{\rm X,rain}$ on riming is in line with the results in (Zawadzki et al., 2005), indicating the reasonable snow classification employed in this study.

4.2 Vertically Vertical profiles of multi-frequency radar measurements in ML

To obtain a general idea of how the ML is modulated by riming and aggregation, statistics of vertically-pointing radar observations were made. As the ML properties are modulated by precipitation intensity (Fabry and Zawadzki, 1995; Carlin and Ryzhkov, 2019), the observations were grouped by PR. In this paper, the vertical axis is shifted such that the reference height is the ML top.

4.2.1 X-band reflectivity, ρ_{hv} and DWR(X,Ka)

30

Figure 4 shows the profiles of radar reflectivity and ρ_{hv} measured by X-SACR and grouped by PR. Note that to generalize the observations, the vertical axis is shifted such that the ML top is the reference height of 0 m, and each reflectivity profile was normalized by offsetting the difference between $Z_{X,rain}$ and the median value of $Z_{X,rain}$ in the corresponding PR group. The same procedure was made to ρ_{hv} and the following measurements. For most cases, the relative humidity (RH) around the ML top is above 95% with no dependence on PR. Thus, the effect of dry air infiltration, e.g., decreasing reflectivity and ML thickness, descending dual-polarization measurements (Carlin and Ryzhkov, 2019), should be minimized. Considering the general aspects of Fig. 4, it is clear that the ML thickness and reflectivity peak increase with PR, which is inline with previous results (Fabry and Zawadzki, 1995; Wolfensberger et al., 2016; Trömel et al., 2019).

The ρ_{hv} and radar reflectivity have been used in identifying the bright band sagging (Kumjian et al., 2016; Ryzhkov et al., 2016; Xie et al., 2016). When PR > 1 mm h⁻¹, the level of ρ_{hv} minimum of rimed snow seems to be lower than the unrimed, however, the opposite holds when PR \leq 1 mm h⁻¹ which seems controversial to the expectation that the bright band sagging

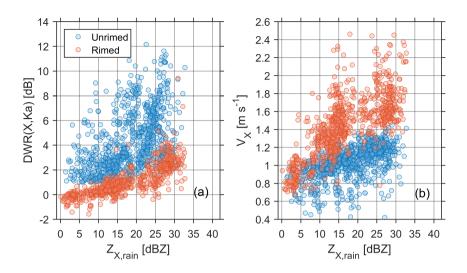


Figure 2. Distribution of (a) DWR(X,Ka) and (b) V_X above the ML as a function of $Z_{X,rain}$. Note that no transitional snow type between unrimed and rimed is presented.




Figure 3. Scatter plot of $V_{X,\text{snow}}/V_{X,\text{rain}}$ vs. reflectivity enhancement in the ML. The reflectivity enhancement is defined as the difference between the reflectivity peak in the ML and the reflectivity in rain just below the ML.

is mainly caused by riming (Kumjian et al., 2016). In our observations, both ρ_{hv} dip and reflectivity peak descend with the increase of PR. Therefore, it appears that precipitation intensity is an important factor affecting the formation of the saggy bright band. This finding is inline with a recent simulation study (Carlin and Ryzhkov, 2019), which proposes that the saggy bright band can also be attributed to other factors, such as the aggregation process, the increased precipitation intensity and the sudden decrease of RH. For unrimed snow, the response of ρ_{hv} to the melting is obviously later than X-band reflectivity, which indicates that the utilization of ρ_{hv} for detecting the ML top should be applied with caution.

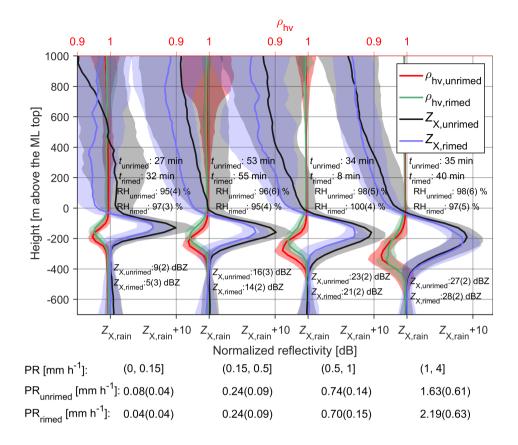


Figure 4. Normalized X-band radar profiles grouped by PR. $t_{unrimed}$ and t_{rimed} indicate the total observing time in each group for unrimed and rimed cases, respectively. The median values of X-band reflectivity at the ML bottom for unrimed ($Z_{X,unrimed}$) and rimed ($Z_{X,rimed}$) cases are marked just below the ML bottom with the standard values in brackets. The median and standard deviations (in parentheses) of relative humidity (RH) at the ML top for unrimed (RH_{unrimed}) and rimed (RH_{rimed}) cases in each group are presented near the ML top. The median and standard deviations (in parentheses) of PR for unrimed (PR_{unrimed}) and rimed (PR_{rimed}) cases in each group are presented in the lower part. Shaded regions represent the standard derivation.

The reflectivity peak is smaller for rimed snow than unrimed for a given PR, provided that the Rayleigh scattering is not violated. When PR > 1 mm h⁻¹ the reflectivity peaks of rimed and unrimed snow are closer, which can be explained by the non-Rayleigh scattering of very large aggregates at X-band as discussed by Fabry and Zawadzki (1995). Another notable finding is that the Z_X at the ML top for rimed snow is smaller than unrimed, which indicates that rimed snowflakes may have smaller sizes for a given PR. This is further confirmed in the DWR(X,Ka) profiles as shown in Fig. 5. From the aggregation region to the ML top, the DWR(X,Ka) of rimed snow is significantly smaller than unrimed snow. In particular, very weak DWR(X,Ka) for rimed snow could be identified just above the ML. This indicates that the aggregation process, the dominating factor of growing snow size close to the ML (Fabry and Zawadzki, 1995), can be heavily suppressed for rimed snow. Heymsfield et al. (2015) have reported the enhanced maximum particle size below the 0°C isotherm using in-situ measurements, and attributed

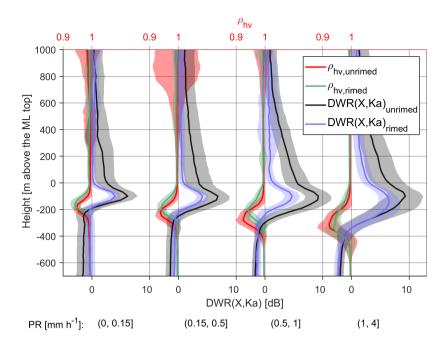


Figure 5. Same as Fig. 4, but for DWR(X,Ka). Note that the radar calibration is made by matching the X- and Ka-band radar reflectivities at cloud-precipitation top.

it to the continuing aggregation in the ML. Such continuing aggregation in conjunction with the changing scattering properties (the water coating) may be responsible for the continuing increase of DWR(X,Ka) in the ML.

Interestingly, the DWR(X,Ka) profile below the ML is higher for the rimed cases and progressively converges towards the unrimed profile as PR increases. For light precipitation, the rain drops are small enough to be Rayleigh scatterers at Ka-band, thus the difference of DWR(X,Ka) in rain between unrimed and rimed cases roots from the differences in attenuation. If the supercooled liquid water attenuation of rimed cases is more significant, the corresponding DWR(X,Ka) in rain would be smaller than the unrimed cases. However, the reverse is observed, von Lerber et al. (2014) have shown that the melting layer attenuation of rimed snowflakes is smaller than unrimed ones, which could possibly explain the larger DWR(X,Ka) of rimed cases in rain. With the increase of precipitation intensity, the DWR(X,Ka) of rimed cases in rain decreases towards the unrimed profile. This can be attributed to several factors, such as the enhanced liquid attenuation above the melting layer and the non-Rayleigh scattering of large raindrops at Ka-band. We hesitate to determine the role of nan-Rayleigh scattering in rain, since raindrops characterized by different non-Rayleigh scattering size regions can lead to opposite effects on DWR(X,Ka) as shown by Li and Moisseey (2019).

4.2.2 Ka-band LDR and reflectivity

LDR usually increases in the ML, as melting is rises-increases the dielectric constant of nonspherical ice particles. Figure 6 shows the profiles of LDR (Ka-SACR) as well as ρ_{hv} (X-SACR). Both LDR peak and ρ_{hv} dip of rimed snow are lower than unrimed snow when PR > 1 mm h⁻¹, while the reverse is observed for lighter precipitation. Despite the rather good agreement between LDR and ρ_{hv} observations, it appears that LDR systematically reveals lower ML bottom than ρ_{hv} , indicating that LDR can be suitable in discriminating rain and melting snow (Illingworth and Thompson, 2011; Dias Neto et al., 2019). The smaller LDR peak for rimed snow is correlated with the smaller X-band reflectivity enhancement as shown in Fig. 4, which is consistent with (Illingworth and Thompson, 2011; Sandford et al., 2017).

As shown in Fig. 7, the Ka-band reflectivity ean be significantly affected by the attenuation from ML, rain as well as a wet radome (Li and Moisseev, 2019). To mitigate this, the relative calibration was made at cloud top where the Rayleigh assumption can apply at Ka- and X-bands. Figure 7 shows the Ka-band reflectivity profiles. To be in line with Fig. 4, $\rho_{\rm RV}$ observed by X-SACR is presented instead of the LDR measured by Ka-SACR. The Ka-band reflectivity enhancement decreases as the precipitation intensifies due to the increasing enhancement in the ML decreases as the precipitation intensifies. This is similar with the observations presented by Fabry and Zawadzki (1995) who found that the reflectivity peak in the ML observed by an X-band radar is less pronounced than that measured by an UHF radar when the reflectivity in rain exceeds 25 dBZ. With the increase of precipitation intensity, the size of snowflakes generally grows. Therefore, there are less hydrometeors satisfying the Rayleigh criteria and the non-Rayleigh scattering effect. Such effects can also explain the sightly larger enhancement of the becomes more significant. As a result, the reflectivity peak in the ML is not as pronounced as in the scenario of Rayleigh scattering. In addition, the ML attenuation increases as PR intensifies (Li and Moisseev, 2019), which further impedes the increase of reflectivity in the ML. This also explains the lower reflectivity enhancement in the ML for rimed snow than the unrimed when PR > 0.5 mm h⁻¹, as rimed snow is smallerfor a given PR. As shown in Fig. 5, rimed snowflakes are usually smaller, thus the non-Rayleigh effect and ML attenuation (von Lerber et al., 2014) are not as significant as the larger unrimed ice particles.

When $PR \le 0.15 \text{ mm h}^{-1}$, a weak reflectivity dip, the dark band, appears at the top of ML for unrimed snow, which may also be observed by cm-wavelength radars Fabry and Zawadzki (1995). In literature, the dark band has different definitions. For ground-based radars, Kollias and Albrecht (2005) referred the dip of radar reflectivity below the ML top as dark band. The dark band which is present just above the ML top, as observed by the spaceborne W-band radar, can be caused by the strong signal attenuation from large snow aggregates as discussed in (Sassen et al., 2007). Meanwhile, the change of PSD during the aggregation process can also contribute to this reflectivity dip, which is named dark band by Sassen et al. (2005) and dim band by Heymsfield et al. (2008). In this study, the dark band is identified as the decrease of radar reflectivity just above the ML top as shown in (Sassen et al., 2005, 2007; Heymsfield et al., 2008).

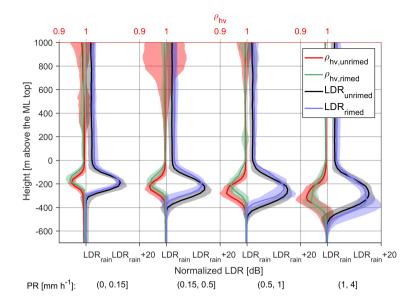


Figure 6. Same as Fig. 4, but for LDR observed by Ka-SACR.

4.2.3 W-band reflectivity

W-band reflectivity can be heavily affected by a wet radome, rain, ML, supercooled liquid water and gaseous attenuation (Kneifel et al., 2015; Li and Moisseev, 2019). Such attenuation coupled with precipitation microphysical processes as well as the change of particle scattering regimes can modulate the W-band reflectivity profiles. As shown in Fig. 8, the decrease of W-band reflectivity with height is mainly caused by rain attenuation. This effect is enhanced as PR increases, which has been adopted to retrieve PR (Matrosov, 2007). From dry to melting snow, there is a jump in W-band reflectivity, and the extent of such a jump seems dependent on PR. The bright band signature is partially visible when PR ≤ 0.15 mm h⁻¹ but is absent as the precipitation intensifies. This is expected, given the increased non-Rayleigh scattering at W-band for large snowflakes (Sassen et al., 2005). When PR ≤ 0.15 mm h⁻¹, the dark band is present for both unrimed and rimed snow, while the reflectivity dip near the ML top for unrimed snow is stronger than rimed. Below 1 mm h⁻¹, the dark band is present for unrimed snow, in contrast with its absence for rimed snow when PR > 0.15 mm h⁻¹, which may indicate that the dark band is more frequently observed for the scenario of unrimed snow.

Sassen et al. (2005) have proposed that the dark band observed by W-band radars is due to the combination of Rayleigh and non-Rayleigh scattering effects modulated by the PSD. Heymsfield et al. (2008) have pinpointed that such a reflectivity dip is linked to the aggregation process, which consumes small ice while grows large snowflakes whose backscattering cross sections at W-band are much smaller than the scenario of Rayleigh scattering. This statement is evidenced in our statistical results, since

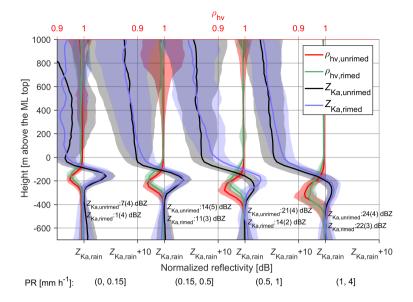


Figure 7. Same as Fig. 4, but for Ka-band radar. Note that the calibration is made by matching the Ka-band reflectivity with X-band at eloud precipitation top, while the attenuation in the profile is not accounted. To be in line with Fig. 4, ρ_{hv} observed by X-SACR is presented instead of the LDR measured by Ka-SACR.

the dark band feature is more significant for unrimed snow and is more distinct at W-band than at Ka-band. Furthermore, the obscured dark band for rimed snow may indicate that the aggregation of rimed snow can be weaker than unrimed snow.

4.3 Weather radar measurements

Recent studies have demonstrated the potential of polarimetric measurements in revealing cloud microphysics and improving precipitation forecasts (Tiira and Moisseev, 2020; Trömel et al., 2019). Given the importance of precipitation intensity to the ML, it is necessary to address how the dual-polarization observations are dependent on PR. Therefore, we have analyzed the statistical profiles of $Z_{\rm dr}$ and $K_{\rm dp}$ observed by the RHI scan of FMI C-band dual-polarization radar. The vertical axis of weather radar RHI observations was shifted to the same level as we did for vertically-pointing radars.

Significant dependence of Z_{dr} and K_{dp} on PR can be found in Fig. 9. In cases where PR > 0.15 mm h⁻¹, Z_{dr} decreases significantly to around 0 dB just above the ML. This is mainly due to the aggregation process, which leads to increased particle size and decreased density. In contrast, Z_{dr} does not change just above the ML when PR \leq 0.15 mm h⁻¹, indicating that very weak aggregation happens in light precipitation. Li et al. (2018) have shown that Z_{dr} is a function of snow shape, canting angle distribution and density, and generally decreases with the increase of radar reflectivity. It would be interesting to study the riming impact on Z_{dr} profiles (Vogel and Fabry, 2018); unfortunately, we were not able to perform such a comparison due to

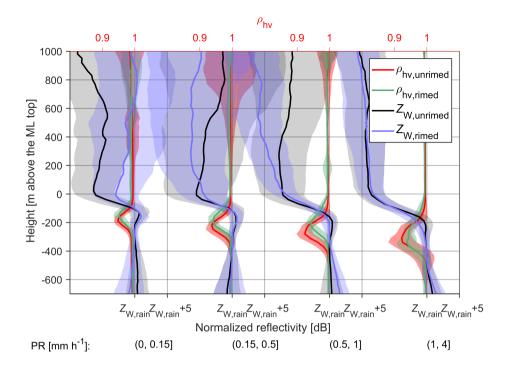


Figure 8. Same as Fig. 4, but for W-band. Note that the reflectivity profiles at W-band are shifted by matching the radar reflectivity at the ML bottom ($Z_{W,rain}$) while the value of $Z_{W,rain}$ is not shown due to the unknown W-band attenuation.

the very limited number of RHI profiles during the studied events. It should be noted that the beam width of FMI C-band radar is 1° , resulting in vertical projection of around 1.1 km over the Hyytiälä station. This explains why the height of Z_{dr} starts increasing is approximately 500 m higher than the ML top determined by X-SACR.

High $K_{\rm dp}$ values were observed when PR exceeds 1 mm h⁻¹ while no detectable $K_{\rm dp}$ signal can be found when PR ≤ 1 mm h⁻¹. This is in line with the previous finding that the enhanced $K_{\rm dp}$ is indicative of intensive intense precipitation (Bechini et al., 2013). When PR > 1 mm h⁻¹, the enhanced $K_{\rm dp}$ starts at around 3000 m above the ML with the expected temperature of around -20 °C, which is related to the dendritic growth region (Bechini et al., 2013; Moisseev et al., 2015). Overall, these observations indicate that the dependence of ML properties on the dual-polarization signatures above, may mainly be due to correlation of these signatures with precipitation intensity.

10 5 Conclusions

In this work, the connection between the precipitation melting layer and snow microphysics was studied using verticallypointing multi-frequency Doppler radar and C-band dual-polarization weather radar observations. Using surface-based snow-

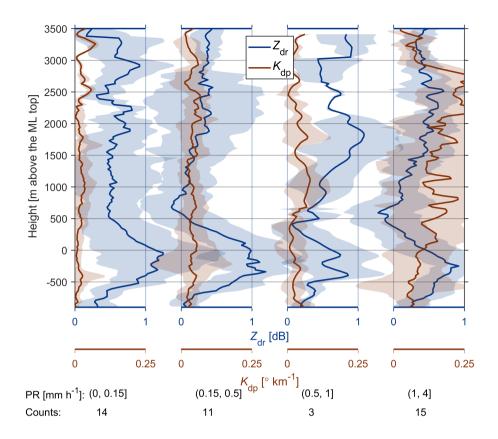


Figure 9. Normalized Z_{dr} and K_{dp} profiles observed by FMI C-band radar with RHI scanning. Number of RHI profiles is presented at the bottom. The ML top (as retrieved from X-SACR observations) is used as the reference height in the vertical axis.

fall measurements collected over five winters at the University of Helsinki measurement station and supplemented by the single particle scattering datasets of aggregated snowflakes and rimed ice particles, a connection between rime mass fraction and radar observations at X- and Ka-bands was established and used in classifying unrimed and rimed snow. The sanity checks show that the results of this classification are consistent with the previous study using single-frequency radar observations (Zawadzki et al., 2005). Statistics of vertically-pointing multi-frequency dual-polarization radars and RHI scans of C-band polarimetric weather radar show that

- 1. Precipitation intensity has a strong impact on The radar-observed melting layer properties show a detectable connection to the precipitation intensity. The increase in precipitation intensity can lead to the saggy bright band, i.e., the descending of reflectivity peak and ρ_{hv} dip.
- 2. Riming can affect melting layer properties in the following ways,

- (a) In moderate to heavy rainfall, riming may cause additional bright band sagging. However, the opposite effect is observed in light precipitation, namely, such sagging is associated with unrimed snow.
- (b) X-band radar reflectivity peak is smaller for rimed snow than unrimed for a given precipitation intensity, if the non-Rayleigh scattering effect is not significant.
- (c) If the non-Rayleigh scattering effect is distinct, e.g., at Ka- or W-band, the reflectivity peak can be larger for rimed snow.
- (d) The reflectivity dip at the melting layer top (dark band) is obscured for rimed snow, while it is pronounced for unrimed snow. This suggests that the aggregation process may be suppressed by riming.
- 3. The decrease of Z_{dr} observed at C-band decreases during the aggregation process just above the melting layer, and can be as low as 0 dB when the precipitation rate is above 0.15 mm h⁻¹. No such changes of Z_{dr} can be identified for light precipitation towards the melting layer is pronounced in heavy precipitation but is insignificant in light precipitation.
 K_{dp} is not sensitive to light precipitation, but an increase is seen at around 3000 m above the ML when PR > 1 mm h⁻¹.

A well-calibrated triple-frequency radar setup has been shown potential in studying the microphysics of snowfall. However, such measurements may not be well suited to rainfall due to the highly uncertain W-band attenuation caused by the melting layer as well as the supercooled water. The approach presented explores the possibility of adding the Doppler velocity to distinguish between unrimed and rimed conditions and is less affected by the attenuation from supercooled water. Such instrumentation as the X/Ka-SACR mounted on the same platform takes much less effort in pointing alignment. Its application may also be expanded to space-borne radars. For example, instead of launching triple-frequency radars, implementing the Doppler capability with sufficient sensitivity on either of the radars on a dual-wavelength platform may be served as an option.

A coordinated radar setup as employed during BAECC facilitates the synergy of multiple radar frequencies and polarimetric observations at various scan modes. Due to the periodical changes of radar scanning modes during BAECC, the total stratiform rainfall cases are limited to ~11.5 h. More such observations can be utilized to evaluate and consolidate the presented conclusions. If such coordinated measurement with high time resolution can be obtained in the future, our understanding of snow microphysical processes may be further advanced.

Data availability. The FMI radar data are available from the Finnish Meteorological Institute open data portal:

http://en.ilmatieteenlaitos.fi/open-data-sets-available.

5

30

The ARM data used in this study are available from Atmospheric Radiation Measurement (ARM) Climate Research Facility (ARM Climate Research Facility, 2006, 2010, 2011).

PIP data are available from https://github.com/dmoisseev/Snow-Retrievals-2014-2015.

Author contributions. HL and DM designed and conceptualized the study. HL performed the investigation and did the data analysis. DM contributed with the research supervision. JT processed the FMI C-band radar raw data. AvL developed the snow retrieval algorithm based on PIP products. HL wrote the original draft. All co-authors contributed to reviewing and editing this draft.

Competing interests. The authors declare that they have no conflict of interest.

- Acknowledgements. We would like to thank the personnel of Hyytiälä station for their support in field observation. Special thanks to Matti Leskinen for his help in data analysis. The research of Haoran Li, Jussi Tiira and Dmitri Moisseev were supported by the Academy of Finland Finnish Center of Excellence program (grant 307331) and ERA-PLANET, trans-national project iCUPE (grant agreement 689443), funded under the EU Horizon 2020 Framework Programme. Annakaisa von Lerber was funded by Academy of Finland (PostDoc grant 333901). Haoran Li was also funded by China Scholarship Council. The instrumentation used in this study was supported by NASA Global
- Precipitation Measurement Mission ground validation program and by the Office of Science U.S. Department of Energy ARM program.

References

5

- ARM Climate Research Facility: Marine W-Band (95 GHz) ARM Cloud Radar (MWACR). 2014-01-15 to 2014-09-13, ARM Mobile Facility (TMP) U. of Helsinki Research Station (SMEAR II), Hyytiala, Finland; AMF2 (M1), Compiled by Isom B., Bharadwaj N., Lindenmaier I., Nelson D., Hardin J. and Matthews A., Atmospheric Radiation Measurement (ARM) Climate Research Facility Data Archive: Oak Ridge, Tennessee, USA, https://doi.org/10.5439/1150242 (last access: 10 February 2018), 2006.
- ARM Climate Research Facility: Ka-Band Scanning ARM Cloud Radar (KASACRVPT). 2014-01-15 to 2014-09-13, ARM Mobile Facility (TMP) U. of Helsinki Research Station (SMEAR II), Hyytiala, Finland; AMF2 (M1), Compiled by Isom B., Bharadwaj N., Lindenmaier I., Nelson D., Hardin J. and Matthews A.,, Atmospheric Radiation Measurement (ARM) Climate Research Facility Data Archive: Oak Ridge, Tennessee, USA, https://doi.org/10.5439/1046201 (last access: 10 February 2018), 2010.
- ARM Climate Research Facility: X-Band Scanning ARM Cloud Radar (XSACRVPT). 2014-01-15 to 2014-09-13, ARM Mobile Facility (TMP) U. of Helsinki Research Station (SMEAR II), Hyytiala, Finland; AMF2 (M1), compiled by: Isom B., Bharadwaj N., Lindenmaier I., Nelson D., Hardin J. and Matthews A., Atmospheric Radiation Measurement (ARM) Climate Research Facility Data Archive: Oak Ridge, Tennessee, USA, https://doi.org/10.5439/1150303 (last access: 10 February 2018), 2011.
 - Atlas, D.: Drop size and radar structure of a precipitation streamer, Journal of Meteorology, 14, 261–271, 1957.
- Barrett, A. I., Westbrook, C. D., Nicol, J. C., and Stein, T. H.: Rapid ice aggregation process revealed through triple-wavelength Doppler spectrum radar analysis, Atmospheric Chemistry and Physics, 19, 5753–5769, 2019.
 - Battaglia, A., Kummerow, C., Shin, D.-B., and Williams, C.: Constraining microwave brightness temperatures by radar brightband observations, Journal of Atmospheric and Oceanic Technology, 20, 856–871, 2003.
 - Bechini, R., Baldini, L., and Chandrasekar, V.: Polarimetric radar observations in the ice region of precipitating clouds at C-band and X-band radar frequencies, Journal of Applied Meteorology and Climatology, 52, 1147–1169, 2013.
 - Bringi, V. N. and Chandrasekar, V.: Polarimetric Doppler weather radar: principles and applications, Cambridge university press, 2001.
 - Carlin, J. T. and Ryzhkov, A. V.: Estimation of Melting-Layer Cooling Rate from Dual-Polarization Radar: Spectral Bin Model Simulations, Journal of Applied Meteorology and Climatology, 58, 1485–1508, 2019.
- Chase, R. J., Finlon, J. A., Borque, P., McFarquhar, G. M., Nesbitt, S. W., Tanelli, S., Sy, O. O., Durden, S. L., and Poellot, M. R.: Evaluation of Triple-Frequency Radar Retrieval of Snowfall Properties Using Coincident Airborne In Situ Observations During OLYMPEX, Geophysical Research Letters, 45, 5752–5760, 2018.
 - Dias Neto, J., Kneifel, S., Ori, D., Trömel, S., Handwerker, J., Bohn, B., Hermes, N., Mühlbauer, K., Lenefer, M., and Simmer, C.: The TRIple-frequency and Polarimetric radar Experiment for improving process observations of winter precipitation, Earth System Science Data, 11, 845–863, https://doi.org/10.5194/essd-11-845-2019, 2019.
- 30 Doviak, R., Bringi, V., Ryzhkov, A., Zahrai, A., and Zrnić, D.: Considerations for polarimetric upgrades to operational WSR-88D radars, Journal of Atmospheric and Oceanic Technology, 17, 257–278, 2000.
 - Erlingis, J. M., Gourley, J. J., Kirstetter, P.-E., Anagnostou, E. N., Kalogiros, J., Anagnostou, M. N., and Petersen, W.: Evaluation of operational and experimental precipitation algorithms and microphysical insights during IPHEx, Journal of Hydrometeorology, 19, 113–125, 2018.
- 35 Fabry, F. and Zawadzki, I.: Long-term radar observations of the melting layer of precipitation and their interpretation, Journal of the Atmospheric Sciences, 52, 838–851, 1995.

- Falconi, M. T., Lerber, A. v., Ori, D., Marzano, F. S., and Moisseev, D.: Snowfall retrieval at X, Ka and W bands: consistency of backscattering and microphysical properties using BAECC ground-based measurements, Atmospheric Measurement Techniques, 11, 3059–3079, 2018.
- Giangrande, S. E., Krause, J. M., and Ryzhkov, A. V.: Automatic designation of the melting layer with a polarimetric prototype of the WSR-88D radar, Journal of Applied Meteorology and Climatology, 47, 1354–1364, 2008.
- 5 Giangrande, S. E., Toto, T., Bansemer, A., Kumjian, M. R., Mishra, S., and Ryzhkov, A. V.: Insights into riming and aggregation processes as revealed by aircraft, radar, and disdrometer observations for a 27 April 2011 widespread precipitation event, Journal of Geophysical Research: Atmospheres, 121, 5846–5863, 2016.
 - Grecu, M., Tian, L., Heymsfield, G. M., Tokay, A., Olson, W. S., Heymsfield, A. J., and Bansemer, A.: Nonparametric Methodology to Estimate Precipitating Ice from Multiple-Frequency Radar Reflectivity Observations, Journal of Applied Meteorology and Climatology, 57, 2605–2622, 2018.

20

- Haynes, J. M., L'Ecuyer, T. S., Stephens, G. L., Miller, S. D., Mitrescu, C., Wood, N. B., and Tanelli, S.: Rainfall retrieval over the ocean with spaceborne W-band radar, Journal of Geophysical Research: Atmospheres, 114, 2009.
- Helmus, J. J. and Collis, S. M.: The Python ARM Radar Toolkit (Py-ART), a library for working with weather radar data in the Python programming language, Journal of Open Research Software, 4, 2016.
- Heymsfield, A. J., Bansemer, A., Schmitt, C., Twohy, C., and Poellot, M. R.: Effective ice particle densities derived from aircraft data, Journal of the atmospheric sciences, 61, 982–1003, 2004.
 - Heymsfield, A. J., Bansemer, A., and Twohy, C. H.: Refinements to ice particle mass dimensional and terminal velocity relationships for ice clouds. Part I: Temperature dependence, Journal of the Atmospheric Sciences, 64, 1047–1067, 2007.
 - Heymsfield, A. J., Bansemer, A., Matrosov, S., and Tian, L.: The 94-GHz radar dim band: Relevance to ice cloud properties and CloudSat, Geophysical Research Letters, 35, 2008.
 - Heymsfield, A. J., Bansemer, A., Poellot, M. R., and Wood, N.: Observations of ice microphysics through the melting layer, Journal of the Atmospheric Sciences, 72, 2902–2928, 2015.
 - Heymsfield, G. M.: Doppler radar study of a warm frontal region, Journal of the Atmospheric Sciences, 36, 2093–2107, 1979.
 - Hogan, R. J., Illingworth, A. J., and Sauvageot, H.: Measuring crystal size in cirrus using 35-and 94-GHz radars, Journal of Atmospheric and Oceanic Technology, 17, 27–37, 2000.
 - Huggel, A., Schmid, W., and Waldvogel, A.: Raindrop size distributions and the radar bright band, Journal of Applied Meteorology, 35, 1688–1701, 1996.
 - Illingworth, A. and Thompson, R.: Radar bright band correction using the linear depolarisation ratio, in: Proc. Eighth Int. Symp. on Weather Radar and Hydrology, pp. 64–68, 2011.
- 30 Klaassen, W.: Radar observations and simulation of the melting layer of precipitation, Journal of the Atmospheric Sciences, 45, 3741–3753, 1988.
 - Kneifel, S., Kulie, M., and Bennartz, R.: A triple-frequency approach to retrieve microphysical snowfall parameters, Journal of Geophysical Research: Atmospheres, 116, 2011.
- Kneifel, S., Lerber, A., Tiira, J., Moisseev, D., Kollias, P., and Leinonen, J.: Observed relations between snowfall microphysics and triplefrequency radar measurements, Journal of Geophysical Research: Atmospheres, 120, 6034–6055, 2015.
 - Kollias, P. and Albrecht, B.: Why the melting layer radar reflectivity is not bright at 94 GHz, Geophysical research letters, 32, 2005.
 - Kollias, P., Jo, I., Borque, P., Tatarevic, A., Lamer, K., Bharadwaj, N., Widener, K., Johnson, K., and Clothiaux, E. E.: Scanning ARM cloud radars. Part II: Data quality control and processing, Journal of Atmospheric and Oceanic Technology, 31, 583–598, 2014.

- Kruger, A. and Krajewski, W. F.: Two-dimensional video disdrometer: A description, Journal of Atmospheric and Oceanic Technology, 19, 602–617, 2002.
- Kumjian, M. R., Mishra, S., Giangrande, S. E., Toto, T., Ryzhkov, A. V., and Bansemer, A.: Polarimetric radar and aircraft observations of saggy bright bands during MC3E, Journal of Geophysical Research: Atmospheres, 121, 3584–3607, 2016.
- 5 Lamb, D. and Verlinde, J.: Physics and chemistry of clouds, Cambridge University Press, 2011.

- Leinonen, J. and Moisseev, D.: What do triple-frequency radar signatures reveal about aggregate snowflakes?, Journal of Geophysical Research: Atmospheres, 120, 229–239, 2015.
- Leinonen, J. and Szyrmer, W.: Radar signatures of snowflake riming: A modeling study, Earth and Space Science, 2, 346–358, 2015.
- Leinonen, J., Kneifel, S., Moisseev, D., Tyynelä, J., Tanelli, S., and Nousiainen, T.: Evidence of nonspheroidal behavior in millimeter-wavelength radar observations of snowfall. Journal of Geophysical Research: Atmospheres, 117, 2012a.
- Leinonen, J., Moisseev, D., Leskinen, M., and Petersen, W. A.: A climatology of disdrometer measurements of rainfall in Finland over five years with implications for global radar observations, Journal of Applied Meteorology and Climatology, 51, 392–404, 2012b.
- Leinonen, J., Moisseev, D., and Nousiainen, T.: Linking snowflake microstructure to multi-frequency radar observations, Journal of Geophysical Research: Atmospheres, 118, 3259–3270, 2013.
- 15 Leinonen, J., Lebsock, M. D., Tanelli, S., Sy, O. O., Dolan, B., Chase, R. J., Finlon, J. A., von Lerber, A., Moisseev, D., et al.: Retrieval of snowflake microphysical properties from multifrequency radar observations, Atmospheric Measurement Techniques, 2018.
 - Lhermitte, R. M.: Observation of rain at vertical incidence with a 94 GHz Doppler radar: An insight on Mie scattering, Geophysical Research Letters, 15, 1125–1128, 1988.
 - Li, H. and Moisseev, D.: Melting layer attenuation at Ka- and W-bands as derived from multi-frequency radar Doppler spectra observations, Journal of Geophysical Research: Atmospheres, 124, https://doi.org/10.1029/2019JD030316, 2019.
 - Li, H. and Moisseev, D.: Two layers of melting ice particles within a single radar bright band: Interpretation and implications, Geophysical Research Letters, In press, https://doi.org/10.1029/2020GL087499, 2020.
 - Li, H., Moisseev, D., and von Lerber, A.: How does riming affect dual-polarization radar observations and snowflake shape?, Journal of Geophysical Research: Atmospheres, 123, 6070–6081, 2018.
- 25 Liebe, H. J.: An updated model for millimeter wave propagation in moist air, Radio Science, 20, 1069–1089, 1985.
 - Locatelli, J. D. and Hobbs, P. V.: Fall speeds and masses of solid precipitation particles, Journal of Geophysical Research, 79, 2185–2197, 1974.
 - Mason, S., Chiu, C., Hogan, R., Moisseev, D., and Kneifel, S.: Retrievals of Riming and Snow Density From Vertically Pointing Doppler Radars, Journal of Geophysical Research: Atmospheres, 123, 13–807, 2018.
- 30 Mason, S. L., Hogan, R. J., Westbrook, C. D., Kneifel, S., Moisseev, D., and Terzi, L. v.: The importance of particle size distribution and internal structure for triple-frequency radar retrievals of the morphology of snow, Atmospheric Measurement Techniques, 12, 4993–5018, 2019.
 - Matrosov, S. Y.: A dual-wavelength radar method to measure snowfall rate, Journal of Applied Meteorology, 37, 1510–1521, 1998.
 - Matrosov, S. Y.: Potential for attenuation-based estimations of rainfall rate from CloudSat, Geophysical research letters, 34, 2007.
- Matrosov, S. Y.: Assessment of radar signal attenuation caused by the melting hydrometeor layer, IEEE Transactions on Geoscience and Remote Sensing, 46, 1039–1047, 2008.
 - Moisseev, D., von Lerber, A., and Tiira, J.: Quantifying the effect of riming on snowfall using ground-based observations, Journal of Geophysical Research: Atmospheres, 122, 4019–4037, 2017.

- Moisseev, D., Lautaportti, S., Alku, L., Tabakova, K., O'Connor, E. J., Leskinen, M., and Kulmala, M.: Inadvertent Localized Intensification of Precipitation by Aircraft, Journal of Geophysical Research: Atmospheres, 124, 2094–2104, https://doi.org/10.1029/2018JD029449, https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/2018JD029449, 2019.
- Moisseev, D. N., Lautaportti, S., Tyynela, J., and Lim, S.: Dual-polarization radar signatures in snowstorms: Role of snowflake aggregation, Journal of Geophysical Research: Atmospheres, 120, 12 644–12 655, 2015.

20

25

- Morrison, H. and Milbrandt, J. A.: Parameterization of cloud microphysics based on the prediction of bulk ice particle properties. Part I: Scheme description and idealized tests, Journal of the Atmospheric Sciences, 72, 287–311, 2015.
- Newman, A. J., Kucera, P. A., and Bliven, L. F.: Presenting the snowflake video imager (SVI), Journal of Atmospheric and Oceanic technology, 26, 167–179, 2009.
- Oue, M., Kollias, P., Ryzhkov, A., and Luke, E. P.: Toward exploring the synergy between cloud radar polarimetry and Doppler spectral analysis in deep cold precipitating systems in the Arctic, Journal of Geophysical Research: Atmospheres, 123, 2797–2815, 2018.
 - Petäjä, T., O'Connor, E. J., Moisseev, D., Sinclair, V. A., Manninen, A. J., Väänänen, R., von Lerber, A., Thornton, J. A., Nicoll, K., Petersen, W., et al.: BAECC: A field campaign to elucidate the impact of biogenic aerosols on clouds and climate, Bulletin of the American Meteorological Society, 97, 1909–1928, 2016.
- Ryde, J.: The attenuation and radar echoes produced at centimeter wavelengths by various meteorological phenomena., Meteorological Factors in Radio Wave Propagation, London, pp. 169–189, 1946.
 - Ryzhkov, A., Zhang, P., Reeves, H., Kumjian, M., Tschallener, T., Trömel, S., and Simmer, C.: Quasi-vertical profiles—A new way to look at polarimetric radar data, Journal of Atmospheric and Oceanic Technology, 33, 551–562, 2016.
 - Sandford, C., Illingworth, A., and Thompson, R.: The potential use of the linear depolarization ratio to distinguish between convective and stratiform rainfall to improve radar rain-rate estimates, Journal of Applied Meteorology and Climatology, 56, 2927–2940, 2017.
 - Sarma, A. C., Deshamukhya, A., Narayana Rao, T., and Sharma, S.: A study of raindrop size distribution during stratiform rain and development of its parameterization scheme in the framework of multi-parameter observations, Meteorological Applications, 23, 254–268, 2016.
 - Sassen, K., Campbell, J. R., Zhu, J., Kollias, P., Shupe, M., and Williams, C.: Lidar and triple-wavelength Doppler radar measurements of the melting layer: A revised model for dark-and brightband phenomena, Journal of Applied Meteorology, 44, 301–312, 2005.
 - Sassen, K., Matrosov, S., and Campbell, J.: CloudSat spaceborne 94 GHz radar bright bands in the melting layer: An attenuation-driven upside-down lidar analog, Geophysical Research Letters, 34, 2007.
 - Sekelsky, S. M.: Near-field reflectivity and antenna boresight gain corrections for millimeter-wave atmospheric radars, Journal of Atmospheric and Oceanic Technology, 19, 468–477, 2002.
- 30 Stewart, R. E., Marwitz, J. D., Pace, J. C., and Carbone, R. E.: Characteristics through the melting layer of stratiform clouds, Journal of the Atmospheric Sciences, 41, 3227–3237, 1984.
 - Szeto, K. K., Lin, C. A., and Stewart, R. E.: Mesoscale circulations forced by melting snow. Part I: Basic simulations and dynamics, Journal of the Atmospheric Sciences, 45, 1629–1641, 1988.
 - Szyrmer, W. and Zawadzki, I.: Modeling of the melting layer. Part I: Dynamics and microphysics, Journal of the Atmospheric Sciences, 56, 3573–3592, 1999.
 - Tiira, J. and Moisseev, D. N.: Unsupervised classification of vertical profiles of dual polarization radar variables, Atmospheric Measurement Techniques, 13, 1227–1241, 2020.

- Tiira, J., Moisseev, D. N., von Lerber, A., Ori, D., Tokay, A., Bliven, L. F., and Petersen, W.: Ensemble mean density and its connection to other microphysical properties of falling snow as observed in Southern Finland, Atmospheric Measurement Techniques, 9, 2016.
- Trömel, S., Ryzhkov, A. V., Zhang, P., and Simmer, C.: Investigations of backscatter differential phase in the melting layer, Journal of Applied Meteorology and Climatology, 53, 2344–2359, 2014.
- 5 Trömel, S., Ryzhkov, A. V., Hickman, B., Mühlbauer, K., and Simmer, C.: Polarimetric radar variables in the layers of melting and dendritic growth at X band—implications for a nowcasting strategy in stratiform rain, Journal of Applied Meteorology and Climatology, 58, 2497–2522, 2019.
 - Tyynelä, J. and Chandrasekar, V.: Characterizing falling snow using multifrequency dual-polarization measurements, Journal of Geophysical Research: Atmospheres, 119, 8268–8283, 2014.
- Tyynelä, J. and von Lerber, A.: Validation of microphysical snow models using in-situ, multi-frequency and dual-polarization radar measurements in Finland, 124, 13 273–13 290, https://doi.org/10.1029/2019JD030721, https://agupubs.onlinelibrary.wiley.com/doi/abs/10.1029/2019JD030721, 2019.
 - Vogel, J. M. and Fabry, F.: Contrasting Polarimetric Observations of Stratiform Riming and Nonriming Events, Journal of Applied Meteorology and Climatology, 57, 457–476, 2018.
- von Lerber, A., Moisseev, D., Leinonen, J., Koistinen, J., and Hallikainen, M. T.: Modeling radar attenuation by a low melting layer with optimized model parameters at C-band, IEEE Transactions on Geoscience and Remote Sensing, 53, 724–737, 2014.
 - von Lerber, A., Moisseev, D., Bliven, L. F., Petersen, W., Harri, A.-M., and Chandrasekar, V.: Microphysical properties of snow and their link to Z e–S relations during BAECC 2014, Journal of Applied Meteorology and Climatology, 56, 1561–1582, 2017.
 - Willis, P. T. and Heymsfield, A. J.: Structure of the melting layer in mesoscale convective system stratiform precipitation, Journal of the Atmospheric Sciences, 46, 2008–2025, 1989.

- Wolfensberger, D., Scipion, D., and Berne, A.: Detection and characterization of the melting layer based on polarimetric radar scans, Quarterly Journal of the Royal Meteorological Society, 142, 108–124, 2016.
- Xie, X., Evaristo, R., Simmer, C., Handwerker, J., and Trömel, S.: Precipitation and microphysical processes observed by three polarimetric X-band radars and ground-based instrumentation during HOPE, Atmospheric Chemistry and Physics, 16, 7105–7116, 2016.
- Zawadzki, I., Szyrmer, W., Bell, C., and Fabry, F.: Modeling of the melting layer. Part III: The density effect, Journal of the Atmospheric Sciences, 62, 3705–3723, 2005.