

Technical Note: Emission factors, chemical composition and morphology of particles emitted from Euro 5 diesel and gasoline light duty vehicles during transient cycles

5 Evangelia Kostenidou¹, Alvaro Martinez-Valiente², Badr R'Mili¹, Baptiste Marques¹, Brice Temime-Roussel¹, Amandine Durand¹, Michel André³, Yao Liu³, Cédric Louis³, Boris Vansevenant³, Daniel Ferry⁴, Carine Laffon⁴, Philippe Parent⁴ and Barbara D'Anna¹

¹Aix-Marseille Université, UMR 7673 CNRS, LCE, Marseille, France

²IRCELYON, UMR 5256 CNRS, Université de Lyon, Villeurbanne, France

10 ³AME-EASE, Univ Gustave Eiffel, IFSTTAR, Univ Lyon, Lyon, France

⁴Aix-Marseille Université, CNRS, CINaM, Marseille, France

Correspondence to: Evangelia Kostenidou (vkostenidou@gmail.com) and Barbara D'Anna (barbara.danna@univ-amu.fr)

Abstract. Changes in engine technologies and after-treatment devices can profoundly alter the chemical composition of the emitted pollutants. To investigate these effects, we characterized the chemical composition of particles emitted from three diesel and four gasoline Euro 5 light duty vehicles on a chassis dynamometer facility. Black carbon (BC) was the dominant emitted species with emission factors (EFs) varying from 0.2 to 7.1 mg km⁻¹ for direct injection gasoline (GDI) cars, from 0.02 to 0.14 mg km⁻¹ for port fuel injection (PFI) vehicles and 0.003 to 0.9 mg km⁻¹ for diesel cars equipped with diesel particulate filter (DPF). For gasoline cars, the organic matter (OM) EFs varied from 5 to 103 µg km⁻¹ for GDI vehicles, and from 1 to 8 µg km⁻¹ for PFI vehicles, while for the diesel cars it ranged between 0.15 and 65 µg km⁻¹. Cold start cycles and more specifically the first minutes of the cycle, contributed the largest fraction of the PM including BC, OM and Polycyclic Aromatic Hydrocarbons (PAHs). More than 40 PAHs, including methylated, nitro, oxygenated and amino PAHs were identified in both diesel and gasoline exhaust particles using an Aerodyne High Resolution Time-of-Flight Aerosol Mass Spectrometry (HR-ToF-AMS). Particle bound PAHs were four times higher for gasoline cars equipped with GDI system with respect to the car with PFI system. For two of the three diesel vehicles the PAHs emissions were below the detection limit, but for one, presenting after-treatment device failure, the average PAHs EF was 2.04 µg km⁻¹ similar to the values measured for the GDI car. Emissions of particles around 15nm, mainly composed by ammonium bisulfate, were measured during the passive regeneration of the catalyzed diesel particulate filter (CDPF) vehicle. TEM images revealed the presence of ubiquitous nanometric metal inclusions into soot particles emitted from the diesel vehicle equipped with a fuel borne catalyst - diesel particulate filter (FBC-DPF). XPS analysis of the particles emitted by the PFI car showed both the presence of metallic elements and a disordered soot surface presenting surface defects having possible consequences on both chemical reactivity and particle toxicity. Our findings show that different after-treatment technologies have an important effect on the level and the chemical composition of the emitted particles. In addition, this work highlights the importance of the particle filter devices condition and performance.

1 Introduction

35 On-road diesel and gasoline vehicles are an important source of urban air pollution, releasing fine particulate matter (PM₁) and gaseous pollutants into the atmosphere (Dallmann and Harley, 2010; Borbon et al., 2013; Platt et al., 2014; Argyropoulos et al., 2016; Hoffman et al., 2016; Gentner et al., 2017). Light-duty vehicle pollutants have been associated with adverse effects on human health inducing cardiovascular, respiratory and also cognitive diseases (Hime et al., 2018 and references therein). At the same time, modern vehicles produce also CO₂ and BC which impact the climate (Lelieveld et al., 2019). Vehicle emissions received a lot of attention in the last years and diverse approaches have been used for their quantification, including

40 tunnel studies (Grieshop et al., 2006; Lawrence et al., 2013; Dallmann et al., 2014; Smit et al., 2017), remote sensing or roadside measurements (Jimenez et al., 2000; Peitzmeier et al., 2017; Ropkins et al., 2017), on road (chase) measurements (Canagaratna et al., 2004; Morawska et al., 2007; Hudda et al., 2013; Karjalainen et al., 2014), on board measurements (Huo et al., 2012; Chikhi et al., 2014) and chassis dynamometer facilities (e.g., Andersson et al., 2014; Collier et al., 2015; Karjalainen et al., 2014; Saliba et al., 2017; Jaworski et al., 2018; R'Mili et al., 2018).

45 Improved information about the chemical composition of PM is essential to understand the source contributions, to implement mitigation measures and to assess health protection programs. PM vehicle emissions are mainly composed of BC and organic aerosol (OA) due to the incomplete combustion of fuel and release of lubricating oil droplets. Less abundant components of vehicles exhausts include sulfate and metal in traces (Maricq, 2007; Cheung et al., 2010). Sulfur and trace elements such as Fe, Zn, P, Mg and Ca are commonly used as additives to lubricant oils (Maricq, 2007; Rönkkö et al., 2014; Liati et al., 2018).

50 The above elements have been correlated to the oxidative potential indicating the toxic nature of these emissions (Cheung et al., 2010).

PAHs have been measured in both modern diesel and gasoline engine exhaust (Zielinska et al., 2004; Cheung et al., 2010; Alkourdi et al., 2013; Huang et al., 2013; Herring et al., 2015; Muñoz et al., 2018) and have been recognized as carcinogenic for humans (IARC, 2010). Exposure to PAHs is associated with excess risk of lung cancer as well as other adverse health

55 effects including bronchitis, asthma, heart disease and reproductive toxicity (IARC, 2012, 2013; 2014). More recently oxygenated (OPAHs) and nitro- (NPAHs) polycyclic aromatic hydrocarbons have received increasing attention because of their cytotoxicity, immunotoxicity, carcinogenicity and mutagenicity (Durant et al., 1996; IARC, 2012; 2013; 2014). In general, gasoline and diesel PM, and more specifically the ultrafine particle fraction (below 100 nm) has been associated to an increased toxicity given its higher surface area and its greater ability to adsorb organic chemicals and metals (Mills et al., 2011;

60 Cassee et al., 2013; Chen et al., 2016; Tyler et al., 2016).

Since 2012 the European market share of diesel light-duty vehicles started to decrease, dropping down to 35.9% of new vehicles sales in 2018, while the demanding of gasoline cars increased to 56.7% (ACEA 2019/2020). This trend continues despite the efficient PM (and BC) reduction achieved by diesel cars, due to the successful combination of Diesel Oxidation Catalysts (DOCs) and Diesel Particulate Filter (DPFs) (Tzankiozis et al., 2010; Gordon et al., 2013; Platt et al., 2017). On the

65 contrary, NO_x emissions from diesel still highly exceed those from gasoline cars (Wang et al., 2016; di Rattalma and Perotti,

2017). Market share of gasoline vehicles equipped with direct injection (DI) system is steadily increasing due to a better fuel efficiency and consequently lower CO₂ emissions than in conventional port fuel injection (PFI) engines (Alkidas, 2007; Myung et al., 2012; Liang et al., 2013). In GDI engines, the fuel is injected at higher pressures and it is mixed less uniformly with the incoming air. As a consequence of this inhomogeneous combustion, these vehicles contribute to considerable higher emissions of BC and organics particles with diameters below 100 nm, compared to those equipped with the PFI system (Karjalainen et al., 2014; Chan et al., 2014; Short et al., 2015; Zhu et al., 2016; Zimmerman et al., 2016; Platt et al., 2017; Saliba et al., 2017; Du et al., 2018). Gasoline vehicles do also emit NH₃ generated by the three-way catalyst (TWC) (e.g., Heeb et al., 2006; Suarez-Bertoa et al., 2017) which might highly enhance new particle formation in the environment (e.g., Korhonen et al., 1999; Ortega et al., 2008; Pikridas et al., 2012; Kürten, 2019).

Despite many studies investigated vehicles' emissions in the past, non-regulated pollutants are still not well identified and quantified for recent car's technologies. European databases (as COPERT 5) are missing information on PM chemical composition preventing a full assessment of car emissions on urban air quality and health. This work provides a detailed description and comparison of PM emissions in terms of chemical composition and emission factors from three diesel and four gasoline (both GDI and PFI) commercial Euro 5 light-duty vehicles tested on a roll bench chassis dynamometer facility. The chemical speciation of particulate matter included BC, organics, sulfate, ammonium, nitrate and PAHs and was accomplished using real time and high-resolution instrumentation, providing real-time emission profiles and information on the impact of after-treatment devices along the cycle. Particles morphology, surface structure and elemental composition were furthermore investigated using offline analysis.

2 Experimental

2.1 Vehicles and infrastructure

Four gasoline and three diesel Euro 5 light duty vehicles were investigated; their names and specifications are listed in Table 1. The passenger vehicles were either rent from a local rental car or they were privately owned, and their mileage ranged from 9500 to 103000 Km. Three GDI and one PFI cars, all equipped with three-way-catalysts (TWC) and three diesel cars equipped with Diesel Oxidation Catalysts (DOC) and Diesel Particulate Filters (DPF) were tested. Two diesel cars had a catalyzed DPF (CDPF) and one had a fuel borne catalyst (FBC-DPF). Commercial fuel was purchased from the same gas station to minimize the influence of fuel composition on emissions. Elemental composition of fuels and lubricant oils were carried out using Inductively Coupled Plasma Mass Spectrometry (ICP-MS).

The experiments were carried out on the roll bench chassis dynamometer owned by the Environment, Planning, Safety and Eco-design Laboratory (EASE) of the French Institute of Science and Technology for Transport, Development and Networks (IFSTTAR). Three types of dilution systems were used a) a Constant Volume Sampler (CVS) and two VLK 10 Palas for vehicles D1 and GDI1, b) a Fine Particle Sampler (FPS 4000, Dekati Ltd) with two dilution stages for vehicles D2 and GDI2 and c) an ejector dilution of one stage (with hot air) for vehicles D3, PFI and GDI3. The dilution ratios for each system were

calculated based on CO₂ concentrations and are provided in Table 1. Three different dilution systems were used because the data presented in this study correspond to four different measurement campaigns conducted in different years with different experimental set ups.

The emissions of vehicles D2 and GDI2 were tested using the Worldwide Harmonized Light Vehicles Cycle (WLTC), (Tutuianu et al., 2015), which is the official cycle for emissions legislation of Euro 6 cars, while the vehicles D1, D3, GDI1, GDI3 and PFI were evaluated using the Common Artemis Driving Cycles (CADC hereafter Artemis) (André, 2004) which allows to evaluate separately the contributions of urban, rural and motorway driving conditions.

A suite of instrumentation was deployed for the characterization of both particle and gas phase emissions. A stainless-steel sampling line of 10 mm inner diameter and 5-6 m long was used. The line was heated at 80-120° C in order to reduce losses of the semi-volatile compounds (SVOCs) which were analyzed by PTR-MS and GC-MS techniques (Marques et al., in preparation) the total flow was approximately of 60 l min⁻¹. Before reaching the instruments, the line was split in two parts: one for the PM measurements, kept at room temperature, and a second one for the gas phase measurements kept at 80-120° C.

In this work, we focus on the particle phase only.

2.2 Instrumentation

Four experimental campaigns were conducted using different combination of measurement systems. Thus, the instrumentation configuration was not the same for all the vehicles tested (Table 1).

2.2.1 HR-ToF-AMS and c-ToF-AMS

An Aerodyne High Resolution Time-of-Flight Aerosol Mass Spectrometer (HR-ToF-AMS) (DeCarlo et al., 2006) or a compact Time-of-Flight Aerosol Mass Spectrometer (c-ToF-AMS) (Drewnick et al., 2005) were deployed for the size-resolved chemical composition of the non-refractory species (e.g., organics, sulfate, ammonium, nitrate). The vaporizer temperature was set at 600-650 °C and the tungsten filament for electron ionization was run at an accelerating voltage of 70 eV. The sampling time resolution was set between 20 and 40 sec in V-mode.

2.2.2 Aethalometer and MAAP

An Aethalometer AE 33-7 (Magee scientific) or a Multi-Angle Absorption Photometer (MAAP 5012, Thermo Fisher Scientific) were used for black carbon measurements at a wavelength of 670 and 880 nm respectively. The time resolution for the Aethalometer was between 1 and 10 sec, while for the MAAP between 2 and 5 min. The MAAP data, when characterized by high BC mass concentrations, were corrected using the method proposed by Hyvärinen et al. (2013).

2.2.3 Offline analysis: GC-MS

Few off-line filters were used for PAHs analysis using GC-MS technique. The analysis was carried out on a trace GC Ultra (Thermo Scientific) equipped with a TG-5MS capillary column (30m x 0.25mm i.d., 0.25µm film thickness, Thermo Scientific)

coupled to a TSQ Quantum XLS Triple Quadrupole Mass Spectrometer (Thermo Scientific). Helium was used as carrier gas at a constant flow rate of 1 mL min⁻¹. 1 µL of the sample was injected in splitless mode. The GC oven temperature program was set to start at 65 °C and ramp to 200 °C at a 6 °C min⁻¹ rate and then to 300 °C at 20 °C min⁻¹, held for 20 min. Temperatures of ion source, injector and transfer line were maintained at 250 °C. The triple quadrupole mass spectrometer was operated in a full scan / single ion monitoring mode at 70 eV ionization energy. PAH calibration mixture and individual standards (EPA 610A, Restek; 9,10-Anthraquinone, Chem Service; 1-methylnaphtalene, Sigma-Aldrich) were used for the identification and quantification of the target compounds.

135 2.2.4 Off-line analysis: TEM-EDX and XPS techniques

A mini-particle sampler (MPS) was used to collect exhaust particles. This technique, based on filtration through TEM-porous grids (Holey carbon films and Quantifoil, AGAR Scientific), enables sampling of particles directly on a specific support minimizing additional sample preparation procedure and sampling artifacts (R'Mili et al., 2013). The sampling was performed at specific times of the cycle for example at the first minutes of the cold start or during a few minutes of the motorway with a flowrate of 0.3 l min⁻¹. The deposited particles were then investigated by Transmission Electron Microscopy (TEM), coupled with energy-dispersive X-ray (EDX). Grids from the D1 and GDI1 vehicles were analysed using a JEOL 2010F microscope operated at 200 kV, while all the other samples were analysed using a JEOL JEM2010 microscope, fitted with a LaB6 electron gun under a 200 kV accelerating voltage and an edge-to-edge resolution of 0.23 nm at 200 kV. The instrumentation included also an EDX spectrometer (BRUKER, Quantax) with a XFlash® silicon drift detector, which has a resolution of 65 eV and 73 eV for the K α transition of carbon and fluoride respectively.

Particles emitted by the PIF4 vehicle were further analysed by XPS recorded under ultra-high vacuum using a Resolve 120 hemispherical electron analyser (PSP Vacuum) and an un-monochromatized X-ray source (Mg K α at 1253.6 eV, PSP Vacuum) operated at 100 W at an incidence angle of 30° with respect to the analyser axis. This X-ray excitation energy and detection geometry correspond to an analysed depth of about 1 nm at the C1s and O1s lines. Survey spectra were collected at a pass energy of 50 eV and an energy step of 0.2 eV, while the other lines were collected at 20 eV pass energy and a step of 0.1 eV. The XPS lines were deconvoluted with the CasaXPS program, after Shirley-type or linear background subtraction. Quantitative estimations of the samples composition were done after correction by the relative sensitivity factors (RSF) provided in the program.

2.3 Methods

155 2.3.1 Organics and PAHs

The AMS data were analyzed with SQUIRREL v1.60A and PIKA v1.20A with Igor Pro 6.37 (Wave-Metrics). For the organic species, we used the fragmentation table of Aiken et al. (2009). For the vehicles D1, D2 and GDI2 the mass spectra are provided in unit mass resolution (UMR), while for the vehicles D3, PFI and GDI3 the mass spectra are given in high resolution (HR).

160 Since the majority of the signal at m/z 44 was practically due to the gaseous CO_2 , the signal at m/z 44 was removed from the
fragmentation table. In addition, we removed the m/z 's 73, 147, 207, 221 and 281 as they were related to polydimethylsiloxane
($\text{SiO}(\text{CH}_3)_2$) contaminations due to conductive silicone material present in parts of the tailpipe (Timko et al., 2009; 2014;
Lamaa 2017). For the quantification of the aerosol and the PAHs mass concentration, a collection efficiency (CE) of 1 was
used following previous engine exhaust studies (Canagaratna et al., 2004; Slowik et al., 2004; Dallmann et al., 2014; Eriksson
et al., 2014; Bruns et al., 2015; Herring et al., 2015). The relative ionization efficiency (RIE) of the PAHs was set to 1.4, as
165 measurements of four PAHs resulted in an RIE between 1.35 and 2.1 (Slowik et al., 2004; Dzepina et al., 2007). PAHs analysis
was carried out using Herring et al. (2015) methodology for vehicles D3, PFI and GDI3 (HR-ToF-AMS data). This method is
based on laboratory intercomparison of PAHs measured by AMS and GC-MS (Dzepina et al., 2007). The method has been
more recently applied for the identification and quantification of functionalized PAHs in wood burning organic aerosol
(Hartikainen et al., 2020). Briefly, each PAH compound concentration (C_i) is estimated using the relative abundance (i.e., the
170 signal fraction of the major contributing ion $[\text{M-H}]^+$) ($f_{A,i}$) of the PAH molecular ion in the reference mass spectra and its
molecular ion concentration ($C_{ion,i}$) (measured for single PAH compounds) by Eq (1):

$$C_i = \frac{C_{ion,i}}{f_{A,i}} \quad (1)$$

175 Even though for most of the PAHs the $f_{A,i}$ is unknown, some laboratory-measured PAH spectra using the AMS do exist (Alfarra,
2004; Aiken et al., 2007; Dzepina et al., 2007). These spectra are for pyrene ($\text{C}_{16}\text{H}_{10}$, m/z 202), fluoranthene ($\text{C}_{16}\text{H}_{10}$, m/z 202),
2,3-benzofluorene ($\text{C}_{17}\text{H}_{12}$, m/z 216), 1-methylpyrene ($\text{C}_{17}\text{H}_{12}$, m/z 216), triphenylene ($\text{C}_{18}\text{H}_{12}$, m/z 228), 10-
methylbenz[a]anthracene ($\text{C}_{19}\text{H}_{14}$, m/z 242), benzo[e]pyrene ($\text{C}_{20}\text{H}_{12}$, m/z 252), and benzo[ghi]perylene ($\text{C}_{22}\text{H}_{12}$, m/z 276), and
their relative abundance ($f_{A,i}$) is summarized in Herring et al. (2015). In this work we used the average relative abundance of
180 the above measured compounds, which corresponds to an $f_{A,i}$ of 26.5%. Using this assumption we introduce an error of $\pm 40\%$
(taking account the minimum and the maximum $f_{A,i}$ reported for the AMS measured PAH spectra). This value is very close to
what published by Dzepina et al. (2007) who showed that the Q-AMS capability of measuring particulate PAH in ambient air
has uncertainty of +35% and -38%. An example of the HR mass spectra fitting for naphthalene, methyl-naphthalene,
anthracene and nitro-anthracene is given in Figure S1.

185 Additional tests were conducted comparing AMS results with GC-MS analysis (quartz filters) of PAHs bound to particles
emitted from the GDI3 car (see table S3). The analysis of PAHs by GC-MS is derived from previous works carried out on
atmospheric particulate matter samples by El Haddad et al. (2011a; 2011b). The filter samples were spiked with known
amounts of the isotope labelled standard, anthracene d10 (Sigma-Aldrich) and they were introduced in a 66 mL stainless-steel
cell. Accelerated solvent extraction was carried out with a dichloromethane/acetone mixture (1:1 v/v, HPLC grade, Sigma-
190 Aldrich) using an ASE 350 system (Dionex) at 100 °C and 100 bars. The extracts were purged from the cell using pressurized

nitrogen gas for 100 s. After, the extracts were concentrated under a gentle nitrogen gas stream at 40 °C (TurboVap II, Biotage) down to a volume of 500 µL in hexane (HPLC grade, Sigma-Aldrich).

2.3.2 Emission factors

The distance-based EF of each species during the cycle was calculated using the Eq. (2):

$$195 \quad EF = \frac{DR}{D} \int C(t) * Q_{ex}(t) * dt(2)$$

were $C(t)$ is the mass concentration of the pollutant (after background corrections), $Q_{ex}(t)$ is the exhaust flow rate at the tail pipe measured by the CVS or the FPS, DR is the external dilution ratio before the entrance of the instrumentation, and D is the distance of the cycle (4.51 km for Artemis urban cycle, 23.8 km for Artemis motorway cycle and 23.25 km for WLTC).

3. Results

200 3.1 AMS chemical composition

3.1.1 Time series profiles

Figure 1 shows the particle mass concentration transient profile of BC measured by an Aethalometer and those of organics, sulfate, nitrate and ammonium measured by the HR-ToF-AMS for the GDI3 vehicle during Artemis cold urban, hot urban and motorway cycles. The mass concentrations have been corrected for the dilution. The particle phase emissions were mainly
205 composed of BC (96.8-98%), while the organic fraction accounted for 1.9-3.1%; ammonium, sulfate and nitrate were approximately 0.1%. The highest mass concentrations of BC and organics, 120 mg m⁻³ and 1600 µg m⁻³ respectively, were observed during the first 1-2 minutes of the cycle, due to the cold engine and thus low catalyst efficiency, which is in agreement with previous studies (e.g., Weilenmann et al., 2009; Clairotte et al., 2013; Collier et al., 2015; Karjalainen et al., 2016; Louis et al., 2016; Pieber et al., 2018). GDI2 particulate mass concentrations in the exhaust flow were measured during WLTC
210 (Figure S2): BC contributed 83-98 % to the total PM mass, while the organic fraction ranged from 1.8 to 14% of the PM. The remaining fraction 0.2-3% was composed of ammonium, sulfate and nitrate. For GDI2 the emitted PM concentrations were comparable to the values measured for the GDI3 vehicle during Artemis/Cold Urban.

PM emissions from the PFI vehicle are shown in Figure S3. The organic and nitrate mass concentrations were a factor of 8 and 2, lower with respect to the GDI3 vehicle during cold urban cycle. High PM emissions from GDI technology have been
215 reported in several previous studies (e.g., Zhu et al., 2016; Saliba et al., 2017; Du et al., 2018), and were explained by the incomplete volatilization and mixing of the fuel in the combustion chamber (Fu et al., 2014; Chen et al., 2017; Saliba et al., 2017).

Figure 2 shows the PM emissions from the D1 car (equipped with a CDPF) in terms of chemical composition (Figure 2a) and particle size distribution (Figures 2b and 2c) during a cold urban and three consecutive motorway cycles. The cold cycle was
220 characterized by relatively high BC and organic matter emissions, reaching concentrations of 300 and 50 µg m⁻³, respectively.

During the cold urban cycle BC accounted for 94% of the total mass concentration and organics only for 4%; during the motorway cycle the contribution of BC decreased to 85% while ammonium bisulfate increased to (6%) and organics to (8%). The three motorway cycles showed good repeatability, characterized by a first release of BC followed by emissions of ammonium bisulfate and organics nanoparticles (15 nm mean diameter). The identification of ammonium bisulfate was based on the sulfate/ammonium mass concentration ratio. These emissions were interpreted as a passive regeneration of the DPF occurring at the high temperatures reached during the cycle, the same behavior was previously reported for diesel cars equipped with CDPF (R'Mili et al., 2018).

PM emission profiles during WLTC cycles from a second CDPF vehicle (D2) are shown in Figure S4. This vehicle was characterized by very low emissions, demonstrating the efficiency of diesel after treatment devices (DPF). Emissions were observed during few accelerations; the organic mass concentration remained always below $20 \mu\text{g m}^{-3}$, while ammonium bisulfate concentrations reached maximum values of $50 \mu\text{g m}^{-3}$.

The emission of sulfate containing particles from the two CDPF vehicles was explained by the presence of the catalyst on the DPF walls. It has been proposed that during acceleration and hot engine combustion periods sulfur can be released from the DPF and converted into SO_3 by the catalyst, forming successively sulfuric acid and/or bisulfate/sulfate ammonium ultrafine particles (e.g., Bikas and Zervas, 2007; Bergmann et al., 2009; Arnold et al., 2012; R'Mili et al., 2018).

PM emissions from the D3 vehicle equipped with an FBC catalyst (Figure S5) were relatively high: OA, nitrates and sulfate reached 300 , 90 and $40 \mu\text{g m}^{-3}$, respectively. The high PM concentrations were interpreted as a possible failure in the after-treatment system and will be further discussed in section 3.3. This was supported by the relatively higher emissions of CO_2 , CO, NO_x and THC in comparison to the rest diesel cars (Table S1).

3.1.2 Organic mass spectra

Figure 3 shows the HR-AMS mass spectra for the GDI3 and the D3 vehicle during the first two and last two minutes of each type of cycle (cold urban, hot urban and motorway). The mass spectra were characterized by the ion fragments $\text{C}_n\text{H}^{+}_{2n+1}$ ($m/z = 29, 43, 57, 71, 85, \dots$) typical of saturated alkyl compounds (n-alkanes and branched alkanes), $\text{C}_n\text{H}^{+}_{2n-1}$ ($m/z = 27, 41, 55, 69, 83, 97, \dots$) typical of unsaturated aliphatic compounds (cycloalkanes, alkenes), and $\text{C}_n\text{H}^{+}_{2n-3}$ ($m/z = 67, 81, 95, 109, \dots$) typical of bicycloalkanes and alkynes (McLafferty and Turecek, 1993). These spectra are consistent with the signatures found in both gasoline and diesel exhaust emissions (e.g., Canagaratna et al., 2004; Mohr et al., 2009; Chirico et al., 2011; Platt et al., 2013; Collier et al., 2015; Dallmann et al., 2014; R'Mili et al., 2018), and arise from both unburned fuel, lubricating oil, and their partially oxidized products (Maricq, 2007).

During some periods of the cycle, the m/z ratios of 43/41, 57/55 and 71/69 were relatively high with values of 1.50, 1.72 and 1.19 during the GDI3 cold start (Figure 3a), and 1.30, 1.32 and 0.85 during the D3 hot engine regimes (Figure 3b). Comparing our mass spectra with pure gasoline, diesel fuel and lubricant oil mass spectra analyzed with a similar instrument (R'Mili et al., 2018), and knowing that the fuels contain high concentrations of n-alkanes, while lubricating oils tend to contain mostly cycloalkanes (Tobias et al., 2001; Isaacman et al., 2012) we concluded that both GDI3 and D3 cars emitted some oil (see also

section 3.2 for TEM images), but we did not observed any evident correlation between oil droplet emission and engine load or
255 cycle speed or acceleration.

Hydrocarbons ion fragments accounted for 77 to 90% of the OA fraction for the GDI3 (Figure 3a), for 83-88% for the D3
(Figure 3b) and for 56-87% for the PFI vehicles (Figure S6). Similar mass spectra were observed for the GDI2 and D1 vehicle
(Figure S7 and Figure S8, UMR mass spectrum). The OA concentration emitted from the D2 car was very low and thus the
corresponding AMS mass spectrum was associated to high uncertainty.

260 For all gasoline cars, sulfur containing organic fragments at m/z 45 (CHS^+ , 44.979), 46 (CH_2S^+ , 45.987) and 47 (CH_3S^+ , 46.995)
were detected. They accounted for approximately 2-4% of the organic mass fraction for the GDI3 (Figure 3a) and 6-7% to the
organic mass for the PFI (Figure S7). For the GDI2 car (Figure S5), a high m/z 45 contribution was detected at the beginning
of the hot start WLTC, but the spectrum was acquired with a c-ToF-AMS and therefore the signal can be assigned to both
oxygenated (CHO_2^+ and $\text{C}_2\text{H}_5\text{O}^+$) and organosulfur (CHS^+) fragments. Sulfur containing ion fragments were mostly emitted
265 from hot engines (end of urban cycle and motorway cycle) and are tentatively explained by the release of some lubricant oil.
Except for the above differences (presence of oil droplets and sulfur containing fragments) no other significant variability was
observed between the cold and the hot start HR mass spectra.

Table 2 presents the correlations between the mass spectra of the tested vehicles with those of previous studies (AMS mass
spectra database). A very good correlation was found between the mass spectra from diesel and gasoline vehicles (Canagaratna
et al., 2004; Mohr et al. 2009; R'Mili et al., 2018) and PMF factors related to fresh traffic emissions (Mohr et al., 2012;
270 Kostenidou et al., 2015; Kaltsonoudis et al., 2017). The R^2 ranged between 0.72 and 0.92 (Table 2) for all cases.

3.1.3 PAHs

In total, 45 PAHs were identified for the GDI3, PFI and D3 vehicles during Artemis cycles (Table S2). The PAHs identification
and quantitative estimation were based on Herring et al. (2015) and Dzepina et al. (2007) methods. An additional test was
275 carried out comparing AMS results with GC-MS analysis of particle from the GDI3 collected on quartz filters. Table S3
presents the intercomparison of PAHs concentrations for analysis of extracts of particle collected on quartz filters and analyzed
by GC-MS and on-line AMS analysis. Three cumulative cycles (one hot urban and two motorway) were collected on the filter.
A considerable overestimation for AMS results is observed for light PAHs, which seems to be reduced for heavier PAHs,
while a good agreement is found for oxy-PAHs. Filters sampling could be affected by volatilization issues due to the warm
280 flow (20 l min^{-1}) since the line was heated and only the last few meters were kept at room temperature.

The PAHs mass concentration during the cold cycle were considerably higher for GDI3 and D3 than for PFI, with values of
1.66, 2.21 and $0.47 \mu\text{g m}^{-3}$, correspondingly. Slightly lower mass concentrations were observed during the hot cycles. For the
diesel D1 and D2 vehicles, the PAHs signal was close to the detection limit, demonstrating the efficiency of diesel after-
treatments devices (DOC and DPF). The remarkable difference among the three diesel vehicles suggest that D3 indeed

285 presented a failure in the after-treatment device. For the GDI2 vehicle, the identification of individual PAHs was not possible since the data were collected with a c-ToF-AMS (UMR mass spectra).

Figure 4 presents the relative contribution of five PAHs families for the GDI3, PFI and D3 cars: unsubstituted PAHs (UnSubPAHs), methylated PAHs (MPAHs), oxygenated PAHs (OPAHs), nitro-PAHs (NPAHs) and amino PAHs (APAHs). The UnSubPAHs represented the most abundant group, accounting for 52 to 66% of the total PAHs, followed by MPAHs (14-
290 35%), then OPAHs (5-19%), NPAHs (1-11%) and finally APAHs (1-6%). Table S4 shows the individual PAH fractions during cold- and hot-start cycles. For all three cars, naphthalene emissions dominated, contributing from 9.6 to 19.1% of the total PAHs, which is in agreement with previous studies (e.g., de Abrantes et al., 2004; Vouitsis et al., 2009; Huang et al., 2013; Alves et al., 2015; de Souza and Corrêa 2016; Muñoz et al., 2018, Yang et al. 2018). Among the 3-rings PAHs species, acenaphthylene (4.3-9.7%), anthracene and its isomer phenanthrene (4.1-15.9%) were the most abundant; concerning the 4-
295 rings PAHs, the major contribution derived from pyrene and from the isomers fluoranthene and acephenanthrylene (1.3-13.9%), while among the 5-rings PAHs, benzo[a]pyrene and all its isomers (0.4-3.8%) and benzo[ghi]fluoranthene (1-3.3%) were the most significant compounds. Some heavier PAHs as indio[1,2,3-cd]pyrene its isomer benzo[ghi]perylene (0.4-6.6%) and coronene (0.06-5.3%) were mostly found in gasoline car emissions. Light PAHs have often been measured in exhaust particles of light-duty vehicles (Ravindra et al. 2008; de Souza and Corrêa 2016; Muñoz et al., 2018, Yang et al. 2018), and
300 their presence has been tentatively explained by incomplete fuel combustion (Lea-Langton et al., 2008; Ravindra et al., 2008) since these compounds are present in the fuel composition (Marr et al. 1999; de Souza and Corrêa 2016). During the gasoline hot cycles an increase of the 3- and 4- ring PAHs (anthracene, pyrene, paracyclene and all its isomers) contribution was observed.

MPAHs accounted for 14 to 35% of the total PAHs and were more abundant for the D3 vehicle; major contributions arose
305 from methyl- and dimethyl-naphthalene, methyl-phenanthrene, methyl-fluorene and ethyl-phenanthrene, which is in agreement with Muñoz et al. (2018) and Yang et al. (2018). All these compounds have been recently associated to carcinogenic potency (Samburova et al., 2017). BaP and its isomers (Benzo[b]fluoranthene or Benzo[j]fluoranthene or Benzo[k]fluoranthene) contributed only 0.5 to 7% of the PAHs fraction of gasoline cars (taking account the AMS and the filters), while the signal was below the detection limit in the D3 emissions. Yet, recent studies suggest that BaP, as indicator
310 compound, may highly underestimate the total carcinogenic potency of PAHs mixtures (U.S.EPA, 2010; Samburova et al., 2017).

Figure 5 depicts the transient profile of selected PAHs for the GDI3, PFI and D3 vehicles during Artemis cycles; these PAHs have been classified as carcinogenic or/and photomutagenic (compounds that cause mutagenicity after being exposed to visible or UV light) according to IARC 2010. Following BC and organics' emission trend, PAHs were mostly emitted in the first few
315 minutes of the cold urban cycle and during acceleration periods of the motorway cycle or during fuel-rich combustion periods in agreement with previous studies (Muñoz et al., 2018). The mass fractions of these carcinogenic and/or photomutagenic PAHs accounted for 27-49% for the GDI3, 29-30% for the PFI and 29-31% for the D3 vehicles.

320 A considerable fraction - up to 31% of the total PAHs - was functionalized and included OPAHs, NPAHs and APAHs. All technologies emitted an important fraction of OPAHs (up to 19%); anthraquinone, indanone and fluorenone were the most abundant in agreement with previous emission studies (Karavalakis et al., 2011) followed by dibenzofuran and dibenzopyran. APAHs accounted for 1 to 6 % of the total PAHs fraction and were mostly emitted by gasoline cars. Major NPAHs were aminopyrene/carbazole and dibenzocarbazole/amino-benzopyrene, however very little is known about the vehicle tailpipe emissions of these compounds so far.

325 Nitro-anthracene and its isomer nitro-phenanthrene contributed up to 8% of the total PAHs in the GDI3 emissions, but only 1% in PFI and D3 vehicles. Nitro-fluorene, nitro-pyrene and nitro-chrysene were found in the car exhaust of all three vehicles, and accounted for less than 1% of the total PAHs mass fraction. Similar results are reported by Yang et al. 2018 even though the authors found several nitro-naphthalenes as the major contributors to the NPAHs for GDI cars. Even if present in small amounts, some of these compounds, as 6-nitrochrysene and 1-nitropyrene, are classified as possibly carcinogenic to humans (group 2B) (IARC, 2012; Bandowe and Meusel, 2017). Surprisingly, NPAHs, including nitro-pyrene, were considerably higher
330 in Euro 5 GDI emissions than in those of diesel car, questioning the pertinence of using NPAHs such as 1-nitropyrene as markers of diesel emissions (Keyte et al., 2016).

3.2 TEM and XPS analysis

335 Figure 6 presents TEM images of particles emitted by the different cars during cold and motorway cycles. Figures 6(a-c) and 6(d-f) show particles emitted from the GDI1 and GDI2 vehicles; the samples were collected during the first 120 seconds of the cycle and the dilution was around 40-46. Figure 6(g-i) shows three images of particles emitted from the D1 car; the corresponding sample was collected for 300 seconds and the dilution was around 40. TEM images confirmed the quite higher emissions of soot particles (or BC) for the two GDI vehicles with respect to the diesel car, which is in agreement with BC emissions measured by the MAAP and the Aethalometer. As usually mentioned in the literature, soot particles are observed
340 either as fractal branched chains and or as bigger agglomerates made of primary soot spheres of different sizes (Lapuerta et al., 2020). Primary soot particles with diameter of 24.2 ± 4.1 nm were observed for the gasoline cars during cold cycles (Figure 6c and 6f), while the diameter was significantly smaller (14.5 ± 3.4 nm) during hot cycles (Figure S9c and S9f). The results are in a good agreement with previous literature, which reported primary diesel soot particles with diameter in the range between 20-25 nm (Barone et al., 2012) and smaller sizes down to 16 nm (Mathis et al., 2004; Gaddam and Vander Wal et al., 2013)
345 for gasoline exhaust particles. A slight decrease in the primary particles size with increasing temperature was observed, in agreement with recent studies (Cadrazco et al., 2019). It has been shown that the engine load has no effect on soot morphology (Lapuerta et al., 2020) as many other parameters may favor opposite trends and compensate each other. Indeed, a higher fuel-air ratio would tend to extend primary particles growth while a higher engine temperature would favor their oxidation and thus lead to smaller particle sizes (Ye et al., 2014). Similarly, increasing the injection timing leads to a decrease of primary particles

350 size due to an increase of in-cylinder oxidation time (Xu et al., 2014). It is therefore difficult to unambiguously attribute the slight decrease in particle size observed only to the temperature effect.

Figure 6(l) depicts soot particles from the D3 car, tiny sparse dark spots were ubiquitous within the soot particles and were interpreted as metal inclusions. Unfortunately, EDX could not reveal their chemical nature due to the very small amount of material in these inclusions as they were very small (typically less than 0.5 nm), and their spatial density was low. Nevertheless, we suppose that these inclusions were metallic and resulted from the after-treatment device of the FBC-DPF vehicle (D3), which use metallic salts or organometallic additives into the engine combustion chamber. Upon combustion, the additive produces metal oxides nanoparticles that are mixed with soot particles and are deposited on the DPF walls. The role of these metals is to reduce the temperature during the DPF regeneration (Ntziachristos et al., 2005; Majewski and Khair, 2006; Song et al., 2006). When the exothermic oxidation of soot takes place DPF filtration efficiency is considerably reduced, allowing, for few minutes, emission of the ash particles attached on/or enclosed in soot particles (Liati et al., 2018).

Nearly spherical particles were observed for some of the cars: GDI2 (Figures 6(d, e), Figures S9(d, e)) and D1 (Figure 6(i)). They were observed both during cold and warm cycles and they had variable sizes and shapes ranging from 100 nm to almost 1 μ m. EDX analysis revealed that on average the droplets presented C and O as major components, followed by S which was enriched in few droplets. Minor components accounted also for calcium, phosphorus, sodium, silica. Only minor traces of zinc, iron, copper, chromium, aluminum and nickel were observed. Analysis of the lubricant oils for D1, D2 and GDI1, GDI2 are presented in table S5. Sulfur accounted for 0.12 and 0.14 wt% of the lubricant oil. Other components of the lubricant oil were calcium, phosphorus and zinc, and only traces of iron, silica and copper were found. The iron found in the used lubricant oil suggests erosion of the engine wear and exhaust line for both D1 and GDI1 vehicles. These findings are in line with previous studies that reported emissions of lubricant oil particles during transient driving conditions (Karjalainen et al. 2014; Rönkkö et al., 2014).

Particles emitted by the PFI car were analyzed by XPS. Figure S10 (a) shows the survey spectrum, from which the averaged elemental composition of the sample was derived (in wt.%). We noticed a strong C1s line at 285 eV (53.8 wt.%), a strong O1s line at 530 eV (23.9 wt.%), and weaker signals of Ti-2p doublet at 460 eV (8.3 wt.%), zinc Auger lines (265 eV) (3.6 wt %), calcium Ca2p (352 eV) (2.8 wt.%), silicon Si2p (110 eV) (2.5 wt.%), phosphorus P2p (140 eV) (1.5 wt.%). Other trace signals (< 1 wt.%) of chlorine Cl2p (200 eV), nitrogen N1s (400 eV), silver Ag 3d (374 eV), and sulfur S 2p (168 eV) are also observed. From previous (unpublished) SEM-EDX analysis we know that Si is an artefact coming from the support plate while C, N, Ti, Cl, Ca, Ag, Zn, and a fraction of O originates from exhaust particles. Calcium, phosphorus, sulfur and zinc might derive from lubricant oil (Table S5), while Ti might originate from the washcoat of the catalytic converter. The weak N1s signal showed typical energy of amino groups confirming the presence of APAHs as observed from AMS chemical analysis (Table S4).

Figure S10 (b and c) depicts the deconvolution of C1s (b) and O1s spectra (c). In the C1s spectrum the carbon speciation can be derived in terms of graphitic sp^2 carbon (at 284.5 eV), aliphatic sp^3 carbon (285.4 eV) and oxidized carbon in C-O-C bonds (ethers, alcohols; 286.4 eV), in C=O bonds (carbonyls, quinones, 287.5 eV), and acidic O=C*-OH bonds (288.9 eV) (Estrade-

Szwarczkopf, 2004). The analysis revealed a soot sample dominated by sp^2 hybridized carbon, the absence of the usual shakeup line associated with graphitic structures, and a significant “defect” contribution (at 283.5 eV, 12% of the C1s signal) associated to carbon vacancies (Barinov et al., 2009), which indicates a significant concentration of carbon radical defects (Levi et al., 2015). All these elements hint to a structurally disordered soot surface, possibly having chemical toxicity or reactivity due to the presence of surface radicals. In addition, a rather high concentration of sp^3 carbons (alkanes, 20 % of the total carbon) was detected at the surface of the particles, in agreement to what observed by AMS analysis (Figure S6). From the O1s spectrum the relative contribution of the C=O carbonyl and carboxylic groups (532.1 eV), the C-O-C groups ethers and alcohols (533.2 eV), and the OH groups acids (534.3 eV) were derived. A strong contribution of Ti-O* in TiO_2 was detected at 530.2 eV coming from ashes. Oxidized calcium and silicon also contributed to the O1s spectrum as Si-O* and Ca-O* lines in the 533-535 eV range (Ni and Ratner, 2008; Yang et al., 2011). Using the C=O contribution at 532.2 eV - the only line not overlapped by the Si, Ca and Ti oxides- and the integrated intensity of the C1s line, we evaluated a soot surface oxidation by the ratio O/(O+C), giving an oxidation rate of 10.8 %. This is in good agreement with Schuster et al. (2011) who found for Euro 4-5 soot particles oxidation rates between 5.5-11.5%.

3.3 Emission factors

Figure 7 shows the emission factors (EFs) for BC, organics, PAHs, sulfate, ammonium and nitrate for all the cars tested in this study. Table S6 summarizes these EFs in $\mu g km^{-1}$. Most of the particles were emitted during the cold start cycles (both Artemis urban and WLTC) followed by motorway, hot WLTC, and hot urban cycle. GDI vehicles generally emitted considerably higher BC concentrations than PFI and diesel vehicles.

The average BC EFs for the GDI1, GDI3 (during Artemis cold urban cycle) and the GDI2 (during WLTC cold) vehicles were 7.14, 3.18 and 5.7 $mg km^{-1}$, respectively, confirming a relative small variability among the three vehicles equipped with the same injection system and post-treatment devices. These results are in a reasonably good agreement with previous studies, such as Saliba et al. (2017) who reported elemental carbon (EC) EFs between 0.08 and 5.8 $mg km^{-1}$ for GDI light vehicles (models 2012-2014) during a unified cycle cold start. Taking into account the cycle distance, the fuel consumption and the fuel density (Table S7), we converted BC EFs of GDI1, GDI3 and GDI2 to 120, 51 and 101 $mg kg^{-1}_{fuel}$, respectively. These values are in good agreement with Pieber et al. (2018) and Platt et al. (2017), who reported for GDI Euro5 light duty vehicles EFs ranging from 10 and 100 $mg kg^{-1}_{fuel}$ during cold start WLTC and 10-250 $mg kg^{-1}_{fuel}$ during cold start New European Driving Cycle (NEDC). BC EFs from PFI car were considerably lower and lied in the range of 0.13 to 0.02 $mg km^{-1}$ during urban cold start and motorway, respectively. These values are in the same range of published work from Chan et al. (2014) and Short et al. (2015) that reported (0.4-0.8 $mg km^{-1}$) for PFI vehicles. BC EF for the diesel D1 vehicle during Artemis cold start cycle was 0.07 $mg km^{-1}$, and for the D2 car was 0.01 $mg km^{-1}$ during a WLTC cold start in agreement with Platt et al. (2017).

The OA EFs emitted by the GDI3, GDI2 and PFI gasoline cars were 66.3, 103.5 and 8.4 $\mu g km^{-1}$ (or 1.1, 2.2 and 0.2 $mg kg^{-1}_{fuel}$), respectively, during cold start cycle. These values are in agreement with Pieber et al. (2018) who reported EFs between

1 and 10 mg kg⁻¹_{fuel} for cold start WLTC. The OA EFs of D2, D1 and D3 vehicles were 0.7, 11 and 61 µg km⁻¹ (or 0.02, 0.21, and 0.94 mg kg⁻¹_{fuel}), respectively. The high variability observed for diesel cars has been related to the performances of the after-treatment devices (mainly DOC and DPF). Indeed, the low OA EF of D2 do agree with Platt et al. (2017), who found
420 that the diesel vehicles equipped with a DPF emitted very low amounts of OA (less than 0.01g km⁻¹_{fuel}), while OA EF of D3 is close to the values calculated for GDI vehicles underlining how DPF bad conditions may affect PM emissions (see also below).

The PAHs EFs were measured for only 3 vehicles: GDI3, PFI and D3. EFs for GDI3 were 1.5 and 1.1 µg km⁻¹ during cold urban and motorway cycles, correspondingly. These results are in excellent agreement with PAHs EFs of 1.6-1.9 µg km⁻¹
425 recently published for two GDI cars (Yang et al. 2018). The PFI vehicle emitted considerably lower PAHs, only 0.4 µg km⁻¹ for cold urban and 0.04 µg km⁻¹ for motorway cycles. These values are in relatively good agreement with Cheung et al. (2010) who reported PAHs EFs of 0.67 µg km⁻¹ from PFI gasoline cars. The PAHs EFs for D3 car were 2.0 µg km⁻¹ during cold urban and 1.7 µg km⁻¹ during motorway cycle. These findings are in good agreement with Alves et al., (2015) that reported EFs of 2.3 µg km⁻¹ and 0.6 µg km⁻¹ for cold urban and motorway cycles of a diesel Euro 5 car. When Cheung et al. (2010) added a
430 DPF to a Euro 4 diesel car (converting it into a “Euro 5”) the PAHs were below detection limit. Reports from literature work emphasize the high variability of PAHs emissions from different diesel Euro 5 cars. As already mentioned in the previous sections both OA and PAHs EFs for D3 were surprisingly high for a diesel vehicle equipped with a DPF suggesting a failure in the after-treatment device.

Sulfate, ammonium and nitrate EFs were generally low. The highest sulfate emissions were observed for the D2 during the
435 cold start WLTC cycle with 4.2 µg km⁻¹ and for the D1 during the Artemis motorway cycle with values of 1.3 µg km⁻¹. Both D1 and D2 cars were equipped with a CDPF, while the D3 was equipped with an FBC-DPF and had lower sulfate EFs (0.18 - 0.22 µg km⁻¹), underlying the determining influence of the DPF technology on PM chemical composition. Nitrate was mostly emitted by gasoline cars, the highest EFs were measured for the GDI2 car with 2.2 and 4.9 µg km⁻¹ for cold and hot start WLTC, respectively.

440 **4 Conclusions**

We characterized the chemical composition and we evaluated the emission factors of three diesel (two CDPF and one FBC-DPF) and four gasoline (three GDI and one PFI equipped with TWC) Euro 5 light duty vehicles during transient cycles. Most of the particulate matter was emitted at the beginning of the cold start cycle due to the incomplete combustion and low catalyst efficiency. BC was always the dominant species accounting for 83-98% of the total particle mass concentration, while the
445 corresponding OA fraction ranged between 1.8 and 14%.

The BC, OA and PAHs emissions of the GDI gasoline cars were between 4 to 50 times higher compared to the gasoline PFI vehicle emissions. In total 45 PAHs were identified. Approximately 52-66% of the PAHs were unsubstituted PAHs, followed by methylated PAHs (14-21% of the PAHs), oxygenated PAHs (5-19%), NPAHs (1-11%) and amino PAHs (1-6%).

Unexpectedly, the GDI car emitted the higher concentrations of NPAHs, questioning the validity of using some NPAHs as
450 marker of diesel emissions.

Oil droplets associated to metallic components as calcium, phosphorus, sulfur and zinc were also observed in PM from both
gasoline and diesel vehicles. Organosulfur containing ion fragments were detected for the first time on particles emitted from
gasoline cars, probably from the release of lubricant oil, and accounted for 2-7% of the total organic mass concentration.
Analysis of particles emitted from the PFI vehicle revealed a highly disordered soot surface, which could affect both chemical
455 reactivity and toxicity of the PM.

Nanoparticles in the size range of 15 nm, mainly composed of ammonium bisulfate, were measured during the motorway
cycle, suggesting passive regeneration of the DPF for CDPF diesel vehicles. This behavior was not observed for the FBC-DPF
vehicle, indicating that the different after-treatment strategy highly affects the PM size and composition.

Diesel cars equipped with well-functioning after treatment-devices generally emitted far less pollutants than the gasoline
460 vehicles, but in the case of a DPF failure, very high levels of PM, similar to those reported for the GDI vehicles, were measured.
This indicates that the DPF condition is important and attention should be given to its maintenance during the lifetime of the
vehicle.

All the particle characteristics investigated in this work should be considered in emission control strategies and in the
assessment of the impact of light duty particle emissions on the environment and on human health
465

Data availability. All data from this study are available from the authors upon request.

Supplement. The supplement related to this article is available on-line at: (link will be included by Copernicus).

470 *Author Contribution.* BD, MA and EK designed the research. EK performed and analyzed the measurements of the D3, PFI
and GDI3 cars. AM-V performed and analyzed the measurements of the D2 and GDI2 cars. BR performed and analyzed the
measurements of the D1 and GDI1 cars. BM, BT-R, YL, CL, BV contributed to the experimental set up and the experimental
procedure. YL, CL and BV drove the cars. DF, CL, PP performed the TEM and XPS analysis. EK synthesized all the data and
wrote the paper with contributions from BD, DF and PP.

475 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements. The authors would thank for their helpful support B. Boréave and L. Buriel from IRCELYON and P.
Tassel from IFSTTAR.

480

Financial support. This work was supported by the ADEME CORTEA program with the project CAPVEREA (contract n.1466C0001) and the project MAESTRO (contract n. 1766C0001). The authors would like to thank the GDR SUIE for the financial support to make complementary investigations on TEM and XPS analysis at the CINaM laboratory.

References

- 485 ACEA European Automobile Manufacturers Association, Pocket Guide 2019-2020:
<https://www.acea.be/publications/article/acea-pocket-guide>.
- Aiken, A. C., DeCarlo, P. F., and Jimenez, J. L.: Elemental analysis of organic species with electron ionization high-resolution mass spectrometry, *Anal. Chem.*, 79, 8350–8358, 2007.
- Alfarra, M. R.: Insights into atmospheric organic aerosols using an aerosol mass spectrometer, in Department of Chemical
490 Engineering, UMIST, Manchester, UK, 2004.
- Alkidas, A. C.: Combustion advancements in gasoline engines, *Energy Convers. Manag.*, 48, 2751–2761, 2007.
- Alkourdi, F., Karabet, F., and Dimashki, M.: Characterization, concentrations and emission rates of polycyclic aromatic hydrocarbons in the exhaust emissions from in-service vehicles in Damascus, *Atmos. Res.*, 120-121, 68-77, 2013.
- Alves, C. A., Barbosa, C., Rocha, S., Calvo, A., Nunes, T., Cerqueira, M., Pio, C., Karanasiou, A., and Querol, X.: Elements
495 and polycyclic aromatic hydrocarbons in exhaust particles emitted by light-duty vehicles, *Environ. Sci. Pollut. Res.*, 22(15), 11526-11542, 2015.
- Amirante, R., Distaso, E., Napolitano, M., Tamburrano, P., Di Iorio, S., Sementa, P., Vaglieco, B. M., and Reitz, R. D.: Effects of lubricant oil on particulate emissions from port-fuel and direct-injection spark-ignition engines, *International Journal of Engine Research*, 18(5-6), 606-620, 2017.
- 500 Andersson, J., May, J., Favre, C., Bosteels, D., de Vries, S., Heaney, M., Keenan, M., and Mansell, J.: On-road and chassis dynamometer evaluations of emissions from two Euro 6 diesel vehicles, *SAE Int. J. Fuels Lubr.*, 7(3), doi: 10.4271/2014-01-2826, 2014.
- André, M.: The ARTEMIS European driving cycles for measuring car pollutant emissions, *Sci. Total Environ.*, 334–335, 73–84, 2004.
- 505 Argyropoulos, G., Samara, C., Voutsas, D., Kouras, A., Manoli, E., Voliotis, A., Tsakis, A., Chasapidis, L., Konstandopoulos, A., and Eleftheriadis, K.: Concentration levels and source apportionment of ultrafine particles in road microenvironments, *Environ. Sci. & Tech.*, 129, 68-78, 2016.
- Arnold, F., Pirjola, L., Rönkkö, T., Reichl, U., Schlager, H., Lähde, T., Heikkil, J., and Keskinen, J.: First online measurements of sulfuric acid gas in modern heavy-duty diesel engine exhaust: implications for nanoparticle formation, *Environ. Sci. Technol.*, 46(20), 11227-11234, 2012.
- 510 Bandowe, B., A., M., and Meusel, H.: Nitrated polycyclic aromatic hydrocarbons (nitro-PAHs) in the environment – A review, *Sci. Total Environ.*, 581–582, 237–257, 2017.

- Barinov, A., Malcioğlu, O. B., Fabris, S., Sun, T., Gregoratti, L., Dalmiglio, M., and Kiskinova, M.: Initial stages of oxidation on graphitic surfaces: Photoemission study and density functional theory calculations, *J. Phys. Chem. C*, 113(21), 9009–9013, 2009.
- 515
- Bergmann, M., Kirchner, U., Vogt, R., and Benter, T.: On-road and laboratory investigation of low-level PM emissions of a modern diesel particulate filter equipped diesel passenger car, *Atmos. Environ.*, 43, 11, 1908-1916, 2009.
- Barone, T. L., Storey, J. M. E., Youngquist, A. D., and Szybist, J. P.: An analysis of direct-injection spark-ignition (DISI) soot morphology, *Atmos. Environ.*, 49, 268-274, 2012.
- 520
- Bikas, G., and Zervas, E.: Regulated and Non-Regulated Pollutants Emitted during the Regeneration of a Diesel Particulate Filter, *Energy and Fuels*, 21(3), 1543-1547, 2007.
- Blanco-Brieva, G., Campos-Martin, J. M., Al-Zahrani, S. M., and Fierro, J. L. G.: Removal of refractory organic sulfur compounds in fossil fuels using MOF sorbents, *Glob. NEST J.*, 12(3), 296-304, 2010.
- Bond, T. C., Streets, D. G., Yarber, K. F., Nelson, S. M., Woo, J. H., and Klimont, Z.: A technology-based global inventory of black and organic carbon emissions from combustion, *J. Geophys. Res.*, 109, D14203, doi: 10.1029/2003JD003697, 2004.
- 525
- Borbon, A., Gilman, J. B., Kuster, W. C., Grand, N., Chevaillier, S., Colomb, A., Dolgorouky, C., Gros, V., Lopez, M., Sarda-Esteve, R., Holloway, J., Stutz, J., Petetin, H., McKeen, S., Beekmann, M., Warneke, C., Parrish, D. D., and de Gouw, J. A.: Emission ratios of anthropogenic volatile organic compounds in northern mid-latitude megacities: Observations versus emission inventories in Los Angeles and Paris, *J. Geophys. Res. Atmos.*, 118, 2041–2057, 2013.
- 530
- Bruns, E. A., El Haddad, I., Keller, A., Klein, F., Kumar, N. K., Pieber, S. M., Corbin, J. C., Slowik, J. G., Brune, W. H., Baltensperger, U., and Prévôt, A. S. H.: Inter-comparison of laboratory smog chamber and flow reactor systems on organic aerosol yield and composition, *Atmos. Meas. Tech. Discuss.*, 8, 2315–2332, 2015.
- Cadrazco, M., Santamaría, A., and Aguledo, J. R.: Chemical and nanostructural characteristics of the particulate matter produced by renewable diesel fuel in an automotive diesel engine, *Combust. Flame*, 203, 130-142, 2019.
- 535
- Canagaratna, M. R., Jayne, J. T., Ghertner, D. A., Herndon, S., Shi, Q., Jimenez, J. L., Silva, P. J., Williams, P., Lanni, T., Drewnick, F., Demerjian, K. L., Kolb, C. E., and Worsnop, D. R.: Chase Studies of Particulate Emissions from in-use New York City Vehicles, *Aerosol Sci. Technol.*, 38, 555–573, 2004.
- Cassee, F. R., Heroux, M. E., Gerlofs-Nijland, M. E., Kelly, and F.J.: Particulate matter beyond mass: recent health evidence on the role of fractions, chemical constituents and sources of emission, *Inhal. Toxicol.*, 25, 802–812, 2013.
- 540
- Chan, T. W., Meloche, E., Kubsh, J., and Brezny, R.: Black carbon emissions in gasoline exhaust and a reduction alternative with a gasoline particulate filter, *Environ. Sci. Technol.*, 48, 6027–6034, 2014.
- Chen, R., Hu, B., Liu, Y., Xu, J. X., Yang, G. S., Xu, D. D., and Chen, C.Y.: Beyond PM2.5: The role of ultrafine particles on adverse health effects of air pollution, *Biochim. Biophys. Acta.*, 1860, 2844–2855, 2016.
- Chen, L., Liang, Z., Zhang, X., and Shuai, S.: Characterizing particulate matter emissions from GDI and PFI vehicles under transient and cold start conditions, *Fuel*, 189, 131–140, 2017.
- 545

- Cheung, K., Ntziachristos, L., Tzamkiozis, T., Schauer, J., Samaras, Z., Moore, K., and Sioutas, C.: Emissions of particulate trace elements, metals and organic species from gasoline, diesel, and biodiesel passenger vehicles and their relation to oxidative potential, *Aerosol Sci. Technol.*, 44, 500–513, 2010.
- 550 Chikhi, S., Boughedaoui, M., Kerbachi, R. and Joumard, R.: On-board measurement of emissions from liquefied petroleum gas, gasoline and diesel powered passenger cars in Algeria, *J. Environ. Sci.*, 26, 1651-1659, 2014.
- Chirico, R., Prévôt, A. S. H., DeCarlo, P. F., Heringa, M. F., Richter, R., Weingartner, E., and Baltensperger, U.: Aerosol and trace gas vehicle emission factors measured in a tunnel using an Aerosol Mass Spectrometer and other online instrumentation, *Atmos. Environ.*, 45, 2182–2192, 2011.
- 555 Clairotte, M., Adam, T. W., Zardini, A. A., Manfredi, U., Martini, G., Krasenbrink, A., Vicet, A., Tournié, E., and Astorga, C.: Effects of low temperature on the cold start gaseous emissions from light duty vehicles fueled by ethanol-blended gasoline, *Applied Energy*, 102, 44-54, 2013.
- Collier, S., Zhou, S., Kuwayama, T., Forestieri, S., Brady, J., Zhang, M., Kleeman, M., Cappa, C., Bertram, T., and Zhang, Q.: Organic PM emissions from vehicles: composition, O/C ratio, and dependence on PM concentration, *Aerosol Sci. Technol.*, 49, 86-97, 2015.
- 560 Dallmann, T. R., and Harley, R. A.: Evaluation of mobile source emission trends in the United States, *J. Geophys. Res.*, doi: 10.1029/2010JD013862, 2010.
- Dallmann, T. R., Onasch, T. B., Kirchstetter, T. W., Worton, D. R., Fortner, E. C., Herndon, S. C., Wood, E. C., Franklin, J. P., Worsnop, D. R., Goldstein, A. H., and Harley, R. A.: Characterization of particulate matter emissions from on-road gasoline and diesel vehicles using a soot particle aerosol mass spectrometer, *Atmos. Chem. Phys.*, 14, 7585–7599, 2014.
- 565 de Abrantes, R., Assunção, J. V., and Pesquero, C. R.: Emission of polycyclic aromatic hydrocarbons from light-duty diesel vehicles exhaust, *Atmos. Environ.*, 38, 1631–1640, 2004.
- DeCarlo, P. F., Kimmel, J. R., Trimborn, A., Northway, M. J., Jayne, J. T., Aiken, A. C., Gonin, M., Fuhrer, K., Horvath, T., Docherty, K., Worsnop, D. R., and Jimenez, J. L.: Field-deployable, high-resolution, time-of-flight aerosol mass spectrometer, *Analytical Chemistry*, 78, 8281-8289, 2006.
- 570 de Souza, C. V., and Corrêa, S. M.: Polycyclic aromatic hydrocarbons in diesel emission, diesel fuel and lubricant oil, *Fuel*, 185, 925-931, 2016.
- di Rattalma, M. F. and Perotti, G.: The dieselgate: a legal perspective, Springer International Publishing AG, 179–218, available at: <https://doi.org/10.1007/978-3-319-48323-8>, 11, 2017.
- Drewnick, F., Hings, S. S., DeCarlo, P. F., Jayne, J. T., Gonin, M., Fuhrer, K., Weimer, S., Jimenez, J. L., Demerjian, K. L., 575 Borrmann, S., and Worsnop, D. R.: A new time-of-flight aerosol mass spectrometer (ToF-AMS) - instrument description and first field deployment, *Aerosol Sci. Technol.*, 39, 637–658, 2005.
- Du, Z., Hu, M., Peng, J., Zhang, W., Zheng, J., Gu, F., Qin, Y., Yang, Y., Li, M., Wu, Y., Shao, M., and Shuai, S.: Comparison of primary aerosol emission and secondary aerosol formation from gasoline direct injection and port fuel injection vehicles, *Atmos. Chem. Phys.*, 18, 9011–9023, 2018.

- 580 Durant, J. L., Busby, W. F., Lafleur, A. L., Penman, B. W., and Crespi, C.L.: Human cell mutagenicity of oxygenated, nitrated and unsubstituted polycyclic aromatic hydrocarbons associated with urban aerosols, *Mutation Research-Genetic Toxicology*, 371, 123–157, 1996.
- Dzepina, K., Arey, J., Marr, L. C., Worsnop, D. R., Salcedo, D., Zhang, Q., Onasch, T. B., Molina, L. T., Molina, M. J., and Jimenez, J. L.: Detection of particle-phase polycyclic aromatic hydrocarbons in Mexico City using an aerosol mass spectrometer. *Int. J. Mass Spectrom.*, 263, 152–170, 2007.
- 585 EEA Report, no 12/2018, Air quality in Europe, 2018.
- Eriksson, A. C., Nordin, E. Z., Nystrom, R., Pettersson, E., Swietlicki, E., Bergvall, C., Westerholm, R., Boman, C., and Pagels, J. H.: Particulate PAH emissions from residential biomass combustion: time-resolved analysis with aerosol mass spectrometry, *Environ. Sci. Technol.*, 48, 7143–7150, 2014.
- 590 El Haddad, I., Marchand, N., Wortham, H., Piot, C., Besombes, J.-L., Cozic, J., Chauvel, C., Armengaud, A., Robin, D., and Jaffrezo, J.-L.: Primary sources of PM_{2.5} organic aerosol in an industrial Mediterranean city, Marseille, *Atmos. Chem. Phys.*, 11, 2039–2058, 2011a. El Haddad, I.: Primary and secondary fractions of the organic aerosol: Methodologies and application to a Mediterranean urban environment, Marseille, PhD Thesis, Aix-Marseille University, Marseille, France, 2011b.
- 595 Estrade-Szwarckopf, H.: XPS photoemission in carbonaceous materials: A “defect” peak beside the graphitic asymmetric peak, *Carbon* 42, 1713–1721, 2014.
- Fu, H., Wang, Y., Li, X., and Shuai, S.: Impacts of cold-start and gasoline RON on particulate emission from vehicles powered by GDI and PFI engines, *SAE Technical Paper*, 2014-01-2836, 10 pp., 2014.
- Fushimi, A., Saitoh, K., Fujitani, Y., Hasegawa, S., Takahashi, K., Tanabe, K., and Kobayashi S.: Organic-rich nanoparticles (diameter: 10–30 nm) in diesel exhaust: Fuel and oil contribution based on chemical composition, *Atmos. Environ.*, 45(35), 6326-6336, 2011.
- 600 Gaddam, C. K., and Vander Wal, R. L.: Physical and chemical characterization of SIDI engine particulates, *Comb. and Flame*, 160(11), 2517-2528, 2013.
- Gentner, D. R., Jathar, S. H., Gordon, T. D., Bahreini, R., Day, D. A., El Haddad, I., Hayes, P. L., Pieber, S. M., Platt, S. M., de Gouw, J., Goldstein, A. H., Harley, R. A., Jimenez, J. L., Prévôt, A. S., and Robinson, A. L.: Review of Urban Secondary Organic Aerosol Formation from Gasoline and Diesel Motor Vehicle Emissions, *Environ. Sci. Technol.*, 51, 1074–1093, 2017.
- 605 Gordon, T. D., Tkacik, D. S., Presto, A. A., Zhang, M., Jathar, S., Nguyen, N., Massetti, J., Truong, T., Cicero-Fernandez, P., Maddox, C., Rieger, P., Chattopadhyay, S., Maldonado, H., Maricq, M., M., and Robinson, A. L.: Primary gas-and particle phase emissions and secondary organic aerosol production from gasoline and diesel off-road engines, *Environ. Sci. Technol.*, 47, 1413–14146, 2013.
- 610 Grieshop, A. P., Lipsky, E. M., Pekney, N. J., Takahama, S., and Robinson, A. L.: Fine particle emission factors from vehicles in a highway tunnel: Effects of fleet composition and season, *Atmos. Environ.*, 40, S287–S298, 2006.

- Hartikainen, A., Tiitta, P., Ihalainen, M., Yli-Pirilä, P., Orasche, J., Czech, H., Kortelainen, M., Lamberg, H., Suhonen, H.,
615 Koponen, H., Hao, L., Zimmermann, R., Jokiniemi, J., Tissari, J., and Sippula, O.: Photochemical transformation of
residential wood combustion emissions: dependence of organic aerosol composition on OH exposure, *Atmos. Chem. Phys.*,
20, 6357–6378, 2020.
- Heeb, N. V., Forss, J. A-M., Brühlmann, S., Lüscher, R., Saxer, C. J., and Hug, P.: Three-way catalyst-induced formation of
ammonia—velocity- and acceleration-dependent emission factors, *Atmos. Environ.*, 40, 5986-5997, 2006.
- 620 Herring, C. H., Faiola, C. L., Massoli, P., Sueper, D., Erickson, M. H., McDonald, J. D., Simpson, C. D., Yost, M. G., Jobson
B. T., and VanReken, M. T.: New methodology for quantifying polycyclic aromatic hydrocarbons (PAHs) using high-
resolution aerosol mass spectrometry, *Aerosol Sci. Technol.*, 49, 1131-1148, 2015.
- Hime, N. J., Marks, G. B., and Cowie, C. T.: A comparison of the health effects of ambient particulate matter air pollution
from five emission sources, *Int. J. Environ. Res. Public Health*, 15(6), pii: E1206, doi: 10.3390/ijerph15061206, 2018.
- 625 Hoffman, J., Staelens, J., Cordell, R., Stroobants, C., Zikova, N., Hama, S. M. L., Wyche, K. P., Kos, G. P. A., Van Der Zee,
S., Smallbone, K. L., Weijers, E. P. Monks, P. S. and Roekens, E.: Ultrafine particles in four European urban environments:
Results from a new continuous long-term monitoring network, *Atmos. Environ.*, 136, 68-81, 2016.
- Huang, L., Bohac, S. V., Chernyak, S. M., and Batterman, S. A.: Composition and integrity of PAHs, nitro-PAHs, hopanes,
and steranes in diesel exhaust particulate matter, *Water Air Soil Pollut.*, 224, 8, 2013.
- 630 Hudda, N., Fruin, S., Delfino, R. J., and Sioutas, C.: Efficient determination of vehicle emission factors by fuel use category
using on-road measurements: downward trends on Los Angeles freight corridor I-710, *Atmos. Chem. Phys.*, 13, 347–357,
2013.
- Huo, H., Yao, Z., Zhang, Y., Shen, X., Zhang, Q., He, K.: On-board measurements of emissions from diesel trucks in five
cities in China, *Atmos. Environ.*, 54, 159–167, 2012.
- 635 Hyvärinen, A.-P., Vakkari, V., Laakso, L., Hooda, R., Sharma, V., Panwar, T., Beukes, J., van Zyl, P., Josipovic, M., Garland,
R., Andreae, M. O., Pöschl, U., and Petzold, A.: Correction for a measurement artifact of the Multi-Angle Absorption
Photometer (MAAP) at high black carbon mass concentration levels, *Atmos. Meas. Tech.*, 6, 81–90, 2013.
- IARC, 2010, International Agency for Research on Cancer, Monographs on the Evaluation of Carcinogenic Risk of Chemicals
to Humans, Volume 92: Some Non-heterocyclic Polycyclic Aromatic Hydrocarbons and Some Related Exposures. IARC,
640 Lyon.
- IARC, 2012. A Review of human carcinogens: some chemicals in industrial and consumer products, food contaminants and
flavourings, and water chlorination by-products, (101), <http://monographs.iarc.fr/ENG/Monographs/vol101/> php, 2012.
- IARC, 2013. Diesel and Gasoline Engine Exhaust and Some Nitroarenes, Lyon (France),
<http://monographs.iarc.fr/ENG/Monographs/vol105/index.php>, 2013.
- 645 IARC, 2014. Diesel and Gasoline Engine Exhausts and Some Nitroarenes, *IARC Monogr. Eval. Carcinog. Risks Hum.*, 105,
9–699.

- Jaworski, A., Kuszewski, H., Ustrzycki, A., Balawender, K., Lejda, K., and Woś, P.: Analysis of the repeatability of the exhaust pollutants emission research results for cold and hot starts under controlled driving cycle conditions, *Environ. Sci. Pollut. Res.*, 25, 17862-17877, 2018.
- 650 Jimenez, J. L., McManus, J. B., Shorter, J. H., Nelson, D. D., Zahniser, M. S., Koplow, M., McRae, G. J., and Kolb C. E.: Cross road and mobile tunable infrared laser measurements of nitrous oxide emissions from motor vehicles, *Chemos., Global Change Science*, 2, 397-412, 2000.
- Kaltsonoudis, C., Kostenidou, E., Louvaris, E., Psychoudaki, M., Tsiligiannis, E., Florou, K., Liangou, A., and Pandis, S. N.: Characterization of fresh and aged organic aerosol emissions from meat charbroiling, *Atmos. Chem. Phys.*, 17, 7143–7155, 655 2017.
- Kampouraki, Z. C., Giannakoudakis, D. A., Nair, V., Hosseini-Bandegharai, A., Colmenares, J. C., and Deliyanni, E. A.: Metal Organic Frameworks as Desulfurization Adsorbents of DBT and 4,6-DMDBT from Fuels, *Molecules*, 24(24), 4525, 2019.
- Karavalakis, G., Boutsika V., Stournas, S., Bakeas, E., Biodiesel emissions profile in modern diesel vehicles. Part 2: Effect of 660 biodiesel origin on carbonyl, PAH, nitro-PAH and oxy-PAH emissions, *Sci. Total Environ.*, 409(4), 738–747, 2011.
- Karjalainen, P., Pirjola, L., Heikkilä, J., Lähde, T., Tzamkiozis, T., Ntziachristos, L., Keskinen, J., and Rönkkö, T.: Exhaust particles of modern gasoline vehicles: a laboratory and an on-road study, *Atmos. Environ.*, 97, 262–270, 2014.
- Karjalainen, P., Timonen, H., Saukko, E., Kuuluvainen, H., Saarikoski, S., Aakko-Saksa, P., Murtonen, T., Bloss, M., Dal Maso, M., Simonen, P., Ahlberg, E., Svenningsson, B., Brune, W. H., Hillamo, R., Keskinen, J., and Rönkkö, T.: Time- 665 resolved characterization of primary particle emissions and secondary particle formation from a modern gasoline passenger car, *Atmos. Chem. Phys.*, 16, 8559–8570, 2016.
- Keyte, I. J., Albinet, A., and Harrison R. M.: On-road traffic emissions of polycyclic aromatic hydrocarbons and their oxy- and nitro- derivative compounds measured in road tunnel environments, *Sci. Total Environ.*, 566–567, 1131–1142, 2016.
- Korhonen P., Kulmala M., Laaksonen A., Viisanen Y., McGraw R. and Seinfeld J.H.: Ternary nucleation of H₂SO₄, NH₃ and 670 H₂O in the atmosphere, *J. Geophys. Res.*, Vol. 104, N. D21, P. 26349-26353, 1999.
- Kostenidou, E., Lee, B. H., Engelhart, G. J., Pierce, J. R., and Pandis, S. N.: Mass spectra deconvolution of low, medium and high volatility biogenic secondary organic aerosol, *Environ. Sci. Technol.*, 43, 4884–4889, 2009.
- Kostenidou, E., Florou, K., Kaltsonoudis, C., Tsiflikiotou, M., Vratolis, S., Eleftheriadis, K., and Pandis, S. N.: Sources and chemical characterization of organic aerosol during the summer in the eastern Mediterranean, *Atmos. Chem. Phys.*, 15, 675 11355–11371, 2015.
- Kürten, A.: New particle formation from sulfuric acid and ammonia: nucleation and growth model based on thermodynamics derived from CLOUD measurements for a wide range of conditions, *Atmos. Chem. Phys.*, 19, 5033–5050, 2019.
- Lamma, L.: Mise au point d'une méthode de mesure des siloxanes méthyliques volatils dans le biogaz et dans l'air ambiant et étude de leur impact sur les systèmes photocatalytiques, PhD Thesis, Univ. Lyon, France, 2017.

- 680 Lapuerta, M., Rodríguez-Fernández, J., and Sánchez-Valdepeñas, J.: Soot reactivity analysis and its implications on diesel filter regeneration, *Prog. Energy Combust. Sci.*, 78, 100833, 2020.
- Lawrence, S., Sokhi, R., Ravindra, K., Mao, H., Prain, H. D., and Bull, I. D.: Source apportionment of traffic emissions of particulate matter using tunnel measurements, *Atmos. Environ.*, 77, 548–557, 2013.
- Lea-Langton, A., Li, H., and Andrews, G.: Comparison of particulate PAH emissions for diesel, biodiesel and cooking oil
685 using a heavy duty DI diesel engine, SAE Technical Paper, 01–1811, 2008.
- Lelieveld, J., Klingmüllera, K., Pozzer, A., Burnett, R. T., Haines A., and Ramanathan, V.: Effects of fossil fuel and total anthropogenic emission removal on public health and climate, *PNAS*, 116(15), 7192-7197, 2019.
- Levi, G., Senneca, O., Causà, M., Salatino, P., Lacovig, P., and Lizzit, S.: Probing the chemical nature of surface oxides during coal char oxidation by high-resolution XPS, *Carbon*, 90, 181–196, 2015.
- 690 Liang, B., Ge, Y., Tan, J., Han, X., Gao, L., Hao, L., Ye, W., and Dai, P.: Comparison of PM emissions from a gasoline direct injected (GDI) vehicle and a port fuel injected (PFI) vehicle measured by electrical low pressure impactor (ELPI) with two fuels: gasoline and M15 methanol gasoline, *J. Aerosol Sci.*, 57, 22–31, 2013.
- Liati, A., Schreiber, D., Dasilva, Y. A. R., and Dimopoulos Eggenschwiler, P.: Ultrafine particle emissions from modern Gasoline and Diesel vehicles: An electron microscopic perspective, *Environ. Pollut.* 239, 661-669, 2018.
- 695 Liu, P. S. K., Deng, R., Smith, K. A., Williams, L. R., Jayne, J. T., Canagaratna, M. R., Moore, K., Onasch, T. B., Worsnop, D. R., and Deshler, T.: Transmission Efficiency of an Aerodynamic Focusing Lens System: Comparison of Model Calculations and Laboratory Measurements for the Aerodyne Aerosol Mass Spectrometer, *Aerosol Sci. Technol.*, 41, 721-733, 2007.
- Louis, C., Liu, Y., Tassel, P., Perret, P., Chaumond, A. and André, M.: PAH, BTEX carbonyl compound, black-carbon, NO₂
700 and ultrafine particle dynamometer bench emissions for Euro 4 and Euro 5 diesel and gasoline passenger cars, *Atmos. Environ.*, 141, 80–95, 2016.
- Majewski, W. A., and Khair, M. K.: Diesel emissions and their control, SAE Technical Paper, SAE: Warrendale, PA, 2006.
- Mamakos, A., Dardiotis, C., Marotta, A., Martini, G., Manfredi, U., Colombo, R., Sculati, M., Lijour, P., and Lanappe, G.: Particle emissions from a Euro 5a certified diesel passenger car, JRC Scientific and Technical Reports
705 <https://ec.europa.eu/jrc/en/publication/eur-scientific-and-technical-research-reports/particle-emissions-euro-5a-certified-diesel-passenger-car>, 2011.
- Maricq, M. M.: Chemical characterization of particulate emissions from diesel engines: A review, *J. Aerosol Sci.*, 38 (11), 1079-1118, 2007.
- Marques, B., Kostenidou, E., Temime-Roussel, B., Ferronato C., Martinez-Valiente, A., Michel, A., Liu, Y., Vansevenant, B.,
710 Fine L., Ferronato, C., and D’Anna B.: Chemical characterization of fresh volatile organic compound emissions from diesel and gasoline EURO 5 light vehicles (in preparation).
- Marr, L., Kirchstetter, T., Harley, R., Miguel, A., Hering, S., and Hammond, S.: Characterization of polycyclic aromatic hydrocarbons in motor vehicle fuels and exhaust emissions, *Environ. Sci. Technol.*, 33(18), 3091-3099, 1999.

- Mathis, U., Kaegi, R., Mohr, M., and Zenobi, R.: TEM analysis of volatile nanoparticles from particle trap equipped diesel and direct-injection spark-ignition vehicles, *Atmos. Environ.*, 38(26), 4347-4355, 2004.
- McLafferty, F. W., and Turecek, F.: *Interpretation of Mass Spectra*, University Science Books, Mill Valley, CA, 1993.
- Mills, N.L., Miller, M.R., Lucking, A.J., Beveridge, J., Flint, L., Boere, A.J., Fokkens, P.H., Boon, N.A., Sandstrom, T., Blomberg, A., Duffin, R., Donaldson, K., Hadoke, P. W. F., Cassee, F. R., and Newby, D. E.: Combustion-derived nanoparticulate induces the adverse vascular effects of diesel exhaust inhalation, *Eur. Heart J.*, 32, 2660–2671, 2011.
- 715 Mohr, C., Huffman, J. A., Cubison, M. J., Aiken, A. C., Docherty, K. S., Kimmel, J. R., Ulbrich, I. M., Hannigan, M., and Jimenez, J. L.: Characterization of primary organic aerosol emissions from meat cooking, trash burning, and motor vehicles with high-resolution aerosol mass spectrometry and comparison with ambient and chamber observations, *Environ. Sci. Technol.*, 43, 7, 2443-2449, 2009.
- Mohr, C., DeCarlo, P. F., Heringa, M. F., Chirico, R., Slowik, J. G., Richter, R., Reche, C., Alastuey, A., Querol, X., Seco, R., 725 Peñuelas, J., Jimenez, J. L., Crippa, M., Zimmermann, R., Baltensperger, U., and Prévôt, A. S. H.: Identification and quantification of organic aerosol from cooking and other sources in Barcelona using aerosol mass spectrometer data, *Atmos. Chem. Phys.*, 12, 1649–1665, 2012.
- Morawska, L., Ristovski, Z. D., Johnson, G. R., Jayaratne, E. R., and Mengersen, K.: Novel method for on-road emission factor measurements using a plume capture trailer, *Environ. Sci. Technol.*, 41, 574–579, 2007.
- 730 Muñoz, M., Haag, R., Honegger, P., Zeyer, K., Mohn, J., Comte, P., Czerwinski, J., Heeb, N.V.: Co-formation and co-release of genotoxic PAHs, alkyl-PAHs and soot nanoparticles from gasoline direct injection vehicles, *Atmos. Environ.*, 178, 242–254, 2018.
- Myung, C. L., Choi, K., Kim, J., Lim, Y., Lee, J., and Park, S.: Comparative study of regulated and unregulated toxic emissions characteristics from a spark Ignition direct injection light-duty vehicle fueled with gasoline and liquid phase LPG (Liquefied Petroleum Gas), *Energy*, 44 (1), 189–196, 2012.
- 735 Ni, M., and Ratner, B.D.: Differentiating calcium carbonate polymorphs by surface analysis techniques - An XPS and TOF-SIMS study, *Surf. Interface Anal.*, 40, 1356–1361, 2008.
- Ntziachristos, L., Samaras, Z., Zervas, E., and Dorlhène, P.: Effects of a catalysed and an additized particle filter on the emissions of a diesel passenger car operating on low sulphur fuels, *Atmos. Environ.*, 39 (27), 4925–4936, 2005.
- 740 Ortega, I. K., Kurtén, T., Vehkamäki, H., and Kulmala, M.: The role of ammonia in sulfuric acid ioninduced nucleation, *Atmos. Chem. Phys.*, 8, 2859-2867, 2008.
- Parent, P., Laffon, C., Marhaba, I., Ferry, D., Regier, T.Z., Ortega, I.K., Chazallon, B., Carpentier, Y., and Focsa, C.: Nanoscale characterization of aircraft soot: a high-resolution transmission electron microscopy, Raman spectroscopy, X-ray photoelectron and near-edge X-ray absorption spectroscopy study, *Carbon*, 101, 86–100, 2016.
- 745 Peitzmeier, C., Loschke, C., Wiedenhau, H., and Klemm, O., Real-world vehicle emissions as measured by in situ analysis of exhaust plumes, *Environ. Sci. Pollut., Res*, doi: 10.1007/s11356-017-9941-1, 2017.

- Pieber, S. M., Kumar, N. K., Klein, F., Comte, P., Bhattu, D., Dommen, J., Bruns, E. A., Kılıç, D., El Haddad, I., Keller, A., Czerwinski, J., Heeb, N., Baltensperger, U., Slowik, J. G., and Prévôt, A. S. H.: Gas-phase composition and secondary organic aerosol formation from standard and particle filter-retrofitted gasoline direct injection vehicles investigated in a batch and flow reactor, *Atmos. Chem. Phys.*, 18, 9929–9954, 2018.
- 750
- Pikridas, M., Riipinen, I., Hildebrandt, L., Kostenidou, E., Manninen, H., Mihalopoulos, N., Kalivitis, N., Burkhardt, J. F., Stohl, A., Kulmala, M., and Pandis, S. N.: New particle formation at a remote site in the eastern Mediterranean, *J. G. R.*, vol 117, D12205, doi:10.1029/2012JD017570, 2012.
- Platt, S. M., El Haddad, I., Zardini, A. A., Clairotte, M., Astorga, C., Wolf, R., Slowik, J. G., Temime-Roussel, B., Marchand, N., Jezek, I., Drinovec, L., Mocnik, G., Mohler, O., Richter, R., Barmet, P., Bianchi, F., Baltensperger, U., and Prévôt, A. S. H.: Secondary organic aerosol formation from gasoline vehicle emissions in a new mobile environmental reaction chamber, *Atmos. Chem. Phys.*, 13, 9141-9158, 2013.
- 755
- Platt, S. M., El Haddad, I., Pieber, S. M., Huang, R.-J., Zardini, A. A., Clairotte, M., Suarez-Bertoa, R., Barmet, P., Pfaffenberger, L., Wolf, R., Slowik, J. G., Fuller, S. J., Kalberer, M., Chirico, R., Dommen, J., Astorga, C., Zimmermann, R., Marchand, N., Hellebust, S., Temime-Roussel, B., Baltensperger, U., and Prévôt, A. S. H.: Two-stroke scooters are a dominant source of air pollution in many cities, *Nature communications*, DOI: 10.1038/ncomms4749, 2014.
- 760
- Platt, S. M., El Haddad, I., Pieber, S. M., Zardini, A. A., Suarez-Bertoa, R., Clairotte, M., Daellenbach, K. R., Huang, R.-J., Slowik, J. G., Hellebust, S., Temime-Roussel, B., Marchand, N., de Gouw, J., Jimenez, J. L., Hayes, P. L., Robinson, A. L., Baltensperger, U., Astorga, C., and Prévôt, A. S. H.: Gasoline cars produce more carbonaceous particulate matter than modern filter-equipped diesel cars, *Scientific Reports*, 7, 4926, 2017.
- 765
- Ravindra, K., Sokhi, R., and Van Grieken, R.: Atmospheric polycyclic aromatic hydrocarbons: Source attribution, emission factors and regulation, *Atmos. Environ.*, 42 (13), 2895–2921, 2008.
- R’Mili, B., Le Bihan, O. L. C., Dutouquet, C., Aguerre-Charriol, O., and Frejafon, E.: Particle sampling by TEM grid filtration, *Aerosol Sci. Technol.*, 47(7), 767-775, 2013.
- 770
- R’Mili, B., Boréave, A., Meme, A., Vernoux, P., Leblanc, M., Noël, L., Raux, S., and D’Anna, B.: Physico-chemical characterization of fine and ultrafine particles emitted during diesel particulate filter active regeneration of Euro5 diesel vehicles, *Environ. Sci. & Tech.*, 52(5), 3312-3319, 2018.
- Rönkkö, T., Pirjola, L., Ntziachristos, L., Heikkilä, J., Karjalainen, P., Hillamo, R., and Keskinen, J.: Vehicle Engines Produce Exhaust Nanoparticles Even When Not Fueled, *Environ. Sci. & Tech.*, 48(3), 2043- 2050, 2014.
- 775
- Ropkins, K., DeFries, T. H., Pope, F., Green, D. C., Kemper, J., Kishan, S., Fuller, G. W., Li, H., Sidebottom, J., Crilley, L. R., Kramer, L., Bloss, W. J. and Hager, J. S.: Evaluation of EDAR vehicle emissions remote sensing technology, *Sci. Total Environ.*, 609, 1464–1474, 2017.
- Roth, P., Yang, J., Fofie, E., Cocker, III, D. R., Durbin, T. D., Brezny, R., Geller, M., Asa-Awuku, A., and Karavalakis, G.: Catalyzed gasoline particulate filters reduce secondary organic aerosol production from gasoline direct injection vehicles, *Environ. Sci. & Tech.*, 53, 3037-3047, 2019.
- 780

- Saffaripour, M., Thomson, K., Smallwood, G., and Lobo, P.: A review on the morphological properties of non-volatile particulate matter emissions from aircraft turbine engines, *J. Aerosol Sci.*, 139, 105467, 2020.
- Saliba, G., Saleh, R., Zhao, Y., Presto, A. A., Lambe, A. T., Frodin, B., Sardar, S., Maldonado, H., Maddox, C., May, A. A., Drozd, G. T., Goldstein, A. H., Russell, L. M., Hagen, F., and Robinson, A. L.: Comparison of gasoline direct-injection (GDI) and port fuel injection (PFI) vehicle emissions: emission certification standards, cold-start, secondary organic aerosol formation potential, and potential climate impacts, *Environ. Sci. & Tech.*, 51, 6542-6552, 2017.
- 785 Samburova, V., Zielinska, B., and Khlystov, A.: Do 16 polycyclic aromatic hydrocarbons represent PAH air toxicity? *Toxics*, 5(3), 2017.
- Schuster, M. E., Hävecker, M., Arrigo, R., Blume, R., Knauer, M., Ivleva, N. P., Su, D. S., Niessner, R., and Schlögl, R.: Surface sensitive study to determine the reactivity of soot with the focus on the European emission standards IV and VI, *J. Phys. Chem. A*, 115, 2568–258, 2011.
- 790 Short, D. Z., Vu, D., Durbin, T. D., Karavalakis, G., Asa-Awuku, A.: Components of particle emissions from light-duty spark-ignition vehicles with varying aromatic content and octane rating in gasoline, *Environ. Sci. Technol.*, 49, 10682–10691, 2015.
- 795 Slowik, J. G., Stainken, K., Davidovits, P., Williams, L. R., Jayne, J. T., Kolb, C. E., Worsnop, D. R., Rudich, Y., DeCarlo, P. F., and Jimenez, J. L.: Particle morphology and density characterization by combined mobility and aerodynamic diameter measurements. Part 2: application to combustion-generated soot aerosols as a function of fuel equivalence ratio, *Aerosol Sci. Technol.*, 38, 1206–1222, 2004.
- Smit, R., Kingston, P., Wainwright, D.H., and Tooker, R.: A tunnel study to validate motor vehicle emission prediction software in Australia, *Atmos. Environ.*, 151, 188–199, 2017.
- 800 Song, J., Wang, J., and Boehman, A. L.: The role of fuel-borne catalyst in diesel particulate oxidation behavior, *Combust. Flame*, 146 (1–2), 73–84, 2006.
- Suarez-Bertoa, R., Zardini, A. A., and Astorga, C.: Ammonia exhaust emissions from spark ignition vehicles over the New European Driving Cycle, *Atmos. Environ.*, 97, 43–53, 2014.
- 805 Timko, M. T., Albo, S. E., Onasch, T. B., Fortner, E. C., Yu, Z., Miake-Lye, R. C., Canagaratna, M. R., Ng, N. L., and Worsnop, D. R.: Composition and sources of the organic particle emissions from aircraft engines, *Aerosol Sci. Technol.*, 48, 61–73, 2014.
- Timko, M. T., Yu, Z. H., Kroll, J., Jayne, J. T., Worsnop, D. R., Miake-Lye, R. C., Onasch, T. B., Liscinsky, D., Kirchstetter, T. W., Destailhats, H., Holder, A. L., Smith, J. D., Wilson, K. R.: Sampling Artifacts from Conductive Silicone Tubing, *Aerosol Sci. Technol.*, 43, 855–865, 2009.
- 810 Tutuianu, M., Bonnel, P., Ciuffo, B., Haniu, T., Ichikawa, N., Marotta, A., Pavlovic, J., and Steven, H.: Development of the World-wide harmonized Light duty Test Cycle (WLTC) and a possible pathway for its introduction in the European legislation, *Transp. Res. Part D*, 40, 61-75, 2015.

- 815 Tyler, C. R., Zychowski, K. E., Sanchez, B. N., Rivero, V., Lucas, S., Herbert, G., Liu, J., Irshad, H., McDonald, J. D., Bleske, B. E., and Campen, M. J.: Surface area-dependence of gas-particle interactions influences pulmonary and neuroinflammatory outcomes, *Part Fibre Toxicol.*, 13, 64, 2016.
- Tzankiozis, T., Ntziachristos, L., and Samaras Z.: Diesel passenger car PM emissions: From Euro 1 to Euro 4 with particle filter, *Atmos. Environ.*, 44(7), 909–916, 2010.
- 820 Vouitsis, E., Ntziachristos, L., Pistikopoulos, P., Samaras, Z., Chrysikou, L., Samara, C., Papadimitriou, C., Samaras, P., and Sakellaropoulos, G.: An investigation on the physical, chemical and ecotoxicological characteristics of particulate matter emitted from light-duty vehicles, *Environ. Pollut.*, 157, 2320-2327, 2009.
- Wang, T., Jerrett, M., Sinsheimer, P., and Zhu, Y.: Estimating PM_{2.5}-associated mortality increase in California due to the Volkswagen emission control defeat device, *Atmos. Environ.*, 144, 168–174, 2016.
- 825 Weilenmann, M., Favez, J.-Y., and Alvarez, R.: Cold-start emissions of modern passenger cars at different low ambient temperatures and their evolution over vehicle legislation categories, *Atmos. Environ.*, 43, 2419–2429, 2009.
- WHO, Air Quality Guidelines for Europe, second edition, World Health Organization, Copenhagen, 2000.
- Xu, Z., Li, X., Guan, C., and Huang, Z.: Effect of injection timing on exhaust particle size and nanostructure on a diesel engine at different loads, *J. Aerosol Sci.*, 76, 28-38, 2014.
- 830 Yang, D., Fan, T., Zhou, H., Ding, J., and Zhang, D.: Biogenic Hierarchical TiO₂/SiO₂ Derived from Rice Husk and Enhanced Photocatalytic Properties for Dye Degradation, *PLoS One* 6, e24788, <https://doi.org/10.1111/php.12873>, 2011.
- Yang, J., Roth, P., Durbin, T. D., Johnson, K. C., Cocker, D. R., Asa-Awuku, A., Brezny, R., Geller, M., and Karavalakis, G.: Gasoline particulate filters as an effective tool to reduce particulate and polycyclic aromatic hydrocarbon emissions from gasoline direct injection (GDI) vehicles: A case study with two GDI vehicles, *Environ. Sci. Technol.*, 52(5), 3275-3284, 2018.
- 835 Ye, P., Sun, C., Lapuerta, M., Aguledo, J., Vander Wal, R., Boehman, A. L., Toops, T. J., and Daw, S.: Impact of rail pressure and biodiesel fueling on the particulate morphology and soot nanostructures from a common-rail turbocharged direct injection diesel engine, *Int. J. Engine Res.*, 17(2), 193-208, 2014.
- Zielinska, B., Sagebiel, J., McDonald, J. D., Whitney, K., and Lawson, D. R.: Emission rates and comparative chemical composition from selected in-use diesel and gasoline-fueled vehicles, *J. Air Waste Manag. Assoc.*, 54, 1138-1150, 2004.
- 840 Zimmerman, N., Wang, J. M., Jeong, C. H., Wallace, J. S., and Evans, G. J.: Assessing the climate trade-offs of gasoline direct injection engines, *Environ. Sci. Technol.*, 50, 8385–8392, 2016.
- Zhu, R., Hu, J., Bao, X., He, L., Lai, Y., Zu, L., Li, Y., and Su, S.: Tailpipe emissions from gasoline direct injection (GDI) and port fuel injection (PFI) vehicles at both low and high ambient temperatures, *Environ. Pollut.*, 216, 223-234, 2016.

845

Table 1: Technical characteristics of the tested vehicles, experimental conditions and particle phase instrumentation used.

	Diesel Euro 5			Gasoline Euro 5			
Vehicle name	D1	D2	D3	GDI1	GDI2	PFI	GDI3
Size class	1.5 DCI	1.6 TDI	2.0 HDI	1.2 TSI	0.9 TCE	1.0 VVTI	1.2 TCE 16 V
Engine capacity (cm³)	1461	1598	1997	1197	900	998	1149
Weight (kg)	1090	1262	1515	1320	1055	1030	1100
Odometer mileage (km)	87073	78903	103000	25844	9500	27712	97089
Catalyst type	DOC	DOC	DOC	TWC	TWC	TWC	TWC
Particulate Filter type	CDPF	CDPF	FBC-DPF	-	-	-	-
Driving Cycles tested	Artemis	WLTC	Artemis	Artemis	WLTC	Artemis	Artemis
Dilution System	CVS	FPS-4000	Hot Injector	CVS	FPS-4000	Hot Injector	Hot Injector
Dilution Ratio	8-40	7-12	2.3-15	13-100	20-46	2.3	1.5
AMS type	c-ToF	c-ToF	HR-ToF	-	c-ToF	HR-ToF	HR-ToF
MAAP/AE-33	MAAP	AE-33	-	MAAP	AE-33	-	AE-33
CPC	YES	YES	-	YES	YES	YES	YES
FMPS/SMPS/SMPS+E	YES	YES	-	-	YES	-	-
TEM/XPS	YES/NO	YES/NO	YES/NO	YES/NO	YES/NO	YES/YES	-

850

855

860

865

Table 2: Correlations between mass spectra taken during the first two minutes of an Artemis motorway cycle and mass spectra from diesel and gasoline vehicles, lubricant oil and PMF factors related to fresh transportation (HOA, Hydrocarbon-like OA) from selected studies using both R^2 and the angle θ (Kostenidou et al., 2009) in parenthesis. The angle θ provides a better comparison for small differences in the mass spectra (when R^2 is less than 0.97), as this method treats the mass spectra as vectors. More details about this method are given in Kostenidou et al. (2009).

	First 2 minutes of Artemis motorway (R^2 and angle θ in degrees)				
	D1	D3	GDI2	PFI	GDI3
Diesel bus exhaust¹	0.80 (24.9)	0.97 (9.1)	0.88 (19.1)	0.88 (19.8)	0.92 (15.1)
Diesel truck²	0.76 (27.4)	0.95 (12.2)	0.84 (21.8)	0.83 (23.1)	0.90 (16.8)
Gasoline car²	0.74 (28.2)	0.96 (11.2)	0.83 (22.9)	0.81 (25.7)	0.91 (16.8)
Diesel car Euro5³	0.82 (23.6)	0.77 (26.9)	0.83 (22.5)	0.72 (29.2)	0.73 (28.9)
Lubricant oil (diesel car)³	0.75 (28.8)	0.96 (12.3)	0.86 (21.5)	0.80 (27.9)	0.89 (19.4)
HOA Athens summer⁴	0.73 (29.3)	0.95 (12.3)	0.80 (24.8)	0.83 (23.9)	0.91 (16.8)
HOA ICE-HT winter⁵	0.69 (31.9)	0.94 (12.7)	0.77 (26.8)	0.80 (24.0)	0.91 (16.8)
HOA Barcelona⁶	0.77 (27.2)	0.96 (10.8)	0.85 (21.6)	0.84 (24.3)	0.92 (16.2)

¹Canagaratna et al. (2004), ²Mohr et al. (2009), ³R'Mili et al. (2018), ⁴Kostenidou et al. (2015), ⁵Kaltsonoudis et al. (2017), ⁶Mohr et al.

870 (2012)

875

880

885


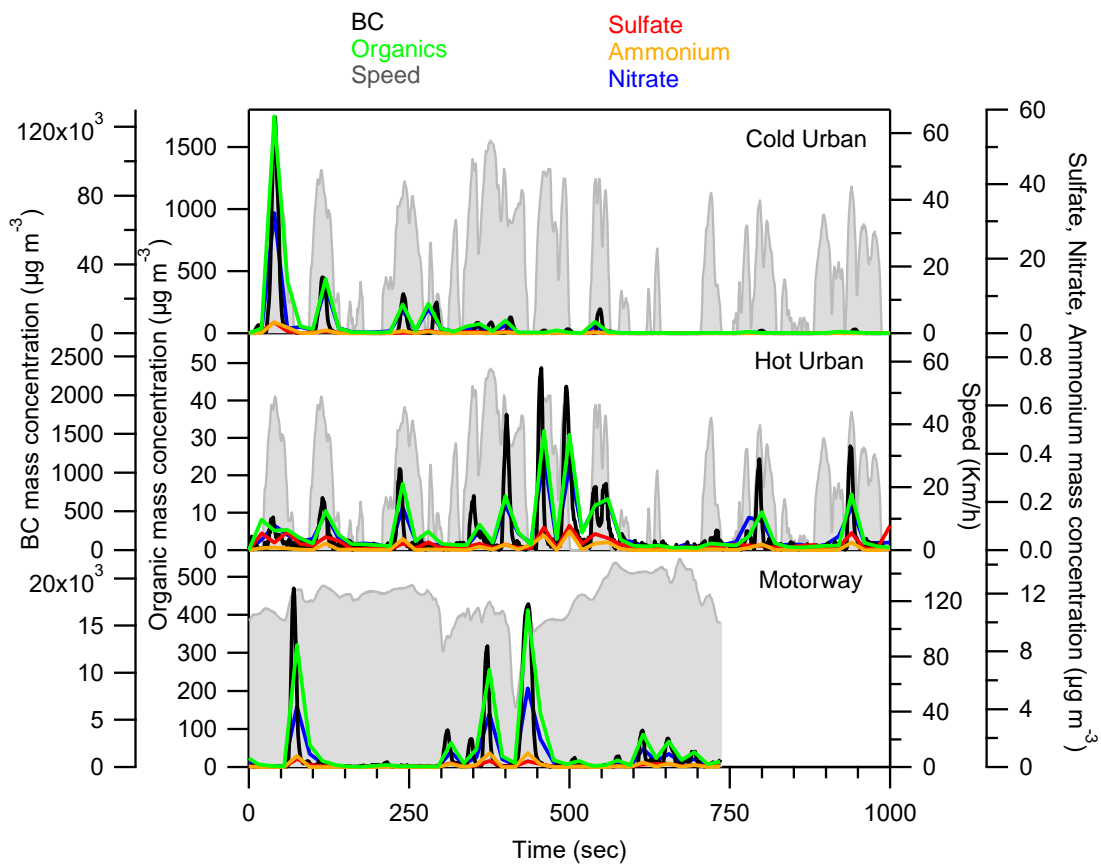


Figure 1: BC, Organics, sulfate, nitrate and ammonium time profiles during a cold urban, a hot urban and a motorway Artemis cycle for the GDI3 car.


890

895

900

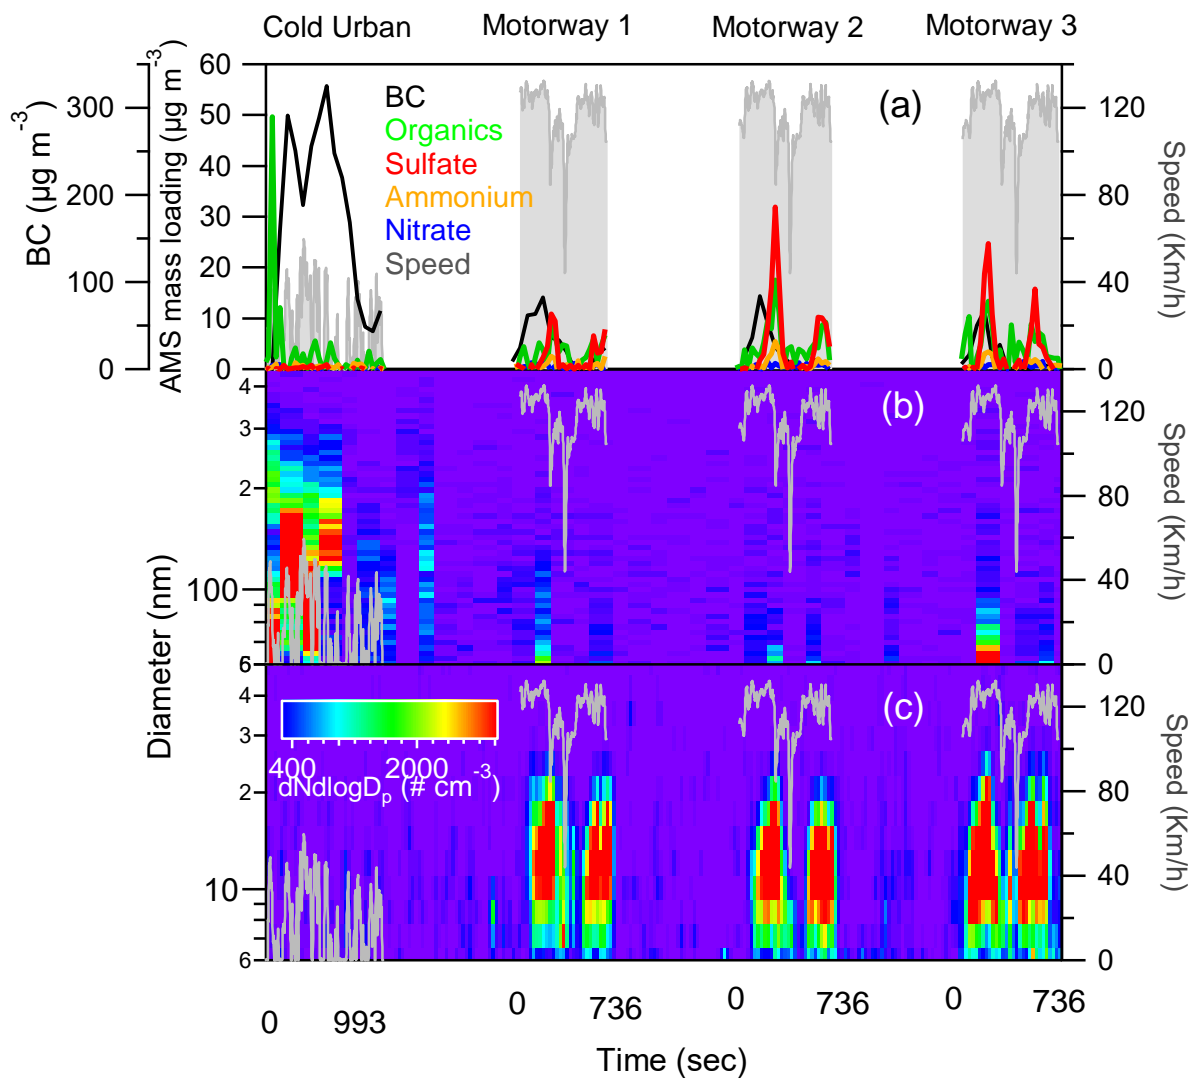

905 **Figure 2: PM emissions from the D1 vehicle, during a cold urban and 3 successive motorway cycles: (a) AMS major chemical species and BC (MAAP); (b) size distribution of fine particles (SMPS) and (c) size distribution of ultrafine particles (SMPS+E).**

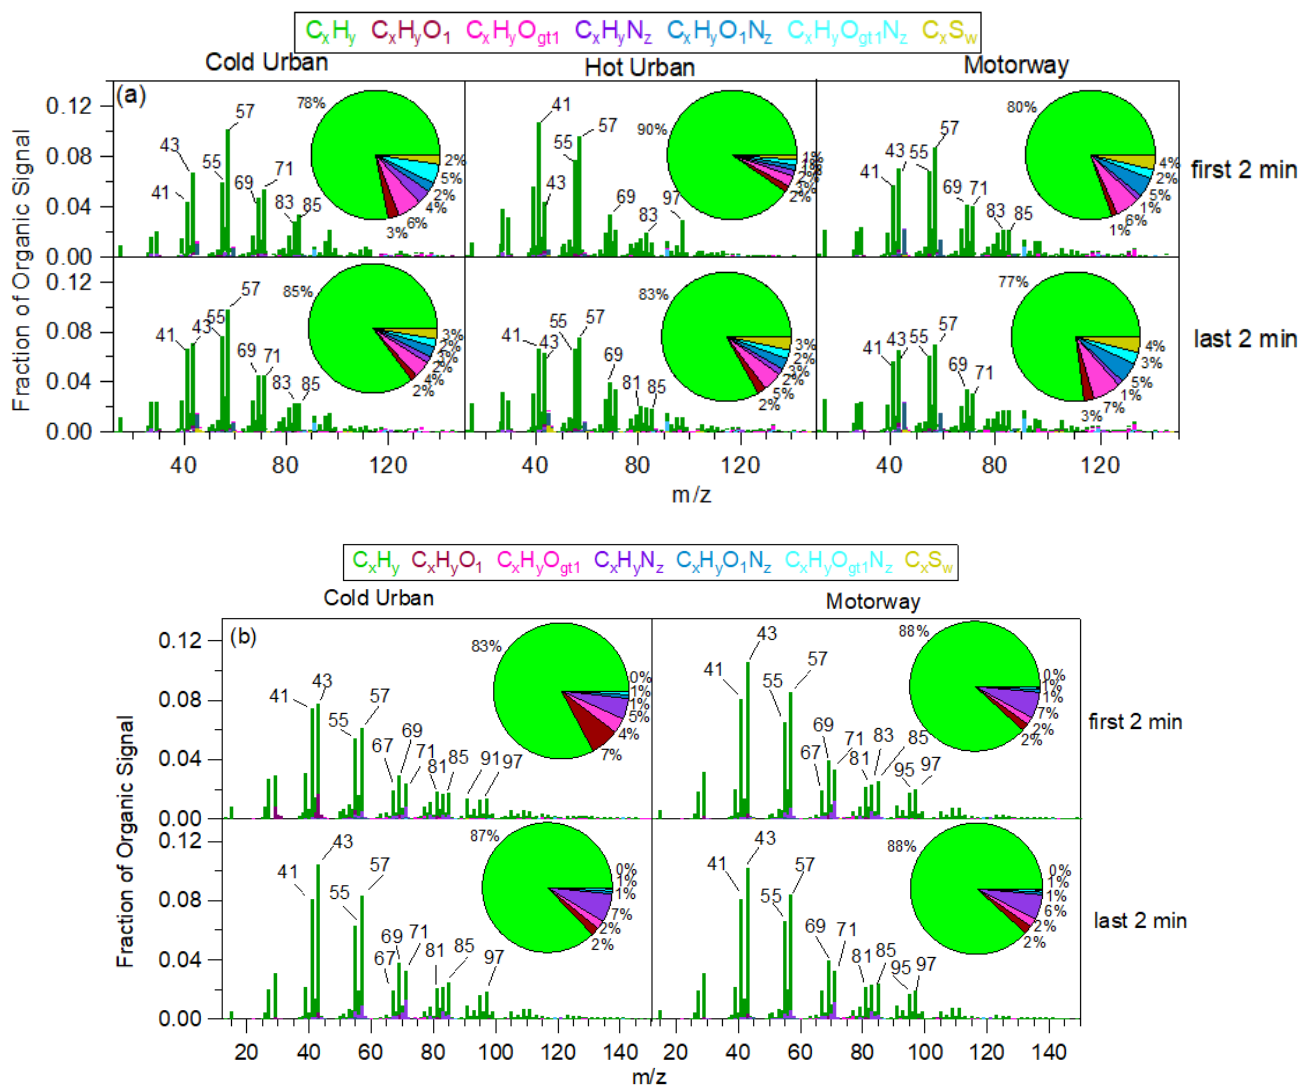

915 **Figure 3: HR mass spectra and chemical composition: (a) during the two first and the two last minutes of a cold urban (left), hot urban (middle) and a motorway (right) Artemis cycle for the gasoline GDI3 car and (b) during the two first and the two last minutes of a cold urban (left) and a motorway (right) Artemis cycle for the diesel D3 car.**

920



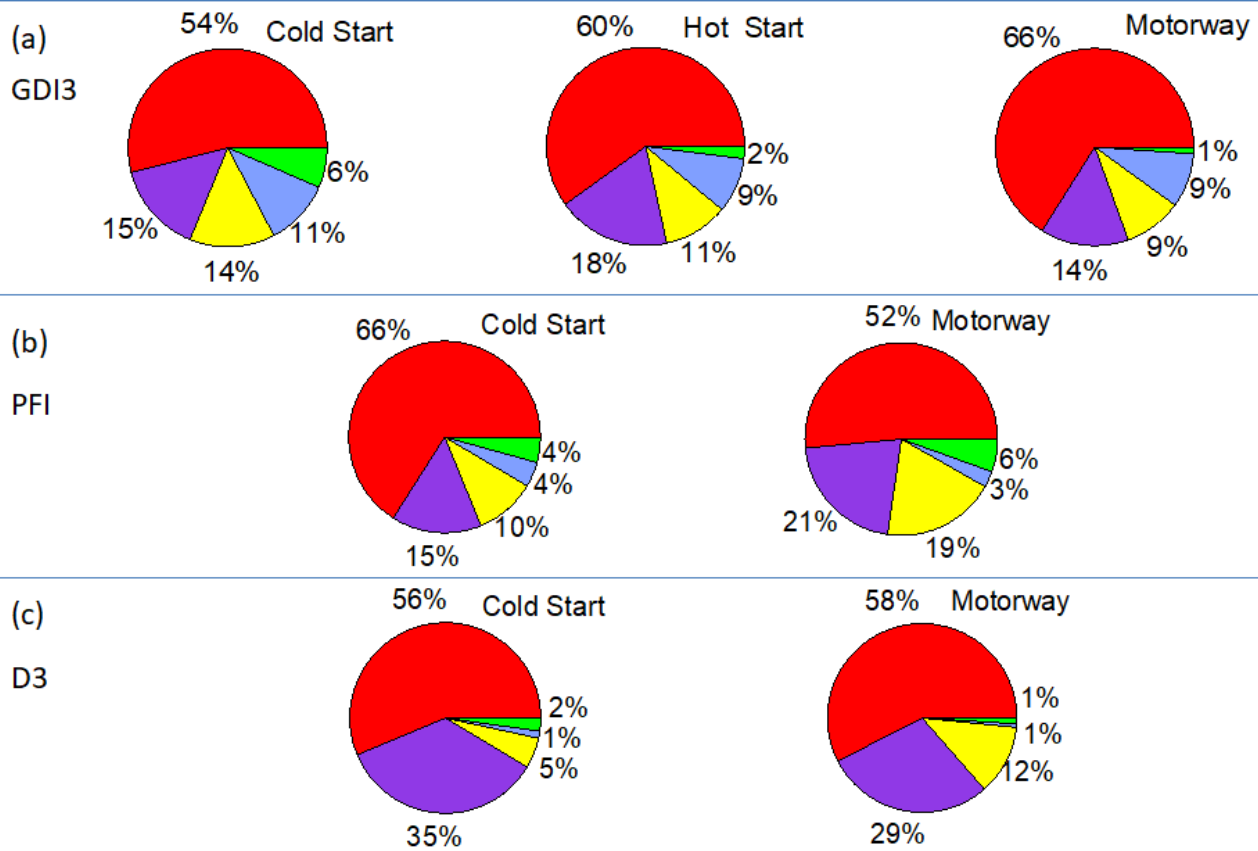


Figure 4: Average contribution of the various PAHs families during Artemis cycles for GDI3 (a), PFI (b) and D3 (c) vehicles, using the method of Herring et al. (2015).

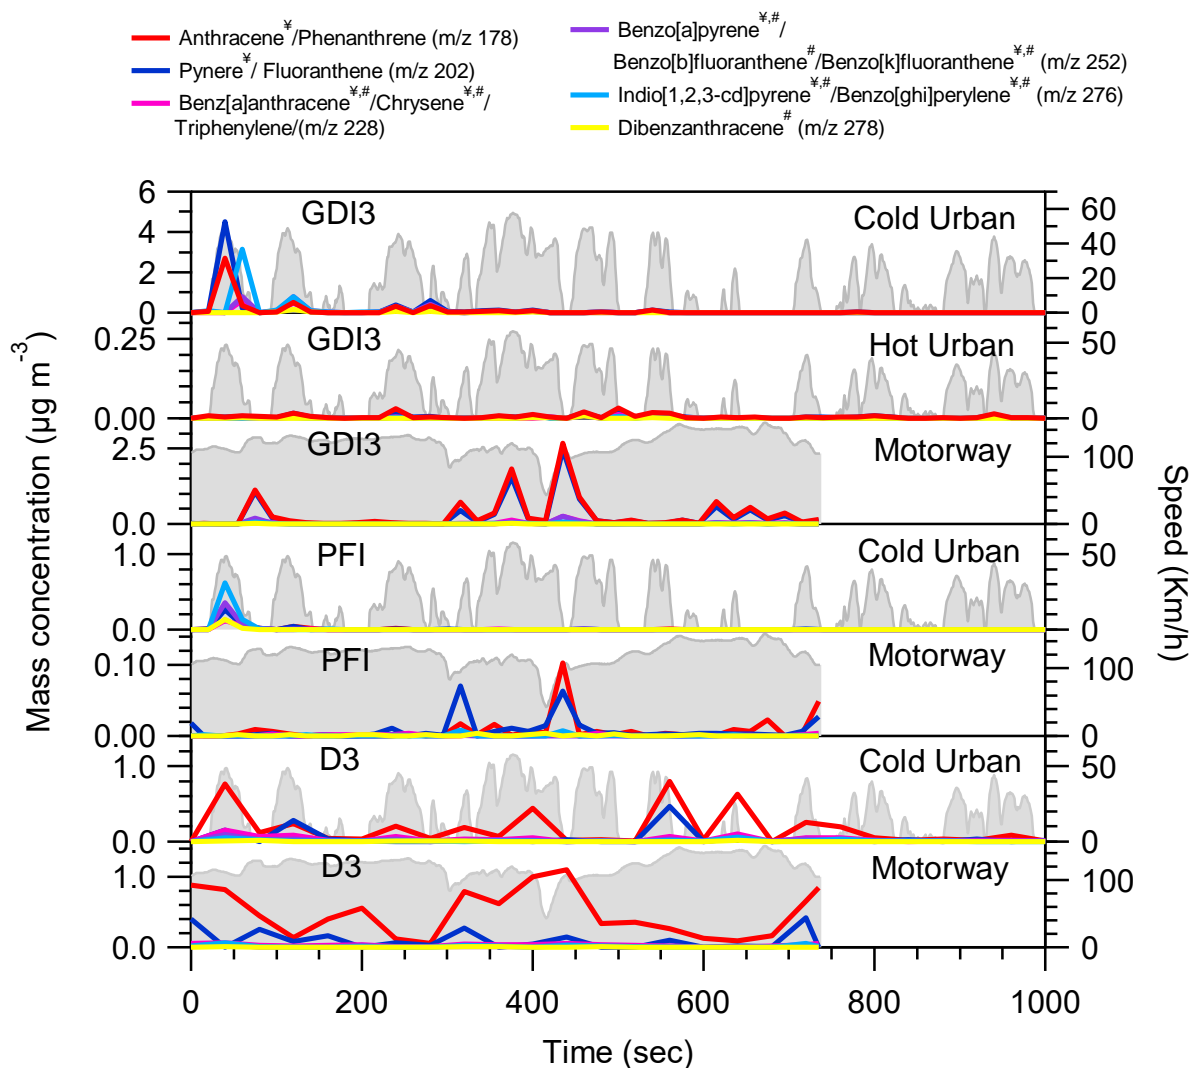


935 **Figure 5:** Example of PAHs time series profiles for GDI3, PFI and D3 vehicles for Artemis tested cycles. The time series have been corrected for the injector dilution (1.5) and for a relative abundance $f_{A,i} = 0.265$. Compounds labelled with ¥ have been characterized as photomutagenic, while compounds labelled with # have been found to be carcinogenic according to WHO (2005). The identification and the quantification of their concentration is based on the approach of Herring et al. (2015).

940

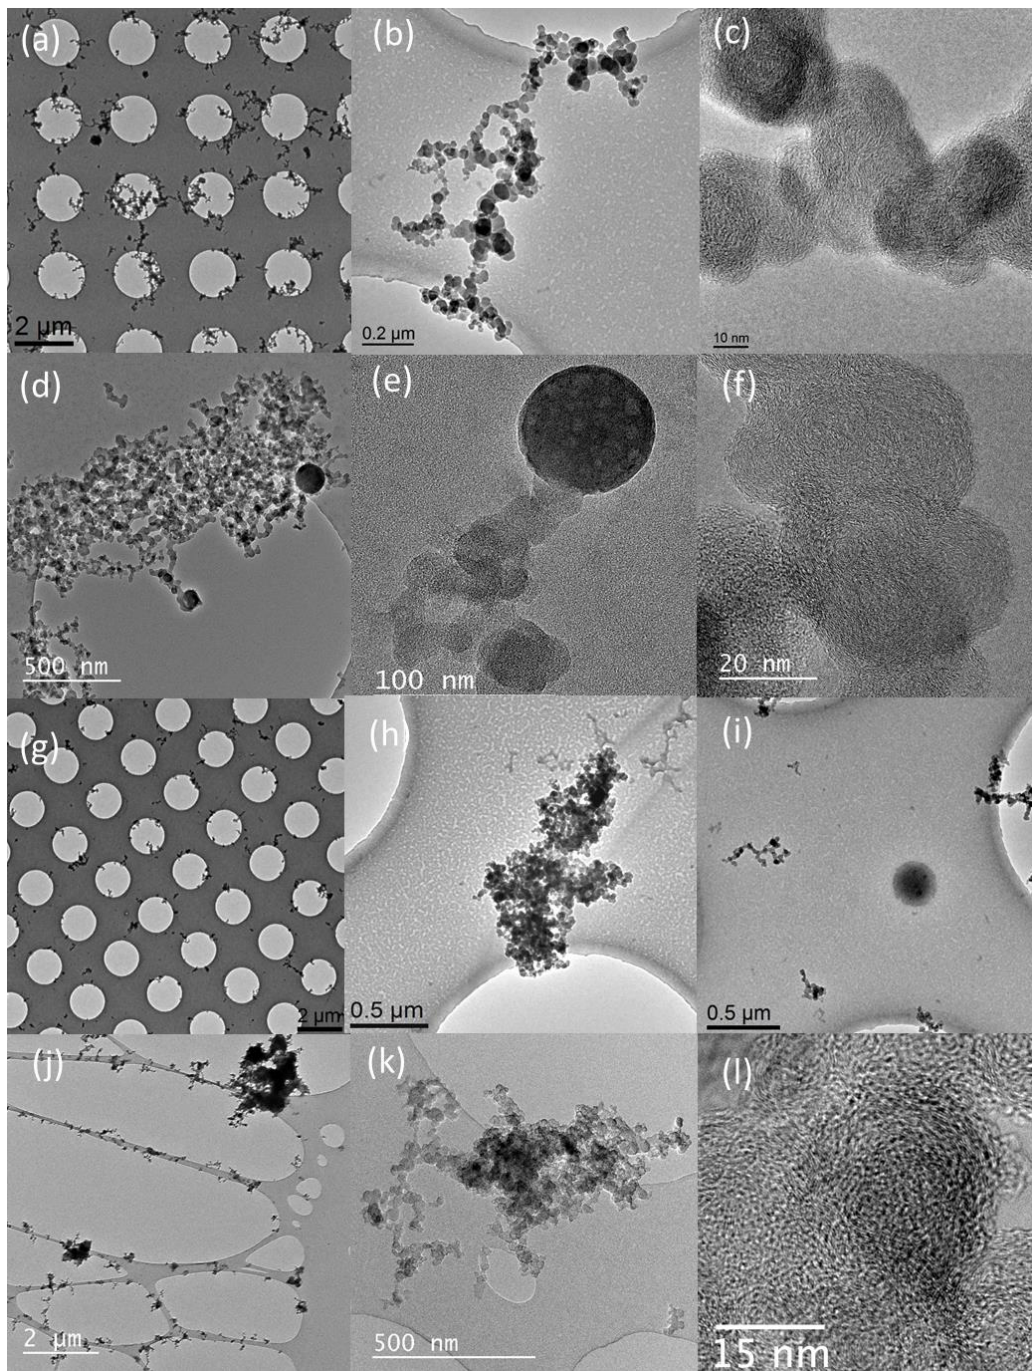

945 **Figure 6: TEM images of samples collected during Artemis urban cold cycle: (a-c) GDI1 vehicle (dilution ratio 40), the sample was collected during the first 120 sec of the cycle; (d-f) GDI2 vehicle (dilution ratio 46), the sample was collected during the first 120 sec of the cycle; (g-i) D1 vehicle (dilution ratio 40) the sample was collected during the first 300 sec of the cycle and during Artemis Motorway cycle (j-l) D3 sampling the first 45 sec of the motorway cycle (dilution ratio 2) tiny metallic inclusion are observed in (l).**

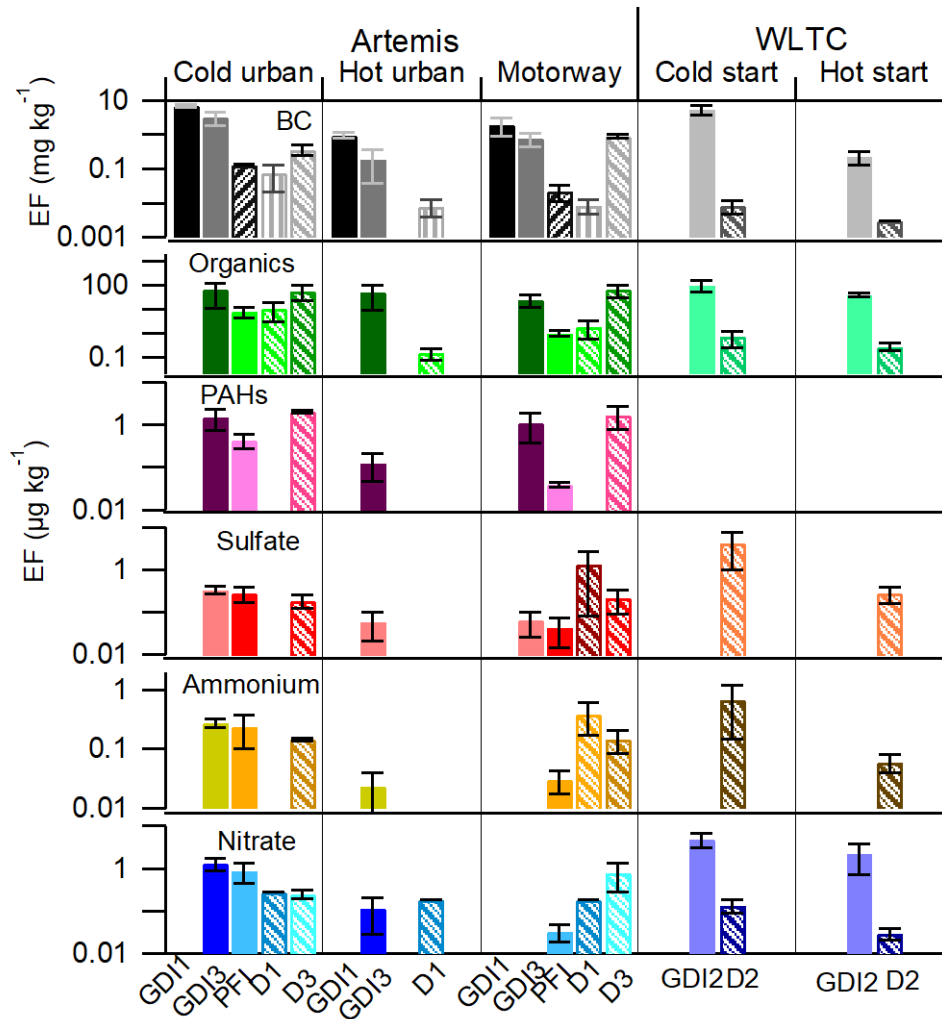

950

Figure 7: Emission factors for three diesel (D1, D2 and D3) and four gasoline (GDI1, GDI2, PFI and GDI3) vehicles Euro 5: BCEFs are expressed in mg km^{-1} , while for organics, PAHs, sulfate, ammonium and nitrate the values are expressed in $\mu\text{g km}^{-1}$. Gasoline cars are shown with solid bars and diesel cars with pattern bars. The error bars correspond to $\pm 1\sigma$ standard deviation.