- Comprehensive characterization of particulate the 1
- intermediate-volatility and semi-volatile organic compounds 2
- (I/SVOCs) from heavy-duty diesel vehicles using 3
- dimensional chromatography time-of-flight gas 4 mass
- spectrometry 5
- Xiao He¹, Xuan Zheng^{1*}, Shaojun Zhang^{2,3}, Xuan Wang⁴, Ting Chen¹, Xiao Zhang², Guanghan Huang², Yihuan 6
- 7
- Cao², Liqiang He², Xubing Cao⁵, Yuan Cheng⁵, Shuxiao Wang^{2,3}, Ye Wu^{2,6*}

 ¹College of Chemistry and Environmental Engineering, Shenzhen University, Shenzhen 518060, China 8
- ²School of Environment, State Key Joint Laboratory of Environment Simulation and Pollution Control, Tsinghua 9
- University, Beijing 100084, China 10
- ³State Environmental Protection Key Laboratory of Sources and Control of Air Pollution Complex, Beijing 11
- 12 100084, China
- 13 ⁴School of Energy and Environment, City University of Hong Kong, Hong Kong SAR, China
- 14 ⁵State Key Laboratory of Urban Water Resource and Environment, School of Environment, Harbin Institute of
- 15 Technology, Harbin, 150090, China
- ⁶Beijing Laboratory of Environmental Frontiers Technologies, Beijing 100084, China 16
- 17 Correspondence to: Xuan Zheng (x-zheng11@szu.edu.cn), Ye Wu (ywu@mail.tsinghua.edu.cn)

Abstract.

18

19 20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

Tailpipe emissions from three heavy-duty diesel vehicles (HDDVs), complying with varying emission standards and installed with diverse aftertreatment technologies, are collected at a certified chassis dynamometer laboratory. The HDDV-emitted intermediate-volatility and semi-volatile organic compound (I/SVOC) emission and the gasparticle partitioning of the I/SVOCs are investigated. Over four thousand compounds are identified and grouped into twenty-one categories. The dominant compound groups of particulate I/SVOCs are alkanes and phenolic compounds. For HDDVs without aftertreatment devices, i.e., diesel oxidation catalyst (DOC) and diesel particulate filter (DPF), the emitted I/SVOCs partition dramatically into the gas phase (accounting for ~ 93% of the total I/SVOC mass), with a few exceptional categories: hopane, 4-ring polycyclic aromatic hydrocarbons (PAH_{4rings}), and PAH_{5rings}. For HDDVs with DPF and DOC, the particulate fractions are reduced to a negligible level, i.e., less than 2%. Nevertheless, 50% of the total 2-ring PAH mass is detected in the particle phase, which is much higher than the high-molecular-weight PAHs, arising from the positive sampling artifact of quartz filter absorbing organic vapours. The positive sampling artifact of quartz filter absorbing organic vapours is clearly observed and uncertainties are discussed and quantified. Particulate I/SVOCs at low-speed, middle-speed, and high-speed phases are collected and analysed separately. Emission factor (EF) distribution of the speciated organic aerosol (OA) on a two-dimensional volatility basis set (2D-VBS) space reveals that the fractions of OA with O:C (oxygen to carbon) ratio > 0.3 (0.4, 0.5) are 18.2% (11.5%, 9.5%), 23% (15.4%, 13.6%), and 29.1% (20.6%, 19.1%) at low-speed, middle-speed, and high-speed stages. The results help to resolve the complex organic mixtures and trace the evolution of OA.

1. Introduction

37

76

The chemical composition of fine particle (particulate matter with aerodynamic diameter less than 2.5 micrometre, 38 39 PM_{2.5}) varies both temporally and spatially. Unlike the inorganic portion that has been well studied, the 40 characterization of organic aerosol, which takes up a major faction of PM_{2.5} mass is yet to achieve. Nevertheless, 41 the elevated PM_{2.5} concentrations have been widely recognized to be associated with enhanced mortality by 42 epidemiologic studies (Franklin et al., 2008; Tecer et al., 2008; Sun et al., 2022b; Faridi et al., 2022; Nguyen et 43 al., 2022). For example, exposures to polycyclic aromatic hydrocarbons (PAHs) and the derivatives through 44 inhalation, ingestion, and dermal contact are associated with an increased risk of cancer (Li et al., 2022; Sun et 45 al., 2022a). 46 Once emitted into the atmosphere, the volatile organic compounds (VOCs), intermediate-volatility and semi-47 volatile organic compounds (I/SVOCs) are subject to sequences of chemical and physical evolutions to form 48 secondary organic aerosol (SOA) (Alier et al., 2013; Paasonen et al., 2016; Wang et al., 2006; Stewart et al., 2021a; 49 Stewart et al., 2021b). I/SVOCs span a wide range of volatility and partition dynamically between the gas and particle phases (Alam et al., 2019; Presto et al., 2009). The term effective saturation concentration (C^* , μg m⁻³) is 50 frequently used to categorize IVOCs ($10^3 < C^* < 10^6 \ \mu g \ m^{-3}$), SVOCs ($10^{-1} < C^* < 10^3 \ \mu g \ m^{-3}$), and low 51 volatility organic compounds LVOCs ($C^* < 10^{-1} \ \mu g \ m^{-3}$) (Gentner et al., 2012). Diesel vehicle exhaust has 52 53 contributed significantly to the emission of VOCs, IVOCs, SVOCs, and PM on both global and regional scales 54 (Huang et al., 2015; Liu et al., 2021; Ridley et al., 2018). The abundant emission of the precursors and the dynamic 55 interactions under atmospheric conditions impose significant impacts on climate change and huma health (Luo et 56 al., 2022; Poorfakhraei et al., 2017). In view of such importance, the quantitative characterization of the vehicular 57 organic components, spanning the whole volatility range, is highly needed. While on-road vehicle emitted VOCs 58 have been well speciated and accurately quantified, regardless of fuel type, vehicle type, ignition system, and 59 driving condition, the determination of IVOCs and SVOCs is far from adequate (Kawashima et al., 2006; Gentner 60 et al., 2009). 61 The accurate quantification of I/SVOCs, which composes of thousands of individual compounds, remains a great 62 challenge (Stewart et al., 2021b). They are frequently reported as a few compound categories and leave the 63 majority being unresolved complex mixtures (UCMs) (Qi et al., 2019; Zhao et al., 2014). For instance, alkanes 64 (including *n*-alkanes, *i*-alkanes, and cyclic alkanes) are found to be the dominant fraction in I/SVOCs, contributing 65 to over 60% of total mass, followed by oxygenated and aromatic species (Alam et al., 2019; Lu et al., 2018; He 66 et al., 2022). Crucial structural information, e.g., carbon skeletons and chemical active moieties, is notably missing. 67 The knowledge of structural information at molecular level helps to give a more comprehensive description of the 68 chemical evolution of I/SVOCs from mobile sources and better predict the SOA formation (Chen et al., 2019; 69 Kleindienst et al., 2012; He et al., 2020; Tkacik et al., 2012). Besides, the molecular level composition alters the 70 optical properties of the OA significantly (Li et al., 2018; Li et al., 2021; Harvey et al., 2016). 71 The gas-particle (g-p) partitioning of vehicle emitted I/SVOCs is determined by the mutual effects of intrinsic 72 nature of the organics, e.g., the sub-cooled liquid vapor pressure, and the environmental conditions, e.g., 73 temperature, bulk OA concentration, and heterogeneous reactions (Lu et al., 2018; Sitaras et al., 2004; Chen et al., 74 2010; Liu et al., 2015). The scenarios of g-p partitioning of vehicle emissions are described by different vehicle 75 types or driving conditions, and limited compound categories are reported (Lu et al., 2018; May et al., 2013b, a).

The lacking of phase distribution by chemical speciation biases the SOA model prediction and hinders a full

understanding of chemical fate of vehicle emissions (Li et al., 2018; Grieshop et al., 2007). For example, Zhao et al. (2013) reported the g-p partitioning of individual organic species using a thermal desorption aerosol gas chromatography (TAG) instrument and found that contribution of oxygenated compounds to SOA can be substantially increased through g-p partitioning. However, a comprehensive characterization of speciated g-p partition of vehicle emission is yet to achieve (Alam et al., 2016; Zhao et al., 2013; Liu et al., 2015). Given such significant research gap, particulate I/SVOCs at ascending speed stages are collected and analysed separately. We combine the targeted and non-targeted analysis to speciate and quantify them. The emission characteristics are explored, and the speciation-by-speciation g-p partitioning is fully addressed. We observe unusual absorption of IVOC vapours to the sampling surface (i.e., quartz filter), and provide a systematic discussion on the sampling artifact/bias on g-p partitioning equilibrium. The results clearly demonstrate that the state-of-the-art instruments enable the characterization of the complex organic mixtures and help to trace the evolution of organic aerosol.

2. Materials and methods

77

78

79

80

81

82

83

84

85

86

87

88

89

2.1 Vehicles, driving cycles, and sampling

90 91 The tailpipe emissions from the three in-use HDDVs are collected at the China Automotive Technology & 92 Research Centre (CATARC) in Tianjin, China. The vehicles are selected to cover a range of aftertreatment 93 technologies. One HDDV (#1) is installed with selective catalytic reduction (SCR) system and two HDDVs (#2 94 and #3) are installed with SCR, diesel oxidation catalyst (DOC), and diesel particulate filter (DPF). The recruited 95 HDDVs are modelled in year of 2016, 2020, and 2020, respectively and the gross weight are 18.7 t, 25 t, and 25 96 t. Vehicle #1 meets with China IV national emission standard which was implemented back to 2010 and vehicles 97 #2 and #3 comply with China VI national emission standard which come into force in 2021. 98 For each HDDV, they were tested on a chassis dynamometer (AIP-ECDM 72H/2AXLE) and operated over the 99 China heavy-duty commercial vehicle test cycle for heavy trucks (CHTC-HT) cold-start and hot-start driving 100 conditions consecutively. CHTC-HT driving cycle (1800 s) simulates the driving conditions for heavy-duty 101 commercial vehicles in China and is divided into three segments: low-speed (phase one (P1), 342 s), middle-speed 102 (phase two (P2), 988 s), and high-speed (phase three (P3), 470 s) and samples were collected separately. Besides, samples were also collected during the whole sampling time (W, 1800 s) under cold-start and hot-start driving 103 104 conditions and named W_cold and W_hot for short. Prior to cold-start, each vehicle was pre-conditioned overnight 105 to cool the engine completely and the time slot between cold-start and hot-start was approximately 10 min. Each 106 test cycle was repeated for three times. 107 Constant volume sampler (CVS) is equipped with the real-time gas analyser module (MEXA-7400HLE, HORIBA, 108 Japan) to monitor the transient concentration of CO and CO2. An array of on-line and off-line instruments are 109 deployed to measure the heavy-duty vehicle exhaust in the gas and particle phases. Experimental conditions including temperature, air flow, relative humidity, and pressure and inorganic and organic components are 110 111 monitored collocated. The details about the sample collection of gaseous I/SVOCs are described elsewhere (He 112 et al., 2022). The particulate I/SVOC collection procedures are given below. Tailpipe emissions from each HDDV 113 is drawn into the CVS system, simultaneously with ambient air which is filtered by high-efficiency particulate air filter. The diluted diesel exhaust is then directed into the second dilution trunk (SDT), where diesel emitted 114

particles are further diluted before entering the PM sampler and being collected by quartz filters. On each test, one 47 mm quartz filter (Grade QM-A, Whatman, UK) is loaded for particle collection. The quartz filters are prebaked overnight at 550 °C to remove any carbonaceous contamination. The particle sampling probe places at the centre line of the first dilution truck (DT) and 10 times DT inner diameter downstream the emission pipeline to guarantee thorough mixing. The air flows, temperature and humidity control, and dilution ratios within the whole sampling system follow the stipulations of the China VI emission standard (2018). The average temperature in the sampling train is 47 ± 5 °C. Field blank samples are collected at the upstream of the emission pipeline. The experiment diagram to collect gaseous and particulate emissions and the position of gas monitors are shown in Figure S1.

2.2 Sample treatment and chemical analysis

- A total of 36 filter samples plus 3 field blanks were collected and subjected to the determination of I/SVOCs, among which 1/3 were non-(DPF + DOC) vehicle samples and 2/3 (DPF + DOC) vehicle samples. A precious portion of 1 cm² (1 cm × 1 cm) was removed from the quartz filter and cut into strips before placing into the thermal desorption (TD) tube. 2 µL deuterated internal standard (IS) mixing solution was spiked onto the strips through a mild N₂ blow (CSLR, Markes International). The list of IS species is shown in the supporting information (S1). The TD tubes were placed into an automated thermal desorption system (TD100-xr, Markes International), which is connected to a two-dimensional gas chromatograph (GC × GC) (Agilent 7890B, Agilent Technologies) coupled with a time-of-flight mass spectrometer (ToF-MS) (LECO Pegasus4D, LECO Corporation). The TD, GC × GC, and ToF-MS parameters are similar to those previously published for the measurement of gaseous I/SVOCs (He et al., 2022). Briefly, the TD tubes are heated to 315 °C for 20 min where the I/SVOCs are vaporized gradually and condense at the cold trap which is kept at 25 °C. Next, the trap is heated to 330 °C for 5
 - vaporized gradually and condense at the cold trap which is kept at 25 °C. Next, the trap is heated to 330 °C for 5 min and the re-concentrated compounds are purged into the GC column in a split ratio of 8.7:1. The first Rxi-5ms capillary column (30 m × 0.25 mm × 0.25 μ m, Restek) and the second Rxi-17Sil MS (0.75 m × 0.25 mm × 0.25 μ m, Restek) capillary column are installed to separate the analytes. A modulator is deployed to partition the effluents from the 1st column into cryo-focused segments and inject them into the 2nd column, with a modulation time slot of 4 s. The column flow is set at 1.3 mL min⁻¹ and GC oven initial temperature at 50 °C for 5 min, increased to 300 °C at 5 °C min⁻¹, and held for another 5 min. The secondary oven and modulator temperature are 5 °C and 30 °C higher than the GC oven temperature, respectively. The complete run time is approximately 3900 s. The ToF-MS is conducted in electron impact positive (EI +) mode (70 eV) scanning over an m/z range of

2.3 Data analysis

35-550 amu. The ion source temperature is kept at 250 °C.

Particulate I/SVOCs are identified and quantified with their respective authentic standards or surrogates using the three-step approach proposed in He et al. (2022). In short, within one GC × GC chromatogram, for the peaks of which the authentic standards are available, they are accurately identified based on the retention time of respective authentic standards and their mass spectrum and precisely quantified based on the constructed calibration curves. The list of authentic standards is shown in Table S1. Next, for the peaks of which the authentic standards are not available, they are semi-identified by referring to the elution sequences and extracting mass spectrum patterns via

- a self-developed algorithm. The syntax is described in He et al. (2022). Third, for the peaks without clear mass
- spectrum patterns, they are semi-identified by the physically nearest surrogate within the $GC \times GC$ chromatogram.
- The surrogate is picked out by iterating through all the authentic standards using the self-developed data
- processing program and comparing the first retention time (RT₁) and second retention time (RT₂) intervals.
- Basically, thousands of peaks are identified and grouped into twenty-one categories. The classified particulate
- 158 I/SVOCs include alkane, alkene, cycloalkane, hopane, 2-ring PAHs, 3-ring PAHs, 4-ring PAHs (PAH_{4rings202} and
- PAH_{4rings228}), 5-ring PAHs, biphenyl & acenaphthene, acid, phenol benzylic alcohol, aliphatic alcohol ether,
- aliphatic ketone ester, benzylic ketone ester, Nitros, C₂ alkyl benzene, C₃ alkyl benzene, C₄ alkyl benzene, C₅
- alkyl benzene, and C₆ alkyl benzene.

172

173

2.4 Calculation of emission factors (EFs)

- Particulate I/SVOC EFs are determined using the following equation by assuming that the CO₂ and CO are the
- dominant combustion products of diesel fuel.

$$EF = \left(\frac{\Delta I/SVOCs}{V_S} \times \frac{V_{cvs} \times 10^6}{\Delta [CO_2] \times M_C/M_{CO_2} + \Delta [CO] \times M_C/M_{CO}}\right) w_C$$

- where EF is the emission factor of particulate I/SVOCs (mg kg·fuel⁻¹); $\Delta I/SVOCs$ is the mass deposited on the
- quartz filter in the CVS (mg), which is corrected for the background contamination measured on the field blanks
- and column bleedings; $\Delta[CO_2]$ and $\Delta[CO]$ are the background-corrected CO₂ and CO masses (mg), respectively;
- M_{CO_2} , M_{CO} , and M_C are the molar weight of CO₂ (44 g mol⁻¹), CO (28 g mol⁻¹), and C (12 g mol⁻¹) atom; V_{cvs}
- and V_S are the air flow monitored in the CVS and particle sampling trunk (L min⁻¹); w_C is the mass fraction of
- carbon (0.865) in the diesel fuel (Dallmann et al., 2013).

3. Results and discussion

3.1 Emission factors and the chemical speciation and of particulate I/SVOCs

- Figure 1 shows the speciated emission factor of the HDDV-emitted I/SVOCs in the particle phase. Generally,
- over four thousand individual peaks are detected within different tailpipe samples and grouped into twenty-one
- categories after the three-step data treatment procedure. The average HDDV-emitted particulate I/SVOCs EFs of
- 177 cold-start and hot-start driving cycles are 147.2 ± 68.3 and 1.7 ± 0.3 mg kg·fuel⁻¹ for non-(DPF + DOC)
- vehicles, 1.6 ± 0.3 and 0.9 ± 0.1 mg kg·fuel⁻¹ for (DPF + DOC) vehicles. Substantial removal effect of the
- aftertreatment devices is confirmed. A category specified EFs for the non-(DOC + DPF) and (DOC + DPF)
- vehicles are shown in Table S2.
- 181 In general, alkane is the most abundant species, taking up 22-63% of the total particulate I/SVOCs followed by
- 182 2-ring PAHs (20-33%) and phenol benzylic alcohols (14-17%). The EF of alkane derived from non-(DOC + DPF)
- vehicles under the cold-start condition averages to 92 ± 42.8 mg kg·fuel⁻¹, which is two orders of magnitude
- higher than that of hot-start cycle and (DOC + DPF) vehicles, as illustrated by the grey squares in Figure 1. Alkene
- and cycloalkane show commensurate EFs, with the average values of 2.4 ± 1.1 and 1.8 ± 0.9 mg kg·fuel⁻¹ for
- 186 cold-start and 0.04 ± 0.01 and 0.05 ± 0.02 mg kg·fuel⁻¹ for hot-start driving cycle for non-(DOC + DPF)
- vehicles, accounting for minor parts of the total particulate I/SVOCs. The emission of the two species is further
- reduced after the installation of aftertreatment devices.

2-ring to 5-ring PAHs are frequently detected in particulate I/SVOCs, which is different from the gaseous 189 I/SVOCs that only 2-ring to 4-ring PAHs were observed (He et al., 2022). The averaged EFs of PAH subgroup 190 191 vary significantly. For example, for non-(DOC + DPF) vehicles operated under cold-start driving condition, 2-192 ring PAHs are detected at abundant concentration of 33.8 ± 15.7 mg kg·fuel⁻¹, whereas 3-ring, 4-ring, and 5-ring 193 PAHs are detected at much less concentration of 1.5 \pm 0.7, 1.3 \pm 0.6, and 0.3 \pm 0.1 mg kg·fuel⁻¹, respectively. 194 It was reported that 16 priority PAHs listed by the United States Environment Protection Agency accounted for a 195 minor fraction of the total PAH mass and the non-targeted analysis has highlighted the significance of the un-196 resolved PAHs (An et al., 2022; Chen et al., 2022). The two isomers, biphenyl and acenaphthene, contribute least 197 (less than 0.2%) within the PAH subgroup, which is consistent with previous findings (Hazarika et al., 2019). 198 Oxygenated compounds, including phenol benzylic alcohols, aliphatic ketones, benzylic ketones, and acids are 199 routinely detected. The EFs sum up to over 7% of the total mass. Aliphatic alcohols are observed to be abundant 200 in the gas phase but not detectable in particulate I/SVOCs (He et al., 2022). The installation of DPF and DOC 201 reduces the emission of oxygenates by over 93-99%. For instance, the EF of benzylic alcohols of non-(DOC + 202 DPF) vehicles is 2.83 mg kg·fuel⁻¹ (cold-start and hot-start averaged) whereas that of (DOC + DPF) vehicles is 203 0.15 mg kg·fuel⁻¹ (cold-start and hot-start averaged). 204 The EF of Nitros is measured to be 0.4 mg kg·fuel⁻¹ on average, taking up of 1.6% of the total mass. The 205 installation of DPF and DOC reduces the emission of Nitros by over 95%, from 1.08 mg kg·fuel⁻¹ to 0.05 mg kg·fuel⁻¹ (cold-start and hot-start averaged). Mono-aromatic compounds (i.e., C₂-C₆ alkyl-substituted benzenes), 206 207 which were measured to take up over 10% of the gaseous I/SVOCs, are negligible constituents in the particle 208 phase (He et al., 2022).

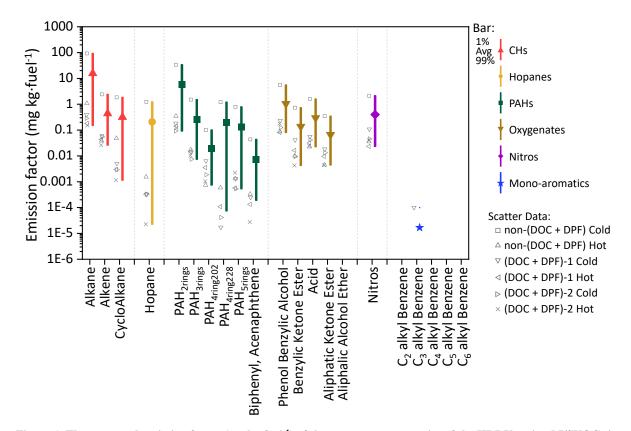


Figure 1. The measured emission factor (mg kg·fuel⁻¹) of the twenty-one categories of the HDDV-emitted I/SVOCs in the particle phase. Coloured-bars and coloured-scatters/shaped-scatters represent different organic species and driving cycles. The scatter points lying in the left side of the bars represent the averaged emission factors measured from different driving conditions or test vehicles. The square dots in the middle of each bar denote the average value and the lower and upper boundaries of the bar denote the 1% and 99% percentile of the values.

3.2 Volatility distribution of the speciated I/SVOCs and the comparison between cold and hot starts

215

Figure 2 displays the volatility distribution of the speciated I/SVOCs under the cold-start and hot-start driving 216 217 cycles for non-(DOC + DPF) vehicles and (DOC + DPF) vehicles. Inserted pie charts illustrate the color-labeled mass contributions of each compound category. The absolute values of I/SVOC EFs distributed in each volatility 218 219 and O:C bin are summarized in Tables S3 - S8. The calculation of the saturation mass concentration is presented 220 in the supporting information (S4). The volatility distributions among the four test conditions, i.e., cold-start non-221 (DOC + DPF) (C_{wo}AT), hot-start non-(DOC + DPF) (H_{wo}AT), cold-start (DOC + DPF) (C_{wi}AT), and hot-start (DOC + DPF) ($H_{wi}AT$), do not vary much except the two peaks at $log_{10}C^* = -4 \mu g m^{-3}$ and $log_{10}C^* = -3 \mu g m^{-3}$ 222 under CwoAT and HwoAT (Figure 2a and 2b). The abnormal abundant emissions indicate intensive incomplete 223 224 combustion processes, especially under cold-start condition. The high emissions at the low volatility end vanish 225 after the installation of DOC and DPF (Figure 2a vs. Figure 2c, Figure 2b vs. Figure 2d), revealing that the 226 aftertreatment devices eliminate the low volatility compounds, mostly alkanes, efficiently. Great environment 227 benefits are thereby expected with the advancing of the aftertreatment technologies. 228 The majority of particulate I/SVOCs distribute in the volatility range of $\log_{10}C^* = 1$ to $8 \mu g \text{ m}^{-3}$ while the specified compound categories distribute differently and could be classified into three groups. First, alkanes are observed 229 230 within the whole volatility range at abundant level. Second, hopanes, PAH_{4rings}, and PAH_{5rings} reside in the volatility range of $\log_{10}C^* \le -2 \,\mu g \, \text{m}^{-3}$ dominantly. For example, about 44% of hopane mass are measured in the 231 volatility bin of $\log_{10}C^* = -3 \mu g \text{ m}^{-3}$. Third, light molecular weight PAHs, oxygenated compounds, and Nitros 232 present in the volatility range of $\log_{10}C^* \ge 2 \mu g \text{ m}^{-3}$ substantially. For example, phenol benzylic alcohols, the 233 234 most abundant oxygenated compounds observed in particulate I/SVOCs, partition into the high volatile range 235 entirely. 236 The mass fractions of oxygenated-I/SVOCs (O-I/SVOCs) under the cold-start and hot-start driving cycles in the 237 gas and particle phases are shown in Figure S3. The impacts of O-I/SVOCs on SOA formation are complex. On one hand, the formation potential of oxidized components is lower than that of hydrocarbons, for example alkane 238 239 (Chacon-Madrid and Donahue, 2011; Donahue et al., 2011; Ziemann, 2011). On the other hand, the increasing O:C ratio adds fragmentation on the carbon skeleton which would facilitate SOA formation (Donahue et al., 2012; 240 241 Kroll et al., 2009). An increasing trend of mass fraction of particulate O-I/SVOCs from low volatility end to high volatility end is clearly demonstrated whereas a bimodal pattern of gaseous O-I/SVOCs is observed. The gaseous 242 243 O-I/SVOCs were divided into two major groups with one group peaking in the volatility range of $\log_{10}C^* = 4$ to $8 \mu g \text{ m}^{-3}$ and another group prevailing in the volatility range of $\log_{10}C^* = -2$ to $3 \mu g \text{ m}^{-3}$. The two groups possess 244 different chemical structures and functional groups. They were fully addressed in previous work and will not be 245 repeated here (He et al., 2022). By contrast, one compound category, phenol benzylic alcohols, dominates in the 246 247 particulate O-I/SVOC. The mass fraction of phenol benzylic alcohols is 5% and 6% for non-(DOC + DPF) vehicles under cold-start and hot-start conditions, respectively. The mass ratio increases to 26% and 22% for 248 (DOC + DPF) vehicles. It contributes significantly to the total mass in the high volatility range of $\log_{10}C^* = 6$ to 249 250 $8 \, \mu g \, m^{-3}$.

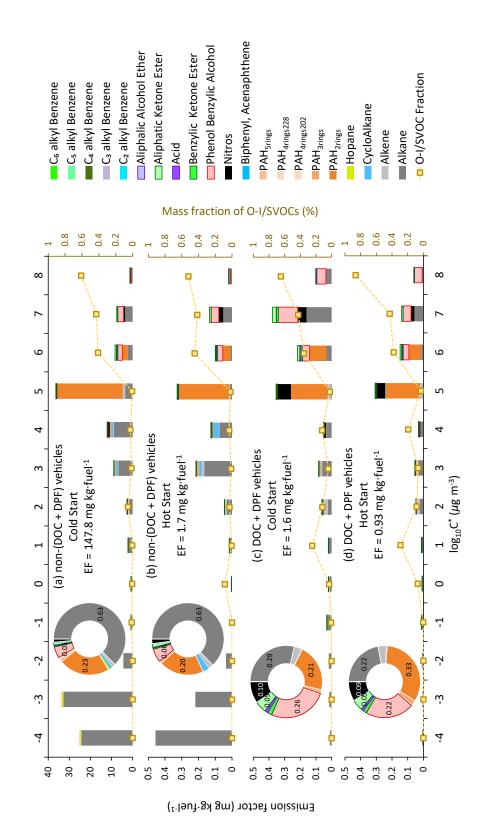


Figure 2. EFs of particulate I/SVOCs under the cold-start and hot-start driving cycles. Different coloured bars represent different compound categories. Mass fraction of the O-I/SVOCs, indicated by the scattered squares, is scaled by the right axis. Embed pie charts are the mass fractions of different compound categories, and the numbers show the mass contributions of the top few species.

3.3 The EF distribution of particulate I/SVOCs

- Figure 3 and Figure 4 display the EF distribution of the speciated particulate I/SVOCs on a two-dimensional 257 258 volatility basis set (2D-VBS) space of P1, P2, P3, and whole (W_cold and W_hot) driving cycles. The absolute values of I/SVOC EFs distributed in each volatility and O:C bin are summarized in Tables S3 - S12. 259 260 Distinct distribution patterns are observed between different speed stages. For non-(DPF + DOC) vehicles, peak 261 signals of P1 are detected at low volatility and O:C ratio bins, i.e., $\log_{10}C^* = -3$ to $-4 \mu g \text{ m}^{-3}$ and O:C < 0.3 262 whereas those of P2 and P3 are measured at \log_{10} C* = 3 to 7 μ g m⁻³ and the fraction of I/SVOCs with higher O:C 263 ratio increases, especially at high-speed stage (P3). For example, the fractions of I/SVOC with O:C > 0.3 (0.4, 264 0.5) are 18.4% (10.2%, 7.0%), 13.4% (8.3%, 7.6%), and 25.3% (19.4%, 18.6%) for P1, P2, and P3 stages. The 265 fraction of I/SVOCs with higher O:C ratio decreases rapidly to less than 10% for low and middle-speed stages, 266 contrast with which the fraction remains at comparable level for high-speed stage. The emission characteristics of 267 the whole driving cycle combine the patterns of the separate speed phases, and a bimodal trend is observed as displayed in Figure 5d and 5e. 268 269 After the installation of aftertreatment devices, the peak signals of P1 are detected at high volatility bins, i.e., 270 \log_{10} C* = 3 to 7 μ g m⁻³ and low O:C range. In comparison with non-(DPF + DOC) vehicles, the EF volatility 271 distribution of P1 resembles that of P2 and P3 whereas the fraction of I/SVOCs with higher O:C ratio of P1 is still 272 lower than that of P2 and P3. The fractions of I/SVOC with O:C > 0.3 (0.4, 0.5) are 18.1% (12.1%, 10.8%), 27.8% 273 (18.9%, 16.6%), and 31.0% (21.2%, 19.3%) for P1, P2, and P3 stages, considering that the O:C ratio of the bulk 274 organic species varies from 0.25 to 0.5. 275 Comparing the EF distribution of I/SVOCs emitted by different types of vehicles under the same driving 276
- conditions, as shown in Figure 5, it is clearly demonstrated that the aftertreatment devices favour the formation of I/SVOCs with higher oxidation state. DOC promotes the oxidation of exhaust gases and the organics filtrated by DPF by oxygen and the I/SVOCs with O:C > 0.3 (0.4, 0.5) under the W_cold condition increase from 0.13 to 0.35 (0.11 to 0.18, 0.08 to 0.16) after the equipment of these aftertreatment devices. The respective fractions under W_hot condition increase from 0.18 to 0.26, 0.09 to 0.25, and 0.07 to 0.23, respectively.

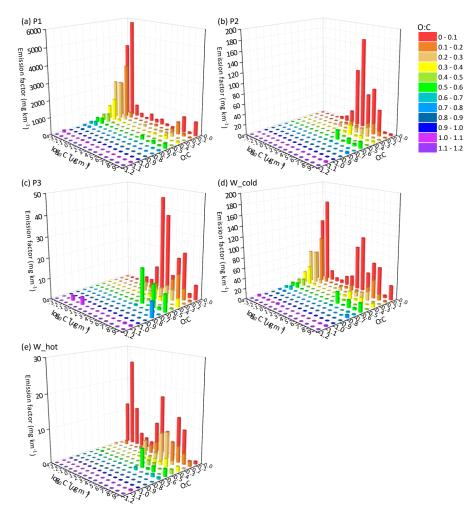


Figure 3. Emission factor distribution of the speciated I/SVOCs of non-(DPF + DOC) vehicles on a 2D-VBS space of (a) low-speed stage (P1), (b) middle-speed stage (P2), (c) high-speed stage (P3), (d) whole (W_cold), and whole (W_hot) driving cycles. Different colours indicate different O:C ratios segmented into 12 bins: 0-0.1, 0.1-0.2, 0.2-0.3, 0.3-0.4, 0.4-0.5, 0.5-0.6, 0.6-0.7, 0.7-0.8, 0.8-0.9, 0.9-1.0, and 1.1-1.2.

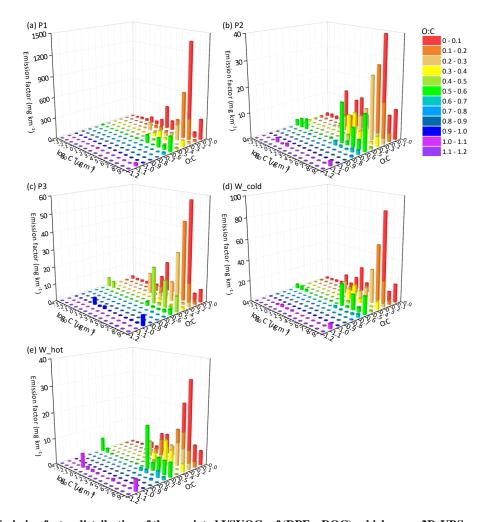


Figure 4. Emission factor distribution of the speciated I/SVOCs of (DPF + DOC) vehicles on a 2D-VBS space of (a) low-speed stage (P1), (b) middle-speed stage (P2), (c) high-speed stage (P3), (d) whole (W_cold), and whole (W_hot) driving cycles. Different colours indicate different O:C ratios segmented into 12 bins: 0-0.1, 0.1-0.2, 0.2-0.3, 0.3-0.4, 0.4-0.5, 0.5-0.6, 0.6-0.7, 0.7-0.8, 0.8-0.9, 0.9-1.0, and 1.1-1.2.

293 294

295

296

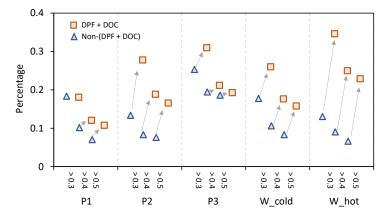


Figure 5. The increment of I/SVOC with O:C > 0.3, 0.4, and 0.5 from non-(DPF + DOC) to (DPF + DOC) vehicles under low-speed stage (P1), middle-speed stage (P2), high-speed stage (P3), and whole (W_cold, W_cold) driving cycles.

Figure 6 shows the g-p partitioning by different compound categories. Generally, the I/SVOCs partition

3.4 Gas particle partitioning of HDDV-emitted I/SVOCs and the uncertainties/artifacts

297 predominantly to the gas phase, with a few exception categories: hopanes, 2ring, 4-ring, and 5-ring PAHs. Distinct patterns are observed between vehicles with and without DPF and DOC. For example, the particle phase 298 299 contributes 7.4% to the total I/SVOC mass for non-(DPF + DOC) vehicles, whereas it accounts for less than 0.2% 300 for (DPF + DOC) vehicles. Similar mass distributions are observed for alkanes, 3-ring PAHs, and oxygenated 301 species, which confirms the high particle removal efficiency of the aftertreatment devices. The monoaromatic 302 compounds are not detected in the particle phase, regardless of the aftertreatment devices. Over 40% 4-ring PAHs 303 partition to the particle phase for non-(DPF + DOC) vehicles and the portion is reduced to less than 0.1% when 304 DPF and DOC systems are installed. The particle fraction of 2-ring PAHs is 57%, whereas that of 3-ring, 4-ring, 305 and 5-ring PAHs are 8.4%, 43.7%, and 100%, respectively. 306 The adsorption of gaseous I/SVOCs onto filters causes negative biases in the measured gas phase concentration 307 and positive artifacts in the measured particle phase concentration (Turpin et al., 1994). Compared with quartz 308 filter, which absorbs vapours significantly (May et al., 2013b), teflon has small surface area and is relatively inert. The OA concentration in the tailpipe is orders of magnitude higher than that in the ambient air even after the 309 310 dilution in the CVS system. With such high OA loadings, the g-p partitioning shift to the particle phase. Although 311 inevitable, the bias should be closely watched. For example, the sampling tube is short enough (less than 50 cm) 312 to minimize the g-p conversion in the sampling system (the residence time is less than the time scale to reach g-p 313 equilibrium) (Saleh et al., 2013) and Teflon filter is deployed instead of a quartz filter. Good news is that there 314 will be a significant pressure drop before and after the Teflon filter, and the lower pressure behind the Teflon 315 drives the g-p portioning to the gas phase, which offsets the vapor loss by some extent (Turpin et al., 1994). We then quantify the sampling artifacts. As shown in Figure 7, the particle mass fraction increases gradually from 316 $\log_{10}C^* = 8 \mu g \text{ m}^{-3}$ to $\log_{10}C^* = -4 \mu g \text{ m}^{-3}$. Similar trends were observed previously (Lu et al., 2018). There is a 317 peak in the volatility range of $\log_{10}C^* = 3$ to 7 μg m⁻³ when the particle mass fraction fluctuates around 10% 318 (Figure 7a). The particle fraction decreases to less than 1% between the volatility range of $\log_{10}C^* = -1$ to 2 μ g 319 m⁻³. It is highly likely that the peak reflects the sampling artifacts originated from the vapor loss to the quartz 320 filter. DOC component oxidizes and removes the exhausted gases efficiently, as a consequent of which the 321

sampling artifacts is reduced, i.e., 10% to 1%. The vapor loss occurs in a certain volatility range instead of the whole volatility range, e.g., $\log_{10}C^* = 3$ to 7 μ g m⁻³ and dominant in $\log_{10}C^* = 5$ μ g m⁻³ bin in this study. The gaseous IVOCs in $\log_{10}C^* = 8$ μ g m⁻³ bin may be too volatile to be absorbed by quartz filter. For non-(DPF + DOC) vehicles, the particle fraction approximates 1% at $\log_{10}C^* = 8$ μ g m⁻³ and $\log_{10}C^* = 2$ μ g m⁻³ bins (the volatility bins adjacent to the bins with sampling artifacts). If we assume that the particle fraction baseline is 1% during the volatility range of $\log_{10}C^* = 2$ to 8 μ g m⁻³, we may deduce that the vapor loss to quartz filter results in a negative bias to the gaseous I/SVOCs mass with an upper limit of 9% and approximate 90% of the particulate I/SVOCs result from sampling artifacts in the volatility range of $\log_{10}C^* = 3$ to 7 μ g m⁻³. It is also worth mentioning that the absorption bias varies significantly for different compound categories. For example, substantial 2-ring PAHs are detected in the particle phase whereas no notable sampling artifacts are observed for phenol benzylic alcohols and benzylic ketone esters.

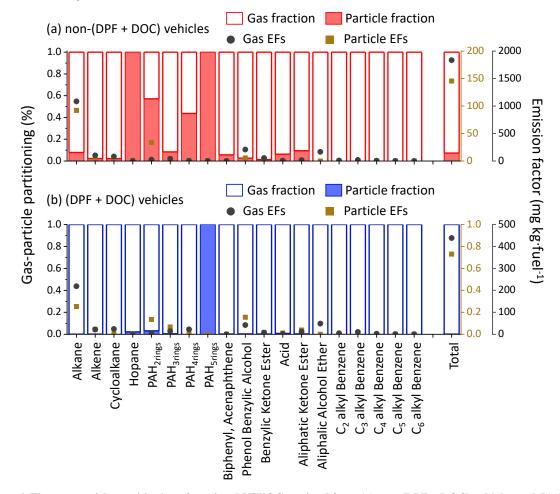


Figure 6. The gas-particle partitioning of speciated I/SVOCs emitted from (a) non-(DPF + DOC) vehicles and (b) (DPF + DOC) vehicles. The hollow and filled columns represent the gas and particle fraction, respectively. The grey dots and brown squares represent the emission factors of the gaseous and particulate I/SVOCs.

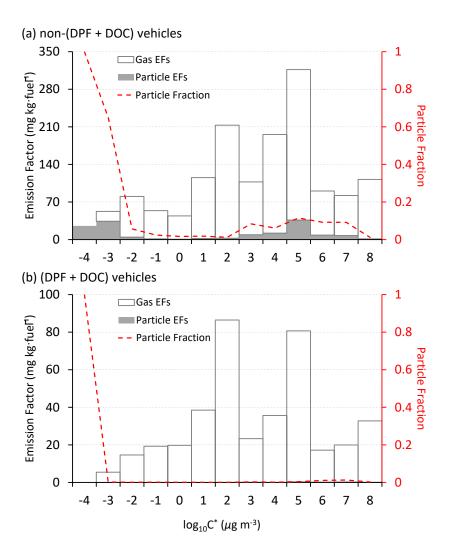


Figure 7. The emission factors of gaseous and particulate I/SVOCs (hollow and filled stack columns) and the particle mass fraction (red dashed line) in each volatility bin computed from (a) non-(DPF + DOC) vehicles and (b) (DPF + DOC) vehicles.

4. Conclusions

Chassis dynamometer tests of HDDVs complying with multiple emission standards are conducted to characterize the particulate I/SVOCs. Thousands of induvial organic compounds are detected and classified, where alkanes and phenolic compounds are observed to be the most abundant groups. The species-by-species g-p partitioning of the I/SVOCs are discussed separately for vehicles with and without aftertreatment devices. Generally, the I/SVOCs partition to the gas phase dominantly. For non-(DPF + DOC) vehicles, the gaseous I/SVOCs account for $\sim 93\%$ of the total mass, except for hopane, PAH_{4rings}, and PAH_{5rings}. For (DPF + DOC) vehicles, the particulate fraction of I/SVOCs are further reduced to less than 2%. Sampling artifacts of quartz filter absorbing organic vapours are confirmed by the abnormal high signal of 2-ring PAHs, and the uncertainties are discussed thoroughly. Speciation information is highly needed to better predict the thermodynamics of oxidation chemistry. The application of GC \times GC-ToF-MS and self-constructed data processing programs achieve the detailed identification and quantification of particulate I/SVOCs. Although not resolved at molecular level, the speciated information enables us to better characterize the emission scenarios and guides the implementation of control

strategies in the future. This approach is versatile and could be applied not only to vehicle emissions but also to other significant sources prevailing in typical environments, e.g., biomass burning and ship emissions, as well as ambient samples collected at receptor sites. Putting the speciated I/SVOC data into atmospheric models and emission inventories, we expect a significantly improved estimation of SOA locally and globally.

Data availability

358

362

370

372

- 359 The measurement data used in this study are available in the data repository:
- 360 https://figshare.com/articles/dataset/Emission_factor_summary_the_g-
- p_partition_and_the_removal_effciency_xlsm/19994603.

Author contribution:

- 363 Xiao He: Conceptualization, Methodology, Validation, Investigation, Formal Analysis, Writing-Original Draft,
- Data Curation, Visualization, Funding Acquisition. Xuan Zheng: Project Management, Validation, Writing-
- Review & Editing, Funding Acquisition. Shaojun Zhang: Validation, Writing-Review & Editing. Xuan Wang:
- Validation, Writing-Review & Editing. Ting Chen: Investigation. Xiao Zhang: Investigation. Guanghan Huang:
- 367 Investigation. Yihuan Cao: Investigation. Liqiang He: Investigation. Xubing Cao: Investigation. Yuan Cheng:
- 368 Investigation. Shuxiao Wang: Resources, Writing-Review & Editing, Funding Acquisition. Ye Wu: Resources,
- 369 Supervision, Funding Acquisition

Declaration of Competing Interest

The authors declare no competing financial interests.

Acknowledgements

- The authors acknowledge the financial support of the National Natural Science Foundation of China (51978404,
- 41977180, 42105100, and 22188102) and the Basic Research of Shenzhen Science and Technology Innovation
- Commission (JCYJ20190808145218827). The contents of this paper are solely the responsibility of the authors
- and do not necessarily represent the official views of the sponsors.

377 References

- Limits and measurement methods for emissions from diesel fuelled heavy-duty vehicles (CHINA VI), 2018.
- 379 Alam, M. S., Zeraati-Rezaei, S., Xu, H., and Harrison, R. M.: Characterization of Gas and Particulate Phase Organic
- 380 Emissions (C9-C37) from a Diesel Engine and the Effect of Abatement Devices, Environ. Sci. Technol., 53, 11345-
- 381 11352, 10.1021/acs.est.9b03053, 2019.
- 382 Alam, M. S., Zeraati-Rezaei, S., Stark, C. P., Liang, Z. R., Xu, H. M., and Harrison, R. M.: The characterisation of
- diesel exhaust particles composition, size distribution and partitioning, Faraday Discuss., 189, 69-84,
- 384 10.1039/c5fd00185d, 2016.
- 385 Alier, M., van Drooge, B. L., Dall'Osto, M., Querol, X., Grimalt, J. O., and Tauler, R.: Source apportionment of
- 386 submicron organic aerosol at an urban background and a road site in Barcelona (Spain) during SAPUSS,
- 387 Atmospheric Chemistry and Physics, 13, 10353-10371, 2013.
- An, Z., Li, X., Yuan, Y., Duan, F., and Jiang, J.: Large contribution of non-priority PAHs in atmospheric fine particles:
- 389 Insights from time-resolved measurement and nontarget analysis, Environ. Int., 163, 107193,
- 390 10.1016/j.envint.2022.107193, 2022.
- 391 Chacon-Madrid, H. J. and Donahue, N. M.: Fragmentation vs. functionalization: chemical aging and organic
- 392 aerosol formation, Atmos. Chem. Phys., 11, 10553-10563, 10.5194/acp-11-10553-2011, 2011.
- 393 Chen, J. J., Jakober, C., Clegg, S., and Kleeman, M. J.: Theoretical versus Observed Gas-Particle Partitioning of
- 394 Carbonyl Emissions from Motor Vehicles, J. Air Waste Manage. Assoc., 60, 1237-1244, 10.3155/1047-
- 395 3289.60.10.1237, 2010.
- Chen, T., Zheng, X., He, X., You, Y., Huang, G. H., Cao, Y. H., He, L. Q., and Wu, Y.: Comprehensive characterization
- of polycyclic aromatic hydrocarbon emissions from heavy-duty diesel vehicles utilizing GC × GC-ToF-MS, Sci.
- 398 Total Environ., 155127, https://doi.org/10.1016/j.scitotenv.2022.155127, 2022.
- 399 Chen, T. Z., Liu, Y. C., Liu, C. G., Liu, J., Chu, B. W., and He, H.: Important role of aromatic hydrocarbons in SOA
- formation from unburned gasoline vapor, Atmos. Environ., 201, 101-109, 10.1016/j.atmosenv.2019.01.001,
- 401 2019.
- 402 Dallmann, T. R., Kirchstetter, T. W., DeMartini, S. J., and Harley, R. A.: Quantifying On-Road Emissions from
- 403 Gasoline-Powered Motor Vehicles: Accounting for the Presence of Medium- and Heavy-Duty Diesel Trucks,
- 404 Environ. Sci. Technol., 47, 13873-13881, 10.1021/es402875u, 2013.
- 405 Donahue, N. M., Epstein, S. A., Pandis, S. N., and Robinson, A. L.: A two-dimensional volatility basis set: 1. organic-
- 406 aerosol mixing thermodynamics, Atmos. Chem. Phys., 11, 3303-3318, 10.5194/acp-11-3303-2011, 2011.
- Donahue, N. M., Henry, K. M., Mentel, T. F., Kiendler-Scharr, A., Spindler, C., Bohn, B., Brauers, T., Dorn, H. P.,
- 408 Fuchs, H., Tillmann, R., Wahner, A., Saathoff, H., Naumann, K. H., Mohler, O., Leisner, T., Muller, L., Reinnig, M.
- 409 C., Hoffmann, T., Salo, K., Hallquist, M., Frosch, M., Bilde, M., Tritscher, T., Barmet, P., Praplan, A. P., DeCarlo, P.
- 410 F., Dommen, J., Prevot, A. S. H., and Baltensperger, U.: Aging of biogenic secondary organic aerosol via gas-phase
- 411 OH radical reactions, Proc. Natl. Acad. Sci. U.S.A., 109, 13503-13508, 10.1073/pnas.1115186109, 2012.
- 412 Faridi, S., Bayat, R., Cohen, A. J., Sharafkhani, E., Brook, J. R., Niazi, S., Shamsipour, M., Amini, H., Naddafi, K.,
- 413 and Hassanvand, M. S.: Health burden and economic loss attributable to ambient PM2.5 in Iran based on the
- 414 ground and satellite data, Sci Rep-Uk, 12, 14386, 10.1038/s41598-022-18613-x, 2022.
- Franklin, M., Koutrakis, P., and Schwartz, J.: The role of particle composition on the association between PM2.5
- 416 and mortality, Epidemiology, 19, 680-689, DOI 10.1097/EDE.0b013e3181812bb7, 2008.
- 417 Gentner, D. R., Harley, R. A., Miller, A. M., and Goldstein, A. H.: Diurnal and Seasonal Variability of Gasoline-
- Related Volatile Organic Compound Emissions in Riverside, California, Environ. Sci. Technol., 43, 4247-4252,
- 419 10.1021/es9006228, 2009.
- 420 Gentner, D. R., Isaacman, G., Worton, D. R., Chan, A. W. H., Dallmann, T. R., Davis, L., Liu, S., Day, D. A., Russell,
- L. M., Wilson, K. R., Weber, R., Guha, A., Harley, R. A., and Goldstein, A. H.: Elucidating secondary organic aerosol
- from diesel and gasoline vehicles through detailed characterization of organic carbon emissions, Proc. Natl. Acad.
- 423 Sci. U.S.A., 109, 18318-18323, 10.1073/pnas.1212272109, 2012.
- 424 Grieshop, A. P., Donahue, N. M., and Robinson, A. L.: Is the gas-particle partitioning in alpha-pinene secondary
- 425 organic aerosol reversible?, Geophys. Res. Lett., 34, 10.1029/2007GL029987, 2007.
- 426 Harvey, R. M., Bateman, A. P., Jain, S., Li, Y. J., Martin, S., and Petrucci, G. A.: Optical Properties of Secondary
- 427 Organic Aerosol from cis-3-Hexenol and cis-3-Hexenyl Acetate: Effect of Chemical Composition, Humidity, and
- 428 Phase, Environ. Sci. Technol., 50, 4997-5006, 10.1021/acs.est.6b00625, 2016.
- 429 Hazarika, N., Das, A., Kamal, V., Anwar, K., Srivastava, A., and Jain, V. K.: Particle phase PAHs in the atmosphere
- 430 of Delhi-NCR: With spatial distribution, source characterization and risk approximation, Atmos. Environ., 200,
- 431 329-342, 10.1016/j.atmosenv.2018.11.064, 2019.

- 432 He, X., Zheng, X., Yan, Y., Zhang, S. J., Zhao, B., Wang, X., Huang, G. H., Chen, T., Cao, Y. H., He, L. Q., Chang, X.,
- Wang, S. X., and Wu, Y.: Comprehensive chemical characterization of gaseous I/SVOC emissions from heavy-duty
- diesel vehicles using two-dimensional gas chromatography time-of-flight mass spectrometry, Environ. Pollut.,
- 435 305, 119284, 10.1016/j.envpol.2022.119284, 2022.
- 436 He, X., Wang, Q. Q., Huang, X. H. H., Huang, D. D., Zhou, M., Qiao, L. P., Zhu, S. H., Ma, Y. G., Wang, H. L., Li, L.,
- 437 Huang, C., Xu, W., Worsnop, D. R., Goldstein, A. H., and Yu, J. Z.: Hourly measurements of organic molecular
- 438 markers in urban Shanghai, China: Observation of enhanced formation of secondary organic aerosol during
- particulate matter episodic periods, Atmos. Environ., 240, 1-14, 2020.
- 440 Huang, C., Wang, H. L., Li, L., Wang, Q., Lu, Q., de Gouw, J. A., Zhou, M., Jing, S. A., Lu, J., and Chen, C. H.: VOC
- 441 species and emission inventory from vehicles and their SOA formation potentials estimation in Shanghai, China,
- 442 Atmos. Chem. Phys., 15, 11081-11096, 10.5194/acp-15-11081-2015, 2015.
- 443 Kawashima, H., Minami, S., Hanai, Y., and Fushimi, A.: Volatile organic compound emission factors from roadside
- 444 measurements, Atmos. Environ., 40, 2301-2312, 10.1016/j.atmosenv.2005.11.044, 2006.
- 445 Kleindienst, T. E., Jaoui, M., Lewandowski, M., Offenberg, J. H., and Docherty, K. S.: The formation of SOA and
- 446 chemical tracer compounds from the photooxidation of naphthalene and its methyl analogs in the presence and
- absence of nitrogen oxides, Atmos. Chem. Phys., 12, 8711-8726, 10.5194/acp-12-8711-2012, 2012.
- 448 Kroll, J. H., Smith, J. D., Che, D. L., Kessler, S. H., Worsnop, D. R., and Wilson, K. R.: Measurement of fragmentation
- and functionalization pathways in the heterogeneous oxidation of oxidized organic aerosol, PCCP, 11, 8005-8014,
- 450 10.1039/b905289e, 2009.
- 451 Li, J. L., Wang, W. G., Li, K., Zhang, W. Y., Peng, C., Liu, M. Y., Chen, Y., Zhou, L., Li, H., and Ge, M. F.: Effect of
- chemical structure on optical properties of secondary organic aerosols derived from C-12 alkanes, Sci. Total
- 453 Environ., 751, 141620, 10.1016/j.scitotenv.2020.141620, 2021.
- 454 Li, K., Li, J. L., Wang, W. G., Li, J. J., Peng, C., Wnag, D., and Ge, M. F.: Effects of Gas-Particle Partitioning on
- Refractive Index and Chemical Composition of m-Xylene Secondary Organic Aerosol, J. Phys. Chem. A, 122, 3250-
- 456 3260, 10.1021/acs.jpca.7b12792, 2018.
- 457 Li, Y. J., Zhu, Y., Liu, W. J., Yu, S. Y., Tao, S., and Liu, W. X.: Modeling multimedia fate and health risk assessment
- 458 of polycyclic aromatic hydrocarbons (PAHs) in the coastal regions of the Bohai and Yellow Seas, Sci. Total Environ.,
- 459 818, 10.1016/j.scitotenv.2021.151789, 2022.
- 460 Liu, Y., Gao, Y., Yu, N., Zhang, C., Wang, S., Ma, L., Zhao, J., and Lohmann, R.: Particulate matter, gaseous and
- particulate polycyclic aromatic hydrocarbons (PAHs) in an urban traffic tunnel of China: Emission from on-road
- vehicles and gas-particle partitioning, Chemosphere, 134, 52-59, 10.1016/j.chemosphere.2015.03.065, 2015.
- 463 Liu, Y. X., Li, Y. J., Yuan, Z. B., Wang, H. L., Sha, Q. E., Lou, S. R., Liu, Y. H., Hao, Y. Q., Duan, L. J., Ye, P. L., Zheng, J.
- 464 Y., Yuan, B., and Shao, M.: Identification of two main origins of intermediate-volatility organic compound
- emissions from vehicles in China through two-phase simultaneous characterization, Environ. Pollut., 281,
- 466 117020, 10.1016/j.envpol.2021.117020, 2021.
- 467 Lu, Q., Zhao, Y., and Robinson, A. L.: Comprehensive organic emission profiles for gasoline, diesel, and gas-
- 468 turbine engines including intermediate and semi-volatile organic compound emissions, Atmos. Chem. Phys., 18,
- 469 17637-17654, 10.5194/acp-18-17637-2018, 2018.
- 470 Luo, Z., Wang, Y., Lv, Z., He, T., Zhao, J., Wang, Y., Gao, F., Zhang, Z., and Liu, H.: Impacts of vehicle emission on
- air quality and human health in China, Sci. Total Environ., 813, 152655, 10.1016/j.scitotenv.2021.152655, 2022.
- 472 May, A. A., Presto, A. A., Hennigan, C. J., Nguyen, N. T., Gordon, T. D., and Robinson, A. L.: Gas-particle
- 473 partitioning of primary organic aerosol emissions: (1) Gasoline vehicle exhaust, Atmos. Environ., 77, 128-139,
- 474 10.1016/j.atmosenv.2013.04.060, 2013a.
- 475 May, A. A., Presto, A. A., Hennigan, C. J., Nguyen, N. T., Gordon, T. D., and Robinson, A. L.: Gas-Particle
- 476 Partitioning of Primary Organic Aerosol Emissions: (2) Diesel Vehicles, Environ. Sci. Technol., 47, 8288-8296,
- 477 10.1021/es400782j, 2013b.
- Nguyen, G. T. H., Nguyen, T. T. T., Shimadera, H., Uranishi, K., Matsuo, T., and Kondo, A.: Estimating Mortality
- Related to O-3 and PM2.5 under Changing Climate and Emission in Continental Southeast Asia, Aerosol and Air
- 480 Quality Research, 22, 10.4209/aaqr.220105, 2022.
- Paasonen, P., Kupiainen, K., Klimont, Z., Visschedijk, A., van der Gon, H. A. C. D., and Amann, M.: Continental
- anthropogenic primary particle number emissions, Atmospheric Chemistry and Physics, 16, 6823-6840, 2016.
- 483 Poorfakhraei, A., Tayarani, M., and Rowangould, G.: Evaluating health outcomes from vehicle emissions
- 484 exposure in the long range regional transportation planning process, J Transp Health, 6, 501-515,
- 485 10.1016/j.jth.2017.05.177, 2017.
- 486 Presto, A. A., Miracolo, M. A., Kroll, J. H., Worsnop, D. R., Robinson, A. L., and Donahue, N. M.: Intermediate-
- 487 Volatility Organic Compounds: A Potential Source of Ambient Oxidized Organic Aerosol, Environ. Sci. Technol.,
- 488 43, 4744-4749, 10.1021/es803219q, 2009.

- 489 Qi, L. J., Liu, H., Shen, X. E., Fu, M. L., Huang, F. F., Man, H. Y., Deng, F. Y., Shaikh, A. A., Wang, X. T., Dong, R.,
- 490 Song, C., and He, K. B.: Intermediate-Volatility Organic Compound Emissions from Nonroad Construction
- 491 Machinery under Different Operation Modes, Environ. Sci. Technol., 53, 13832-13840, 10.1021/acs.est.9b01316,
- 492 2019
- Ridley, D. A., Heald, C. L., Ridley, K. J., and Kroll, J. H.: Causes and consequences of decreasing atmospheric
- 494 organic aerosol in the United States, Proc. Natl. Acad. Sci. U.S.A., 115, 290-295, 10.1073/pnas.1700387115, 2018.
- 495 Saleh, R., Donahue, N. M., and Robinson, A. L.: Time Scales for Gas-Particle Partitioning Equilibration of
- 496 Secondary Organic Aerosol Formed from Alpha-Pinene Ozonolysis, Environ. Sci. Technol., 47, 5588-5594,
- 497 10.1021/es400078d, 2013.
- Sitaras, I. E., Bakeas, E. B., and Siskos, P. A.: Gas/particle partitioning of seven volatile polycyclic aromatic
- hydrocarbons in a heavy traffic urban area, Sci. Total Environ., 327, 249-264, 10.1016/j.scitotenv.2003.08.022,
- 500 2004.

- 501 Stewart, G. J., Nelson, B. S., Drysdale, W. S., Acton, W. J. F., Vaughan, A. R., Hopkins, J. R., Dunmore, R. E., Hewitt,
- 502 C. N., Nemitz, E., Mullinger, N., Langford, B., Shivani, Reyes-Villegas, E., Gadi, R., Rickard, A. R., Lee, J. D., and
- Hamilton, J. F.: Sources of non-methane hydrocarbons in surface air in Delhi, India, Faraday Discuss., 226, 409-
- 504 431, 10.1039/d0fd00087f, 2021a.
- 505 Stewart, G. J., Acton, W. J. F., Nelson, B. S., Vaughan, A. R., Hopkins, J. R., Arya, R., Mondal, A., Jangirh, R., Ahlawat,
- 506 S., Yadav, L., Sharma, S. K., Dunmore, R. E., Yunus, S. S. M., Hewitt, C. N., Nemitz, E., Mullinger, N., Gadi, R., Sahu,
- 507 L. K., Tripathi, N., Rickard, A. R., Lee, J. D., Mandal, T. K., and Hamilton, J. F.: Emissions of non-methane volatile
- organic compounds from combustion of domestic fuels in Delhi, India, Atmos. Chem. Phys., 21, 2383-2406,
- 509 10.5194/acp-21-2383-2021, 2021b.
- 510 Sun, J., Shen, Z. X., Zhang, T., Kong, S. F., Zhang, H. A., Zhang, Q., Niu, X. Y., Huang, S. S., Xu, H. M., Ho, K. F., and
- 511 Cao, J. J.: A comprehensive evaluation of PM2.5-bound PAHs and their derivative in winter from six megacities
- 512 in China: Insight the source-dependent health risk and secondary reactions, Environ. Int., 165,
- 513 10.1016/j.envint.2022.107344, 2022a.
- 514 Sun, S. Y., Zheng, N., Wang, S. J., Li, Y. Y., Hou, S. N., An, Q. R., Chen, C. C., Li, X. Q., Ji, Y. N., and Li, P. Y.: Inhalation
- 515 Bioaccessibility and Risk Assessment of Metals in PM2.5 Based on a Multiple-Path Particle Dosimetry Model in
- the Smelting District of Northeast China, Int. J. Env. Res. Public Health, 19, 10.3390/ijerph19158915, 2022b.
- 517 Tecer, L. H., Alagha, O., Karaca, F., Tuncel, G., and Eldes, N.: Particulate matter (PM2.5, PM10-2.5, and PM10)
- and children's hospital admissions for asthma and respiratory diseases: A bidirectional case-crossover study,
- 519 Journal of Toxicology and Environmental Health-Part a-Current Issues, 71, 512-520
- 520 10.1080/15287390801907459, 2008.
- 521 Tkacik, D. S., Presto, A. A., Donahue, N. M., and Robinson, A. L.: Secondary Organic Aerosol Formation from
- 522 Intermediate-Volatility Organic Compounds: Cyclic, Linear, and Branched Alkanes, Environ. Sci. Technol., 46,
- 523 8773-8781, 10.1021/es301112c, 2012.
- Turpin, B. J., Huntzicker, J. J., and Hering, S. V.: Investigation of Organic Aerosol Sampling Artifacts in the Los-
- 525 Angeles Basin, Atmos. Environ., 28, 3061-3071, Doi 10.1016/1352-2310(94)00133-6, 1994.
- 526 Wang, X. L., Sato, T., and Xing, B. S.: Size distribution and anthropogenic sources apportionment of airborne
- 527 trace metals in Kanazawa, Japan, Chemosphere, 65, 2440-2448, 2006.
- 528 Zhao, Y., Hennigan, C. J., May, A. A., Tkacik, D. S., De Gouw, J. A., Gilman, J. B., Kuster, W. C., Borbon, A., and
- Robinson, A. L.: Intermediate-Volatility Organic Compounds: A Large Source of Secondary Organic Aerosol,
- 530 Environ. Sci. Technol., 48, 13743-13750, 10.1021/es5035188, 2014.
- Zhao, Y. L., Kreisberg, N. M., Worton, D. R., Isaacman, G., Weber, R. J., Liu, S., Day, D. A., Russell, L. M., Markovic,
- 532 M. Z., VandenBoer, T. C., Murphy, J. G., Hering, S. V., and Goldstein, A. H.: Insights into Secondary Organic
- 533 Aerosol Formation Mechanisms from Measured Gas/Particle Partitioning of Specific Organic Tracer Compounds,
- 534 Environ. Sci. Technol., 47, 3781-3787, 10.1021/es304587x, 2013.
- Ziemann, P. J.: Effects of molecular structure on the chemistry of aerosol formation from the OH-radical-initiated
- oxidation of alkanes and alkenes, Int. Rev. Phys. Chem., 30, 161-195, 10.1080/0144235x.2010.550728, 2011.