

Estimating hub height wind speed based on machine learning algorithm: Implications for wind energy assessment

Boming Liu¹, Xin Ma¹, Jianping Guo^{2*}, Hui Li¹, Shikuan Jin¹, Yingying Ma¹, and Wei Gong¹

¹ State Key Laboratory of Information Engineering in Surveying, Mapping and Remote Sensing (LIESMARS), Wuhan University, Wuhan 430072, China

² State Key Laboratory of Severe Weather, Chinese Academy of Meteorological Sciences, Beijing 100081, China

Correspondence to: Dr./Prof. Jianping Guo (Email: jpguocams@gmail.com)

Abstract. Accurate estimation of wind speed at wind turbine hub height is of significance for wind energy assessment and exploitation. Nevertheless, the traditional power law method (PLM) generally estimates the hub height wind speed by assuming a constant exponent between surface and hub height wind speed. This inevitably leads to significant uncertainties in estimating wind speed profile especially under unstable conditions. To minimize the uncertainties, we here use a machine learning algorithm known as Random Forest (RF) to estimate the wind speed at hub heights such as at 120 m (WS_{120}), 160 m (WS_{160}) and 200 m (WS_{200}). These heights go beyond the traditional wind mast limit of 100-120 m. The radar wind profiler and surface synoptic observations at the Qingdao station from May 2018 to August 2020 are used as key inputs to develop the RF model. A deep analysis of the RF model construction has been performed to ensure its applicability. Afterwards, the RF model and the PLM are used to retrieve the WS_{120} , WS_{160} and WS_{200} . The comparison analyses from both RF and PLM models are performed against radiosonde wind measurements. At 120 m, the RF model shows a relative higher correlation coefficient R of 0.93 and a smaller RMSE of 1.09 m/s, compared with the R of 0.89 and RMSE of 1.50 m/s for the PLM. Notably, the metrics used to determine the performance of model declines sharply with height for the PLM model, as opposed to the stably variation for the RF model. This suggests the RF model exhibits advantages over the traditional PLM model. This is because the RF model well considers the factors such as surface friction and heat transfer. The diurnal and seasonal variations of WS_{120} , WS_{160} and WS_{200} from RF are then analyzed. The hourly WS_{120} is large at daytime from 0900 to 1600 local solar time (LST) and reach a peak at 1400 LST. The seasonal WS_{120} is large in spring and winter and is low in summer and autumn. The diurnal and seasonal variations of WS_{160} and WS_{200} are similar to those of WS_{120} . Finally, we investigated the absolute percentage error (APE) of wind power density between RF and PLM at different heights. In the vertical direction, the APE is gradually increased as the height increases. Overall, the PLM algorithm has some limitations in estimating wind speed at hub height. The RF model that combines more observations or

auxiliary data is the more suitable for the hub height wind speed estimation. These findings obtained here have great implications for the development and utilization of wind energy industry in the future.

Key words: wind energy, radar wind profiler, remote sensing, machine learning

35

1. Introduction

With the rapid economic development of the world, the massive consumption of fossil fuels produces an increasing emission of carbon dioxide, sulfur dioxide and other pollutants (Yuan, 2016; Magazzino et al., 2021). To tackle this problem, it is increasingly becoming imperative to develop renewable clean energy (Hong et al., 2012; Luo et al., 2022). Among the myriad renewable energy resources, wind energy has gained more and more favors because of its abundant availability, good sustainability, and high cost-effectiveness (Li et al., 2018; Leung et al., 2012). As one of the largest energy consuming countries in the world, China is currently facing an increasingly serious energy and climate situation (Khatib et al., 2012). The Chinese government proposes to peak its carbon dioxide emissions before 2030 and achieve carbon neutrality before 2060 (Shi et al., 2023; Su et al., 2022a; 2022b). With the stimulus of policies and the favor of investors, wind power industry in China is flourishing. Therefore, the scientific assessment of wind energy resources in China is of great importance for the healthy development of wind energy industry in the decades to come.

Characterizing the wind speed at wind turbine hub height is key for wind energy assessment (Yu et al., 2022). The wind turbine is usually installed at the top of wind mast with a height of 100-120 m above ground level (AGL), which roughly corresponds to the surface layer (Veers et al., 2019). The wind speed data that have been widely used for wind energy assessment are mainly obtained from wind mast, Doppler lidar or reanalysis data (Debnath et al., 2021; Lolli et al., 2011; 2021). The 10 m wind data measured by the ground meteorological station can be used for wind energy assessment (Oh et al. 2012; Liu et al., 2019). The wind tower or mast can also provide wind speed observation data below 100 m AGL (Durisic et al. 2012; Liu J. et al., 2018). Moreover, the reanalysis data, such as the fifth generation European Centre for Medium-Range Weather Forecasts atmospheric reanalysis system (ERA5), can provide the hourly wind speed at a height of 10 or 100 m AGL for wind energy assessment (Laurila et al., 2021; Gualtieri, 2021). However, the wind turbines are increasing in height and rotor diameter with the development of technology, which go beyond the surface layer and enter the Ekman layer. Such as some offshore wind power plants, the blade tips of the largest wind turbine can reach heights of 250 m AGL (Gaertner et al. 2020). In addition, increasing wind turbine hub height reduces the impact of surface friction, enabling wind turbines to operate in high-quality wind resource

environments (Veers et al., 2019). Therefore, the wind profile is important for the selection of wind turbine hub height and the assessment of wind energy.

It is widely recognized that the wind profile is mainly obtained by empirical formulae (Li et al., 2018), such as the power law method (PLM). The PLM method generally assumes that the wind speed below 150 m in the planetary boundary layer (PBL) varies exponentially with height (Hellman et al. 1914). This means that the wind speed at the wind turbine hub height can be calculated from the surface wind speed based on a constant power law exponent (α). However, the surface layer wind profile is mainly controlled by the surface roughness, friction velocity and the atmospheric stability (Gryning et al., 2007). The surface layer is where obstructions such as trees, buildings, hills, and valleys cause turbulence and reduce the wind speed (Coleman et al., 2021; Solanki et al., 2022). Due to the influence of inhomogeneous underlying surface and ubiquitous atmospheric turbulence, wind speed varies constantly and greatly in the vertical (Tieleman 2021). Especially above surface layer, the factors, such as the Coriolis force, baroclinity and wind shear, increase the complexity of the wind profile (Brümmer 1991). As a result, the α has spatiotemporal variability and depends on a variety of factors, such as terrain, time and height (Li et al., 2018). Therefore, the assumption of a constant α poses great challenges and uncertainties to wind energy assessment. Some studies use more complex models to improve the PLM, such as the perturbation theory (Sen et al., 2012) and the bivariate wind speed-wind shear model (Jung et al., 2017). These studies confirm that there is a complex nonlinear relationship between surface observations and wind speed at the wind turbine hub height. Therefore, one of the greatest challenges is to develop an accurate method to describe the nonlinear transfer from surface observations to wind speed at wind turbine hub height.

With the development of machine learning (ML) technology, the ML algorithms have been widely used in the field of wind speed and wind power prediction (Magazzino et al., 2021). Chi et al. (2015) compared two wind speed-forecasting mechanisms in China based on linear regression and support vector machine algorithm. They find that the ML algorithms have better accuracy in solving the nonlinear problem. Lahouar and Slama et al. (2017) use several meteorological factors to forecast wind power based on a random forest (RF) model. The results indicate that compared with physical and statistical approaches, the ML model can achieve better accuracy when coping with problems that cannot be analytically defined. Therefore, it is worth trying to use ML algorithms to retrieve the wind speed at wind turbine hub height from available observations.

Given the abovementioned problems, we attempt to use a ML algorithm known as RF to retrieve wind speed at wind turbine hub height from the radar wind profiler (RWP) and surface synoptic observations.

A RF model has been trained based on the surface in situ wind speed, high-height RWP wind speed and corresponding surface meteorological data from May 2018 to August 2020. The performance of the classical PLM method and the RF model are then compared. Next, the wind speeds from the RF model are used to evaluate the wind power. The results of our study can provide useful information for the development of wind energy industry in coastal China. The observational data are introduced in section 2. The RF model construction and wind energy evaluation method are displayed in section 3. Section 4 discusses the accuracy of the RF model and the variation of wind energy resources. A summary of results is presented in section 5.

2. Materials and Data

2.1 RWP data

The RWP is a ground-based remote sensing device that is used to measure the atmospheric wind profiles from surface to 5-8 km AGL (Liu B. et al., 2019; Guo et al., 2021a). It has high and low detection modes in the vertical direction, and their corresponding vertical resolutions are 120 and 60 m, respectively (Liu et al., 2020; Chen et al., 2023). Nevertheless, the wind profile near the ground surface, especially those below 300 m AGL are usually highly uncertain, due to the influence of ground and intermittent clutter (May and Strauch 1998; Allabakash et al., 2019). Therefore, there exists large data gap between ground surface and the lowest measurement height provided by the RWP. Here, the RWP data are obtained at Qingdao (120.23 °E, 36.33 °N), which is a typical coastal synoptic weather station. The spatial distribution and surface type of this station are shown in Fig. 1. Geographically, Qingdao station is located on the south of Shandong Peninsula and lies to the west of the Yellow Sea. To be more specific, this station is set up in the suburb, surrounded by cropland. The altitude of this station is 12 m above mean sea level. The hourly wind speed (WS_{300}) and direction (WD_{300}) data at 300 m AGL are obtained from 1 May 2018 to 31 August 2020. The original RWP data at 6-min intervals have not been released temporarily, but can be reasonably requested upon demand by contacting Dr. Jianping Guo (Email: jpguocams@gmail.com).

2.2 Anemometer

The wind cup anemometer can measure the instantaneous wind speed and is installed at 10 m AGL (Mo et al., 2015). The sensing part of wind cup anemometer is composed of three or four conical or hemispherical empty cups. It can provide surface wind data with an error of less than 10% (Zhang et al., 2020). This device is also installed at Qingdao station. Here, the 10 m wind speed (WS_{10}) and

direction (WD_{10}) data are also obtained from 1 May 2018 to 31 August 2020. The WS_{10} data are processed into hourly average value to match the RWP data.

2.3 Radiosonde data

130 The radiosonde (RS) provides the vertical profiles of wind speed and wind direction at 5-8 meter intervals (Guo et al., 2020). The accuracy of RS wind speed is within 0.1 m/s in the PBL (Guo et al., 2021b). One noteworthy drawback is that the operational RS can provide observations of wind profiles only twice per day: 0800 and 2000 local solar time (LST). The Qingdao station is equipped with RS and RWP at the same time. The RS data also collect from 1 May 2018 to 31 August 2020.

2.4 ERA5 data

135 The ERA5 is the reanalysis data combining model data and observations, which provides global, hourly estimates of atmospheric variables (Hoffmann et al., 2019). The horizontal resolution can reach $0.25 * 0.25$ degree, and there are 137 vertical levels in vertical direction. “ERA5 hourly data on single levels from 1959 to present” is a dataset of ERA5, which can provide a series of surface parameters such as temperature, humidity, pressure and radiation etc. (Hersbach et al., 2020). Here, nine
140 parameters have been collected, including charnock coefficient (Char), forecast surface roughness (FSR), friction velocity (FV), dew point (DP), temperature (Temp), pressure (Pres), net solar radiation (Rn), latent heat flux (LHF), and sensible heat flux (SHF). Char, FSR and FV are related to surface roughness, and can evaluate the influence of different surface types on the wind speed in the surface layer. DP, Temp and Press are the meteorological parameters associated with wind speed. Rn, LHF
145 and SHF indicate the solar radiation level, which is directly related to the generation of wind. According to the longitude and latitude information of the Qingdao station, the grid where the RWP station is located is selected and those parameters in the corresponding grid are obtained accordingly. These data are obtained from 1 May 2018 to 31 August 2020.

3. Methods

150 The schematic diagram of surface layer wind profile observations is shown in Fig. 2. The wind mast or tower can provide wind speed data below 100 m AGL (Durisic et al. 2012; Liu et al., 2018). The RWP can measure the wind profiles from the 300 m to a height of 5-8 km AGL (Liu B. et al., 2019). It leads to a gap (100 to 300 m) in the observation of wind profile. At present, the PLM method is most often applied to extrapolate the surface wind speed to the wind turbine hub height, such as wind speed
155 at 120 m (WS_{120}), 160 m (WS_{160}) and 200 m (WS_{200}) AGL.

3.1 Power law method

The PLM method is proposed by Hellman et al. (1914). It assumes that the wind speed below 150 m in the PBL varies exponentially with height. As a result, the wind speed at wind turbine hub height is typically estimated using the following formula (Abbes et al., 2012):

$$v_2 = v_1 \times \left(\frac{h_2}{h_1}\right)^\alpha \quad (1)$$

where v_1 and v_2 are the wind speed at height h_1 and h_2 , respectively. The α is the power law exponent, which varies with time, altitude, and location (Durisic et al., 2012). In engineering application, the value of α is determined by the terrain type, and generally is estimated to range from 0.1 to 0.4 (Li et al., 2018). Here, the general value of α for coastal topography is set to 0.15 based on former studies (Patel et al., 2005; Banuelos et al., 2010). However, Jung et al. (2021) pointed out that the error in the wind power density estimation over China can reach to 30 % based on a constant α value. Therefore, we attempt to use ML algorithm to obtain the WS_{120} , WS_{160} and WS_{200} .

3.2 RF algorithm

RF is an ensemble ML method, which has been widely used in regressive calculation (Breiman, 2001). It is a method to integrate many decision trees into forests and predict the result. Schematic diagram of RF is shown in Fig. S1. The RF is composed of many decision trees, and each decision tree is irrelevant. The performance of RF is determined by the aggregation of the results of all the trees (Ma et al., 2021). For RF model, the number of trees (N) is an important parameter to achieve the optimal performance of the model. The further detailed information can be referred to Breiman (2001).

3.2.1 Inputs for RF

In the construction of the RF model, it is necessary to obtain the relevant variables that may affect the surface wind profile according to the physical mechanism and previous research. At present, the PLM is often used to calculate the wind speed at hub height. It confirms that the wind speed at hub height is related to the wind speed at other heights (Durisic et al., 2012; Li et al., 2018). Therefore, the WS_{10} , WD_{10} , WS_{300} and WD_{300} are selected as inputs. The surface wind profile also depends on the surface roughness, friction velocity and the atmospheric stability (Gryning et al., 2007), so that FSR, FV and Char are also regarded as inputs. The higher FSR causes a slower wind speed in the surface layer. The FV is a theoretical wind speed at the Earth's surface, which is used to calculate the way wind changes with height in near surface (Stull, 1988). Moreover, considering that the generation of wind is closely associated with uneven heating of the Earth's surface by solar radiation (Solanki et al., 2022), the R_n , LHF and SHF are also selected as input variables. Additionally, some studies use atmospheric temperature and pressure as input to improve the accuracy of wind speed prediction (Chi et al., 2015).

Here, we also regard DP, Temp and Press as the input variables. The reference value, also included as input in the RF model, is the WS_{120} , WS_{160} and WS_{200} measured from RS. These values are listed in Table S1.

3.2.2 Feature selection

To estimate the WS_{120} , WS_{160} and WS_{200} , we need to build RF model on 120 m (RF_{120}), 160 m (RF_{160}) and 200 m (RF_{200}), respectively. For each model, it is necessary to select the main features from the inputs to avoid data redundancy and reduce the complexity of the model (Ma et al., 2021). Following the research of De et al. (2022), the inputs, which cannot cause a 2% reduction in correlation coefficient, are regarded as irrelevant feature and removed. Figure 3 shows the importance analysis of inputs for three RF models. The relevant features are marked by red bars. The irrelevant features are marked by blue bars, which are not regarded as final inputs in three RF models. For three RF models, the relevant features are both WS_{10} , FV, Char, SHF and WS_{300} . It indicates that the factors such as surface friction, heat transfer and high-height wind speed constraints are considered in the construction of RF models. In addition, it is surprising that FSR has such low importance in three RF models construction. FSR is a measure of surface resistance, which directly affects the near-surface wind speed (Gryning et al., 2007). At a land station, the FSR is derived from the vegetation type (Li et al., 2021). The surface type of Qingdao station is cropland. Li et al. (2021) confirms that the FSR at cropland is most likely to 0.3 m. In training data, the FSR from ERA5 also approximates a constant value (0.3 m). Since the constant variable has no meaning for RF model construction, the RF model divides FSR into irrelevant variable. Therefore, the final inputs for three RF models are WS_{10} , FV, Char, SHF and WS_{300} .

3.2.3 Tuning parameter

RF algorithm requires to setup the N in order to avoid overfitting in the training dataset (Ma et al., 2021). Here, we use the RF algorithm for regression in MATLAB R2020b. The code and usage of RF are referred to the MATLAB help center (<https://ww2.mathworks.cn/help/stats/treebagger.html>, last access: 15 November 2022). The specific tuning parameter process of RF model is presented as follows: The N value varies from 1-500 with an interval of 10. Correlation coefficient (R) and root mean square error (RMSE) are used to evaluate the accuracy of the model. We need to set an appropriate N value to maximize R and minimize RMSE. Fig. S2 shows the tuning parameter process for the N of three RF models. For RF_{120} , it can find that the R increased with N value increased, while the R is almost unchanged when N value is greater than 100. When N equals 200, R reaches the maximum value (0.82) and RMSE reaches the minimum value (1.68 m/s). Therefore, the N value is set to 200 for RF_{120} . Moreover, according to the same tuning parameter process, the N values are set to 300 and 150 for RF_{160} and RF_{200} , respectively. After determining the final inputs and N values, the three RF models

have been trained and tested. At Qingdao Station, a total of 746 sample data are obtained after data matching. We use the 5-fold crossover to train RF models. The test results are discussed in section 4.1.

3.2.4 Sensitivity analysis

The accuracy and generalization of the RF model depend on training and testing samples (Ma et al., 2021). However, the training and testing samples are obtained at 0800 and 2000 LST. It needs to discuss whether the RF model also applies to other times. This depends on whether the RF model has enough generalization for the training samples, and whether the inputs at other times have appeared in the training samples. Fig. S3-S5 shows the difference between estimated wind speed and observed wind speed of three RF models, which as a function of the inputs. For three RF models, the deviations are relatively stable and not change with the increase of inputs. It indicates that three RF models have good generalization for the training and testing samples. This is because the RF tends to increase random disturbance in the sample space, parameter space and model space, thereby reducing the impact of "cases" and improving the generalization ability (Breiman, 2001). Moreover, Fig. S6 shows the distribution of inputs at different time. The red dashed lines represent the maximum and minimum values of each variable at training samples. In the range of the red line, three RF models can provide stable output due to its good generalization ability. It can be found that almost all the inputs have appeared in training samples. Therefore, three RF models have sufficient generalization and can be used at other times.

3.3 Assessment methods of wind energy

For the wind speed at hub height, a series of indicators have been used to evaluate wind energy, such as Weibull distribution and wind power density (WPD) (Pishgar et al., 2015). These parameters are commonly used to evaluate the wind energy at a certain station (Fagbenle et al., 2011; Liu et al., 2018).

3.3.1 Weibull distribution

The Weibull distribution can calculate the cumulative probability $F(v)$ and probability density $f(v)$ function of WS_{120} in a certain period of time, which are expressed as follows (Chang et al., 2011):

$$F(v) = 1 - \exp\left[-\left(\frac{v}{c}\right)^k\right] \quad (2)$$

$$f(v) = \frac{dF(v)}{dv} = \left(\frac{k}{c}\right) \left(\frac{v}{c}\right)^{k-1} \exp\left[-\left(\frac{v}{c}\right)^k\right] \quad (3)$$

where v is the WS_{120} ; k and c are the shape parameter of the Weibull distribution. Higher c indicates larger wind speed, while the k indicates wind stability. Saleh et al. (2012) compared different methods to estimate k and c , and pointed out that the moments method is recommended in estimating the

Weibull shape parameter. Therefore, we use the moments method to calculate the k and c , which shows as follows (Rocha et al., 2012):

$$k = \left(\frac{\sigma}{\bar{v}}\right)^{-1.086} \quad (4)$$

$$c = \frac{\bar{v}}{\Gamma\left(1+\frac{1}{k}\right)} \quad (5)$$

255 where \bar{v} and σ are the mean and square deviation of WS_{120} , respectively. Γ is the gamma function, which has a standard form as follows:

$$\Gamma(x) = \int_0^{\infty} e^{-u} u^{x-1} du \quad (6)$$

3.3.2 Wind power density

260 The WPD is the wind energy per unit area that the airflow passes vertically in unit time, and generally takes the form like (Akpınar et al., 2005):

$$WPD = \frac{1}{2} \rho c^3 \Gamma\left(\frac{k+3}{k}\right) \quad (7)$$

where ρ is the air density, k and c are the shape parameter of Weibull (equ.4 and 5), and Γ is the gamma function (equ.6). In addition, the absolute percentage error (APE) is used to quantify the differences in wind energy assessment based on different methods. The APE is calculated by:

$$265 \quad APE = \frac{|WPD_{RF} - WPD_{PLM}|}{WPD_{RF}} * 100 \% \quad (8)$$

where WPD_{RF} and WPD_{PLM} are calculated by the wind speed from RF and PLM, respectively.

4. Results and discussion

4.1 Intercomparison of wind speed using different methods.

270 Figure 4 shows the wind profile from different methods under different time. The red, black and blue lines represent the mean wind speed from RS, PLM and RF, respectively. For the PLM, the retrieved results below 80 m AGL are consistent with the RS observations. Gryning et al. (2007) also pointed out that the wind profile based on surface-layer theory is valid up to a height of 50–80 m. Above 80 m AGL, the wind speeds retrieved by PLM deviate from the RS observations. This deviation is increasing with the height. The comparison results between PLM and RS at 120 m, 160 m and 200 m AGL (Fig. 275 5) are also confirmed it. This is due to the fact that above surface layer, the Coriolis force, baroclinity and wind shear increase the complexity of the wind profile (Brümmer 1991). Moreover, most of estimated results from PLM are underestimated when the observed wind speed is high, especially at 200 m AGL. The reason is that the surface wind profile is affected by turbulence, surface friction and other factors (Tieleman 2021; Solanki et al., 2022). The turbulence caused by inhomogeneous

280 underlying surface can change the wind direction and reduce the horizontal wind speed (Coleman et al., 2021). Especially in coastal areas, the sea land interaction and complex surface types make the variations of near surface wind profiles more complex. The simple exponential relationship is unable to obtain the surface wind profile with high accuracy, especially at high wind speed condition. By comparison, the WS_{120} , WS_{160} and WS_{200} retrieved from RF are closer to RS observations. Compared
285 with PLM, the R and RMSE between the observed wind speed and the estimated wind speed from RF at three heights are significantly improved (Fig. 5). This is due to the fact that the surface friction (FV), heat transfer (SHF) and high-height wind speed constraints (WS_{300}) are considered in construction of RF, which can improve the accuracy of the model. Moreover, it notes that three RF models tend to slightly overestimate small values and underestimate high values. The reason is the small number of
290 training samples at high and low values, resulting in the reduction of RF model generalization. Overall, it can be seen from the metrics of R and RMSE that the wind speed from RF model is better than that from PLM.

In addition, for both PLM and RF, the retrieved wind profile at 2000 LST is closer to the RS observations. The comparisons between the observed wind speed and the estimated wind speed for
295 PLM and RS under different time is shown in Fig. S7. The fitting results of PLM and RF at 2000 LST are slightly higher than that at 0800 LST. It indicates that the performance of PLM and RF vary with hour of the day. This is because the wind profile depends not only on the surface friction but also on the atmospheric stratification (Gryning et al., 2007). The surface layer is in an unstable stratification due to heat transfer caused by solar radiation during daytime, while the surface layer tends to stable
300 stratification due to surface radiation cools during nighttime (Yu et al., 2022; Solanki et al., 2022). The WS_{120} , WS_{160} and WS_{200} are more vulnerable to the surface turbulence due to the unstable stratification during daytime. Therefore, the performance of PLM and RF at nighttime is better than that at daytime.

Figure 6 shows the comparisons between the observed results and the estimated results for PLM and RF under different season. The red, green, blue and black represent the spring, summer, autumn and
305 winter, respectively. At three heights, the performance of PLM is the best in winter and the worst in summer. It shows that the performance of PLM is affected by seasonal factors, which is due to the wind shear varying dramatically with season (Banuelos-Ruedas et al., 2010). Pérez et al. (2005) indicates that the surface layer wind speed profile is mainly affected by the convection produced by surface heating in summer. The WS_{120} , WS_{160} and WS_{200} affect by the surface due to the unstable stratification, which leads that the PLM performs worst in summer. In contrast, during winter, the
310 surface temperature is generally lower than the air temperature aloft creating a stable inversion (Yu et al., 2022; Liu et al., 2022). The WS_{120} , WS_{160} and WS_{200} are disconnected from the surface due to

stable stratification. It leads that the PLM performs best in winter. As for RF, although the performance in spring is slightly lower than that in other seasons, the fitting results at four seasons are significantly improved compared with the PLM. This indicates that RF is least affected by seasons. The reason is that the RF model is less subjective than PLM because they are data driven. Overall, in terms of stability and accuracy, the RF is more suitable for estimating wind speed at hub height.

4.2 Vertical profiles of wind speed at surface layer

Figure 7 shows the diurnal and seasonal variations of WS_{120} , WS_{160} and WS_{200} . The diurnal and seasonal variations of wind speed at three heights are on average similar to each other. From the perspective of daily variation, the wind speed is larger at daytime from 0900 to 1600 LST, while is lower at nighttime from 0000 to 0400 LST. This daily cycle is mainly affected by the solar radiation and the sea-land breeze. On the one hand, the surface is heated by solar radiation at daytime, warming the low-level air. The convection formed by rising warm air mass results in high wind speed during the daytime. After sunset, the surface radiation cools and the air layer tends to stabilize, resulting in a gradual decrease in wind speed (Liu et al., 2018). On the other hand, the difference of specific heat capacity between sea and land can form the difference of thermal properties between sea and land. The difference of air pressure is obvious, which is easy to form sea land breeze (Li et al., 2020). Similar diurnal variations in 10 m wind speed are also observed at three other stations in China (Liu et al., 2013). From the perspective of seasonal variation, the wind speed is large in spring and winter and is low in summer and autumn. This is because the influence of East Asia Monsoon and Mongolian cyclones (Yu et al., 2016; Zheng et al., 2020). The large-scale synoptic systems in China have a relatively high occurrence frequency during the cold season (spring and winter), which result in the higher wind speed than warm season (summer and autumn) (Liu F. et al., 2019).

The histograms of WS_{120} , WS_{160} and WS_{200} with corresponding Weibull distributions are plotted in Fig. 8. The blue bar and pink lines represent occurrence probability and Weibull distributions, respectively. Moreover, the mean wind speed and Weibull distribution parameters for three heights are listed in Table 1. The occurrence probabilities of WS_{120} , WS_{160} and WS_{200} are both the unimodal distribution, with a peak probability in medium wind speed (about 5 m/s) and a low probability in high and low wind speed. The mean WS_{120} , WS_{160} and WS_{200} are 5.84, 6.26 and 6.57 m/s, which gradually increases with height. The lower wind speed near the ground is caused by the influence of underlying surface roughness and surface friction (Li et al., 2018; Li et al., 2020). In addition, there is a deviation between the probability density function and the frequency of occurrence at some stations, which is because Weibull distribution generally has a long tail effect or a right skewed distribution (Pishgar-

345 Komleh et al., 2015; Ali et al., 2018). Overall, the Weibull distribution matches with the frequency of wind speed at all stations. Therefore, the Weibull distribution parameters can be applied for the wind energy assessment.

4.3 Influence of wind speed from different methods on WPD

Figure 9 shows the diurnal variations of WPD from PLM and RF at 120 m, 160 m and 200 m AGL. The red solid and dotted lines represent the variation of WPD from RF and PLM, respectively. The gray bar represents the absolute percentage error (APE) of WPD between RF and PLM. The diurnal pattern of WPD from RF is like that from PLM. At three heights, the hourly mean WPD is larger at daytime from 0900 to 1600 LST with a peak at 1400 LST and is lower at nighttime from 0000 to 0400 LST. On the contrary, the APE is lower at daytime (0800 to 1800 LST) and larger at nighttime (2000 to 0600 LST). At 120 m, the mean APE at daytime and nighttime are 14.09 % and 35.80 %, respectively. Considering that the results from RF are underestimated at high wind speed condition, the APE of WPD between PLM and actual observation at daytime should be slightly greater than 14.09 %. Moreover, the diurnal variations of APE at 160 m and 200 m AGL generally resemble the features obtained at 120 m AGL. But the APE of WPD between RF and PLM increases with the height. These results indicate that the PLM is more suitable for wind energy assessment in the daytime, and the error of wind energy assessment based on PLM is gradually increased as the height increases.

Figure 10 shows the monthly variations of WPD from PLM and RF at 120 m, 160 m and 200 m AGL. The monthly variation of WPD from RF is also similar to that from PLM. The monthly WPD is relatively high for the period from March to May, as compared to the lower values from June to October. At 120 m, the APE is largest in summer and is lowest in winter. The seasonal APE during spring, summer, autumn and winter are 23.65 %, 40.83 %, 19.67 % and 12.62 %, respectively. The monthly variations of APE at 160 m and 200 m are consistent with that at 120 m. It indicates that the PLM is more suitable for wind energy assessment in autumn and winter. In addition, the APE during spring at 120 m, 160 m and 200 m are 23.65 %, 28.12 % and 34.22 %, respectively. Due to the performance of RF model is the worst in spring, the APE of WPD between PLM and real value during spring may increase. Jung et al. (2021) also finds that the global median absolute percentage error in the wind energy estimations is 36.9% assuming the power law exponent being 0.14. Overall, the PLM has some limitations in wind energy assessment above 100 m. When using PLM to evaluate wind energy at high height, it is necessary to pay attention to its errors. Moreover, the use of RF model that takes the factors such as surface friction, heat transfer and high-height wind speed constraints into account is suggested to evaluate wind energy.

5. Summary and conclusions

The traditional methods such as the PLM used to estimate wind speed at hub height generally assume a constant exponent α in establishing the power law relationship between wind speeds at surface and hub height, which inevitably leads to large uncertainties. To confront this challenge, this study uses the RF algorithm to retrieve the wind profile based on the RWP and surface meteorological data from May 2018 to August 2020.

The comparison against observations indicates that the WS_{120} estimated from RF are better than those from PLM, given the relative higher R (0.93 versus 0.89) and smaller RMSE (1.09 m/s versus 1.50 m/s). Particularly, the performance of PLM declines with height. Especially at 200 m, the R and RMSE from PLM change to 0.78 and 2.42 m/s, respectively. In contrast, the RF model maintains good accuracy at different heights. The R (RMSE) for RF model at 160 m and 200 m are 0.91 (1.29 m/s), and 0.91 (1.48 m/s), respectively. These results show that above the surface layer, the wind speeds from PLM deviate from the observed value. The RF model is more suitable for retrieving the hub height wind speed, when the hub height is extended above the surface layer. Overall, the RF model shows advantages over the traditional PLM. This is because the RF model well considers the influence of near-surface environmental parameters, such as friction velocity and charnock coefficient. Moreover, the heat transfer and high-height wind speed constraints are also considered in the construction of RF model. Based on the wind speed from RF, the diurnal and seasonal variations of wind energy are then analyzed. The hourly mean WPD is larger from 0900 to 1600 LST with a peak at 1400 LST. The WPD is relatively high in spring and winter, as compared to the lower values in summer and autumn. Finally, the differences of WPD between RF and PLM at different heights are investigated. At 120 m, the mean APE of WPD between RF and PLM at daytime and nighttime are 14.09 % and 35.80 %, respectively. Moreover, the seasonal APE at 120 m is largest in summer (40.83 %) and is lowest in winter (12.62 %). In addition, the mean APE at 120 m, 160 m and 200 m are 24.19 %, 27.99 % and 32.57 %, respectively. These results indicate that there are some errors in the wind energy evaluation based on wind speed from PLM. Therefore, when retrieving high height wind speed, it is suggested to combine more observation or auxiliary data to build a more accurate model, such as RF model. In the absence of other observation data, it is necessary to pay attention to the errors when using PLM to evaluate wind energy at high height.

Our work provides a new pathway to fill the data gap of wind speed at the hub height for the high capability of the state-of-the-art ML algorithm, which lays a solid foundation for more robust wind energy assessment. However, the high-precision wind profile estimate is only one part of the efficient

utilization of wind energy resources. The cost of wind turbines, topography conditions, and other
410 factors also need more attention, which deserves further investigation in the future.

Data Availability

The output data and codes used in this paper can be provided for non-commercial research purposes upon motivated request (Jianping Guo, Email: jpguocams@gmail.com). The anemometer data can be downloaded in <http://www.nmic.cn/data/cdcdetail/dataCode/A.0012.0001.html>, last access: 15
415 November 2022. The RS data can be downloaded in <http://www.nmic.cn/data/cdcdetail/dataCode/B.0011.0001C.html>, last access: 15 November 2022. The ERA5 data can be downloaded in <https://cds.climate.copernicus.eu/cdsapp#!/dataset/reanalysis-era5-single-levels?tab=overview>, last access: 15 November 2022.

Acknowledgments

420 This work was supported by the National Natural Science Foundation of China (under grants 42001291), the Fundamental Research Funds for the Central Universities (under grants 2042022kf1003), and the Open Grants of the State Key Laboratory of Severe Weather (under grants 2021LASW-B09).

Author Contributions

425 The study was completed with cooperation between all authors. JG and BL designed the research framework; BL and JG conducted the experiment and wrote the paper; XM, HL, SJ, YM, and WG analyzed the experimental results and helped touch on the manuscript.

Conflicts of Interest

The authors declare no conflicts of interest.

References

- 430 Ali, S., Lee, S. M., Jang, C. M.: Statistical analysis of wind characteristics using Weibull and Rayleigh distributions in Deokjeok-do Island–Incheon, South Korea. *Renew Energ.*, 123:652–663, <https://doi.org/10.1016/j.renene.2018.02.087>, 2018.
- Abbes, M., and Belhadj, J.: Wind resource estimation and wind park design in El-Kef region, Tunisia.
435 *Energy*, 40(1), 348–357, <https://doi.org/10.1016/j.energy.2012.01.061>, 2012.

- Akpınar E. K., Akpınar S.: An assessment on seasonal analysis of wind energy characteristics and wind turbine characteristics. *Energy Convers Manage*, 46(11):1848–67, <https://doi.org/10.1016/j.enconman.2004.08.012>, 2005.
- 440 Allabakash, S., Lim, S., Yasodha, P., Kim, H., and Lee, G.: Intermittent clutter suppression method based on adaptive harmonic wavelet transform for L-band radar wind profiler. *IEEE Transactions on Geoscience and Remote Sensing*, 57(11), 8546–8556, 2019.
- Brümmer B.: Wind shear at tilted inversions. *Boundary-Layer Meteorol* 57:295–308, 1991.
- Breiman, L.: Random forests, in: *Machine Learning*, 45: 5–32, 2001.
- 445 Banuelos-Ruedas, F., Angeles-Camacho, C., Rios-Marcuello, S.: Analysis and validation of the methodology used in the extrapolation of wind speed data at different heights. *Renew Sustain Energy Rev.*, 14(8):2383-91, <https://doi.org/10.1016/j.rser.2010.05.001>, 2010.
- Chang, T. P.: Performance comparison of six numerical methods in estimating Weibull parameters for wind energy application. *Appl. Energ.*, 88(1): 272–82, <https://doi.org/10.1016/j.apenergy.2010.06.018>, 2011.
- 450 Chi Z, Haikun W, Tingting Z, Kanjian Z, Tianhong L. Comparison of two multi-step ahead forecasting mechanisms for wind speed based on machine learning models. In: 2015 34th Chinese control Conference (CCC). IEEE; 2015. p. 8183–7.
- 455 Coleman, T. A., Knupp K. R., and Pangle P. T.: The effects of heterogeneous surface roughness on boundary-layer kinematics and wind shear. *Electronic J. Severe Storms Meteor.*, 16 (3), 1–29, 2021.
- Chen, B., Tan, J., Wang, W., Dai, W., Ao, M., & Chen, C.: Tomographic Reconstruction of Water Vapor Density Fields From the Integration of GNSS Observations and Fengyun-4A Products. *IEEE Transactions on Geoscience and Remote Sensing*, 61, 1-12, doi: 10.1109/TGRS.2023.3239392, 2023.

- 460 Debnath, M., Doubrawa, P., Optis, M., Hawbecker, P., and Bodini, N.: Extreme wind shear events in US offshore wind energy areas and the role of induced stratification, *Wind Energ. Sci.*, 6, 1043–1059, 2021.
- Durisic Z., Mikulovic J.: Assessment of the wind energy resource in the South Banat region, Serbia. *Renew Sust Energ Rev.*, 16(5):3014–3023, <https://doi.org/10.1016/j.rser.2012.02.026>, 2012.
- 465 De Arruda Moreira, G., Sánchez-Hernández, G., Guerrero-Rascado, J. L., Cazorla, A., & Alados-Arboledas, L.: Estimating the urban atmospheric boundary layer height from remote sensing applying machine learning techniques. *Atmospheric Research*, 266, 105962, 2022.
- Fagbenle R. O., Katende J, Ajayi O. O., Okeniyi J. O.: Assessment of wind energy potential of two sites in North-East, Nigeria. *Renew Energ.*, 36(4):1277–1283, <https://doi.org/10.1016/j.renene.2010.10.003>, 2011.
- 470 <https://doi.org/10.1016/j.renene.2010.10.003>, 2011.
- Gryning, S. E., Batchvarova, E., Brümmer, B., Jrgensen, H., and Larsen, S.: On the extension of the wind profile over homogeneous terrain beyond the surface boundary layer. *Boundary-Layer Meteorology*, 124(2), 251-268, 2007.
- Gaertner, E., Rinker, J., Sethuraman, L., Zahle, F., Anderson, B., Barter, G., Abbas, N., Meng, F., 475 Bortolotti, P., Skrzypiński, W. R., Scott, G., Feil, R., Bredmose, H., Dykes, K., Shields, M., Allen, C., and Viselli, A.: Definition of the IEA 15-Megawatt Offshore Reference Wind Turbine, Golden, CO: National Renewable Energy Laboratory, NREL/TP-5000-75698, <https://www.nrel.gov/docs/fy20osti/75698.pdf>, 2020.
- Guo, J., Chen X., Su T., Liu L., Zheng Y., Chen D., Li J., Xu H., Lv Y., He B., Li Y., Hu X., Ding A., 480 and Zhai P.: The climatology of lower tropospheric temperature inversions in China from radiosonde measurements: roles of black carbon, local meteorology, and large-scale subsidence. *Journal of Climate*, 33 (21): 9327–9350, doi: 10.1175/JCLI-D-19-0278.1, 2020.
- Guo, J., Liu, B., Gong, W., Shi, L., Zhang, Y., Ma, Y., Xu, X.: First comparison of wind observations from ESA’s satellite mission Aeolus and ground-based radar wind profiler network of China. 485 *Atmos. Chem. Phys.* 21 (4), 2945–2958, <https://doi.org/10.5194/acp-21-2945-2021>, 2021a.

- 490 Guo, J., Zhang, J., Yang, K., Liao, H., Zhang, S., Huang, K., Lv, Y., Shao, J., Yu, T., Tong, B., Li, J.,
Su, T., Yim, S. H. L., Stoffelen, A., Zhai, P., and Xu, X.: Investigation of near-global daytime
boundary layer height using high-resolution radiosondes: First results and comparison with ERA-
5, MERRA-2, JRA-55, and NCEP-2 reanalyses, *Atmos. Chem. Phys.*, 21, 17079–17097,
<https://doi.org/10.5194/acp-21-17079-2021>, 2021b.
- Gualtieri, G.: Reliability of era5 reanalysis data for wind resource assessment: a comparison against
tall towers. *Energies*, 14(14), 4169, 2021.
- Hoffmann L., Gunther G., Li D., Stein O., Wu X., Griessbach S.: From ERA-Interim to ERA5: the
considerable impact of ECMWF's next-generation reanalysis on Lagrangian transport simulations.
495 *Atmos. Chem. Phys.*, 19(5):3097–3124, <https://doi.org/10.5194/acp-19-3097-2019>, 2019.
- Hersbach H., Bell B., Berrisford P., Hirahara S., Horanyi A., Muñoz-Sabater J.: The ERA5 global
reanalysis. *Q. J. Roy. Meteor. Soc.*, 146(730):1999–2049, 2020.
- Hellmann G. Über die Bewegung der Luft in den untersten Schichten der Atmosphäre: Kgl. Akademie
der Wissenschaften. Reimer 1914.
- 500 Hong, L. X., Moller, B.: Feasibility study of China's offshore wind target by 2020. *Energy.*, 48(1):268–
77, <https://doi.org/10.1016/j.energy.2012.03.016>, 2012.
- Jung C, Schindler D.: Development of a statistical bivariate wind speed-wind shear model (WSWS) to
quantify the height-dependent wind resource. *Energy Convers Manag*, 149:303–17, 2017.
- Jung, C., and D. Schindler.: The role of the power law exponent in wind energy assessment: A global
505 analysis. *International Journal of Energy Research* 45.6, 8484-8496, 2021.
- Khatib, H.: IEA World Energy Outlook 2011-A comment. *Energy Policy.*, 48:737–743, 2012.
- Leung, D. Y. C., and Yang, Y.: Wind energy development and its environmental impact: A review.
Renew. Sust. Energ. Rev., 16(1):1031–1039, <https://doi.org/10.1016/j.rser.2011.09.024>, 2012.
- Lahouar A, Slama JBH.: Hour-ahead wind power forecast based on random forests. *Renew Energy*, 109:
510 529–41, 2017.

- Li, J. L., Yu, X.: Onshore and offshore wind energy potential assessment near Lake Erie shoreline: A spatial and temporal analysis. *Energy*, 147: 1092–1107, <https://doi.org/10.1016/j.energy.2018.01.118>, 2018.
- 515 Li, Y., Huang, X., Tee, K. F., Li, Q., and Wu, X. P.: Comparative study of onshore and offshore wind characteristics and wind energy potentials: A case study for southeast coastal region of China. *Sustainable Energy Technologies and Assessments*, 39: 100711, 2020.
- Lolli, S., Sauvage, L., Loaec, S., & Lardier, M.: EZ Lidar™: A new compact autonomous eye-safe scanning aerosol Lidar for extinction measurements and PBL height detection. Validation of the performances against other instruments and intercomparison campaigns. *Optica pura y aplicada*, 520 44(1), 33-41, 2011.
- Lolli, S.: Is the air too polluted for outdoor activities? Check by using your photovoltaic system as an air-quality monitoring device. *Sensors*, 21(19), 6342, 2021.
- Li, J., Guo, J., Xu, H., Li, J., and Lv, Y.: Assessing the surface-layer stability over china using long-term wind-tower network observations. *Boundary-Layer Meteorology*, 180(1), 155-171, 2021.
- 525 Liu, J., Gao, C. Y., Ren, J., Gao, Z., Liang, H., and Wang, L.: Wind resource potential assessment using a long term tower measurement approach: A case study of Beijing in China. *Journal of cleaner production*, 174: 917–926, 2018.
- Liu, B., Ma, Y., Guo, J., Gong, W., Zhang, Y., Mao, F., Li, J., Guo, X., and Shi, Y.: Boundary layer heights as derived from ground-based Radar wind profiler in Beijing. *IEEE Trans. Geosci. Remote Sens.*, 57 (10): 8095–8104. doi: 10.1109/TGRS.2019.2918301, 2019.
- 530 Liu, B., Guo, J., Gong, W., Shi, L., Zhang, Y., and Ma, Y.: Characteristics and performance of wind profiles as observed by the radar wind profiler network of China. *Atmos. Meas. Tech.*, 13: 4589–4600, <https://doi.org/10.5194/amt-13-4589-2020>, 2020.
- Liu, B., Ma, X., Ma, Y., Li, H., Jin, S., Fan, R., and Gong, W.: The relationship between atmospheric 535 boundary layer and temperature inversion layer and their aerosol capture capabilities. *Atmos. Res.*, 271: 106121, <https://doi.org/10.1016/j.atmosres.2022.106121>, 2022.

- Liu, R., Liu, S., Yang, X., Lu, H., Pan, X., Xu, Z.: Wind dynamics over a highly heterogeneous oasis area: An experimental and numerical study. *Journal of Geophysical Research: Atmospheres*, 123: 8418–8440. <https://doi.org/10.1029/2018JD028397>, 2018.
- 540 Liu, Y., Xiao, L. Y., Wang, H. F., Dai, S. T., Qi, Z. P.: Analysis on the hourly spatiotemporal complementarities between China’s solar and wind energy resources spreading in a wide area. *Sci. China. Technol. Sc.* 56: 683–692, <https://doi.org/10.1007/s11431-012-5105-1>, 2013.
- Liu, F., Sun, F., Liu, W., Wang, T., Wang, H., Wang, X., and Lim, W. H.: On wind speed pattern and energy potential in China. *Applied Energy*, 236: 867–876, 2019.
- 545 Laurila, T. K., Sinclair, V. A., and Gregow, H.: Climatology, variability, and trends in near-surface wind speeds over the North Atlantic and Europe during 1979–2018 based on ERA5. *International Journal of Climatology*, 41(4), 2253–2278, 2021.
- Luo, B.; Yang, J.; Song, S.; Shi, S.; Gong, W.; Wang, A.; Du, L.: Target Classification of Similar Spatial Characteristics in Complex Urban Areas by Using Multispectral LiDAR. *Remote Sens.*, 550 14, 238. <https://doi.org/10.3390/rs14010238>, 2022.
- May, P. T., and Strauch, R. G.: Reducing the effect of ground clutter on wind profiler velocity measurements. *Journal of Atmospheric and Oceanic Technology*, 15(2): 579–586, 1998.
- Maronga, B., and Reuder, J.: On the formulation and universality of Monin–Obukhov similarity functions for mean gradients and standard deviations in the unstable surface layer: Results from 555 surface-layer-resolving large-eddy simulations. *Journal of the Atmospheric Sciences*, 74(4): 989–1010, 2017.
- Mo, H. M., Hong, H. P., and Fan, F.: Estimating the extreme wind speed for regions in China using surface wind observations and reanalysis data. *Journal of Wind Engineering and Industrial Aerodynamics*, 143: 19–33, 2015.
- 560 Magazzino, C., Mele, M., & Schneider, N.: A machine learning approach on the relationship among solar and wind energy production, coal consumption, GDP, and CO2 emissions. *Renewable Energy*, 167: 99–115, 2021.

- 565 Ma, Y., Zhu, Y., Liu, B., Li, H., Jin, S., Zhang, Y., Fan, R., and Gong, W.: Estimation of the vertical distribution of particle matter (PM_{2.5}) concentration and its transport flux from lidar measurements based on machine learning algorithms, *Atmos. Chem. Phys.*, 21: 17003–17016, <https://doi.org/10.5194/acp-21-17003-2021>, 2021.
- Oh, K. Y., Kim, J. Y., Lee, J. K., Ryu, M. S., and Lee, J. S.: An assessment of wind energy potential at the demonstration offshore wind farm in Korea. *Energy*, 46(1):555–563, 2012.
- 570 Shi, T., Han, G., Ma, X., Mao, H., Chen, C., Han, Z., and Gong, W.: Quantifying factory-scale CO₂/CH₄ emission based on mobile measurements and EMISSION-PARTITION model: cases in China. *Environmental Research Letters*. 2023.
- Pérez, I. A., García, M. A., Sánchez, M. L., & De Torre, B. (2005). Analysis and parameterisation of wind profiles in the low atmosphere. *Solar Energy*, 78(6), 809-821.
- Patel, M. R.: *Wind and solar power systems: design, analysis, and operation*. CRC press; 2005.
- 575 Pishgar-Komleh S. H., Keyhani A., Sefeedpari P.: Wind speed and power density analysis based on Weibull and Rayleigh distributions a case study: Firouzkooh county of Iran. *Renew Sust Energ Rev.*, 42: 313-22, <https://doi.org/10.1016/j.rser.2014.10.028>, 2015.
- Rocha P. A. C., de Sousa R. C., de Andrade C. F., da Silva M. E. V.: Comparison of seven numerical methods for determining Weibull parameters for wind energy generation in the northeast region of Brazil. *Appl. Energ.*, 89(1):395–400, 2012.
- 580 Sen Z, Altunkaynak A, Erdik T.: Wind velocity vertical extrapolation by extended power law. *Adv Meteorol*, 1–6. <https://doi.org/10.1155/2012/178623>, 2012.
- Saleh H, Aly A. A., Abdel-Hady S.: Assessment of different methods used to estimate Weibull distribution parameters for wind speed in Zafarana wind farm, Suez Gulf, Egypt. *Energy*. 585 44(1):710–719, <https://doi.org/10.1016/j.energy.2012.05.021>, 2012.
- Solanki, R., Guo J., Lv Y., Zhang J., Wu J., Tong B., and Li J.: Elucidating the atmospheric boundary layer turbulence by combining UHF Radar wind profiler and radiosonde measurements over urban area of Beijing. *Urban Climate*, 43: 101151, doi: 10.1016/j.uclim.2022.101151, 2022.

- 590 Stull, R. B.: An Introduction to Boundary Layer Meteorology. Kluwer Academic Publishers, Dordrecht, 1988.
- Su, X., Wang, L., Gui, X., Yang, L., Li, L., Zhang, M., and Wang, L.: Retrieval of total and fine mode aerosol optical depth by an improved MODIS Dark Target algorithm. *Environment International*, 166: 107343, 2022a.
- 595 Su, X., Wei, Y., Wang, L., Zhang, M., Jiang, D., and Feng, L.: Accuracy, stability, and continuity of AVHRR, SeaWiFS, MODIS, and VIIRS deep blue long-term land aerosol retrieval in Asia. *Science of The Total Environment*, 832: 155048, 2022b.
- Tieleman, H. W.: Wind characteristics in the surface layer over heterogeneous terrain. *Journal of Wind Engineering and Industrial Aerodynamics* 41(1): 329-340, 1992. Wen Y, Kamranzad B, Lin PZ. Assessment of long-term offshore wind energy potential in the south and southeast coasts of 600 China based on a 55-year dataset. *Energy*. 224, <https://doi.org/10.1016/j.energy.2021.120225>, 2021.
- Veers, P., Dykes, K., Lantz, E., Barth, S., Bottasso, C. L., Carlson, O., and Wiser, R.: Grand challenges in the science of wind energy. *Science*, 366(6464): eaau2027, 2019.
- Yuan, J.: Wind energy in China: Estimating the potential. *Nature Energy*, 1(7): 1-2, 2016.
- 605 Yu, L., Zhong, S., Bian, X., and Heilman, W. E.: Climatology and trend of wind power resources in China and its surrounding regions: A revisit using Climate Forecast System Reanalysis data. *International Journal of Climatology*, 36(5): 2173-2188, 2016.
- Yu, S., & Vautard, R.: A transfer method to estimate hub-height wind speed from 10 meters wind speed based on machine learning. *Renewable and Sustainable Energy Reviews*, 169, 112897. 610 2022.
- Zhang, J., Zhang, M., Li, Y., Qin, J., Wei, K., and Song, L.: Analysis of wind characteristics and wind energy potential in complex mountainous region in southwest China. *Journal of Cleaner Production*, 274: 123036, 2020.

615 Zheng, Z., Zhao, C., Lolli, S., Wang, X., Wang, Y., Ma, X., and Yang, Y.: Diurnal variation of summer
precipitation modulated by air pollution: observational evidences in the beijing metropolitan area.
Environmental Research Letters, 15(9), 094053, 2020.

Tables:

620

Table 1 Statistics for the Weibull distribution of WS_{120} , WS_{160} and WS_{200} from 1 May 2018 to 31 August 2020.

625

Height (m)	Mean wind speed (m/s)	Standard deviation (m/s)	Weibull Shape factor k	Weibull Scale factor c (m/s)
120	5.84	2.54	2.47	6.58
160	6.26	2.59	2.60	7.05
200	6.57	2.80	2.52	7.40

Figures:

630

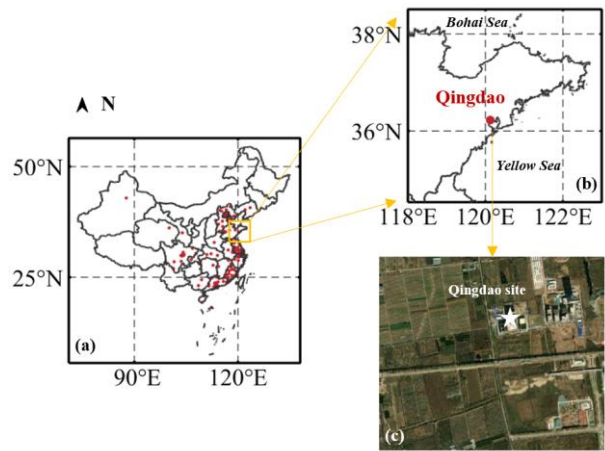


Figure 1. (a, b) Geographical distribution and (c) surface type of the radar wind profiler station at Qingdao. The photo of surface type is provided by Google Earth map (© Google Maps).

635

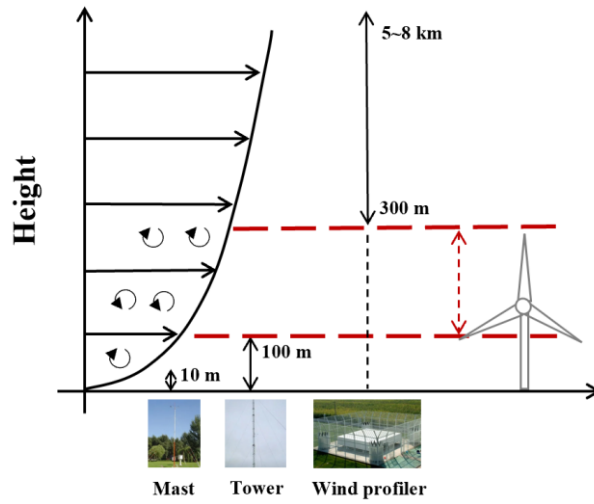


Figure. 2 The schematic diagram of surface layer wind profile observations. The photos are provided by Baidu (© Baidu).

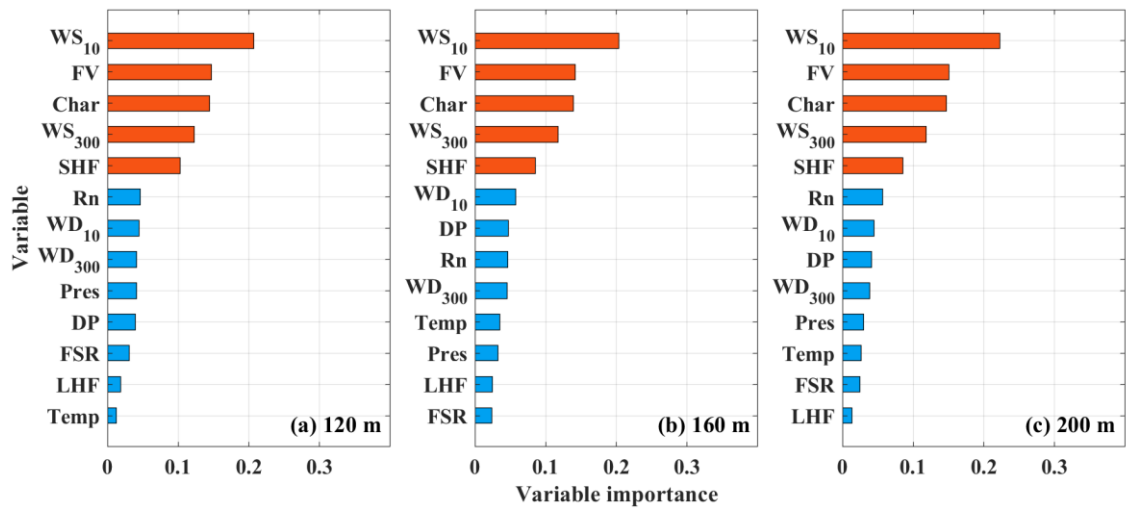


Figure 3. Importance analysis of inputs for RF model at (a) 120 m, (b) 160 m, and (c) 200 m.

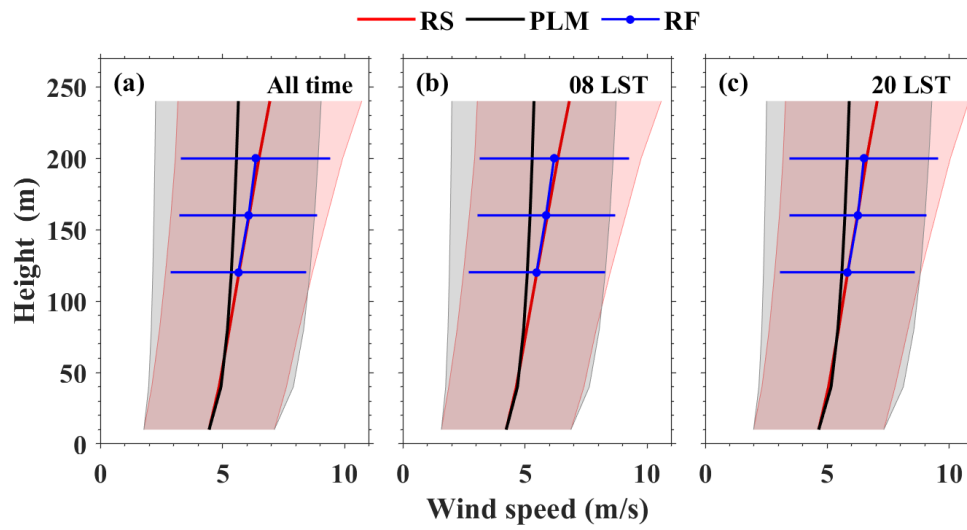


Figure 4. Vertical profiles of the wind speed from different methods at (a) all time, (b) 0800 and (c) 2000 LST. Red, black and blue lines represent mean wind profile from RS, PLM and RF, respectively. Corresponding color shading areas represent the standard deviation.

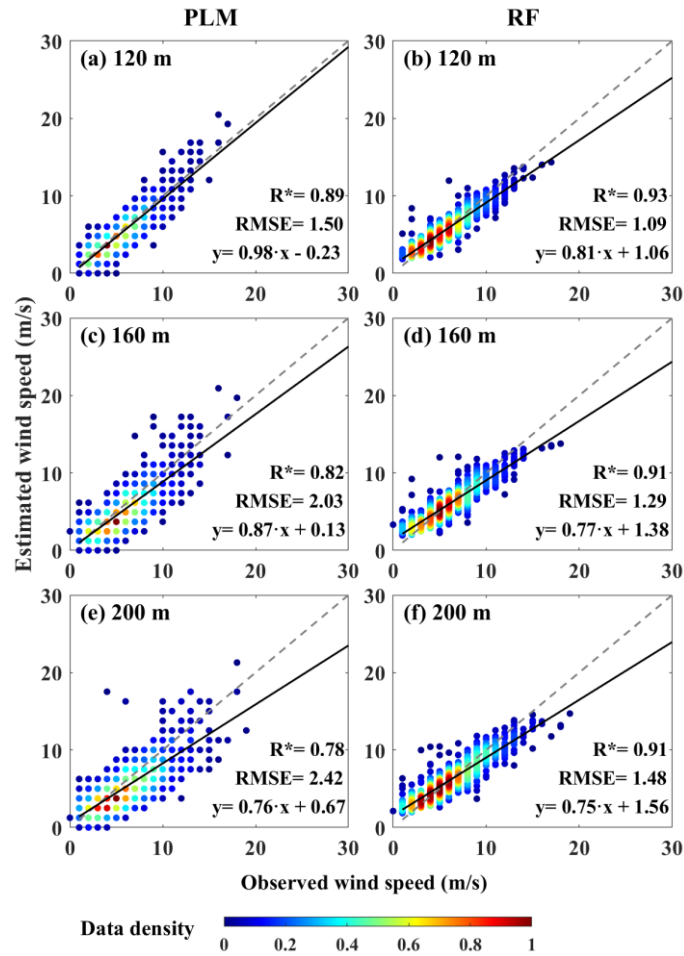


Figure 5. Comparisons between observed wind speed and estimated wind speed for (a, c, e) PLM and (b, d, f) RF at 120 m, 160 m and 200 m. The gray and black line is the reference and regression line, respectively. The color bar represents the data density. The asterisk indicates that the correlation coefficient (R) has passed the t-test at a confidence level of 95%.

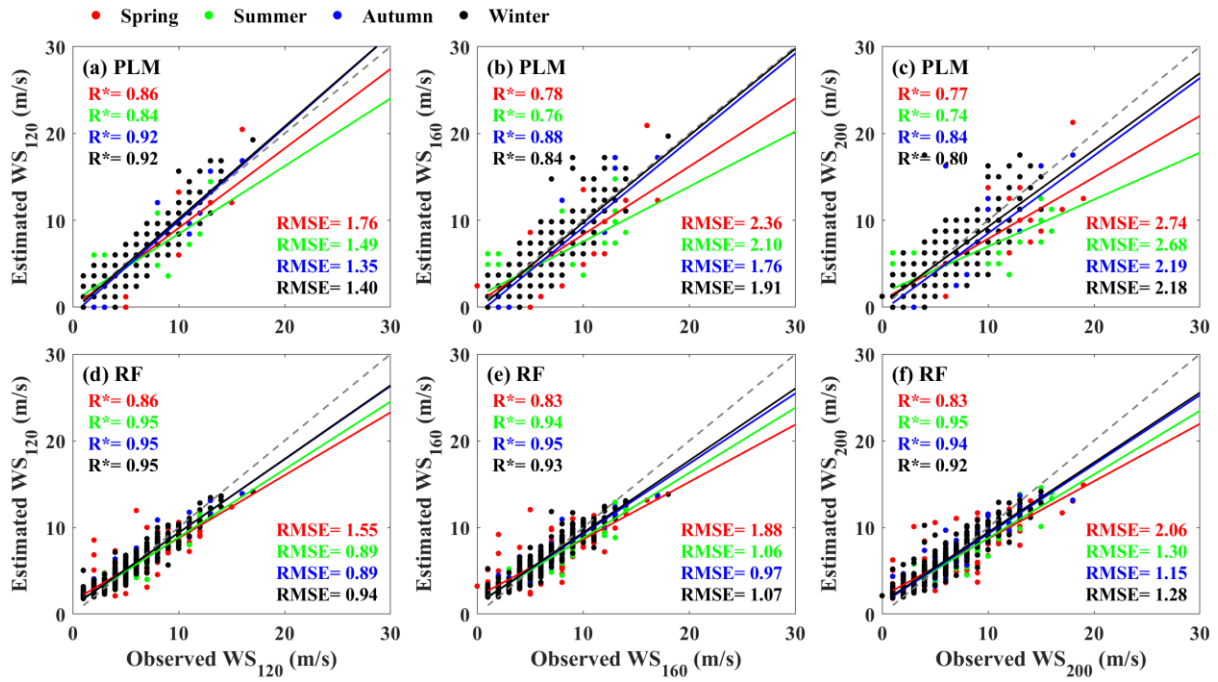


Figure 6. Comparisons between observed wind speed and estimated wind speed for (a, b, c) PLM and (d, e, f) RF at 120 m, 160 m and 200 m under different season. The red, green, blue and black represent spring, summer, autumn and winter, respectively. The asterisk indicates that the correlation coefficient (R) has passed the t-test at a confidence level of 95%.

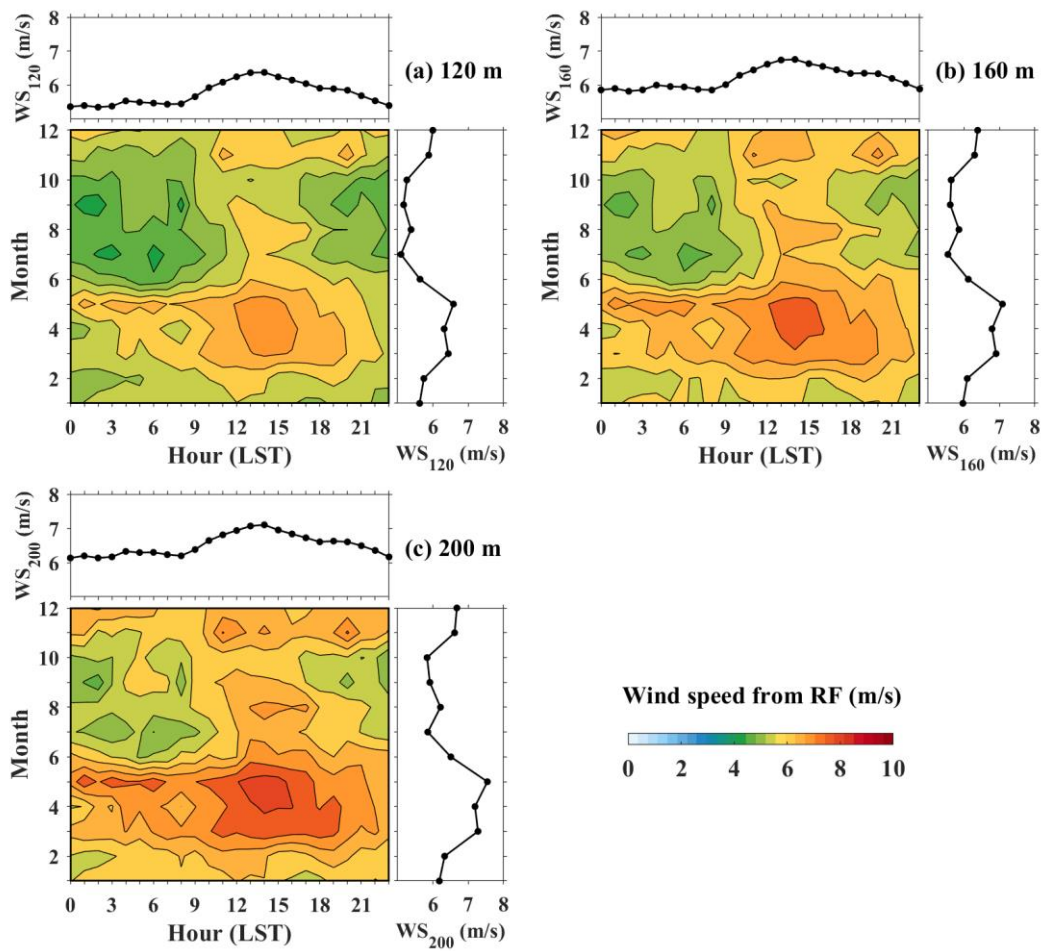


Figure 7. Monthly and diurnal cycles of (a) WS_{120} , (b) WS_{160} and (c) WS_{200} from 1 May 2018 to 31 August 2020. Color bar represents the wind speed from RF model.

665

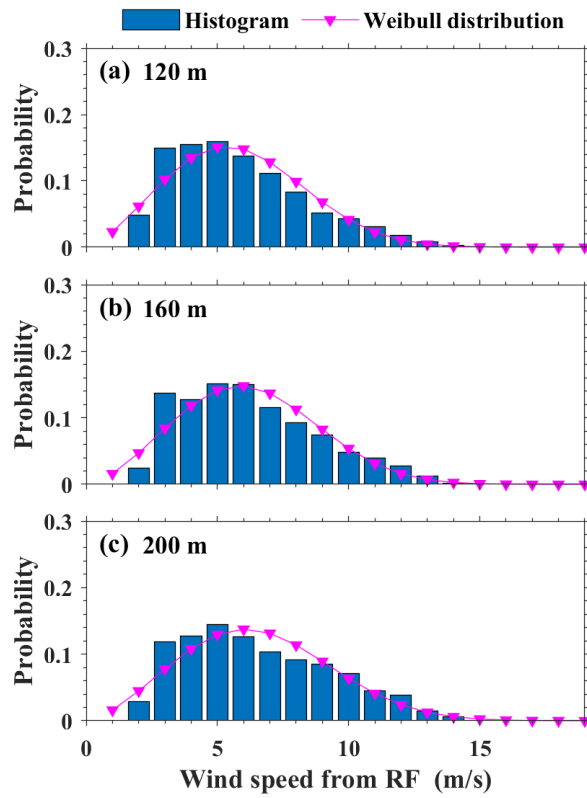


Figure 8. Probability distribution and Weibull distribution of (a) WS_{120} , (b) WS_{160} and (c) WS_{200} from 1 May 2018 to 31 August 2020. The blue bar and pink lines represent occurrence probability and Weibull distributions, respectively.

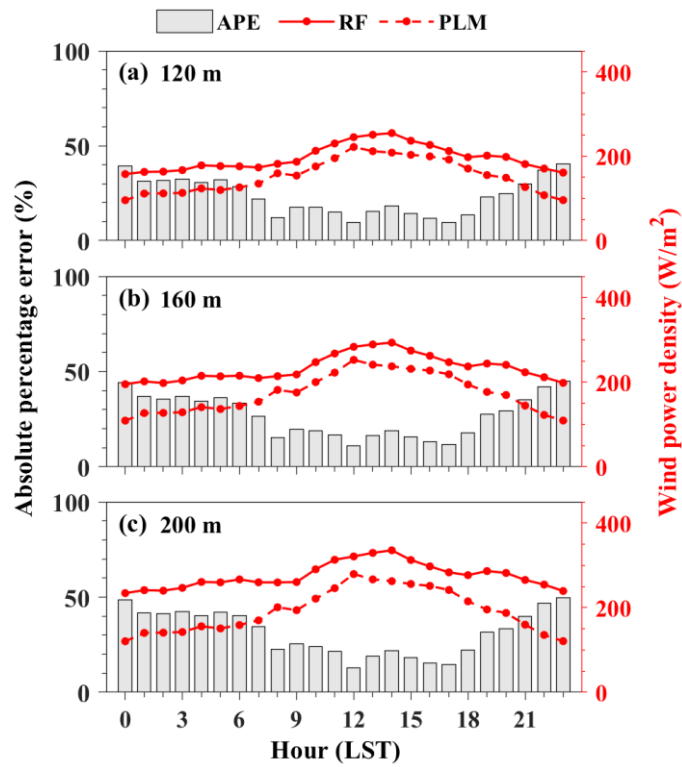


Figure 9. Diurnal variation of the wind power density (WPD) at (a) 120 m, (b) 160 m and (c) 200 m.

675 The red solid and dotted lines represent the WPD from RF and PLM, respectively. The gray bar represents the absolute percentage error (APE) of WPD between RF and PLM.

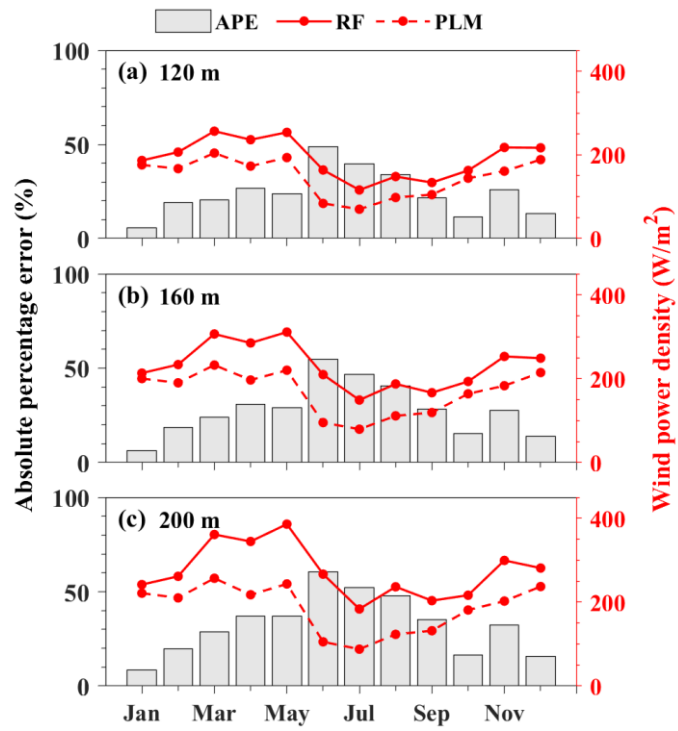


Fig. 10. Similar to Fig. 9, but for the monthly variation.